



CueTracker hierarchical partition: rear electronics / front inertial sensors

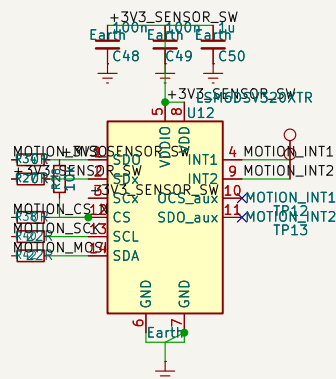


Sheet: /		
File: CueTracker.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.4		Id: 1/3


FRONT SENSOR BOARD – 24-pin Hirose interconnect




LSM6DSV320XTR main motion SPI. Local series parts and decoupling stay on this board.

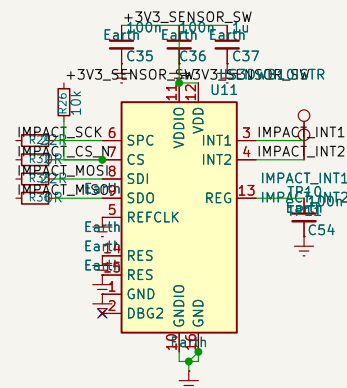


IIS3DWB10ISTR impact SPI. Wetablet-flank LLGA16.

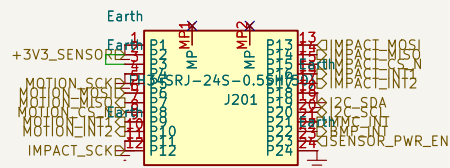

Connector pin numbers are the electrical contact numbers. Confirm FPC contact-side mirroring before PCB release.

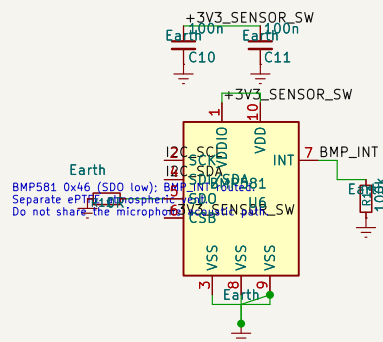

BMP581 0x46 (SDO low); BMP581 0x47 (SDO high).
Separate ePIB from the microphones.
Do not share the microphones.

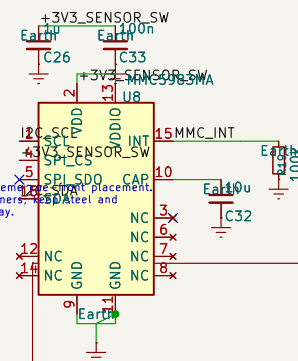

MMC5983MA 0x30; extreme care should be taken.
Use nonmagnetic fasteners, e.g. steel and high-current paths away.

Sheet: /Front Sensor/
File: front_sensor.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.4

Rev:

Id: 3/3