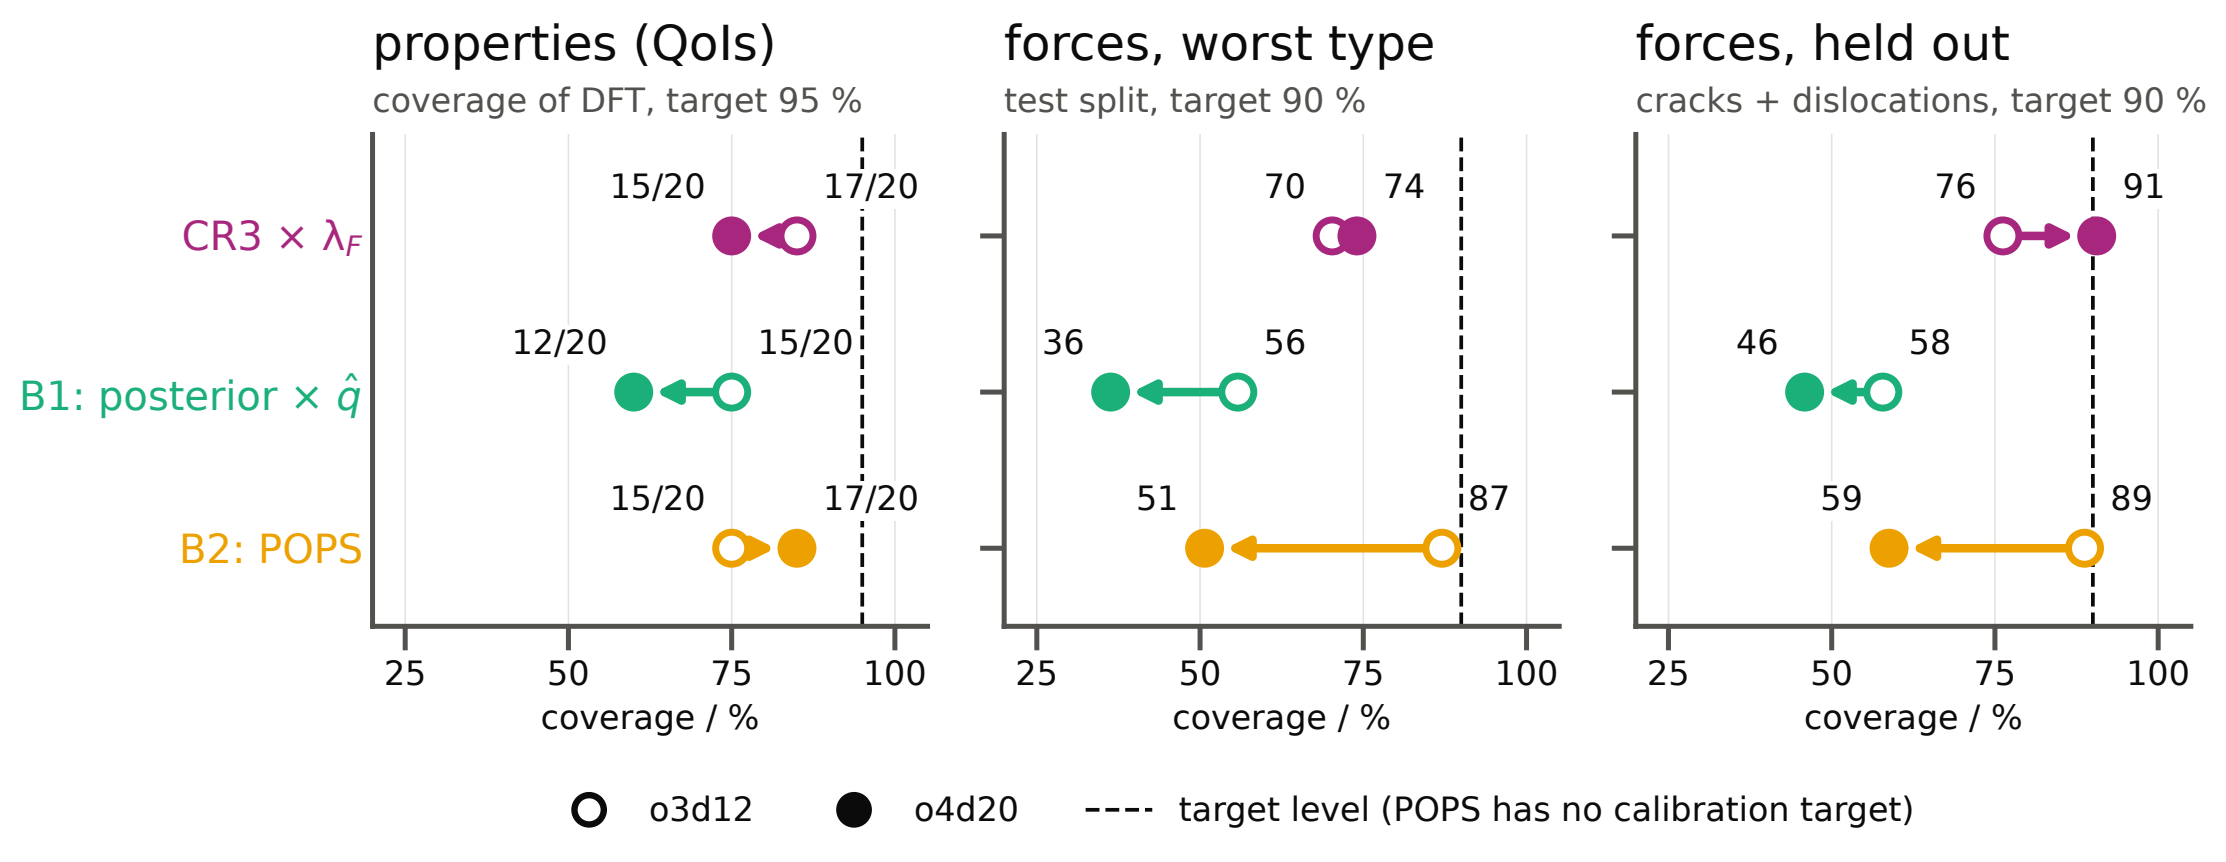
properties (QoIs)
coverage of DFT, target 95 %
forces, worst type
test split, target 90 %
forces, held out
cracks + dislocations, target 90 %
CR3 × λ_F
B1: posterior × $\hat{q}$
B2: POPS
15/20
17/20
12/20
15/20
15/20
17/20
70
74
36
56
51
87
76
91
46
58
59
89
25
50
75
100
coverage / %
o3d12
o4d20
target level (POPS has no calibration target)