o3d12

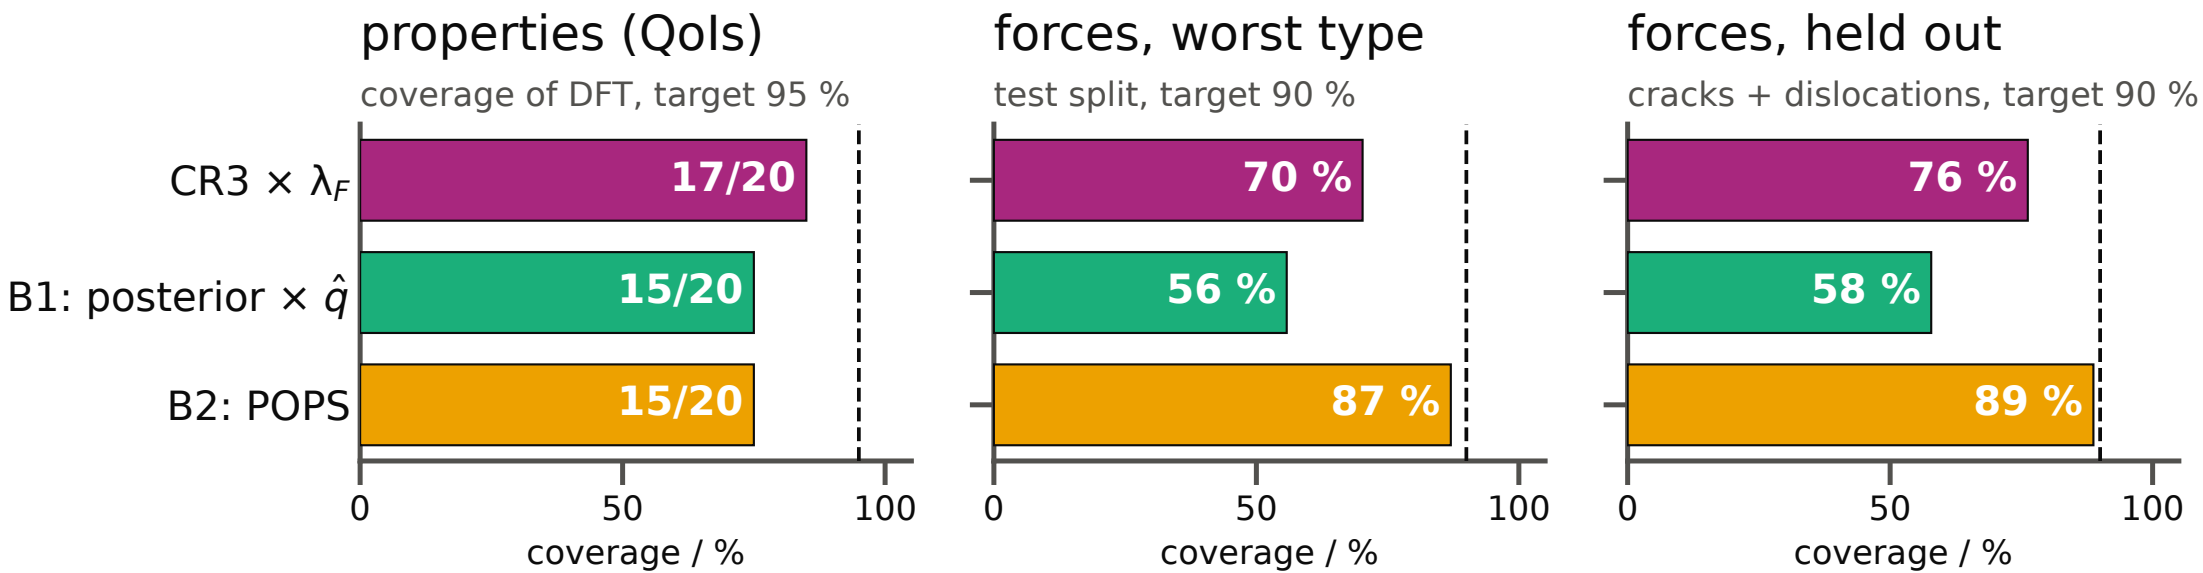
properties (QoIs)
coverage of DFT, target 95 %
forces, worst type
test split, target 90 %
forces, held out
cracks + dislocations, target 90 %
CR3 × λF
B1: posterior × q̂
B2: POPS
17/20
15/20
15/20
70 %
56 %
87 %
76 %
58 %
89 %
0
50
100
coverage / %
dashed: target level (POPS has no calibration target)