Authors: L. Andersson   K. Kompella   A. Farrel
              Bronze Dragon Consulting   *Juniper Networks*   *Old Dog Consulting*

RFC 9017
Special-Purpose Label Terminology

Abstract

This document discusses and recommends terminology that may be used when MPLS Special-Purpose Labels (SPLs) are specified and documented.

This document applies that terminology change to the relevant IANA registry and also clarifies the use of the Entropy Label Indicator (7) when immediately preceded by the Extension Label (15).

This document updates RFCs 3032 and 7274.

Status of This Memo

This is an Internet Standards Track document.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has received public review and has been approved for publication by the Internet Engineering Steering Group (IESG). Further information on Internet Standards is available in Section 2 of RFC 7841.

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at https://www.rfc-editor.org/info/rfc9017.

Copyright Notice

with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction

RFC 7274 [RFC7274] made some changes to the terminology used for MPLS Special-Purpose Labels but did not define consistent terminology.

One thing that RFC 7274 did was to deprecate the use of the term "reserved labels" when describing a range of labels allocated from a registry maintained by IANA. The term "Reserved" in such a registry means "set aside, not to be used", but that range of labels was available for allocation according to the policies set out in that registry. The name "Special-Purpose Labels" was introduced in RFC 7274 in place of the previous term, and the abbreviation "SPL" was recommended.

At the time of writing the first draft version of this document, the IETF was in the process of allocating the very first SPLs from the Extended SPL (eSPL) range [RFC8595]. This document discusses and recommends terminology and abbreviations to be used when talking about and documenting Special-Purpose Labels.

This document updates RFC 3032 [RFC3032] and RFC 7274 [RFC7274] in that it changes the terminology for both Base SPLs (previously referred to simply as "Special-Purpose Labels") and Extended SPLs.

This document applies that terminology change to the relevant IANA registry and also clarifies the use of the Entropy Label Indicator (7) when immediately preceded by the Extension Label (15).

1.1. Terminology

The key words "**MUST**", "**MUST NOT**", "**REQUIRED**", "**SHALL**", "**SHALL NOT**", "**SHOULD**", "**SHOULD NOT**", "**RECOMMENDED**", "**NOT RECOMMENDED**", "**MAY**", and "**OPTIONAL**" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

2. Background

Two sets of SPLs are defined for use in MPLS:

- The range 0-15 (Base Special-Purpose Labels (bSPLs) as described in this document) is specified in RFC 3032 [RFC3032].
- The range 0-1048575 of eSPLs is specified in RFC 7274 [RFC7274].
    - The values 0-15 have been reserved and are never to be allocated.
    - The values 16-239 are available for allocation.
    - The values 240-255 are for experimental use.
    - The values 256-1048575 are currently not available for allocation. A Standards Track RFC would be needed to change this rule, and that RFC would need to define the ranges that are made available for allocation and the registration policy for those ranges.

2.1. GMPLS Special-Purpose Labels

Note that IANA maintains a registry that is called "Special-Purpose Generalized Label Values". Labels in that registry have special meaning when present in certain signaling objects, are 32 bits long, and are not to be confused with MPLS forwarding-plane labels. This document does not make any changes to the GMPLS registry or to how labels from that registry are described.

3. Terminology and Abbreviations

Prior to the publication of this document, IANA maintained a name space for "Special-Purpose Multiprotocol Label Switching (MPLS) Label Values" code points [SPL-NAME-SPACE]. Within this name space, there are two registries. One was called the "Special-Purpose MPLS Label Values" registry [bSPL]. The other was called the "Extended Special-Purpose MPLS Label Values" registry [eSPL].

The difference in the name of the name space and the first registry is only that the MPLS abbreviation is expanded. This document makes no change to the name of the name space itself (i.e., "Special-Purpose Multiprotocol Label Switching (MPLS) Label Values"). This document changes the name of the first registry to "Base Special-Purpose MPLS Label Values" but leaves the name of the latter registry unchanged as "Extended Special-Purpose MPLS Label Values".

The following conventions will be used in specifications and when talking about SPLs.

- Collectively, the two (unrelated) ranges (0-15 and 16-1048575) are known as "Special-Purpose Labels" (SPLs).
- SPLs from the range 0-15 are called "Base Special-Purpose Labels" (bSPLs).
- SPLs from the range 16-1048575 are called "Extended Special-Purpose Labels" (eSPLs). (Note that the reserved values 0-15 from the "Extended Special-Purpose MPLS Label Values" registry do not need a name, as they are not available for allocation and **MUST NOT** be used.)
- The combination of the Extension Label (XL) (value 15, which is a bSPL and is also called the "xSPL") and an eSPL is called a "Composite Special-Purpose Label" (cSPL).

This results in label stacks such as the examples shown in Figures 1 and 2.

```
            0                              31
            |     MPLS Label Stack entry      |
            +--------+--------+--------+--------+
            |     MPLS Label Stack entry      |
            +--------+--------+--------+--------+
    bSPL    |             Base SPL           |
            +--------+--------+--------+--------+
            |  MPLS Label Stack entry (cont.)  |
```

Figure 1: Example of Label Stack

```
               0                             31
               |      MPLS Label Stack entry      |
               +--------+--------+--------+--------+
               |      MPLS Label Stack entry      |
               +--------+--------+--------+--------+
      xSPL     |       Extension Label (XL)      | <--+
               +--------+--------+--------+--------+   |--- cSPL
      eSPL     |           Extended SPL          | <--+
               +--------+--------+--------+--------+
               |  MPLS Label Stack entry (cont.)  |
```

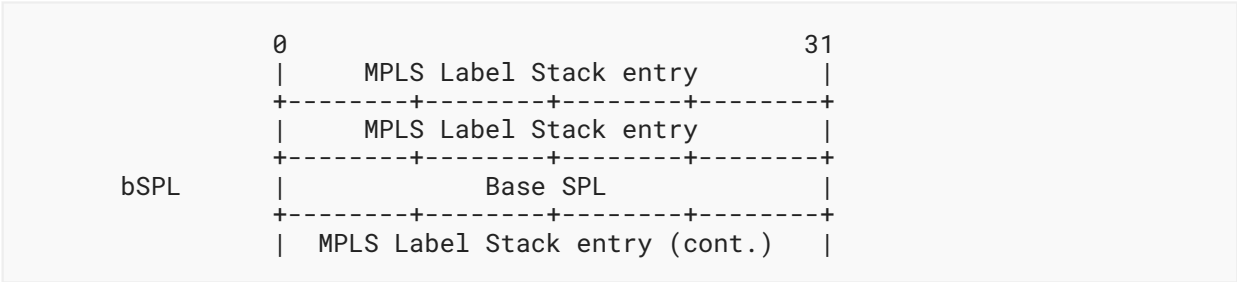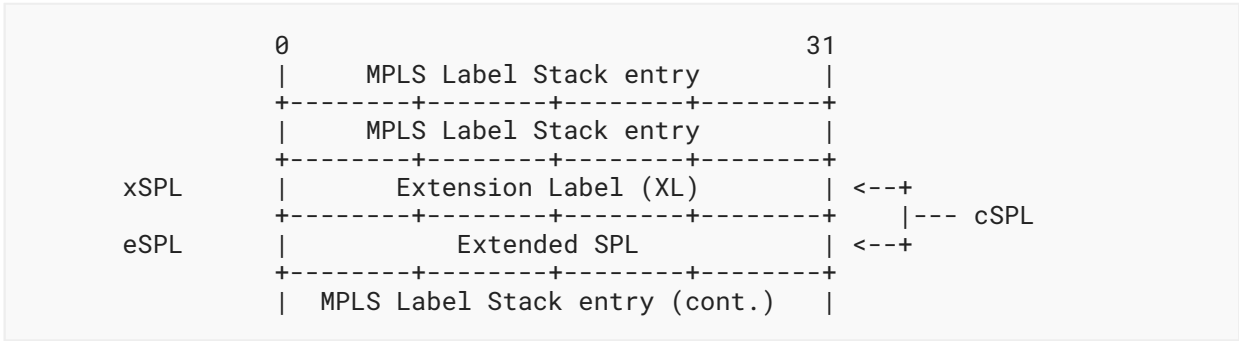*Figure 2: Example of Label Stack*

4. Clarification on Handling of the Entropy Label Indicator

Section 3.1 of [RFC7274] contains two paragraphs that describe the handling of the Entropy Label Indicator (label 7). These paragraphs have introduced some confusion about whether the Entropy Label Indicator can be present when immediately preceded by the Extension Label. This document updates [RFC7274] by replacing those paragraphs as follows.

OLD

> Values 0-15 of the "Extended Special-Purpose MPLS Label Values" registry are set aside as reserved. Furthermore, values 0-6 and 8-15 **MUST NOT** appear in the data plane following an XL; an LSR processing a packet with an XL at the top of the label stack followed by a label with value 0-6 or 8-15 **MUST** drop the packet.
>
> Label 7 (when received) retains its meaning as Entropy Label Indicator (ELI) whether a regular special-purpose label or an ESPL; this is because of backwards compatibility with existing implemented and deployed code and hardware that looks for the ELI without verifying if the previous label is XL or not. However, when an LSR inserts an entropy label, it **MUST** insert the ELI as a regular special-purpose label, not as an ESPL.

NEW

> Values 0-15 of the "Extended Special-Purpose MPLS Label Values" registry are set aside as reserved. Furthermore, an implementation **MUST NOT** place a label with a value in the range 0-15 in the label stack immediately following an XL; an LSR processing a packet with an XL at the top of the label stack immediately followed by a label with a value in the range 0-15 **MUST** drop the packet.

> When inspecting a label stack to find an Entropy Label Indicator (ELI -- label 7), a preexisting implementation may fail to inspect the previous label and thus not notice that it is an XL. Such systems can continue to process the entropy information and forward the packet when the previous label is an XL without causing harm. However, the packet will be dropped when the XL reaches the top of the stack at another LSR.

END

5. Security Considerations

This document describes the terminology to be used when describing and specifying the use of SPLs. It does not affect forwarding in the MPLS data plane, nor does it have any effect on how Label Switched Paths are established by an MPLS control plane or by a centralized controller.

This document does not aim to describe existing implementations of SPLs or potential vulnerabilities of SPLs.

6. IANA Considerations

IANA has changed the name of the registry once called "Special-Purpose MPLS Label Values" to now be called "Base Special-Purpose MPLS Label Values" [bSPL].

IANA has also updated the "Base Special-Purpose MPLS Label Values" registry by changing the description for value 15 from "Extension Label" to "Extension Label (XL)" and also adding this document as a reference.

Value	Description	Reference
15	Extension Label (XL)	RFC 7274, RFC 9017

Table 1: Updated Entry for Value 15 in the "Base Special-Purpose MPLS Label Values" Registry

7. References

7.1. Normative References

[bSPL]   IANA, "Base Special-Purpose MPLS Label Values", <https://www.iana.org/assignments/mpls-label-values/>.

[eSPL]   IANA, "Extended Special-Purpose MPLS Label Values", <https://www.iana.org/assignments/mpls-label-values/>.

[RFC2119]   Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <https://www.rfc-editor.org/info/rfc2119>.

[RFC3032]   Rosen, E., Tappan, D., Fedorkow, G., Rekhter, Y., Farinacci, D., Li, T., and A. Conta, "MPLS Label Stack Encoding", RFC 3032, DOI 10.17487/RFC3032, January 2001, <https://www.rfc-editor.org/info/rfc3032>.

[RFC7274]   Kompella, K., Andersson, L., and A. Farrel, "Allocating and Retiring Special-Purpose MPLS Labels", RFC 7274, DOI 10.17487/RFC7274, June 2014, <https://www.rfc-editor.org/info/rfc7274>.

[RFC8174]   Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <https://www.rfc-editor.org/info/rfc8174>.

[SPL-NAME-SPACE]   IANA, "Special-Purpose Multiprotocol Label Switching (MPLS) Label Values", <https://www.iana.org/assignments/mpls-label-values/>.

7.2. Informative References

[RFC8595]   Farrel, A., Bryant, S., and J. Drake, "An MPLS-Based Forwarding Plane for Service Function Chaining", RFC 8595, DOI 10.17487/RFC8595, June 2019, <https://www.rfc-editor.org/info/rfc8595>.

Acknowledgements

Contributors

The following individual contributed text to this document:

Stewart Bryant
Futurewei Technologies Inc.
Email: stewart.bryant@gmail.com

Authors' Addresses

Loa Andersson
Bronze Dragon Consulting
Email: loa@pi.nu

Kireeti Kompella
Juniper Networks
Email: kireeti@juniper.net

Adrian Farrel
Old Dog Consulting
Email: adrian@olddog.co.uk