
Abstract*Keywords:*

1 Introduction

This paper describes a method for simulating event-oriented data sources of a flexible assembly system (FAS) including faults. Such a simulator is required for creating representative corpuses of data for teaching automated learning algorithms for predictive maintenance, condition monitoring and systemic fault detection.

Flexible assembly system was described by Donath and Graves [8] as a collection of flexible assembly cells comprising one or several work stations connected by automatic material-handling devices. In practise, a flexible assembly system contains parts and materials stored in an intermediate storage, a conveyor or crane system to move the parts, materials, intermediate assemblies and finished products between the stations, and the stations with work machines and necessary tooling to assemble, process or inspect intermediate assemblies and products. The stations might consist of for example manual assembly steps, and robotic assembly cells. In flexible manufacturing systems (FMS), the work stations might contain more complex machining and manufacturing tools like CNC lathes, or 3D printing. FAS and FMS are considered interchangeable for the purposes of this article, although they have different scheduling and configuration properties. Often the assembly sequence has multiple ways of being executed for a finished product leading to some redundancy and more efficient scheduling in terms of utilization.

As opposed to more specialized industrial production systems, flexible assembly systems are designed for smaller batches and greater flexibility so that the set of end products can vary more widely. Flexible assembly systems can be reconfigured more conveniently following the evolution of new versions of the end products. Flexibly assembly systems also allow for a wider range of customization between the different end product instances of the same product. The nature of fast evolution of configurations and workflows, and varying operating conditions make planning maintenance more challenging.

System downtime is a significant cost for flexible assembly systems. System downtime is reduced by preventive maintenance typically scheduled periodically. Recently Internet of Things and opening of the networked industrial system APIs have created new possibilities for predictive maintenance and systemic fault detection. Different sites with similar flexible automation systems have widely different environmental and workload conditions which has an impact on the wear and tear of the flexible automation system components. There is a clear need to adapt maintenance based on actual conditions in the operation rather than by simply scheduling maintenance periodically [15].

Going from preventive maintenance towards predictive maintenance optimizes and targets the maintenance related costs towards the activities that have best impact on improving the availability and operation of deployed flexible assembly systems.

Predictive maintenance in flexible assembly systems benefits from automatic indicators for immediate and potential future faults. It is generally not possible to enumerate all the possible fault conditions and their sensory indicators of a flexible assembly system in an exhaustive fashion, as the rare errors are neglected and faults can present in an unexpected manner [4]. There is a need for autonomously learning systems which are able to deduce the correct operation of

the flexible assembly system and report potential deviances. One way to monitor a process is to observe the symbolic logs generated as the process is being executed.

Current predictive maintenance and condition monitoring systems concentrate on measuring device health for example by means of measuring temperature [25], vibration [30], lube oil particle analysis [16] and electrical current signals [32]. Research on anomaly detection for non-interleaved discrete sequences is summarized in a survey by Varun Chandola et al. [6]. Interleaved discrete sequences, or uncorrelated process traces have been mainly researched in relation to specification mining for multi-threaded or asynchronous software processes. The solutions use domain-specific features to help in reconstructing the dependency graphs out of interleaved sequences. For example a solution for mining message sequence graphs by Sandeep Kumar et al. [20] works for message-oriented systems, and this solution requires sets of separate and complete traces corresponding to executions of an application [18]. Most process mining and specification mining solutions aim to solve the challenging task of inferring a complete process model out of the logs, even if the interleaved logs themselves might exhibit some weaker form of features and characteristics already useful for anomaly detection.

Evaluating novel automatic methods for fault prediction requires standard benchmarks to compare these methods against. Currently there are no standard benchmarks to test different symbolic log anomaly detection methods and compare their performance against each other. Such standard benchmarks exist in other fields of machine learning, such as the MNIST handwritten digits benchmark [24]. Realistic and plausible simulations are often used [17] [26] for domains where real data is hard to collect or where real data would be subject to business confidentiality. Training neural network and other learning systems often utilizes realistic simulations instead of real data [34]. Real measured data is often limited in both state space and in volume, and simulations can give better results [9].

Some simulations of flexible assembly systems are generally available [28] [11] [8] and have been studied for visualization and optimization purposes. However, these are not directly suitable for benchmarking fault detection methods regarding interleaved discrete sequences.

2 Problem Formulation

A standard benchmark should reflect a realistic task with real value, and it should be plausible in terms of incorporating salient features of the problem domain.

Real data regarding flexible assembly system faults is not generally available, because fault data is generally subject to business confidentiality in flexible assembly industry. The generally available simulation models do not contain failure modes and are not designed to emit log structured events in a realistic fashion.

To enable relevant research into anomaly detection in flexible assembly systems a realistic simulator for logged events is needed. All references to simulated faults and failure modes in the research described in this article are hypothetical and should not be considered to reflect actual characteristics of any specific existing systems. An effort is made to make the simulations contain the necessary features of generic and realistic failure modes to make the models useful for research, but for example the simulated fault frequencies and the configuration of the flexible assembly system along with workflows and end products are arbitrary.

A simulation for benchmarking anomaly and fault detection methods should not be fully deterministic to reflect the real world dynamics. The simulation should also include realistic faults with possible early indicators such as variations in delays in the steps of the process. The focus of the simulator is on faults without pre-existing diagnostic fault codes, such as unexpected faults, degradation of the assembly modules and conveyors, and on systemic faults.

Systemic faults in this paper are defined to mean faults and degradation of output where each of the component modules of the flexible assembly system are seemingly operating without faults. Execution failures which are detected during execution of an action as a deviance of the state from the expected state are outside of the focus of this work, as these conditions are adequately detected and handled by existing supervision systems.

Ultimately, the learning system should model the correct operation of the system and detect deviances, rather than to learn specific failure modes which might never repeat after presenting once.

Flexible assembly system process traces are not separable into complete and separate execution runs in the general case, because assembly process is typically continuous and forms a single interleaved log. On the other hand, delays in processing steps are mostly independent of the whole system state, and could be hypothetically used to infer structure in the interleaved log. There are also events unrelated to the processes, for example timer ticks. The main process events often follow stoichiometric laws in a normal operation corresponding to materials not being created or destroyed within the process. Stoichiometric invariance is often clearly visible when drawing a histogram of event type counts in the logs showing that specific events corresponding to certain assembly steps are done specific numbers of times per product, leading to counts of events for a specific event type strongly correlating with counts of other event types. If there are alternative routes of products through the assembly process, the correlation is more specifically between sums of counts of alternative event type which might not be as easily visible.

3 Modes of Failures in Flexible Assembly Systems

Flexible assembly system failures are typically component failures where a failure of a single module or a component will lead to the part of the system becoming inoperational. Since the flexible assembly systems are dynamic systems with numerous moving parts, the wear and tear of the components and tools are a significant source of faults.

In addition to the component failures, certain critical systemic failures can cause downtime, such as power loss and network communication failures. The critical systemic failures mentioned don't typically show any indication before they happen so predictive maintenance has little potential to be applied there. In addition to these critical system failures, the whole system can exhibit modes of failure and degradation which are not directly attributable to single component degradation or failure. Some of these might be caused by external factors, such as accidents and human errors, but also for example by timing issues in the whole process causing unexpected queues or traffic jams.

Tool wear and tear depends on the workload. Typically tools that wear out fast, for example multiple times for one unit of work in a station, receive much attention and such tools are generally well maintained. Tools that have wear and tear but have longer life spans are more susceptible to being overlooked by operators and might have some indicators of degrading before a failure. Cranes, hatches and conveyors have relatively long life spans and are primarily maintained in periodic preventive maintenance. If we could get indicators for impending failure for these components, the periodical maintenance could be scheduled earlier to prevent downtime.

In addition to these physical faults the flexible assembly system can suffer from human errors. Human operator can inadvertently misconfigure the flexible assembly system so that its operating mode changes unexpectedly, for example by disabling a station which can lead to the system stopping without a proper failure. In addition to configuration errors, human

Table 1: Table of recognized fault types in flexible assembly systems

| Fault type | Unexpected faults | Potentially has an early indication | Useful target for anomaly detection |
|---|-------------------|-------------------------------------|-------------------------------------|
| Auxilliary component wear and tear | X | X | X |
| Station operation failures (feeder error, insertion error, grip error, fixture position errors) | | | |
| Critical systemic failures (power, network, emergency stop) | X | | |
| Human error, failed manual step | X | X | X |
| Incompatible parts, materials or replacement tools | X | | |
| Systemic failures (e.g. accidents and cyberattacks) | X | X | X |
| Tool wear and tear for quickly degrading tools (e.g. drill bits) | | X | |
| Tool wear and tear for slowly degrading tools (e.g. screwdriver) | X | X | X |

operators might fail in manual assembly steps for example by pressing the button to mark the step as completed before the step was completed. The flexible assembly system might also get in incompatible materials, parts or replacement tools and fail when trying to use them.

There has lately been an increase of computer crime against industrial networks as the devices and systems become more connected. Nation states execute industrial espionage and even sabotage against each other [21]. An electronic sabotage attack might present itself much like a human misconfiguration error, and would be potentially detected in a similar fashion even if the attack itself would not be directly visible in the logs as anomalous activity.

Modelling the failure events can be based on Process Failure Mode and Effects Analysis (FMEA, PFMEA) [31] methodology which produces lists of failure modes of components in an assembly and machining process, and the respective effects of failures.

For the purposes of describing the fault types we divide system components into slowly and quickly degrading tools and auxilliary components. Tools are the components such as drill bits which are directly used to assemble or machine the product. The auxilliary components are components with less expected wear and tear which are used to transport the products, inspect the intermediate assemblies or dispense assembly components.

The fault types and distribution depend on the assembly system and on the products being assembled. For one specific assembly line [7] the common fault types were feeder errors, robot insertion errors, robot grip errors, unqualified parts, fixture position errors, emergency stops, robot gripper collision, grip sensor line break, and inspection equipment failures. The root causes for these are wear and tear, and incompatible parts.

For useful anomaly detection systems we need to concentrate on faults that are unexpected without pre-existing diagnostic error codes, and that potentially have early indications in collected event-based logs. Early indication in this context means that the error can be detected in the system logs before the failure becomes otherwise evident. The table 1 summarizes the classes of faults.

4 Flexible Assembly System Model

The simulation consists of a realistic discrete event model of a flexible assembly system with a class of faults optionally injected into the process. The initial simulation is very simple and linear, and does not incorporate complex scheduling and routing decisions or optimization like many flexible assembly/manufacturing system simulations [8]. However, it is a reasonable configuration of such a production system.

Introducing synthetic faults into process data is a common method for testing whether the fault detection model works [2]. Discrete Event Systems can be conveniently described using Mixed Process Algebra Petri Nets (MPPN) [13]. In the following description we augment the MPPN with intervals between state transitions, because event intervals are important information for deinterleaving the process traces.


Using the notation defined in [12], we note that the system can be described as an interleaved execution of n process instances P_i , shown in Equation 1.

$$P_1 \oplus P_2 \oplus \dots \oplus P_n \quad (1)$$

The interleaved process instances consist of sequences of m steps which are identical within a production batch in the simple assembly process being tested, shown in Equation 2. More complex assembly processes might have several alternatives for specific steps, representing multiple interchangeable stations where an unit of work can be scheduled. It is also possible for some processes that some assembly steps can be performed in an arbitrary order. The sets B and U above the arrows denote the booking/unbooking sets constraining this transition, encapsulating the scheduling dependencies between process instances.

$$P_i = a_1 \xrightarrow{B_2 \& U_1} a_2 \rightarrow \dots \rightarrow a_m \quad (2)$$

Some steps are associated with exclusive resources which can be described by associating the transitions in the MPPN model with booking and unbooking resources, so that the corresponding transitions $b_l(x)$ and $u_l(x)$ for a single resource R_l in the general resource model Petri net shown in 3 trigger changes in the status of the resource and are gated by the status of the resource.



(3)

Symbolic process logs are generated by running the simulation. The simulation will not be fully deterministic and contains soft faults which do not immediately affect operation in addition to hard faults which result in immediate downtime. Flexible assembly system scheduling and production optimization is an active research field. Different scheduling models can be implemented into the simulation, but the provided initial example is a simple sequence of mostly independent steps.

The simulator is implemented in Python using Simpy discrete event simulation framework and it generates a JSON file which models the logs from the system. The log messages consist of a timestamp and an event type.

The discrete event simulation framework consists of a scheduler that takes the next event from the event queue and applies it to the respective module. The simulated modules execute when events are applied to them, and generate new events and immediate log entries with timestamps. The simulated modules have optional failure modes that affect the simulated operation of the component. Failure modes are configured to the simulated modules by scheduling failure activation as separate unlogged events. The main executable sets up the configuration of the processes, and bootstraps the events and optional failures.

The simulated hypothetical system assembles and tools a car transmission block loosely inspired by a Youtube video of Chrysler transmission assembly [5]. The linear workflow consists of several manual assembly steps in separate stations and transporting the subassemblies between the stations by the means of cranes and conveyors. Multiple transmission blocks in different stages of assembly are being assembled simultaneously in separate, independent stations.

The main sequence starts from the frame of the transmission block and continues through several manual steps done in separate stations. The steps of the main sequence are given in the software documentation [19]. Each step contains several events and associated log messages. The log messages include the component which logged the event, but not the process instance. The non-negative durations follow a truncated normal distribution. The durations for manual steps in normal operation have a standard deviation of five percent of the mean. The durations for automatic steps have a standard deviation of one percent of the mean.

The production frequency of the transmission blocks depends on the slowest step as in this case there is only one station for one step and no parallel work is possible within one station. The slowest step takes about 76 seconds in normal operation.

4.1 Simulated Failure Modes

It is regrettable that real data on fault modes in real flexible assembly systems is not publicly available, but in any case it is possible to make reasonable models based on existing data from other analogous sources such as [1] and [33]. Specialized simulations designed to reflect specific assembly line conditions can be based on process FMEA reports. In the example described in this article, the fault modes are arbitrary, but can be reasonably expected to roughly reflect the real conditions.

The previous subsection describes the normal operation of the system. The failure modes of the manual steps include human errors by pressing an OK button signifying a completed manual assembly step prematurely without properly executing the step. This leads to the next manual step failing and returning the block back to the previous step or removing it from the assembly line altogether. Failed manual steps also include wear and tear on the tools which gradually increases the duration of the work before causing a fault. The human operator can also tire and lose concentration when doing lots of repetitive steps. There are studies showing how speed performance degrades in general in a linear fashion in humans under fatigue and boredom, for example [27]. Switching human operators during the day might change the effective performance slightly.


The automatic steps wear and tear cause gradually increasing durations for the step also until at some point the step stops functioning and intermediate assemblies start piling up until a fault is signalled because of exceeding the limits of intermediate storage space.

Duration increases before a fault are non-deterministic and for some faults they don't actually happen before the fault. The profile of the duration increase depends on the type of device used for the step. Generally mechanical wear and tear effect on machine health profile follows an accelerating curve downwards [10], [14]. For the purposes of simulation we can assume machine health has an approximately linear effect on machine performance measured in delays and success rates in applicable types of faults.


Simulated wear and tear causes two types of delay profiles. First, a continuous wear and tear typically causes no measurable delays at first, but when the degradation accumulates the delay increases following a roughly exponential curve shown in the Figure 1a. Second, for certain steps, such as taking bolts from the bowl feeder a human operator might fail to grab a bolt from time to time. Typically the human operator tries again until successful. The frequency

easychair: Running title head is undefined.

easychair: Running author head is undefined.

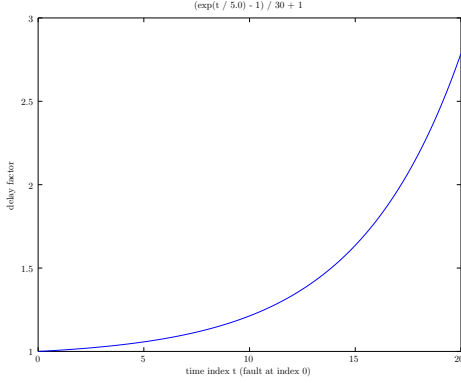

(a) A delay profile of continuous wear and tear

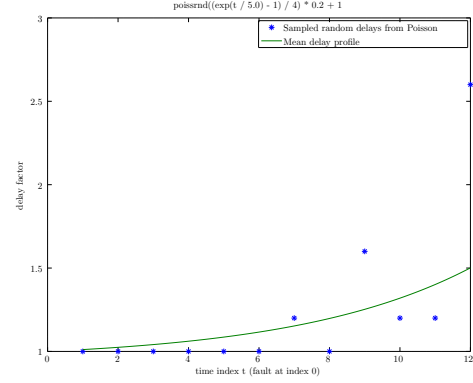

(b) A characteristic delay profile of human operator retry delays

Figure 1: Delay profiles of faults.

of the failure increases slowly and roughly following an exponential curve until the failure rate becomes apparent and causes the operator to take corrective action, typically causing downtime. These failures cause a random delay if they happen. This characteristic delay profile is depicted in the Figure 1b.

A misconfiguration can cause different kinds of results. It is possible for example to choose an incorrect version of a Numerical Control (NC) program for a machining cell. It is also possible to misconfigure the required steps for a final product. Here we assume that some work step is skipped so that it is not noticed and doesn't directly prevent the subsequent steps from being executed. As the assembly process works exactly as configured, a traditional fault detection system comparing the events to the configured process would miss this kind of a problem.

When there are human operators or assembly line workers in the assembly process, there are always human errors and accidents. For the purposes of this simulation we assume a specific assembly worker has become incapacitated for a medical reason. This is a good target for anomaly detection, because sometimes there is no specific fault code triggered if the human operator stops performing the assembly step.

Cyberattacks are becoming more frequent in the industrial domain. Both Stuxnet and BlackEnergy have been developed to specifically target SCADA industrial control systems. These malware frameworks are modular with switchable components for different vectors, different targets and different functions. In practice, these have been used for industrial espionage and sabotage. For the purposes of this article, only sabotage is considered.

There are at least two methods for how these kinds of malware can affect the industrial operations after successfully penetrating such facilities. One, the control computer systems are destroyed by wiping the disks and shutting them down. BlackEnergy malware successfully shutdown an Ukrainian Prykarpattyaoblenergo electric utility in Ivano-Frankivsk Oblast with this mechanism in 2015 December 23th. Two, a tailored attack is implemented, so that specific physical vulnerabilities are abused in the plant systems. Stuxnet allegedly used a special function to affect uranium enrichment centrifuges in Iran's Natanz nuclear facility in 2010 in a subtle way causing the centrifuges to tear themselves apart.

This kind of sabotage is a good target for anomaly detection, because the effects and failures they cause are unexpected and it is possible that the primary control systems have been disabled

Table 2: Table of the simulated failures

| Failure | Description | Effect |
|--------------------|--|---|
| Failed manual step | The human operator tries again until successful | A poisson distribution of delay for the step 7 |
| Wear & tear | The completion time for the step degrades | The delay for the step 20 is exponential |
| Misconfiguration | The process is misconfigured | Steps 19 and 20 are skipped, process continues otherwise normally |
| Accident | A human assembly worker becomes incapacitated for a medical reason | Step 14: Combine with subassembly B stops |
| Cyberattack | An attacker disables a crane by flooding it with commands | Step 10: The Crane with subassembly A is repeatedly moving to end position without transporting the subassembly A |

so they are incapable of handling faults in the normal way. For this example simulation, we disable the Crane with subassembly A by flooding it with commands to repeatedly transport it to the other end position. The hypothetical attacker assumes this causes the system to jam up as the products are not being transported to the next assembly stations. The attacker also assumes that this does not trigger a fault code as the crane is technically functioning perfectly.

While the directly visible fault modes are easier to model and characterise, complex flexible assembly systems also have warnings and trace messages which are signalled into logs, but are not signalled to operators in real time because most of the time these messages are not a cause for concern. An example of such a signal could be for example a health warning of a device that happens spuriously once every now and then for normal operation, but increases in frequency when the device actually starts to fail. There can also be log messages for example for electrical switches turning on and off when the working step is active, but never while the step is not active. Anomalies in such messages can be indicators of potential future faults.

The simulated failures and their effects are listed in the table 2. To have a meaningful simulation of a system under faults we only need to simulate some representative fault conditions.

5 Implementation

The FAS Simulator [19] is implemented in Python as a discrete event simulator using Simpy discrete event simulation library. Each step of the assembly process is a Simpy resource and a process which receives and generates delayed events in model time. Each step of the assembly process manages its own internal state, and possible failure modes.

The example simulation consists of stereotypical models of the steps of the process with input signals and configurable output signals. For example, simulating the operation of a crane an instance of a module named Crane is configured and added to the respective position in the process in relation to other module instances. The Crane module has a capacity of one item to transport at a time, and generates delayed output events for each of the input event in sequence, so that only one item is transported at a time. This is in contrast to conveyor module instances which don't have a limited capacity, as the conveyors transport the items independently and in parallel.

The simulation is set up by first defining the all the modules in the assembly plant, and then the sequence of the activities by defining the process. The actual simulation is done simply by triggering the global process inputs as required, causing sequences of events being generated accordingly. For interleaved process traces we instantiate multiple parallel processes that share the resources in the simulated assembly plant.

The events are logged in JSON with a timestamp and an event type, resembling logs in a real flexible assembly system. The logs are not exported to Mining eXtensible Markup Language

(MXML) format, because MXML requires that separate process instances are identified. It is possible to make statistics of the internal simulator state, for example graphing the queues forming at different points of the assembly plant. However, for the purposes of learning system development, the generated log output is the most interesting resulting artifact.

The simulator in principle allows defining different kinds of discrete event simulations. Several specific types of simulations are pre-defined for the purposes of benchmarking different modelling approaches. These pre-defined simulations vary in complexity and length from trivial one item at a time sequences to complex multiple items at once simulations. Each type of simulation can also be configured to fail in specific ways to test different failure detection approaches. All the simulations are based on the flexible assembly system defined in this article and the simulations are stochastic in respect to delays between steps.

In addition to the events related to specific process traces, we will add an event for an alarm if the queue waiting for a manual process is larger than five items. Also, we will add a periodical “tick” event for every 10 seconds to allow for the learning system a realistic way of perceiving time, but also to include events that are unrelated to the processes being executed, to reflect real logs. One conveyor is reused for two process steps, the steps 6 and 9. This means that these conveyor events trigger twice for each product. This is to demonstrate a common situation where there might be multiple identical events of a specific type associated to a single process trace.

6 Mathematical Description

Mathematically, the logs generated by the FAS Simulator can be described as a set of largely independent sequences each describing a successful assembly of one product instance shuffled, or interleaved together. For simplicity we consider only sequences where the assembly line is run successfully from empty start state to empty end state without modelling delays and queues, even if those are modelled in the underlying simulation. A formal language that accepts such sequences is called a shuffled language [3]. These languages are context-sensitive, so modelling methods relating to regular and context-free languages are inadequate. For example Langer et al. [23] showed that Angluin learner was able to learn small toy examples very well, but didn’t work very well for a real world example of a stream of events recorded from a CAN bus of the powertrain network of an electric vehicle.

FAS processes are often modelled as colored Petri nets [29], where a colored token corresponds to each process instance, moving between process states at observed events. In the scope of this research the process instances are not known, and all events are interleaved together for each process instance running concurrently. In the absence of distinction between process instances and by extension the Petri net tokens, the most appropriate formal model in the analysis time would be a Petri Net.

7 Practical Evaluation

The simulation is considered useful if it can be reasonably expected to mirror the real world contingencies and patterns, and if it is not completely trivial to learn or infer by existing methods. If the simulator creates event sequences that are challenging to learn by existing methods, then it is useful as a benchmark in relation to improving those methods and in creating new ones.

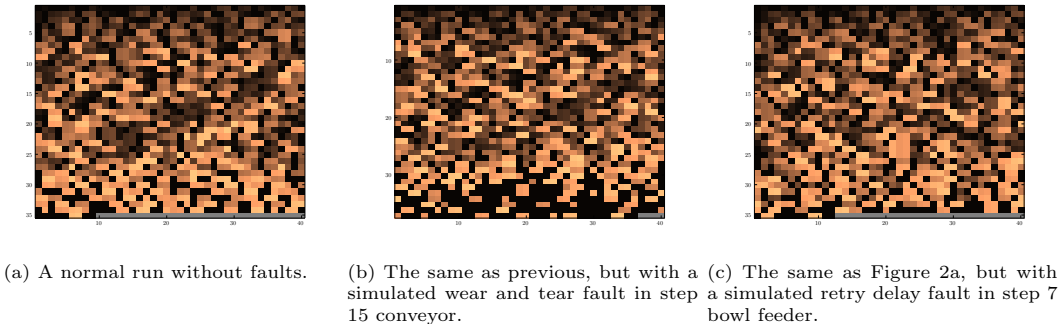


Figure 2: The event sequence as grayscale pixels from left to right, top to bottom, padded in the end with gray.

For the purposes of this article, we will only consider methods which are not trained based on known error conditions beforehand. Thus, the failure prediction challenge becomes a challenge of learning the correct operation of the system and flagging any inconsistencies and anomalies.

For evaluation purposes, we will use a generated fault-free event sequence with first one complete sequence for one item only, then for 30 items simultaneously going through the system simultaneously in the same log file. This results in a log file with a sequence of 1364 events of 36 different event types.

For evaluating whether there is enough information in the sequence to determine some structure in the model, the sequence was visualized as grayscale pixels in Figure 2a. The pixel colors are chosen from an ordered grayscale map, and the states are indexed in the order they are met in the log. It is possible to discern the three different length production batches from the image. For each batch there are a number of products assembled which corresponds to the same number of certain production related events. For comparison, Figure 2b was created for situation where a simulated wear and tear fault happens in one of the conveyors, slowing its operation down slightly. Comparing the two simulations visually it is evident that the second process is slower in the end of the batch, featuring tick events in longer sequences. Similarly a retry delay fault with the bowl feeder can be seen in the Figure 2c. As the retry delay affects a process step that is relatively fast, and does not represent a bottleneck in the process, it does not have a significant impact to the process.

It should be noted that while this kind of wear and tear fault would also be evident from measuring the process throughput, process throughput is a function of many other variables as well, so in itself it is not an adequate measure of faults. A general anomaly detection system only observing event logs does not necessarily have a complete process model, but can still observe these kinds of deviations from expected kind of activity.

We know that material balance requires that each log event strictly associated to a later part of process requires the number of requisite steps before it can be executed, and therefore the associated log events must be present. Analogously this relates to the principles of stoichiometry and material balance used in chemistry and industrial processes. For such a simple process what we have used as an example, most events occurs once and only once for each process instance, so drawing a histogram over a time window of a logged composed of such process traces forms an equal distribution, discounting window effects.

In process mining there are several approaches in automatically extracting such models such as Alpha algorithm and its variants, genetic process mining, heuristic process mining, multi phase mining, and region-based process mining. In general these algorithms work with

log messages labelled with the process instance.

Some success have been reported by Niels Landwehr using Mixture Hidden Markov Models [22] in labelling interleaved activities from event logs. However, these methods require manual labelling of the training data and are therefore unsuitable for an unsupervised setting. A method used in parallel software workflow mining described here [18] requires the execution logs to be separated into a large number of complete runs, and would not work with a flexible assembly system in a continuous operation.

8 Conclusion

This study presents a benchmark model for validating anomaly detection methods for flexible assembly systems using log structured data. Existing systems for predictive maintenance concentrate on measuring health of separate devices based on typical degradation characteristics for such devices. They also concentrate on continuous measurement data instead of symbolic log entries.

The diagnostic data for flexible assembly systems is a closely guarded secret for business reasons, but it is possible to make reasonable models of faults based on other analogous sources.

The Flexible Assembly System Simulator, FAS Simulator, is published in GitHub [19] as open source. This kind of simulator would have little realism, and in fact little use unless it was continuously developed in dialogue with real flexible assembly systems. While the simulation approach adds an indirection between real data and developed methods, it is necessary to veil the business critical real fault and diagnostic data of the flexible assembly systems but still make the different anomaly detection methods comparable. The simulator also provides means to incorporate new types of failures and test anomaly detection methods in a quick iteration.

Additional research is needed to improve this benchmark simulation by using experiences from real flexible assembly systems and their modes of failure and respective future fault indicators. For example, continuous measurement values from temperature, acoustic and vibration sensors would be good targets to simulate.

References

- [1] Nasa ames prognostics center of excellence - data repository.
- [2] Charles M Able, Alan H Baydush, Callistus Nguyen, Jacob Gersh, Alois Ndlovu, Igor Rebo, Jeremy Booth, Mario Perez, Benjamin Sintay, and Michael T Munley. A model for preemptive maintenance of medical linear accelerators—predictive maintenance. *Radiation Oncology*, 11(1):1, 2016.
- [3] Martin Berglund, Henrik Björklund, and Johanna Högborg. Recognizing shuffled languages. In *Language and Automata Theory and Applications*, pages 142–154. Springer, 2011.
- [4] Luis M Camarinha-Matos, Luis Seabra Lopes, and José Barata. Integration and learning in supervision of flexible assembly systems. *IEEE Transactions on Robotics and Automation*, 12(2):202–219, 1996.
- [5] Cars. Chrysler transmission assembly line, 2014.
- [6] Varun Chandola, Arindam Banerjee, and Vipin Kumar. Anomaly detection for discrete sequences: A survey. *Knowledge and Data Engineering, IEEE Transactions on*, 24(5):823–839, 2012.
- [7] Ming Cong, Jianzhi Zhang, and Wenhan Qian. Fault diagnosis system for automated assembly line. In *Intelligent Processing Systems, 1997. ICIPS’97. 1997 IEEE International Conference on*, volume 2, pages 1478–1482. IEEE, 1997.

- [8] Markus Donath and ROBERT J GRAVES. Flexible assembly systems: an approach for near real-time scheduling and routing of multiple products. *The International Journal Of Production Research*, 26(12):1903–1919, 1988.
- [9] Wlodzislaw Duch. *Artificial Neural Networks: Formal Models and Their Applications–ICANN 2005: 15th International Conference, Warsaw, Poland, September 11-15, 2005, Proceedings*. Springer Science & Business Media, 2005.
- [10] OF Eker, F Camci, and IK Jennions. Major challenges in prognostics: Study on benchmarking prognostics datasets. *PHM Europe, 6th–8th July*, 2012.
- [11] AM El-Tamimi, SMA SULIMANJ, and DF Williams. A simulation study of part sequencing in a flexible assembly cell. *THE INTERNATIONAL JOURNAL OF PRODUCTION RESEARCH*, 27(10):1769–1793, 1989.
- [12] Petter Falkman and Bengt Lennartson. Combined process algebra and petri nets for specification of resource booking problems. In *American Control Conference, 2001. Proceedings of the 2001*, volume 6, pages 4949–4955. IEEE, 2001.
- [13] Petter Falkman, Bengt Lennartson, and Michael Tittus. Modeling and specification of discrete event systems using combined process algebra and petri nets. In *Advanced Intelligent Mechatronics, 2001. Proceedings. 2001 IEEE/ASME International Conference on*, volume 2, pages 1011–1016. IEEE, 2001.
- [14] Kai Goebel and Alice Agogino. Documentation for mill data set.
- [15] Hashem M Hashemian and Wendell C Bean. State-of-the-art predictive maintenance techniques*. *Instrumentation and Measurement, IEEE Transactions on*, 60(10):3480–3492, 2011.
- [16] Trevor M Hunt. *Handbook of wear debris analysis and particle detection in liquids*. Springer Science & Business Media, 1993.
- [17] Georg Jäger, Sebastian Zug, Tino Brade, Andre Dietrich, Christoph Steup, Christian Moewes, and Ana-Maria Cretu. Assessing neural networks for sensor fault detection. In *Computational Intelligence and Virtual Environments for Measurement Systems and Applications (CIVEMSA), 2014 IEEE International Conference on*, pages 70–75. IEEE, 2014.
- [18] Shengqi Yang Jiang Li Bin Wu Jian-Guang Lou, Qiang Fu. Mining program workflow from interleaved traces. In *SigKDD’10 (full paper)*. Association for Computing Machinery, Inc., July 2010.
- [19] Tero Keski-Valkama. Flexible assembly simulation: FAS Simulator.
- [20] Sandeep Kumar, Siau-Cheng Khoo, Abhik Roychoudhury, and David Lo. Mining message sequence graphs. In *Proceedings of the 33rd International Conference on Software Engineering*, pages 91–100. ACM, 2011.
- [21] David Kushner. The real story of stuxnet. *IEEE Spectrum*, 2013.
- [22] Niels Landwehr. Modeling interleaved hidden processes. In *Proceedings of the 25th international conference on Machine learning*, pages 520–527. ACM, 2008.
- [23] Falk Langer, Karsten Bertulies, and F Hoffmann. Self learning anomaly detection for embedded safety critical systems. *Schriftenreihe des Instituts für Angewandte Informatik, Automatisierungstechnik am Karlsruher Institut für Technologie. KIT Scientific Publishing*, pages 31–45, 2011.
- [24] Yann LeCun and Corinna Cortes. MNIST handwritten digit database, 2010.
- [25] R Keith Mobley. *An introduction to predictive maintenance*. Butterworth-Heinemann, 2002.
- [26] The Bay Area’s Metropolitan Planning Organization. Fast-trips simulation tool for metropolitan transportation.
- [27] Christopher S. Pan, Richard L. Shell, and Lawrence M. Schleifer. Performance variability as an indicator of fatigue and boredom effects in a vdt data-entry task. *International Journal of Human-Computer Interaction*, 6(1):37–45, 1994.
- [28] Giulio Rosati, Maurizio Faccio, Christian Finetto, and Andrea Carli. Modelling and optimization of fully flexible assembly systems (f-fas). *Assembly Automation*, 33(2):165–174, 2013.

- [29] Kazuhiro Saitou, Samir Malpathak, and Helge Qvam. Robust design of flexible manufacturing systems using, colored petri net and genetic algorithm. *Journal of intelligent manufacturing*, 13(5):339–351, 2002.
- [30] Cornelius Scheffer and Paresh Girdhar. *Practical machinery vibration analysis and predictive maintenance*. Elsevier, 2004.
- [31] Sheng-Hsien Teng and Shin-Yann Ho. Failure mode and effects analysis: an integrated approach for product design and process control. *International Journal of Quality & Reliability Management*, 13(5):8–26, 1996.
- [32] William T Thomson and Mark Fenger. Current signature analysis to detect induction motor faults. *Industry Applications Magazine, IEEE*, 7(4):26–34, 2001.
- [33] Panagiotis H Tsarouhas. Classification and calculation of primary failure modes in bread production line. *Reliability Engineering & System Safety*, 94(2):551–557, 2009.
- [34] Jason Weston, Sumit Chopra, and Antoine Bordes. Memory networks. *arXiv preprint arXiv:1410.3916*, 2014.