FIRESTAR

FIREFIGHTING GARMENTS & EQUIPMENT

KIVANÇ Group

DIVISIONS

Established in 1980, Kıvanç Group continues its activities in 4 divisions:

SAFETY
Heat & Flame
Protective Clothing

TECHNICAL TEXTILE
Technical Yarns
& Fabrics

ENGINEERING
Glass Fiber Thermal
Insulation Materials

MINING
Silica/Quartz
Sand
Musselstone

TECHNICAL ASSISTANCE

As an expert in personal protective clothing industry, we give technical assistance to our customers. Our experienced technical staff recommends the correct materials according to the risk analysis of our customers. Our Design Studio Team recommends the perfect design meeting EN standard requirements and customer requests.

DESIGN STUDIO

We have our own Design Studio and we develop customized solutions for different applications. Starting from scratch, we develop all details of a protective clothing by means of Adobe Illustrator, Adobe Photoshop, Gerber and other software programs. We have expertise in combining customer requests and EN standard requirements to make the perfect design.

HIGH QUALITY PRODUCTS

Using high quality materials is a key factor in order to have long term relationship with our customers. In order to do that we are working with PBI® and 3M Scotchlite™ products. We are an official partner of PBI Performance Products, Inc.

3M Scotchlite™ Reflective Material

ISO 9001 ISO 14001 ISO 45001

LABORATORY AND R&D

We built the first heat laboratory in Turkey for personal protective garments. Following the second investment that we have made, our physical test laboratory has commenced to provide services. In our heat and physical test laboratory, raw materials (fabrics, accessories etc.) and finished products (protective garments) are tested in accordance to EN and ISO standards. In our laboratory, which serves for R&D purposes also, new products are developed and all controls are performed before CE certification. These controls enhance product reliability and expedite required processes.





ISO 9001 QUALITY SYSTEM

We are an ISO 9001 certified company. All processes are recorded and audited through strict procedures.

ERP SYSTEM

We use an ERP (Enterprise Resource Planning) System to keep track of all records. All divisions are integrated: Purchasing, Sales, Production, Accounting, Warehouse, Import, Export etc.

BARCODE SYSTEM

We implemented Barcode System in 2011. We use a unique barcode system which enables us tracking each individual product seperately.

TRACEABILITY

Using a barcode system enables us to track each individual item. We can track the history of a garment through its barcode: When was this product manufactured and which Product Order Number was used? Which raw materials are used in this production? From which supplier at which date with which lot number were these raw materials bought? Traceability is possible in each step.

CE CERTIFICATION

Our products are tested according to European Standards and are CE certified by accredited notified bodies / laboratories in Europe.

PRODUCT LIABILITY INSURANCE

Our customers are in safe hands. We have a Product Liability and Third Party Liability Insurance. This insurance covers the claims for bodily/material loss or damage as a result of the usage of the insured product.

FIRESTAR LAYER OPTIONS 1/2

NO	NAME	OUTER LAYER	MOISTURE BARRIER	HEAT BARRIER
EN469:2020 LEVEL 2		X2,Y2,Z2		
033	FIRESTOP	390 - PBI X55 205 g/m² 40% PBI 59% Para - Aramid 1% Antistatic	4003 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
018	MATRIX PLUS	388 - PBI Matrix 205 g/m² 40% PBI 58% Para - Aramid 2% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
041	PANO PLUS	387 - PBI Gold 205 g/m² 40% PBI 58% Para - Aramid 2% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
046	ECO	386 - Fire Resist 195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4000 - Aramid nonwoven laminated to a PU Membrane (90 g/m²)	5003 - Aramid felt quilted to an Aramid/Viscose FR Inner Lining (250 g/m²)
008	FREE	386 - Fire Resist 195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4001 - Aramid nonwoven laminated to a PU Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
030	FREE PLUS	386 - Fire Resist 195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
039	FREE PLUS RIPSTOP	392 - Fire Resist Ripstop195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
045	FREE PLUS ULTRA LIGHT	386 - Fire Resist 195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4005 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (90 g/m²)	5008 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (175 g/m²)
047	NEPTUN PLUS	444 - Poseidon 200 g/m² 79% Meta - Aramid 20% Para - Aramid 1% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
077	KAMA PLUS	507 - Kama 215 g/m² 40% Meta - Aramid 58% Para - Aramid 2% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)

EN 469 This European Standard specifies minimum $RHTI_{12}$ level of performance requirements for protective clothing to be worn during firefighting operations and associated activites such as rescue work, assistance during disasters. This European Standard covers general clothing design, minimum performance levels of the materials used and methods of test to be used to determine these performance levels. Firefighting Garments shall provide protection for the firefighters torso, neck, arms to the wrists, and leg to ankles during the activites. EN 469 Level 2 is the higher requirement for structural firefighting and is used by professional firefighters. Level 2 suits should include a waterproof moisture barrier.

X2 = Convective heat $HTI_{24} \geq 13s$ and $HTI_{24} - HTI_{12} \geq 4s$

Radiant heat $RHTI_{24} \geq 18s$ and $RHTI_{24} - RHTI_{12} \geq 4s$

Y2 = Water resistance ≥ 20 kPa

Z2 = Water vapour resistance ≤ 30 m² Pa/W

NO	NAME	OUTER LAYER	MOISTURE BARRIER	HEAT BARRIER
EN469:2020 LEVEL 2 X2,Y2,Z2				
049	ARMOR PLUS	511 - Armor 195 g/m² 38% Meta - Aramid 60% Para - Aramid 2% Antistatic	4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Vickose FR Inner Lining (205 g/m²)
097	ARMOR STOP	511 - Armor 195 g/m² 38% Meta - Aramid 60% Para - Aramid 2% Antistatic	4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
085	BOMBA	392 - Fire Resist Ripstop195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
086	BOMBA DUO	392 - Fire Resist Ripstop195 g/m² 75% Meta - Aramid 23% Para - Aramid 2% Antistatic	4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)	5011 - Double layer aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (260 g/m²)
091	FIRESAFE	525 - PBI Y55 205 g/m² 40% PBI 59% Para - Aramid 1% Antistatic	4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)	5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)
076	PROLITE PLUS	572 - PBI Peak 5 180 g/m² 40% PBI 58% Para - Aramid 2% Antistatic	4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)	5010 - Aramid Spunlaced Nonwoven Quilted to Slider Inner Lining (205 g/m²)

EN 469 This European Standard specifies minimum $RHTI_{12}$ level of performance requirements for protective clothing to be worn during firefighting operations and associated activites such as rescue work, assistance during disasters. This European Standard covers general clothing design, minimum performance levels of the materials used and methods of test to be used to determine these performance levels. Firefighting Garments shall provide protection for the firefighters torso, neck, arms to the wrists, and leg to ankles during the activites. EN 469 Level 2 is the higher requirement for structural firefighting and is used by professional firefighters. Level 2 suits should include a waterproof moisture barrier.

X2 = Convective heat $HTI_{24} \geq 13s$ and $HTI_{24} - HTI_{12} \geq 4s$
Radiant heat $RHTI_{24} \geq 18s$ and $RHTI_{24} - RHTI_{12} \geq 4s$
Y2 = Water resistance ≥ 20 kPa
Z2 = Water vapour resistance ≤ 30 m Pa/W

ALUMINIZED LAYER OPTIONS

NO	NAME	OUTER LAYER	MOISTURE BARRIER	HEAT BARRIER
EN 1486				
080	ALU ADK 270	518 - Aluminized IFR Fabric 270 g/m²	4000 - Aramid Nonwoven laminated to a PU Membrane (90 g/m²)	5004 - Double layer Aramid felt quilted to an Aramid/Viscose FR inner lining (380 g/m²)
079	ALU ADK APC	519 - Aluminized Glass Fabric 520 g/m²		5005 - Three layers of Aramid felt quilted to an Aramid/Viscose FR inner lining (500 g/m²)

EN 1486 - Aluminized Protective Clothing for Firefighters

This garment is intended for use in specialized firefigthing operations, which may include the activities of rescue and fire suppression at incidents involving very high levels of radiant, convective and contact heat, such as aircraft fires, bulk flammable liquid fires.

These operations are conducted close to the fire but do not involve fire entry. Suitable Breathing Apparatus must used together with the garment. The period for which protection will be provided by a protective garment can not be precisely stated as it will depend on the specific conditions encountered. The level of protection as outlined within EN 1486 is achieved through the use of multi-layer clothing assembly. The overjacket, overtrousers, shroud, gloves and boots with gaiters have been designed to for protection as defined in EN 1486 on its own without under garments.

Heat Direction

FIRESTOP

Outer Layer
390 - PBI® X55 Gold 205 g/m²
40% PBI®
59% Para-Aramid
1% Antistatic

Gold Brown

3D Moisture Barrier
4003 - Aramid 3D nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

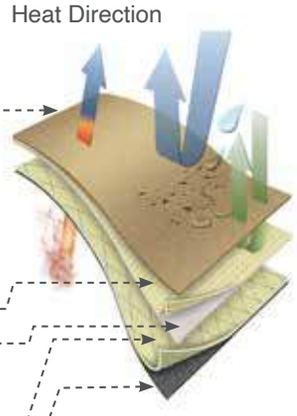

Heat Direction

MATRIX PLUS

Outer Layer
388 - PBI® Matrix 200 g/m²
40% PBI®
58% Para-Aramid
2% Antistatic

Gold

Moisture Barrier
4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

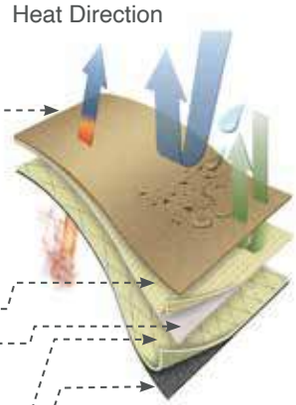

Heat Direction

PANO PLUS

Outer Layer
387 - PBI® Gold 205 g/m²
40% PBI®
58% Para-Aramid
2% Antistatic

Gold

Moisture Barrier
4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

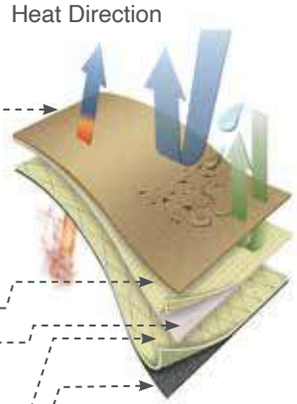

Heat Direction

ECO

Outer Layer
386 - Fire Resist 195 g/m²
75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue Gold Red Yellow Black

Moisture Barrier
4000 - Aramid nonwoven laminated to a PU membrane (125 g/m²)

Heat Barrier
5003 - Aramid felt (virgin) quilted to an Aramid/Viscose FR inner lining (250 g/m²)

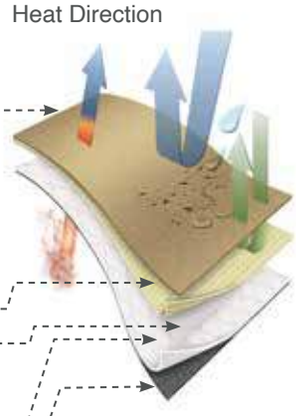

Heat Direction

FREE

Outer Layer
386 - Fire-Resist 195 g/m²
75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue Gold Red Yellow Black

Moisture Barrier
4001 - Aramid nonwoven laminated to PU membrane (125 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

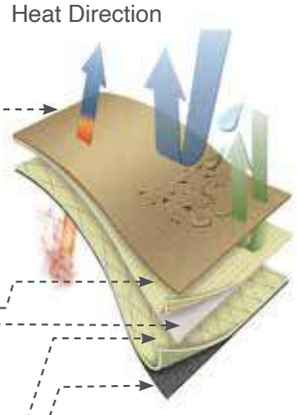

Heat Direction

FREE PLUS

Outer Layer
386 - Fire-Resist 195 g/m²
75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue Gold Red Yellow Black

Moisture Barrier
4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier
5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

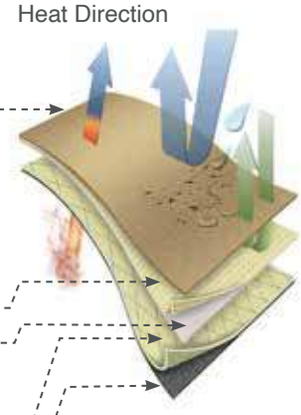

FREE PLUS RS

Heat Direction

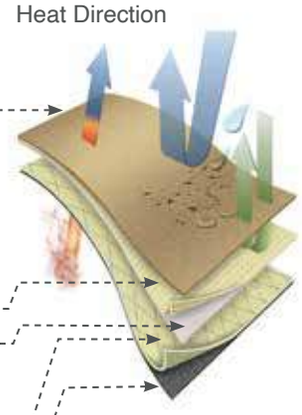

Outer Layer

392 - Fire-Resist Ripstop 195 g/m²

75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue · Gold · Red · Yellow · Black

Moisture Barrier

4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (125 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

FREE PLUS ULTRA LIGHT

Heat Direction

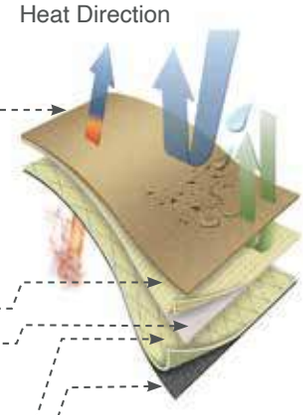

Outer Layer

386 - Fire-Resist 195 g/m²

75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Gold · Red · Yellow

Moisture Barrier

4005 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (90 g/m²)

Heat Barrier

5008 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (175 g/m²)

NEPTUN PLUS

Heat Direction

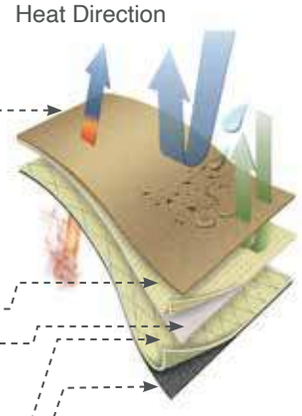

Outer Layer

444 - Poseidon 200 g/m²

79% Meta-Aramid
20% Para-Aramid
1% Antistatic

Dark Blue · Gold · Red

Moisture Barrier

4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

KAMA PLUS

Heat Direction

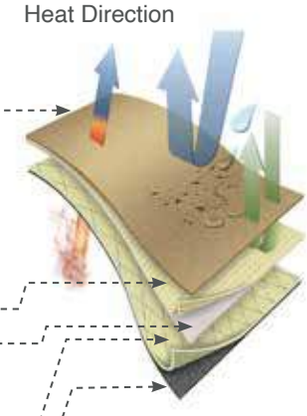

Outer Layer

507 - Kama 215 g/m²

40% Meta-Aramid
58% Para-Aramid
2% Antistatic

Dark Blue · Gold · Red

Moisture Barrier

4002 - Aramid nonwoven laminated to an e-PTFE bicomponent membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

ARMOR PLUS

Heat Direction

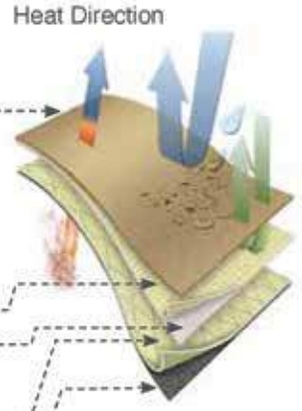

Outer Layer

511 - Armor 195 g/m²

38% Meta - Aramid
60% Para - Aramid
2% Antistatic

Brown · Gold

Moisture Barrier

4002 - Aramid nonwoven laminated to an e - PTFE bicomponent Membrane (125 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)

ARMOR STOP

Heat Direction

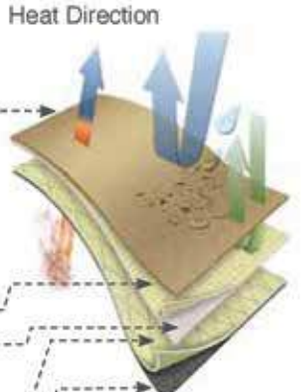

Outer Layer

511 - Armor 195 g/m²

38% Meta - Aramid
60% Para - Aramid
2% Antistatic

Brown · Gold

Moisture Barrier

4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)

BOMBA

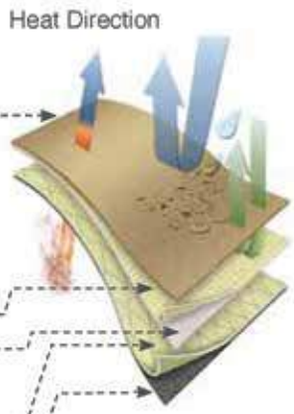

Outer Layer

392 - Fire Resist Ripstop 195 g/m²

75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Dark Blue Red

Moisture Barrier

4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)

BOMBA DUO

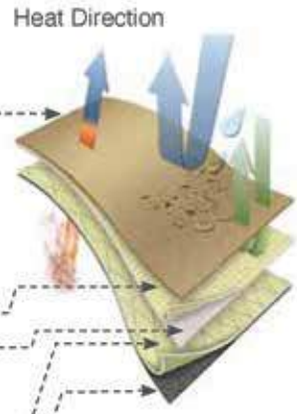

Outer Layer

392 - Fire Resist Ripstop 195 g/m²

75% Meta - Aramid
23% Para - Aramid
2% Antistatic

Dark Blue Red

Moisture Barrier

4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)

Heat Barrier

5011 - Double layer aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (260 g/m²)

FIRESAFE

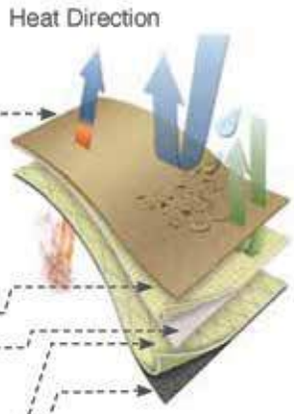

Outer Layer

525 - PBI Y55 205 g/m²

40% PBI
59% Para - Aramid
1% Antistatic

Dark Blue Gold

Moisture Barrier

4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR Inner Lining (205 g/m²)

PROLITE PLUS

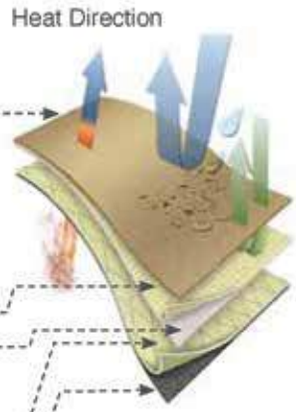

Outer Layer

572 - PBI Peak 5 180 g/m²

40% PBI
58% Para - Aramid
2% Antistatic

Gold Gray

Moisture Barrier

4003 - Aramid 3D nonwoven laminated to an e - PTFE bicomponent Membrane (165 g/m²)

Heat Barrier

5010 - Aramid Spunlaced Nonwoven Quilted to Slider Inner Lining (205 g/m²)

Heat Direction

ALU ADK 270

Outer Layer
518 - Aluminized IFR Fabric
270 g/m²

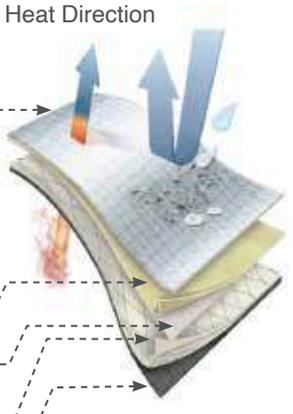

Moisture Barrier
4000 - Aramid nonwoven laminated to a PU membrane (90 g/m²)

Heat Barrier
5004 - Double layer Aramid felt quilted to an Aramid/Viscose FR inner lining (380 g/m²)

Heat Direction

ALU ADK APC

Outer Layer
519 - Aluminized Glass Fabric
500 g/m²

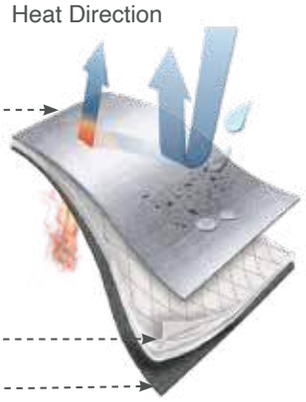

Heat Barrier
5005 - Three layers of Aramid felt (virgin) guilted to an Aramid/Viscose FR inner lining (500 g/m²)

KIVANÇ Group

ALEXUS 832346

REVOLUTION IN HIGH VISIBILITY

Glow-in-the-dark photoluminescent tapes – silhouette visible in total darkness, up to 200 m distance.

UV

Full charge in **5** minutes of daylight

Full charge in **10** minutes under fluorescent light

8 HOURS OF ILLUMINATION AFTER FULL CHARGE

No batteries required

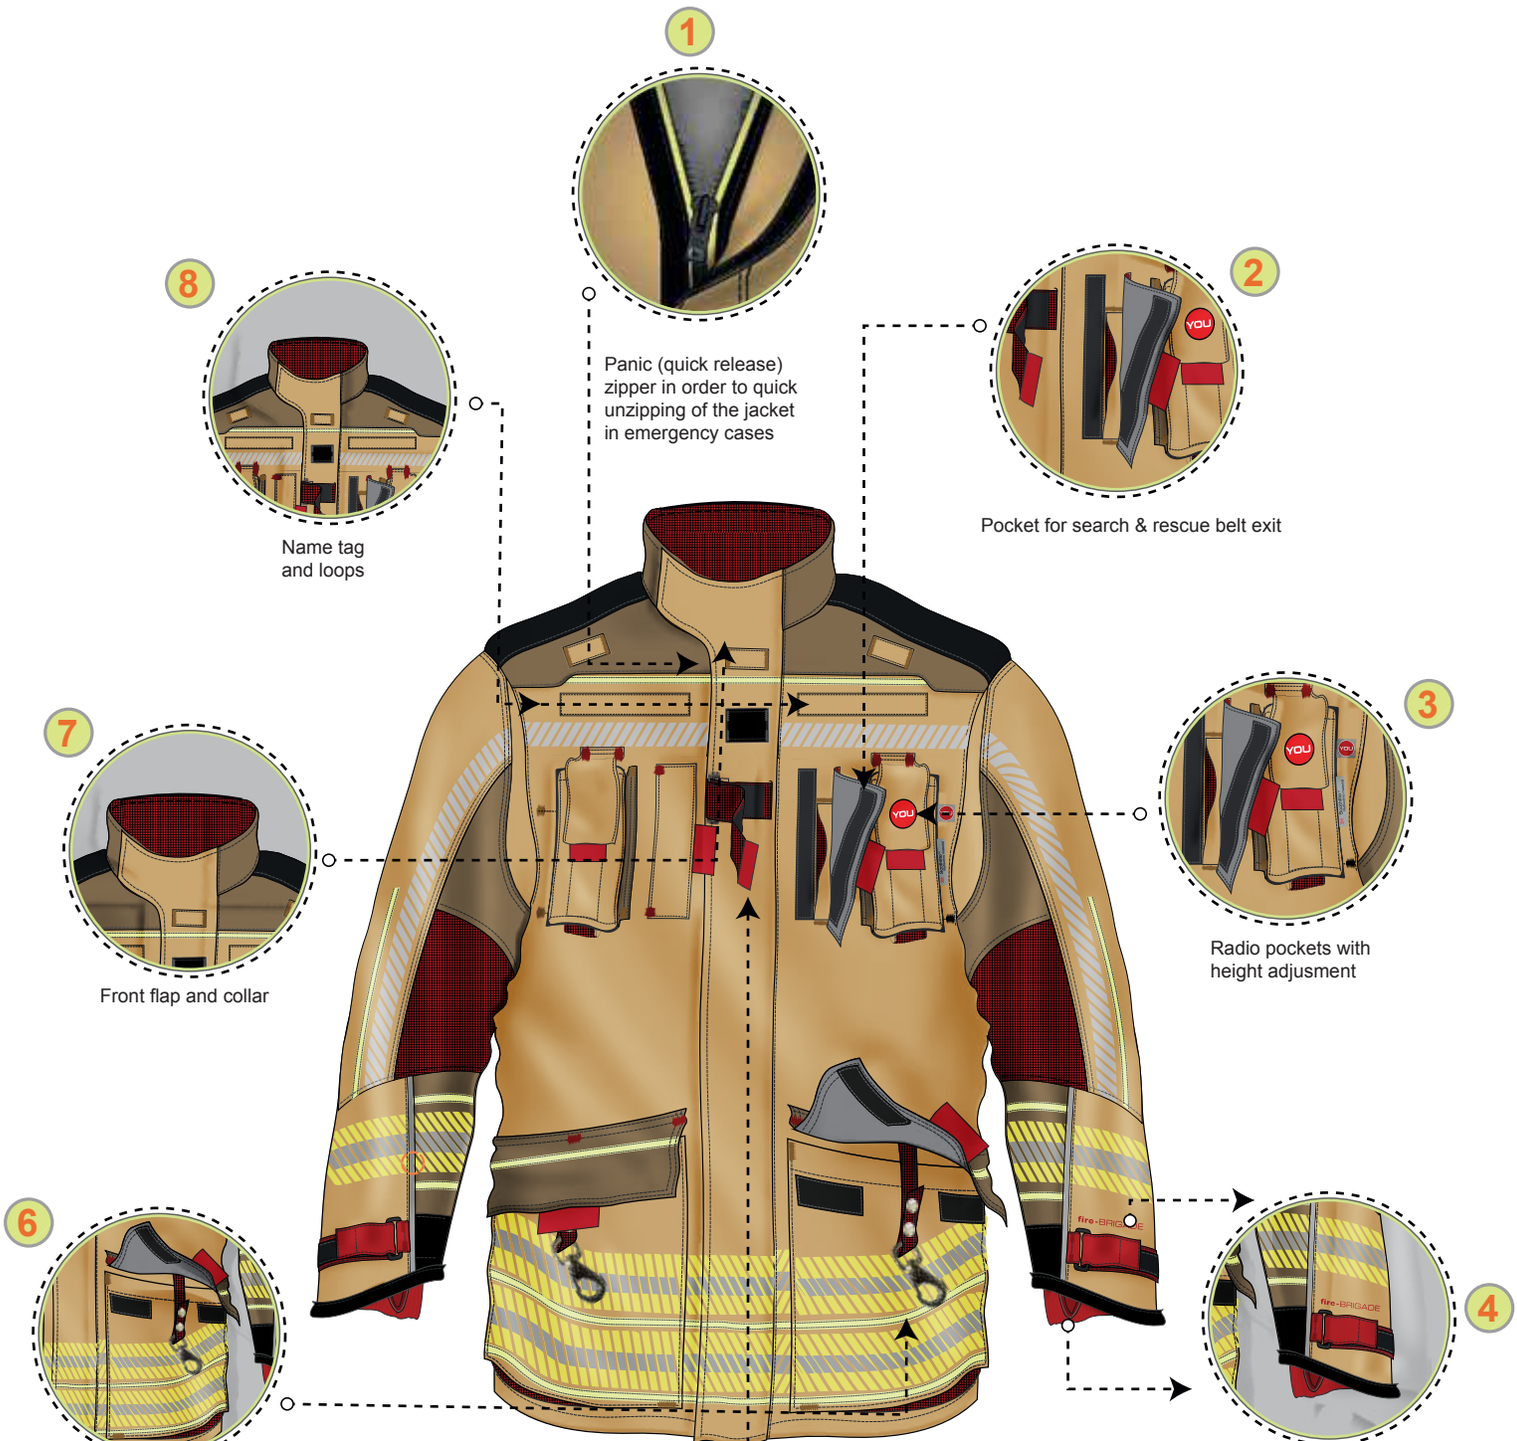
1
Panic (quick release) zipper in order to quick unzipping of the jacket in emergency cases
2
Pocket for search & rescue belt exit
3
Radio pockets with height adjusment
4
Adjustable cuff system
Anti-wicking tapes on sleeve hems to prevent water absorption
5
Torch holder
6
Bellow pocket with additional hand warmer pocket
Hanger tab with snap fastener in pocket to hang gloves when they are not used
7
Front flap and collar
8
Name tag and loops

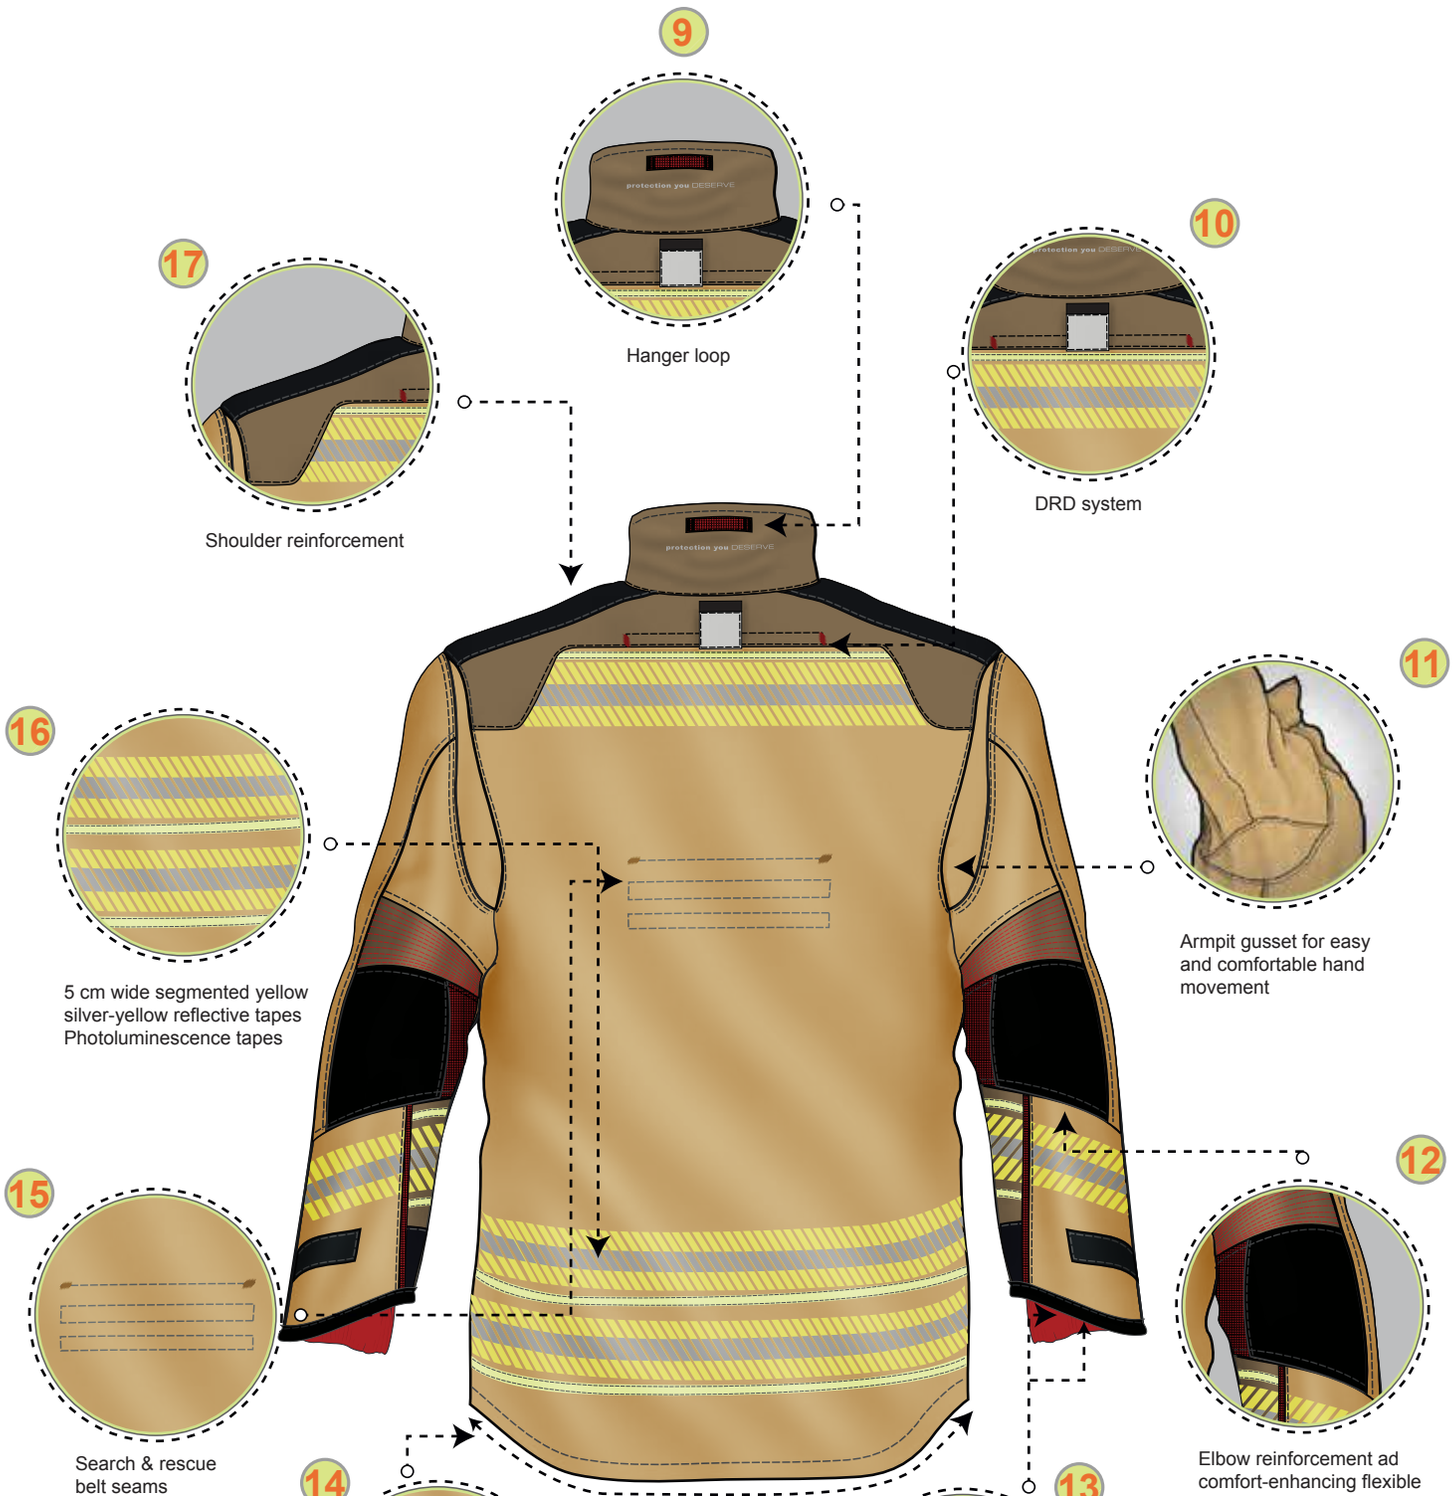
9
Hanger loop
10
DRD system
17
Shoulder reinforcement
16
5 cm wide segmented yellow
silver-yellow reflective tapes
Photoluminescence tapes
11
Armpit gusset for easy
and comfortable hand
movement
15
Search & rescue
belt seams
12
Elbow reinforcement ad
comfort-enhancing flexible
elbow system for easy and
comfortable body movement
14
Back jacket hem inclined from
side to back and long to
prevent opening the waist,
while leaning forward
13
Cuff reinforcement
Knitted red cuffs



18 Hanger loops

19 Washing label and inner pocket details



20 Pocket fot full body harness belt exit and pen pocket



21 Anti-wicking fabric to prevent fluid entry
Water drain holes
Inspection opening with zipper closure

KIVANÇ Group

SUIT 832346
TROUSERS 842313
JACKET 841246

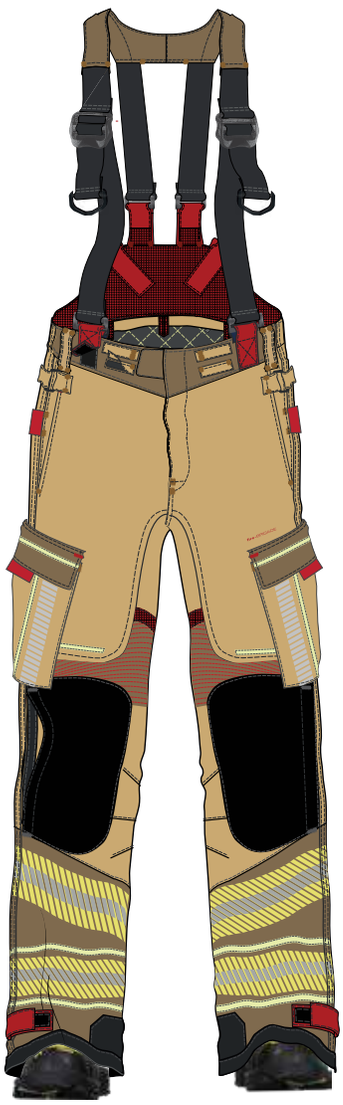

Inspection opening

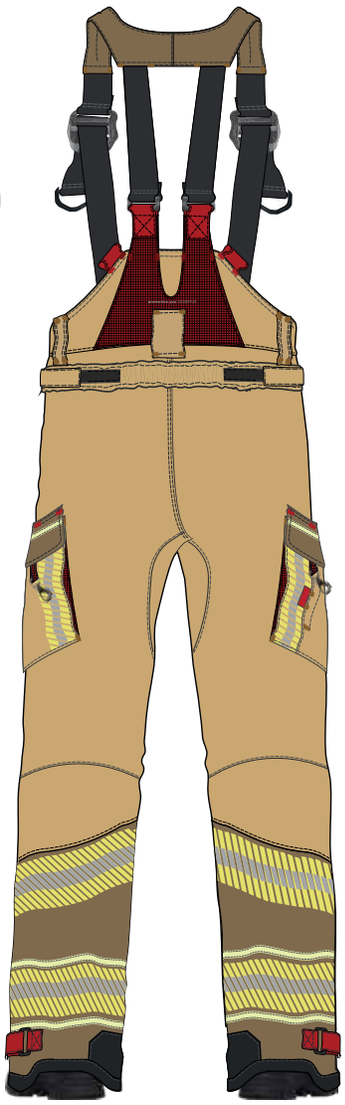

22

Adjustable and removable suspender system

23



Exit points for belt of sit harness

24



Crotch gusses for easy movement

25



Adjustable belt system

26



Wear resistant knee reinforcement with replaceable padding closed with velcro tapes

27

Trotters with reinforcement are adjustable with velcro tapes
Inward cut on the back of trotters for comfortable movement

28



Velcro tapes for belt of full body harness

29



Cargo pocket with knife pocket

DRD System

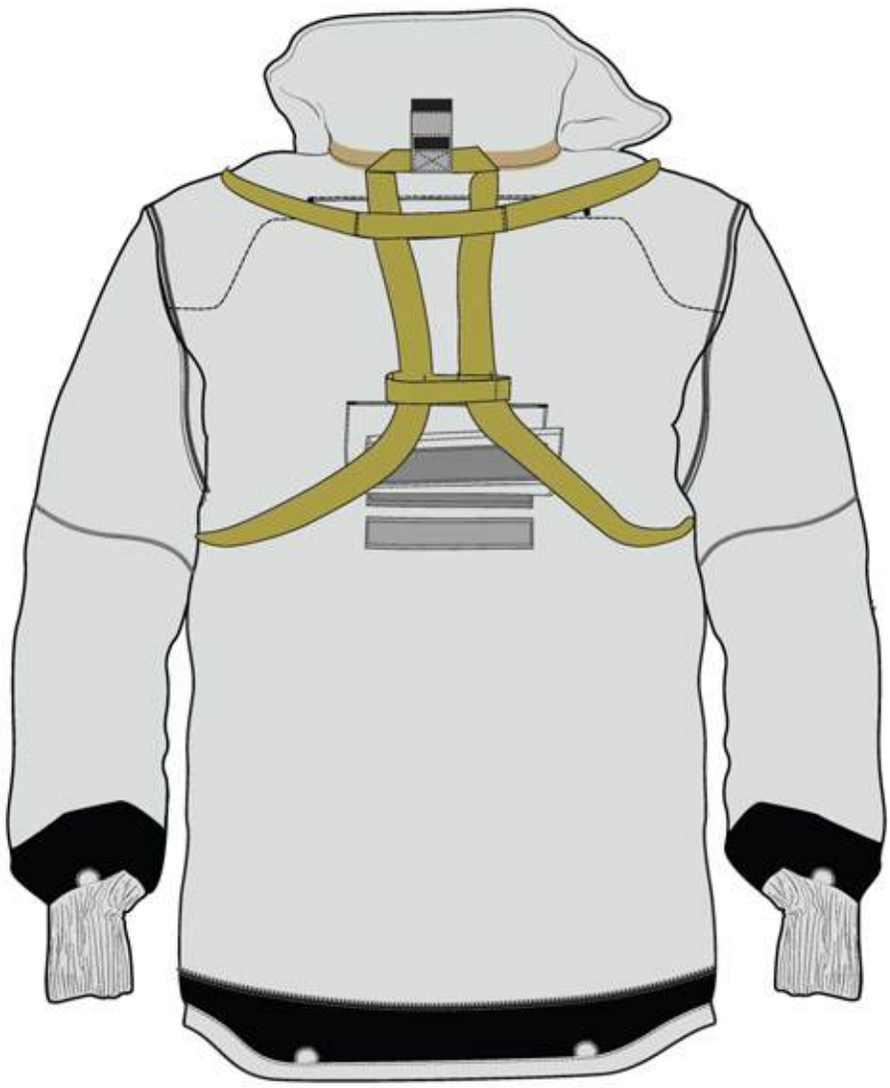

Drag rescue device enables easy removal
of firefighter in case of emergency with the rescue belt.

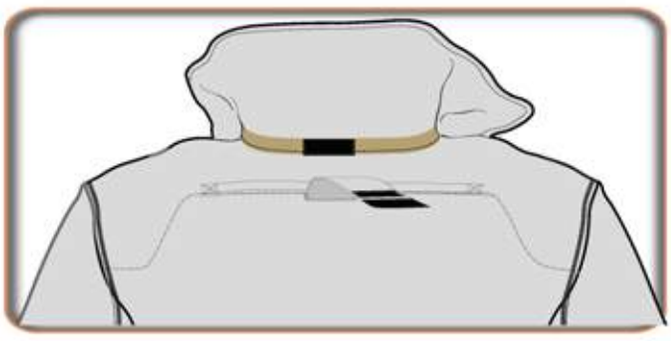

DRD with open handle - 1

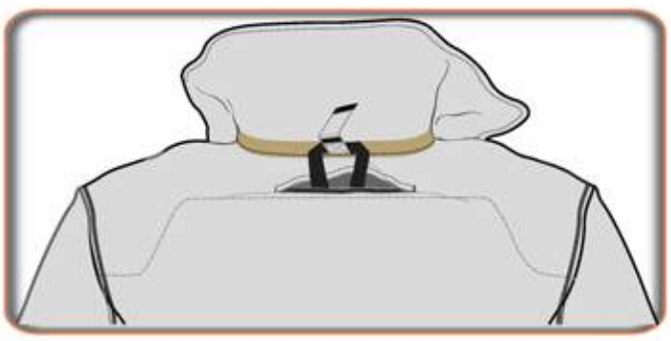

DRD with open handle - 2

-OPTIONAL-

Chest Belt

Firefighter fixes himself by using the belt system.Chest belt, which wraps the whole chest from the inside (between the outer layer and the moisture barrier), converges at the front

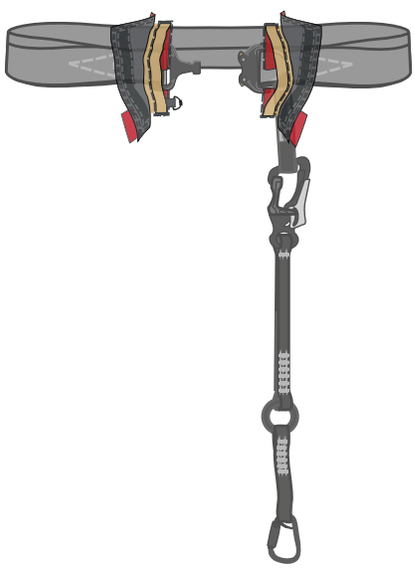

Chest Belt

Chest belt front view inner details

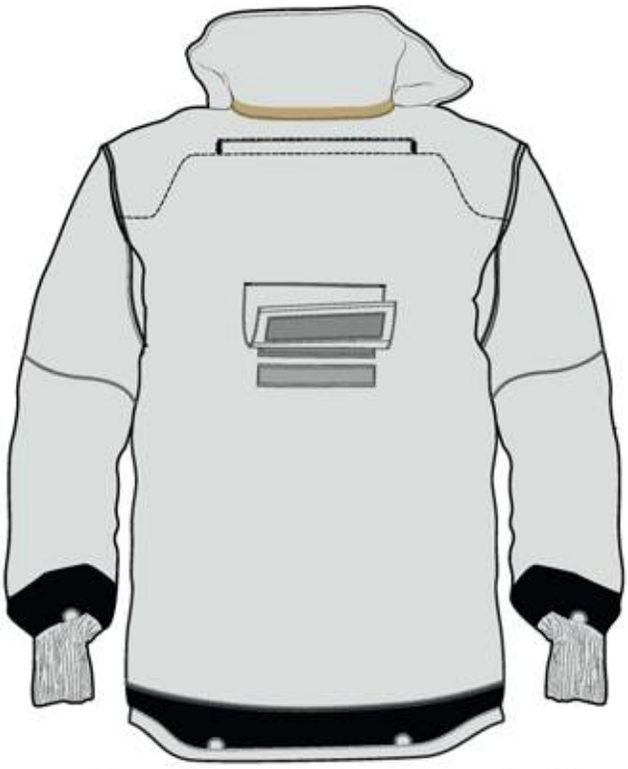

Chest belt back view inner details

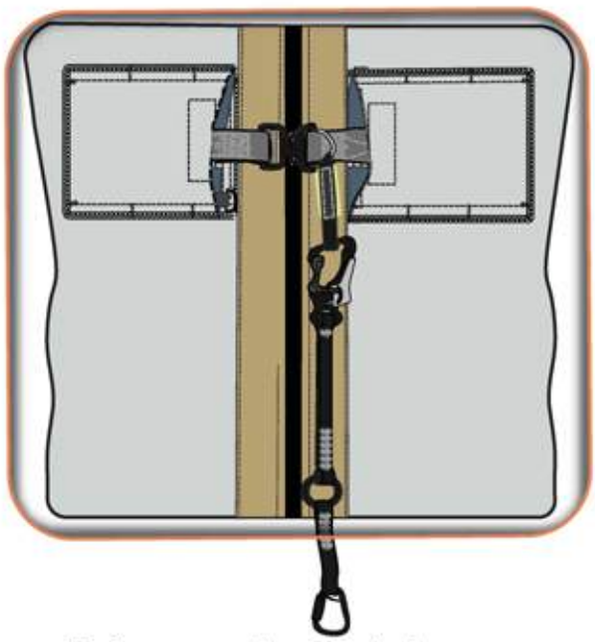

Belt connection front view

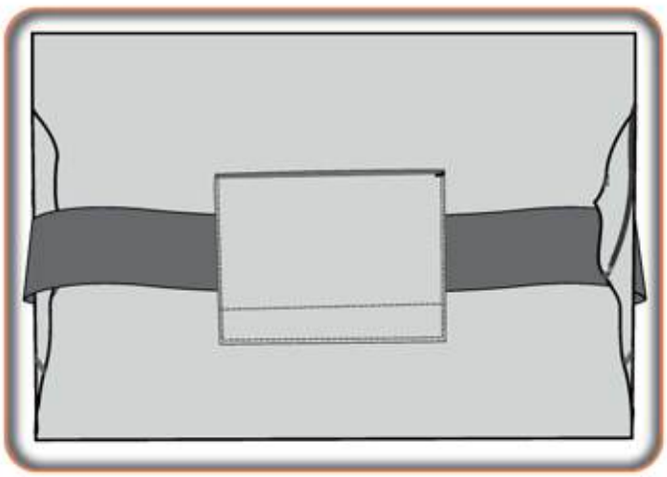

Belt connection back inner view

Sit Harness 890144

-OPTIONAL-

Sit Harness

Front View

Back view

Sit harness enables freedom of movement and a high degree of safety without weighing much trough waist belt and leg loops.

Rescuer can sit comfortably in it when hanging. The load is spread to the upper thighs in the event of a fall.

-OPTIONAL-

Sit Harness 890144

KIVANÇ Group

Sit Harness

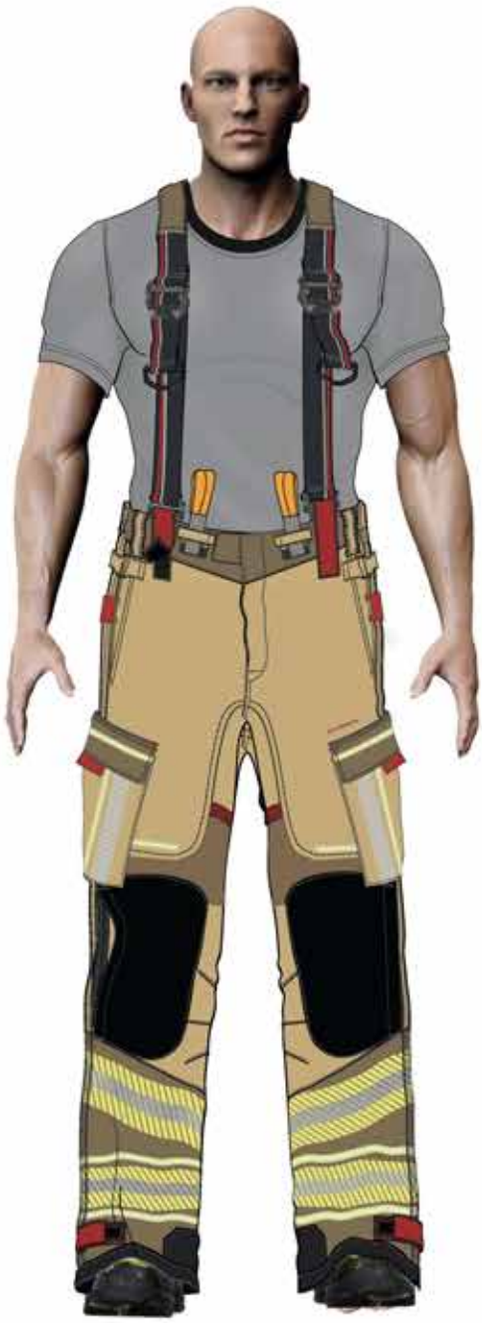

Sit harness exit points

Sit harness front inner view

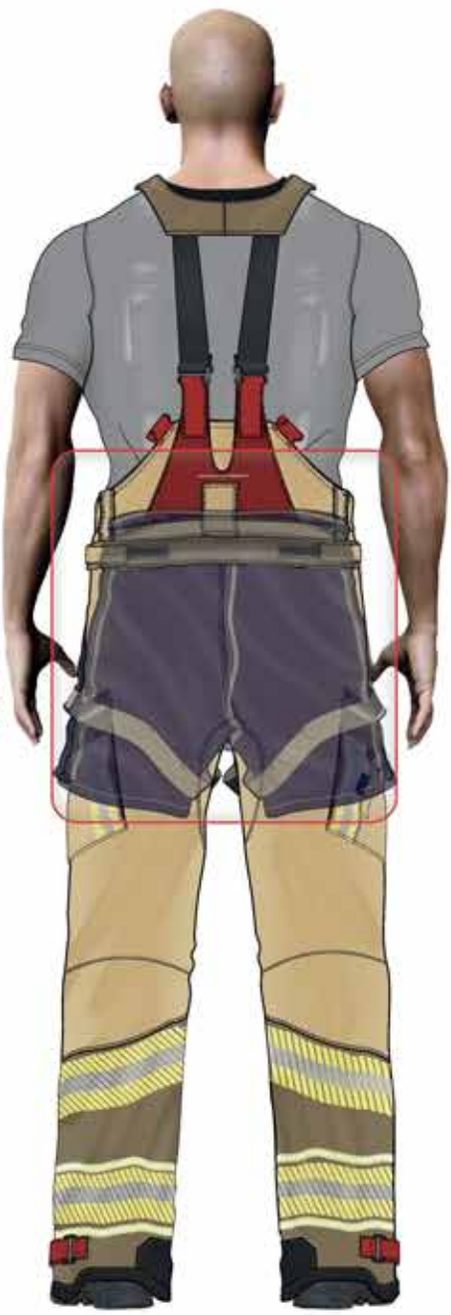

Sit harness back inner view

KIVANÇ Group

Full Body Harness 890145

-OPTIONAL-

Full Body Harness

Front view | Back view | Side view

A full body harness is body holding device used to protect firefighters/rescuers from falls by distributing the force throughput the body, ensuring the person is suspended upright after the fall.

Full body harness functions in the same way as a sit harness and chest harness combination.

It provides more body support for parts including; hips, legs, chest and shoulders.

Full body harness is easy to use, adjust and suitable for people of all shapes and sizes.

-OPTIONAL-

Full Body Harness 890145

KIVANÇ Group

Full Body Harness

Full body harness exit points
from with firefighter jacket

Full body harness connection
with firefigther trousers

MAXIMUS 2.0 832551

KIVANÇ Group

REVOLUTION IN HIGH VISIBILITY

Glow-in-the-dark photoluminescent tapes – silhouette visible in total darkness, up to 200 m distance.

UV

Full charge in **5** minutes of daylight

Full charge in **10** minutes under fluorescent light

8 HOURS OF ILLUMINATION AFTER FULL CHARGE

No batteries required

4
Panic (quick release) zipper in order to quick unzipping of the jacket in emergency cases
5
Radio pockets with height adjusment
3
Front flap and collar
2
Torch holder
6
Name tag and loops
1
Hanger tab with snap fastener in pocket to hang gloves when they are not used
7
Adjustable cuff system
Anti-wicking tapes on sleeve hems to prevent water absorption

KIVANÇ Group

SUIT 832551
JACKET 841541
TROUSERS 842686



15 Hanger loops



16 Inner pocket details

17 Anti-wicking fabric to prevent fluid entry
Water drain holes
Inspection opening with zipper closure

KIVANÇ Group

SUIT 832551
TROUSERS 842686
JACKET 841541

18



Adjustable and removable suspender system

19



Cargo pocket

20



Crotch gusses for easy movement

21



Adjustable belt system

22



Wear resistant knee reinforcement with replaceable padding closed with velcro tapes

23

Trotters with reinforcement are adjustable with velcro tapes
Inward cut on the back of trotters for comfortable movement

OPTIMUS 2.0 832536

KIVANÇ Group

Heat Direction

FIRESTOP

Outer Layer
390 - PBI® X55 Gold 205 g/m²
40% PBI®
59% Para-Aramid
1% Antistatic

Gold Brown

3D Moisture Barrier
4003 - Heat resistant 3D nonwoven
(67% Meta-Aramid / 33%Para-Aramid)
laminated to an e-PTFE bicomponent
Membrane (165 g/m²)

Heat Barrier
5000 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
quilted to an Aramid/Viscose FR
inner lining (205 g/m²)

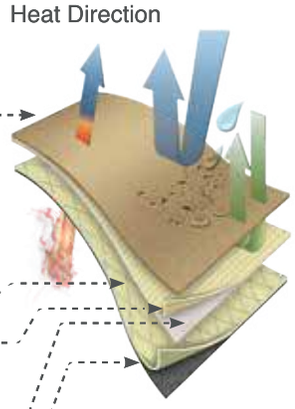

Heat Direction

MATRIX PLUS

Outer Layer
388 - PBI® Matrix 200 g/m²
40% PBI®
58% Para-Aramid
2% Antistatic

Gold

Moisture Barrier
4002 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
laminated to an e-PTFE bicomponent
Membrane (165 g/m²)

Heat Barrier
5000 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
quilted to an Aramid/Viscose FR
inner lining (205 g/m²)

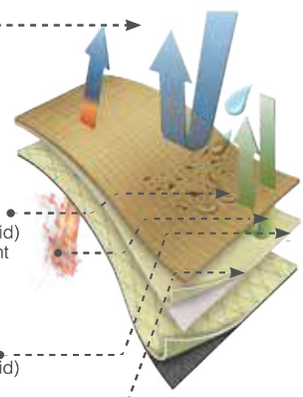

Heat Direction

FREE PLUS

Outer Layer
386 - Fire-Resist 195 g/m²
75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue Gold Red Yellow Black

Moisture Barrier
4002 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
laminated to an e-PTFE bicomponent
Membrane (125 g/m²)

Heat Barrier
5000 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
quilted to an Aramid/Viscose FR
inner lining (205 g/m²)

AVAILABLE IN STOCK
Dark Blue Gold

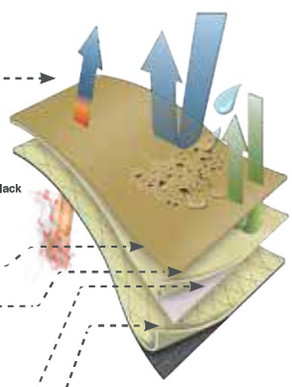

Heat Direction

FREE PLUS RS

Outer Layer
392 - Fire-Resist Ripstop 195 g/m²
75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue Gold Red Yellow Black

Moisture Barrier
4002 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
laminated to an e-PTFE bicomponent
Membrane (125 g/m²)

Heat Barrier
5000 - Heat resistant nonwoven
(85% Meta-Aramid / 15%Para-Aramid)
quilted to an Aramid/Viscose FR
inner lining (205 g/m²)

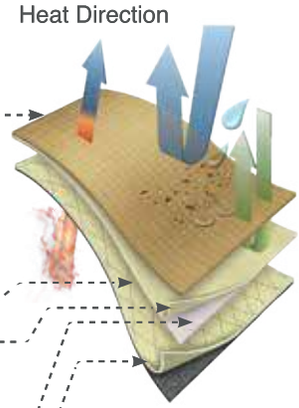

REVOLUTION IN HIGH VISIBILITY

Glow-in-the-dark photoluminescent tapes – silhouette visible in total darkness, up to 200 m distance.

UV

Full charge in **5** minutes of daylight

Full charge in **10** minutes under fluorescent light

8 HOURS OF ILLUMINATION AFTER FULL CHARGE

No batteries required

KIVANÇ Group

SUIT 832536
JACKET 841527
TROUSERS 842462

Quick-release (panic) zipper for rapid removal of the jacket in emergency situations



Shoulder reinforcement made of outer fabric with foam padding



Torch holder on flap



Radio pockets with height adjustment



Glove hanger tab with snap fastener inside pocket for storing gloves when not in use

Adjustable cuff system with buckle



Hanger

Anti-wicking tapes on sleeve hems to prevent water absorption



Elbow reinforcement



Extended back hem, inclined from the sides towards the back, ensuring full waist coverage when leaning forward



DRD-compatible opening (accessory available upon request)



Hanger loops for drying

Washing label and
inner pocket details



Inner front flap and collar details

Anti-wicking fabric to prevent
fluid entry
Water drain holes
Inspection opening with zipper
closure

KIVANÇ Group

SUIT 832536

TROUSERS 842462

JACKET 841527

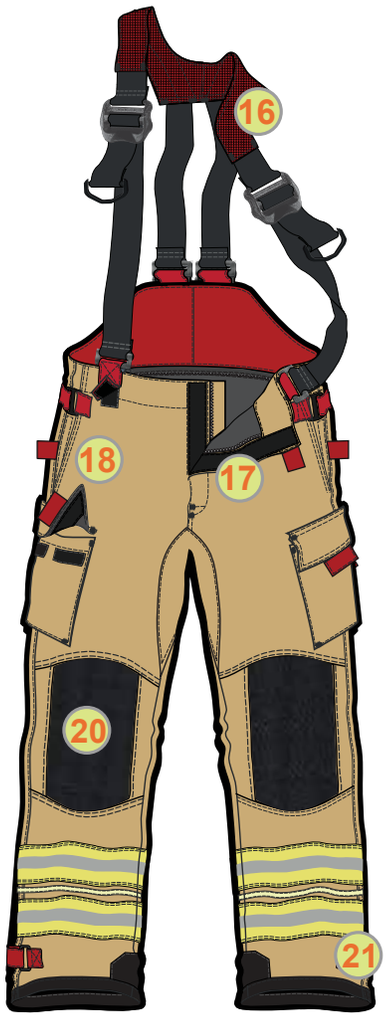

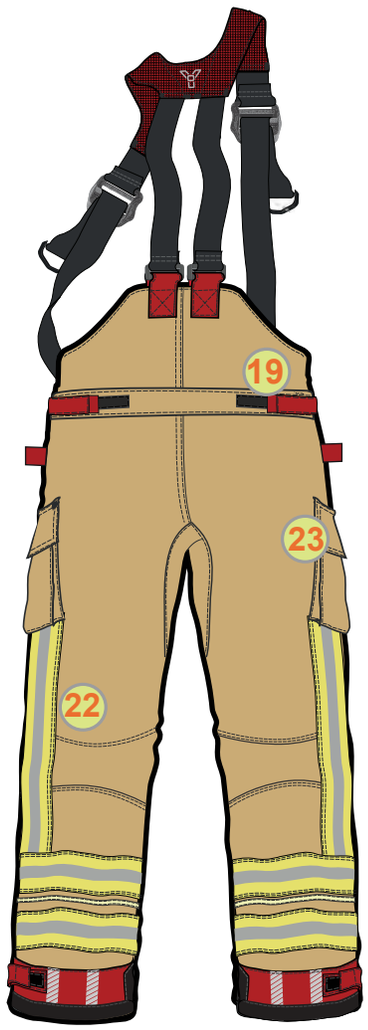

16

Adjustable and removable suspender system with padding

17



Front flap with velcro and zipper closure

18



French pocket with external access to inner layers

19



Adjustable belt system

20



Knee reinforcement with padding

21

Reinforced adjustable trotter with buckle

22



3D articulated knee design

23



Semi bellow cargo pocket

STEFAN II 832356

KIVANÇ Group

REVOLUTION IN HIGH VISIBILITY

Glow-in-the-dark photoluminescent tapes – silhouette visible in total darkness, up to 200 m distance.

UV

Full charge in 5 minutes of daylight

Full charge in 10 minutes under fluorescent light

8 HOURS OF ILLUMINATION AFTER FULL CHARGE

No batteries required

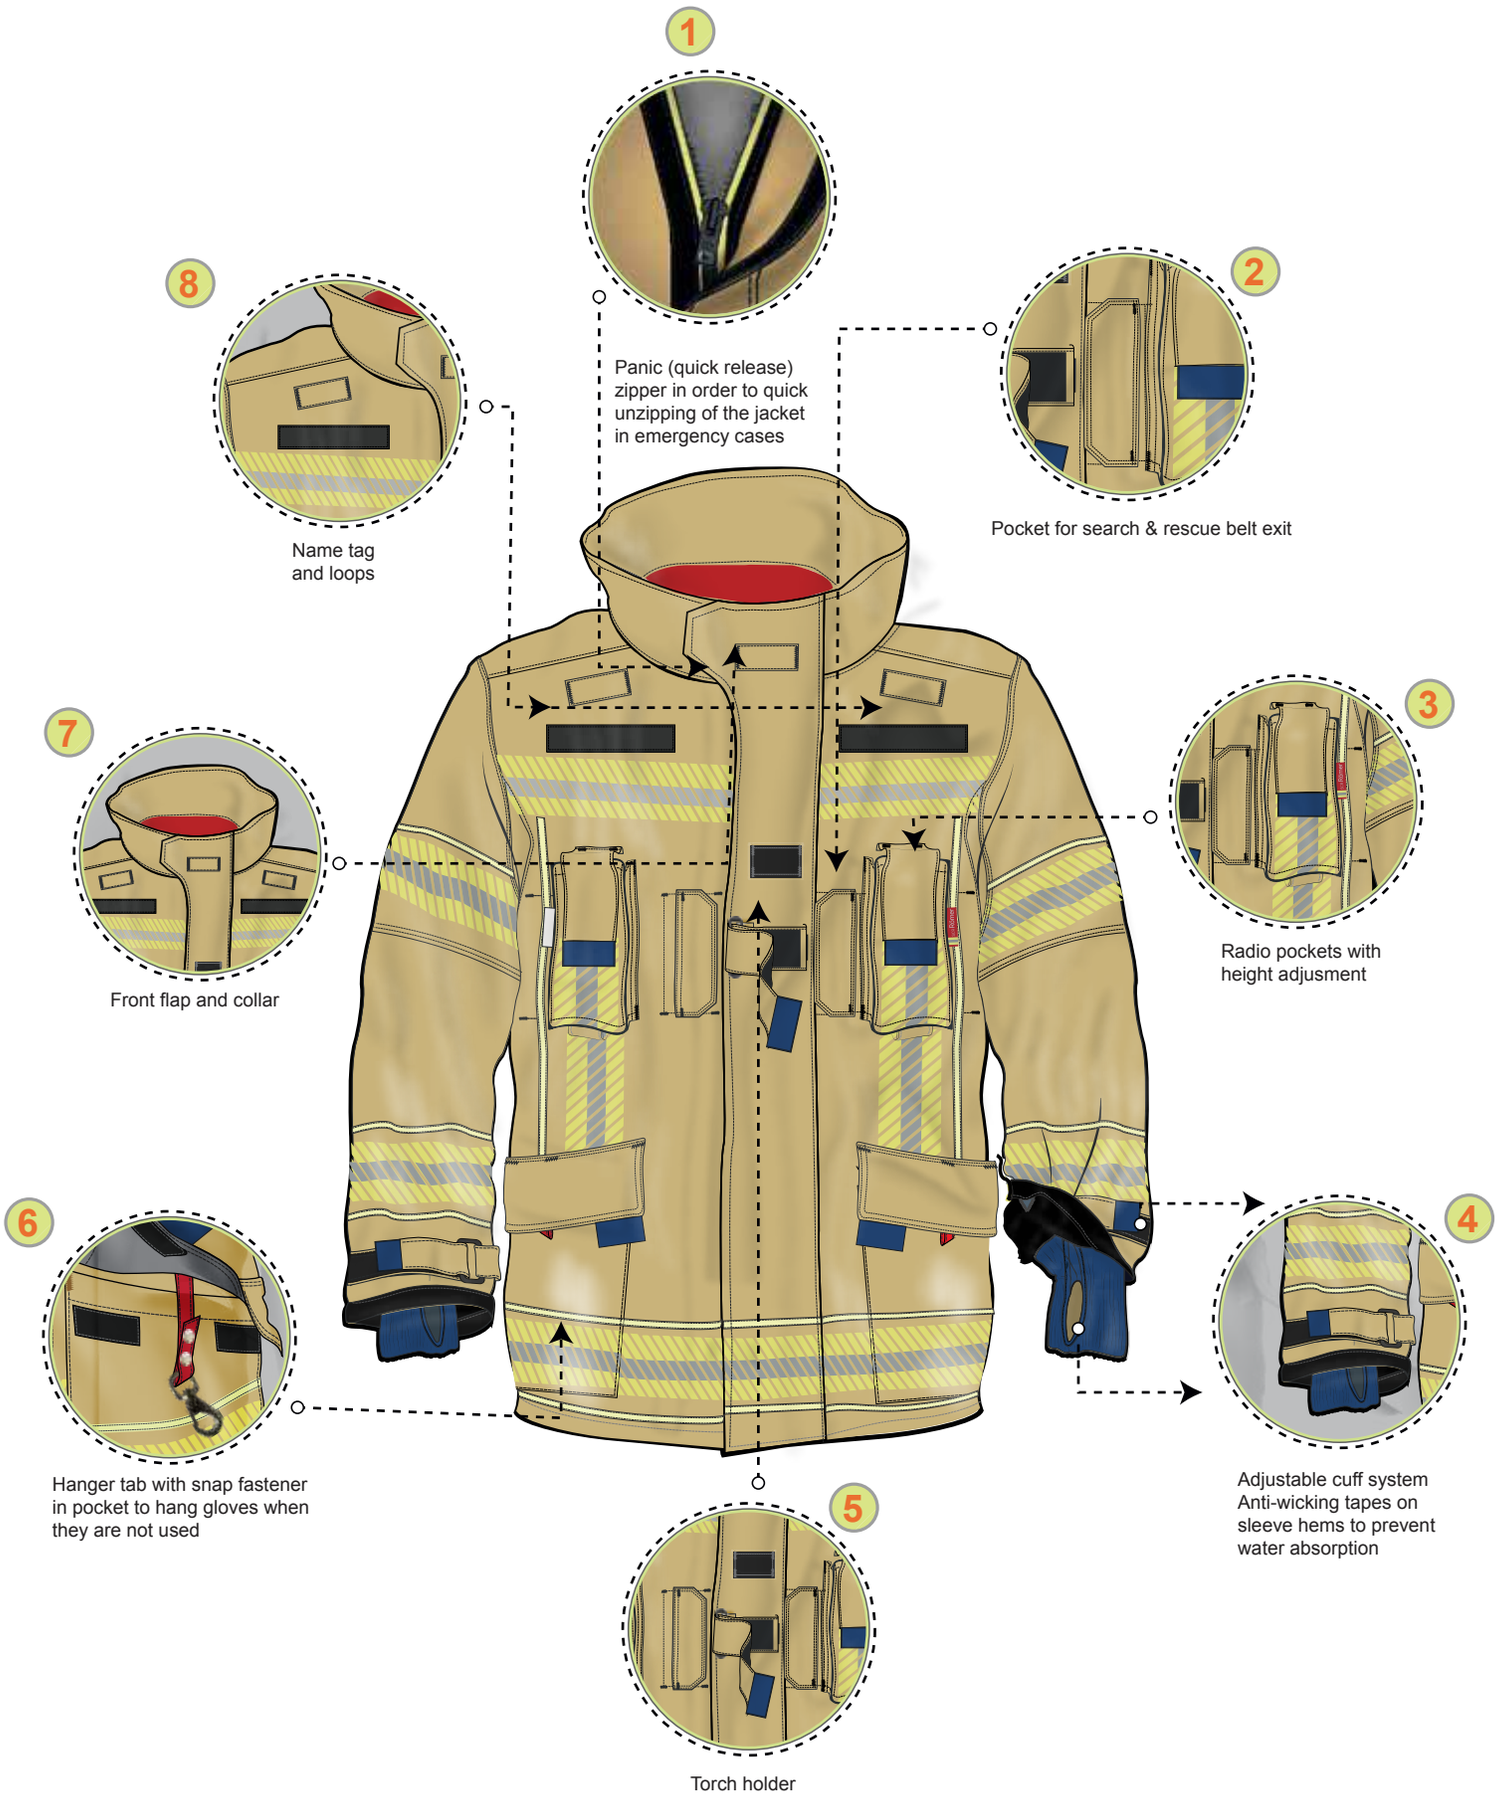
1
Panic (quick release) zipper in order to quick unzipping of the jacket in emergency cases
2
Pocket for search & rescue belt exit
3
Radio pockets with height adjusment
4
Adjustable cuff system
Anti-wicking tapes on sleeve hems to prevent water absorption
5
Torch holder
6
Hanger tab with snap fastener in pocket to hang gloves when they are not used
7
Front flap and collar
8
Name tag and loops

9



Hanger loop

14



7,5 cm wide segmented
yellow
silver-yellow reflective tapes
Photoluminescence tapes

10

Armpit gusset for easy
and comfortable hand
movement

13



Search & rescue
belt seams

11

Elbow reinforcement

12

Cuff reinforcement
Knitted red cuffs

15



Hanger loops

16

Washing label and
inner pocket details

17



Pen pocket

18

Anti-wicking fabric to prevent fluid entry
Water drain holes
Inspection opening with zipper closure

19

Adjustable and removable suspender system

20



Crotch gusses for easy movement

21

Cargo pocket with knife pocket

22

Adjustable belt system

23



Wear resistant knee reinforcement with replaceable padding closed with velcro tapes

24



Trotters with reinforcement are adjustable with velcro tapes

PRIMUS 2.0 832548

KIVANÇ Group

Heat Direction

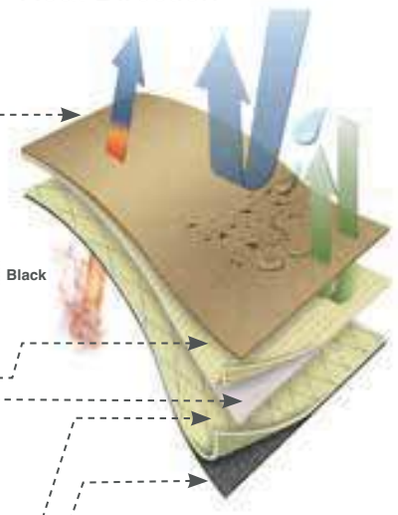

FREE

Outer Layer

386 - Fire-Resist 195 g/m²

75% Meta-Aramid
23% Para-Aramid
2% Antistatic

Dark Blue | Dark Blue Rip-Look | Gold | Red | Yellow | Black

Moisture Barrier

4001 - Aramid nonwoven laminated to PU membrane (125 g/m²)

Heat Barrier

5000 - Aramid nonwoven quilted to an Aramid/Viscose FR inner lining (205 g/m²)

AVAILABLE IN STOCK

Dark Blue Rip - Look

Suit 832548

Quick-release (panic) zipper for rapid removal of the jacket in emergency situations



Radio pocket with height adjustment (also suitable for torch use)

Adjustable cuff system



Pocket hanger tab with snap fastener



Ergonomic zipper pull tab for easy operation with gloves

Knitted cuff

KIVANÇ Group

SUIT 832548

TROUSERS 842683

JACKET 841538

Front flap closed with velcro tape and zipper

X-type suspenders

Adjustable suspender system with buckle

SALVATOR 832330

KIVANÇ Group

Suit 832330

Panic (quick release) zipper in order to quick unzipping of the jacket in emergency cases
Name tag
Armpit gusset for easy and comfortable hand movement
YOU
Shoulder reinforcement
Radio pockets
Bellow pocket with velcro tape
Adjustable cuff system and knitted cuffs
Anti-wicking tape

Velcro tape to fasten
the front collar flap
Back bellow system
Shoulder reinforcement
back view
Elbow reinforcement

Inside View of Jacket
Detachable Heat Barrier

Collor flap

Inner pocket details

Heat barrier is fastened to outershell fabric with snap buttons

KIVANÇ Group

SUIT 832330
JACKET 841330
TROUSERS 842329

Adjustable suspender system



Front flap

Adjustable belt system back view

Trotter reinforcement and yellow - silver - yellow reflective tapes

Adjustable belt system front side view

Wear resistant knee reinforcement

Back trotter detail

Cargo pockets

Inside View of Jacket
Detached Heat Barrier

Heat barrier is integrated to moisture barrier. Detacheable heat barrier is attached to outershell fabric by means of snap buttons. Heat barrier has inside pockets on right and left. Only the collar of the heat barrier is attached by means of velcro tape.

Detached Moisture Barrier View

Heat barrier is integrated to moisture barrier. Detachable heat barrier is attached to outershell fabric by means of snap buttons. Only the collar of the heat barrier is attached by means of velcro tape.

Detached Moisture Barrier View

Heat barrier is integrated to moisture barrier. Detacheable heat barrier is attached to outershell fabric by means of snap buttons

KIVANÇ Group

MARE 83115

KIVANÇ Group

FIREFIGHTER COVERALL 833115

FIREFIGHTER COVERALL 833115

Double slider zipper

Heat barrier is detachable
from outer fabric by means
of snap buttons



Adjustable cuff system
Knitted cuffs

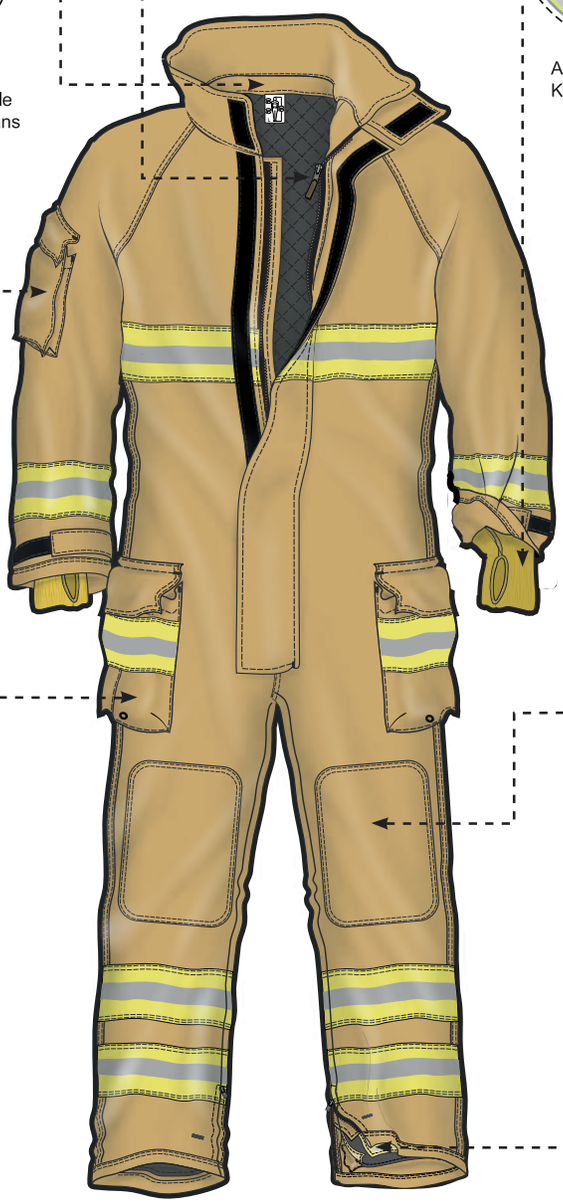

Sleeve bellow pocket
with velcro tape



Knee reinforcement

Side bellow pocket
with velcro tape

Adjustable trotter system
with zipper

FIREFIGHTER COVERALL 833115



Elbow reinforcement



Elastic waist system



Side bellow pocket
with velcro tape



Yellow - silver - yellow
reflective tapes on
trotters

Inverse View of Coverall

Heat barrier is integrated to moisture barrier. Detachable heat barrier is attached to outershell fabric by means of snap buttons. There is a detachable heat barrier within the coverall.

Detached Heat Barrier View

Heat barrier is integrated to moisture barrier. Detacheable heat barrier is attached to outershell fabric by means of snap buttons

ALUSTAR ULTRA LIGHT 830100

KIVANÇ Group

There is a front collar flap that can be adjusted to neck of person

Panic zipper is used for quick unzipping in emergency case

Knitted cuffs at sleeve hems that prevent ingress of flame and bruning parts

Front flap and collar

Adjustable suspenders
to fit any body size

Front flap can be easily opened
and closed with Velcro tape
and zipper

SHROUD

827100 - Wolf

- Shroud with gold coated visor and EN 397 certified helmet

GLOVES

805100 - Tyler

- EN 1486 certified aluminized gloves

GAITERS

817100 - Harvey

- Gaiters with EN 15090 certified rubber boots

CARRYING BAG

- Aluminized set contains jacket, trousers, shroud, gaiter, gloves. There are carried with this bag.

KIVANÇ Group

ALUSTAR 830102

There is a front collar flap that can be adjusted to neck of person

Panic zipper is used for quick unzipping in emergency case

Knitted cuffs at sleeve hems that prevent ingress of flame and bruning parts

Front flap and collar

Adjustable suspenders
to fit any body size

Front flap can be easily opened
and closed with Velcro tape
and zipper

SHROUD

827100 - Wolf

- Shroud with gold coated visor and EN 397 certified helmet

GLOVES

805100 - Tyler

- EN 1486 certified aluminized gloves

GAITERS

817101 - Curtis

- Gaiters with EN 15090 certified rubber boots

CARRYING BAG

- Aluminized set contains jacket, trousers, shroud, gaiter, gloves. There are carried with this bag.

ERIC 854106

EN ISO 11612 A1 A2 B1 C1 F1 | EN 1149-3 EN 1149-5 | EN61482-1-2 Class 1 (4kA)

Art No:	854106
Material:	Fire-Blocker 190 g/m² Interlock 93% Meta-aramid, 5% Para-aramid, 2% Antistatic
Color:	Dark Blue, Ecru
Properties:	Underwear designed to wear inside non-flammable clothing in a cold environment Round collar with long sleeves, long johns Skin-friendly, breathable technical knit 100% Aramid sewing thread

NICK 825105

Aramid

EN 13911 | EN ISO 11612 A1 A2 B1 C1 F1 | EN 1149-3 EN 1149-5 | EN1482-1/ATPV 38,9 cal/cm2

Art No:	825105
Material:	Double layer knitted fabric and 100% Aramid sewing thread
Outershell Material:	Fire-Blocker 250 g/m² Interlock 93% Meta-aramid, 5% Para-aramid, 2% Antistatic
Inner Lining:	Fire-Blocker 250 g/m² Interlock 93% Meta-aramid, 5% Para-aramid, 2% Antistatic
Color:	Dark Blue, Ecru
Description:	Double layer hood with ergonomic design in the form of head and neck, ergonomic face opening, special stitching preventing thickness on sewing area for comfortable skin-friendly wearing

NICK 825105

PBI

EN 13911

Art No:	825105
Material:	Double layer knitted fabric and 100% Aramid sewing thread
Outershell Material:	PBI 170 g/m² 40% PBI, 58% Para-aramid, 2% Antistatic
Inner Lining:	Aramid / Viscose FR 220 g/m² 50% Aramid, 50% Viscose FR
Color:	Gold
Description:	Double layer hood with ergonomic design in the form of head and neck, ergonomic face opening, special stitching preventing thickness on sewing area for comfortable skin-friendly wearing

NICK 825105

Aramid / Viscose FR

EN 13911 EN 1149-3 EN 1149-5

Art No:	825105
Material:	Double layer knitted fabric and 100% Aramid sewing thread
Outershell Material:	Aramid / Viscose FR 220 g/m² 50% Aramid, 50% Viscose FR
Inner Lining:	Aramid / Viscose FR 220 g/m² 50% Aramid, 50% Viscose FR
Color:	Dark blue, pink
Description:	Double layer hood with ergonomic design in the form of head and neck, ergonomic face opening, special stitching preventing thickness on sewing area for comfortable skin

BLOCK-HOOD 825126

EN 13911 EN 1149-3 EN 1149-5

Art No:	825126
Material:	Double layer knitted fabric and 100% Aramid sewing thread
Outershell Material:	Fire-Blocker 240 g/m² Interlock 93% Meta-aramid, 5% Para-aramid, 2% Antistatic
Inner Lining:	Particulate Blocking Barrier 150 g/m²
Color:	Dark Blue, Ecru
Description:	Particulate-protective hood helps to protect the head and neck from toxic airborne particulates, particularly soot.Particulate-protective hood is made of aramid knitted fabric on the outside and tri-layer laminate knitted fabric on the inside.

SEKUR 810220000

PBI® Matrix

EN 659:2003 + A1:2008 + AC:2009

Art No:	Sekur Matrix 810220000
Material:	PBI® Matrix
Color:	Gold / Black
Size:	6-13 according to EN 659 and EN 420
Properties:	Made of PBI Matrix fabric Para-aramid knitted inner lining Waterproof and breathable membrane The palm, knuckles, finger joints and fingertips are reinforced with silicon / carbon coated para-aramid fabric. Flame resistant photoluminescent tape with glow in the dark effect. Para-aramid knitted cuff

REACTOR S 810220110

FR Leather / Para-aramid

EN 659:2003 + A1:2008 + AC:2009

Art No:	Reactor S 810220110
Material:	Leather / Para-aramid fabric
Color:	Black / Yellow
Size:	6-13 according to EN659 and EN420
Properties:	Black / yellow firefighting gloves made of flame retardant leather It has a para aramid inner lining It has a breathable, waterproof membrane When not in use, the glove can be hung with a loop/ hook Adjustable elastic part between the glove and cuff ensures that the glove fits perfectly on the wrist It has a yellow knitted aramid cuff

TURAN 810220001

Aramid

EN 659:2003 + A1:2008 + AC:2009

Art No:	810220001
Material:	Aramid
Color:	Dark blue
Size:	6-13 according to EN 659 and EN 420
Properties:	Made of Aramid fabric Para-aramid inner linning and FR cotton cuff lining Waterproof and breathable membrane The palm, back of the hand and fingertips are reinforced with silicon / carbon coated Para-aramid fabric. Finger joints are protected with bellow type red aramid fabric FR yellow-silver-yellow reflective tape and silver reflective label on the cuff for high visibility Adjustable strap made of dark blue aramid with Velcro closure

SEIZ® FIREFIGHTER PREMIUM

Firefighter Premium

EN 659:2003 + A1:2008

Art No:	FIREFIGHTER PREMIUM
Material:	Knit of Para-aramid with SEIZ® Silicon Carbon
Color:	Black / Navyblue
Size:	9, 10 and 11 according to the EN 659 and EN 420
Properties:	SEIZ®Senso Touch lining system. A technology to guarantee a strong and parmanent link between Para-aramid lining, GORE-TEX® membrane and the outer shell. Clasp that blocks the heat on the outer surface of the hand. Elastic shirring at wrist 3M Scotchlite™ reflective tape at cuff end

SEIZ

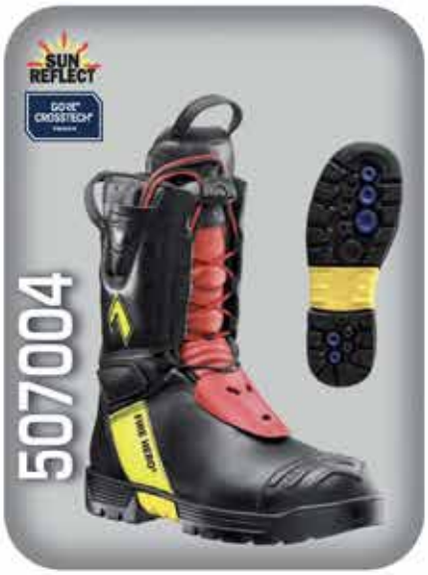

FIRE HERO 2

The champion among firefighter boots

CE 0197 EN 15090:2012 HI3 CI AN M SRC - Category F2A

CE EN 17249:2013 - Level 2

Art No:	507004
Material:	2,5 - 2,7 mm thick waterproof leather
Color:	Black
Leg Height:	27 cm
Inner Lining:	CROSSTECH
Sole:	01, antistatic
Size:	EU 36-47

FIRE HERO 3

The safest firefighter boot in the world - the reliable Fire Hero 3.0

CE 0193 EN 15090:2012 F2A HI3 CI AN M SRC - Category F2A

CE EN 17249:2013 - Level 2

Art No:	507006
Material:	2,0 - 2,2 mm thick waterproof leather
Color:	Black
Leg Height:	27 cm
Inner Lining:	CROSSTECH
Sole:	0,27 antistatic
Size:	EU 37-47

Boot Jack, RFID Ready

FIRE EAGLE

The new generation. Light & highly innovatie.

CE 0197 EN 15090:2012 HI13 CI M SRC - Typ F2A

Art No:	507501
Material:	2,0 - 2,2 mm thick waterproof leather
Color:	Black
Leg Height:	23 cm
Inner Lining:	CROSSTECH
Sole:	017, antistatic
Size:	EU 36-47

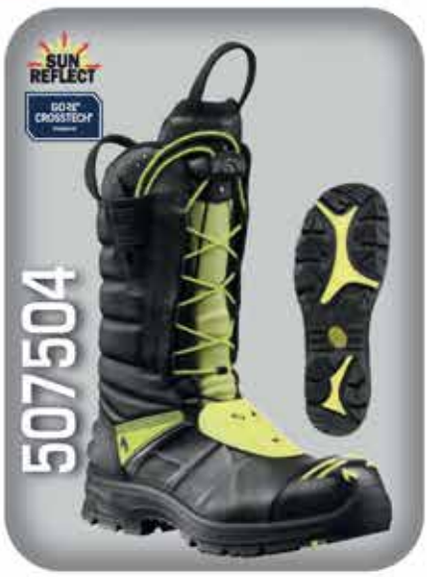

FIRE EAGLE HIGH

The ultralight fire brigade high boot.

CE 0197 EN 15090:2012 HI13 CI AN M SRC - Typ F2A

Art No:	507504
Material:	2,0 - 2,2 mm thick waterproof leather
Color:	Black
Leg Height:	29 cm
Inner Lining:	CROSSTECH
Sole:	017, antistatic
Size:	EU 36-47

FIRE EAGLE VARIO

The athletic newcomer in slip - on design

CE 0197 EN 15090:2012 HI3 CI AN SRC - Typ F2A

Art No:	507506
Material:	2,0 - 2,2 mm thick waterproof leather
Color:	Black
Leg Height:	29 cm
Inner Lining:	CROSSTECH
Sole:	017, antistatic
Size:	EU 36-47

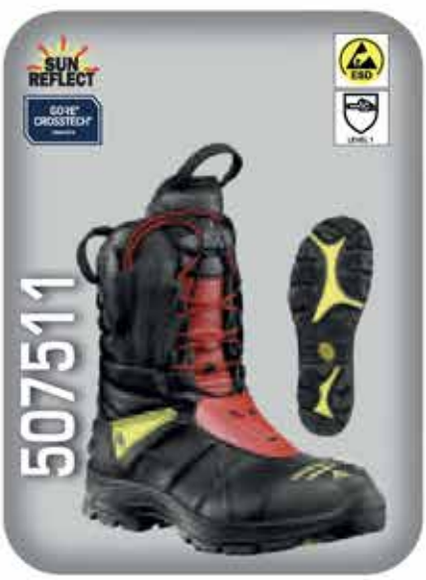

FIRE EAGLE PRO

Athletic firefighter boot with cut protection class 1

CE 0197 EN 15090:2012 HI13 CI M SRC - Typ F2A

CE EN ISO 17249:2013

Art No:	507511
Material:	2,0 - 2,2 mm thick waterproof leather
Color:	Black-red-yellow
Leg Height:	23 cm
Inner Lining:	CROSSTECH
Sole:	017, antistatic
Size:	EU 36-47

FIRE FLASH 2.0

The most popular service boot with lace - zipper closure

CE 0197 EN 15090:2012 HI13 CI SRC - Typ F2A

Art No:	503007
Material:	2,0 - 2,7 mm thick waterproof and breathable leather
Color:	Black
Leg Height:	28 cm
Inner Lining:	GORE - TEX Performance
Sole:	011, antistatic
Size:	EU 36-47

FIRE FLASH GAMMA

The most popular lace-zipper boot with class 2 protective cut-resistance

CE 0197 EN 15090:2012 HI3 CI SRC - Typ F2A

Art No:	503005
Material:	2,5 - 2,7 mm thick waterproof and breathable leather
Color:	Black
Leg Height:	28 cm
Inner Lining:	GORE - TEX Performance
Sole:	011, antistatic
Size:	EU 36-47

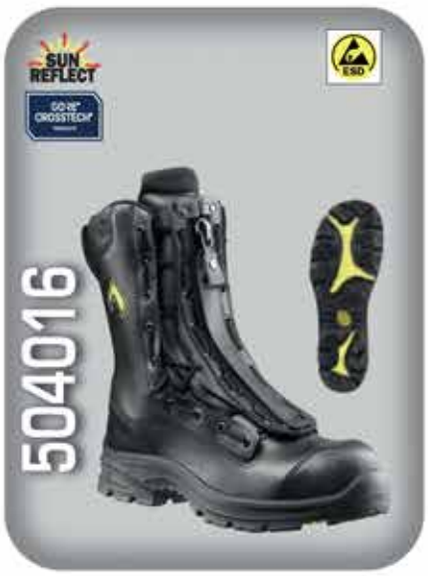

SPECIAL FIGHTER PRO

Low firefighter boot with CROSSTECH

CE 0197 EN 15090:2012 HI13 CI SRC - Typ F2A

Art No:	504016
Material:	2,0 - 2,2 mm thick waterproof leather
Color:	Black
Leg Height:	21 cm
Inner Lining:	CROSSTECH
Sole:	017, antistatic
Size:	EU 36-47

FLORIAN PRO

The service boot with the comfort of a lace boot

CE 0197 EN 15090:2012 HI13 CI SRC - Typ F2A

Art No:	501501
Material:	2,5 - 2,7 mm thick waterproof and breathable leather
Color:	Black
Leg Height:	30 cm
Inner Lining:	GORE - TEX Performance
Sole:	011, antistatic
Size:	EU 36-47

FIREMAN YELLOW

The model for first - time users

CE 0197 EN 15090:2012 HI3 CI SRC - Typ F2A

Art No:	500004
Material:	2,4 - 2,76 mm thick waterproof leather
Color:	Black
Leg Height:	30 cm
Inner Lining:	Breathable inner liner
Sole:	011, antistatic
Size:	EU 36-47

RUBBER BOOT HARVIK 9687L

Boots have 18kV Electric Shock Resistance

EN ISO 20345:2011 SB P E FO CI HI HRO SRA

EN 15090:2012 F2 HI3 P CI SRA

EN 50321-1:2018-Class 0

Art No:	9687L
Color:	Black / Yellow
Type of Construction:	Vulcanized Rubber Upper and Sole
Last / Sole Pattern:	VSV / NJV
	Structural fire fighting
	General fire rescuse
	Bush fire fighting
Size:	EU 36-47

FHR 005 NEO-S

Slip-on boots, black leather, steel toe cap, anti-puncture Kevlar insert, class I, design D,

Type 2, F2A, HI3, SRC, CI, AN

Art No: FHR 005 NEO-S

FHR 006 NEO-S

Laces and quick release system with zipper, black leather, steel toe cap, anti-puncture Kevlar insert, class I, design C,

Type 2, F2A, HI3, SRC, CI, AN

Art No: FHR 006 NEO-S

HELMET - VULCAN NEO

Fire helmet Vulcan NEO is an innovative design. It is made entirely of composites by direct injection method. It has excellent protection, use convenience and design. It complies with Regulation (EU) 2016/425 and the following harmonised standards:

- EN 443:2008 Helmets for firefighting in buildings and other structures.
- EN 16471:2014 Firefighters helmets. Helmets for wildland fire fighting.
- EN 16473:2014 Firefighters helmets. Helmets for technical rescue.
- EN 50365:2002 Electrically insulating helmets for use on low voltage installations,

confirmed by a certificate issued by Notified Body No. 0497 CSI S.p.A.
Certificate of admittance issued by Notified Body No. 1438 CNBOP-PIB.

HELMET - CALISIA VULCAN type CV 102

The Calisia Vulcan helmet for firefighters has been designed with the growing demands and needs of firefighters in mind. It is intended for firefighting in buildings and other structures, wildland firefighting and technical rescue. The new solutions are aimed most of all to improve its performance charac-teristics and, for example, to reduce the load on the firefighter's hands during rescue operations. The helmet is made using the latest technologies and the best materials. This makes it light and gives it excellent protective, performance, and structural characteristics. The helmet guarantees the highest level of safety even in the hardest conditions.

Safety in extreme conditions

- Resistance of the shell to impact, puncture, and lateral compression
- Full protection in low and high temperatures, resistance to flame and heat streams (tested at the temperature of 1000 °C).
- Resistance to melted iron.
- The eye and face shields (goggles and visor) meet the requirements set out in the EN 14458:2018, EN 171:2002, and EN 166:2001 standards, are resistant to high temperatures, flames, chemicals, and ensure protection against infrared radiation.
- 3M® reflective elements ensure good visibility of the firefighter.

Maximum comfort

- The visor can be lowered over a breathing mask, is suitable for persons wearing corrective glasses, and can be quickly and easily replaced.
- The quick and optimized fit and the stable position of the helmet on the user's head are achieved due to:

– the wide range of circumference adjustment (47-68 cm);
– the large knob that can be turned even in gloves;
– the possibility to adjust the head circumference without the need to take the helmet off, which is important when the user puts on a breathing mask;
– convenient adjustment of the position angle and the wearing height.

- The neck protectors are resistant to thermal radiation and flames and are made of fire-resistant materials; four models are available:

– a neck protector made of non-combustible fabric (a short version and a long version that protects the nape and the larynx);
– a neck protector made of leather;
– a neck protector made of metalized fabric.

- Finishing elements which improve comfort: a set of Nomex® cushions and liners, soft and comfortable interior inside the helmet that prevents abrasions and which is made of textile or natural leather, and a comfortable silicone chin pad.
- A broad range of accessories which are suitable for use with breathing masks and torches, and which allow wireless communication systems.
- Suitable for use with torches due to a universal set of torch adapters.
- Full range of adjusting the position angle of the torch even with the breathing mask on (upper mount), and full range of installing torches on both sides of the shell and in the lower and upper part of the shell.
- High degree of customization with rank and unit insignias.
- Shell available in any color, including photoluminescent and chrome-coated

Available models

- MO – with goggles and a metalized visor.
- TO – with goggles and a transparent visor.
- T – with a transparent visor.

Bullard

FEATURES	(The Lightweight) TXS	(The Versatile Workhorse) DXT	(The All-Around Pro) QXT Pro
Deployment	Lightweight decision-maker. Incredible value.	Versatile Decision-making details.	Sharpest image. Best performance.
Image Enhancement	X-Factor Lite 320 x 240 resolution	X-Factor 2.0 320 x 240 resolution	X-Factor 2.0 640 x 480 resolution
Refresh Rate	30 Hz	60 Hz	60 Hz
Power	Replaceable battery; Up to 6 hours; Dual-bay charger	Internal battery; Up to 8.5 hours ; Wireless charger	Internal battery; Up to 6.5 hours; Wireless charger
Options	Single button operation	Basic & Advanced feature packs (optional)	Basic & Advanced feature packs (optional)
Warranty	CareFree® 5-Year Battery 2-Year	CareFree® 5-Year Battery 5-Year	CareFree® 5-Year Battery 5-Year

ULTRA LIGHT SAFER®

Ultralight SAFER® Composite Cylinders

Ultralight SAFER® composite cylinders have been developed with Polish science institutes.

The machines and the software used in a production process are designed and developed in a accordance with the design criteria which are perfectly adapted to the production requirements.

The cylinders are manufactured in an automatic quality control process and are subject to comprehensive tests under TÜV SÜD supevision.

The highest quality materials guarantee the highest SAFER® cylinder quality.

PET LINER

Use of PET liner SAFER® cylinders has allowed the production of ultralight composite cylinders.

The liner protects the cylinder against reaction with gas, and thus prevents corrosion. The gases stored in cylinders are kept clean and are safe for cylinder users.

PET features high barrier properties that guarantee safe gas storage in SAFER® cylinders.

QS II

QS II is a product platform based on high performance system products that can be adapted for different needs. The harness concept is combined with the proven performance of the Interspiro pressure regulator and breathing valve.

To ensure optimal comfort for different body lengths, the harness can easily be adjusted, even when the cylinder is attached and when the SCBA is mounted in a fire truck.

The QS II is available for single cylinder, twin cylinders and cylinder pack. It can also be equipped with the optional Cylinder Quick Coupling (QC).

1. Maximum mobility: Hip belt and shoulder straps move independently of each other.
2. Wide range of face mask variants.
3. Easy adjustment to body size. Large rescue handle.
4. Small and lightweight warning whistle.
5. Easy to maintain plug-in pressure regulator.
6. Optimized weight distribution with body-shaped hip belt.

INTERSPIRO

SPIROMATIC 90U

SPIROMATIC 90U is a basic breathing apparatus for firefighting, and it is excellent for industrial and maritime environments. The pressure regulator (1st stage regulator) is identical to that used in other SCBA series from Interspiro. The harness is equipped with padded shoulder straps and easy-to-adjust hip belt buckles.

The Spiromatic 90U configurations are CE approved according to European product standards and approved according to the Marine Equipment Directive ("ship wheel mark"). They are delivered as SCBA configurations including face mask or as basic models excluding the face mask and breathing valve.

The Spiromatic 90USA-S configurations are NIOSH approved according to U.S. product standards. The 90USA-S is delivered with the S face mask, and is available in one high pressure (HP) version for 4500 psi and one low pressure (LP) version for 2216 psi.

1. Padded shoulder straps with integrated hose holders.
2. Carrying handle.
3. Easy to maintain plug-in pressure regulator.

INTERSPIRO

In action with
Kıvanç Group Garments

#KıvançlıAnlar

PERSONAL PROTECTIVE EQUIPMENT

FIREFIGHTING and SEARCH RESCUE BOOTS

Boots are certified according to EN 15090 firefighter standard. They are ergonomic, heat insulated, protective against ankle sprain, steel toed models are available.

FIREFIGHTING HELMETS

Helmets are certified according to EN 443 standards and have high temperature resistance as well as they ensure visibility in dark environments and at night by emitting light thank to their photo luminescent feature.

BREATHING APPARATUS

Back plates have durability to cope with challenging conditions.
Each component has been selected and designed carefully.
Carbon/Para-Aramid composite cylinder ensures comfort due it's lightness.

FIREFIGHTING GLOVES

Fabric and leather gloves that are certified to EN 659 standards are protective against high temperatures, flame and external factors and are ergonomic.

KIVANÇ Group

Headquarters

İkitelli OSB Mahallesi Aykosan 2. Kısım 5C Blok Sokak
Aykosan Sitesi 5C Blok No: 1 İç Kapı No: 1
Başakşehir/İstanbul/TURKEY 34490
T: 90 (212) 671 28 00 info@kivancgroup.com
F: 90 (212) 671 99 27 www.kivancgroup.com

kivancgroup
kivancgroup
kivancgroup
kivancgroup
Kıvanç Group