
Inline valve with permanent pressure gauge

K632-3x/K632-5x



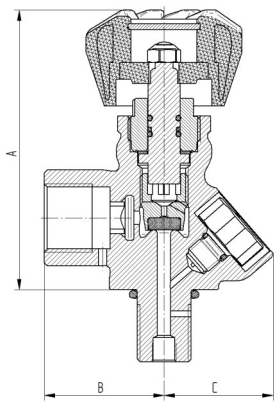

general information

product area	AIRcontrol
application	breathing protection
geometry	• handwheel in line with inlet connection • equipped with permanent pressure gauge

technical data

gas type	compressed air
inlet connection	M18x1.5, E17con, M25x2 (acc. to EN144-1:2005) 25E (acc. to ISO 11363-1) others on request
outlet connection	G5/8" RH fem. (acc. to EN144-2:2005) others on request
working pressure	200 / 300 bar
nominal diameter (valve seat)	4.5 mm
sealing system	K44
operating conditions	working temperature: -20 °C to +65 °C storage temperature: -40 °C to +65 °C
KV value	0.57 m^3/h (may vary by attachment part)
weight	approx. 620 g
maintenance / service life	inspect at regular intervals (e.g. as part of the cylinder recertification) and service or replace depending on the inspection results
operation	standard: handwheel TPU, flame resistant various colour options available (standard colours: black, blue, grey) handwheels for protection against unintentional closing: • double-winged handwheel • ratchet handwheel • Push-Button

dimensions

A	approx. 93 mm
B	approx. 40 mm
C	approx. 36 mm

materials

metals	valve body: brass
polymers	handwheel: TPU, flame resistant o-rings: EPDM

optional accessories

for the outlet connection	closing plug 200 / 300 bar
for the inlet connection	• protection tube • sinterfilter • EFV - Excess Flow Valve
others	bursting device (for 200 / 300 bar cylinder working pressure)

certification & approval

- type approval certificate BAM-TPED-2011/011
- authorisation certificate BAM-TPED-beP (2011/001) acc. with directive 2010/35/EU in conjuction with subsection 1.8.7.6 RID/ADR

2021-05-31

VTI Ventil Technik GmbH | Iserlohner Landstraße 119 | DE-58706 Menden | Tel.: +49 2373 935 3 | Fax: +49 2373 935 444 | info@vti.de | www.vti.de