


Esercizio PT



Creare la topologia mostrata in figura, utilizzando come router i modelli della serie 2900 cisco.

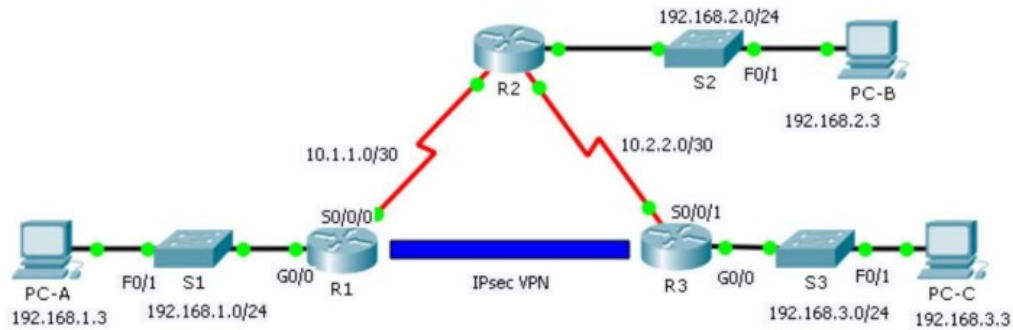

Assegnare alle interfacce gli indirizzi IP riportati nella seguente tabella:

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	G0/0	192.168.1.1	255.255.255.0	N/A
	S0/0/0	10.1.1.2	255.255.255.252	N/A
R2	G0/0	192.168.2.1	255.255.255.0	N/A
	S0/0/0	10.1.1.1	255.255.255.252	N/A
	S0/0/1	10.2.2.1	255.255.255.252	N/A
R3	G0/0	192.168.3.1	255.255.255.0	N/A
	S0/0/1	10.2.2.2	255.255.255.252	N/A
PC-A	NIC	192.168.1.3	255.255.255.0	192.168.1.1
PC-B	NIC	192.168.2.3	255.255.255.0	192.168.2.1
PC-C	NIC	192.168.3.3	255.255.255.0	192.168.3.1

Usare router 2911 e aggiungere il modulo HWIC2T dotato di 2 porte seriali

Configurare le tabelle di routing sui tre router con RIP