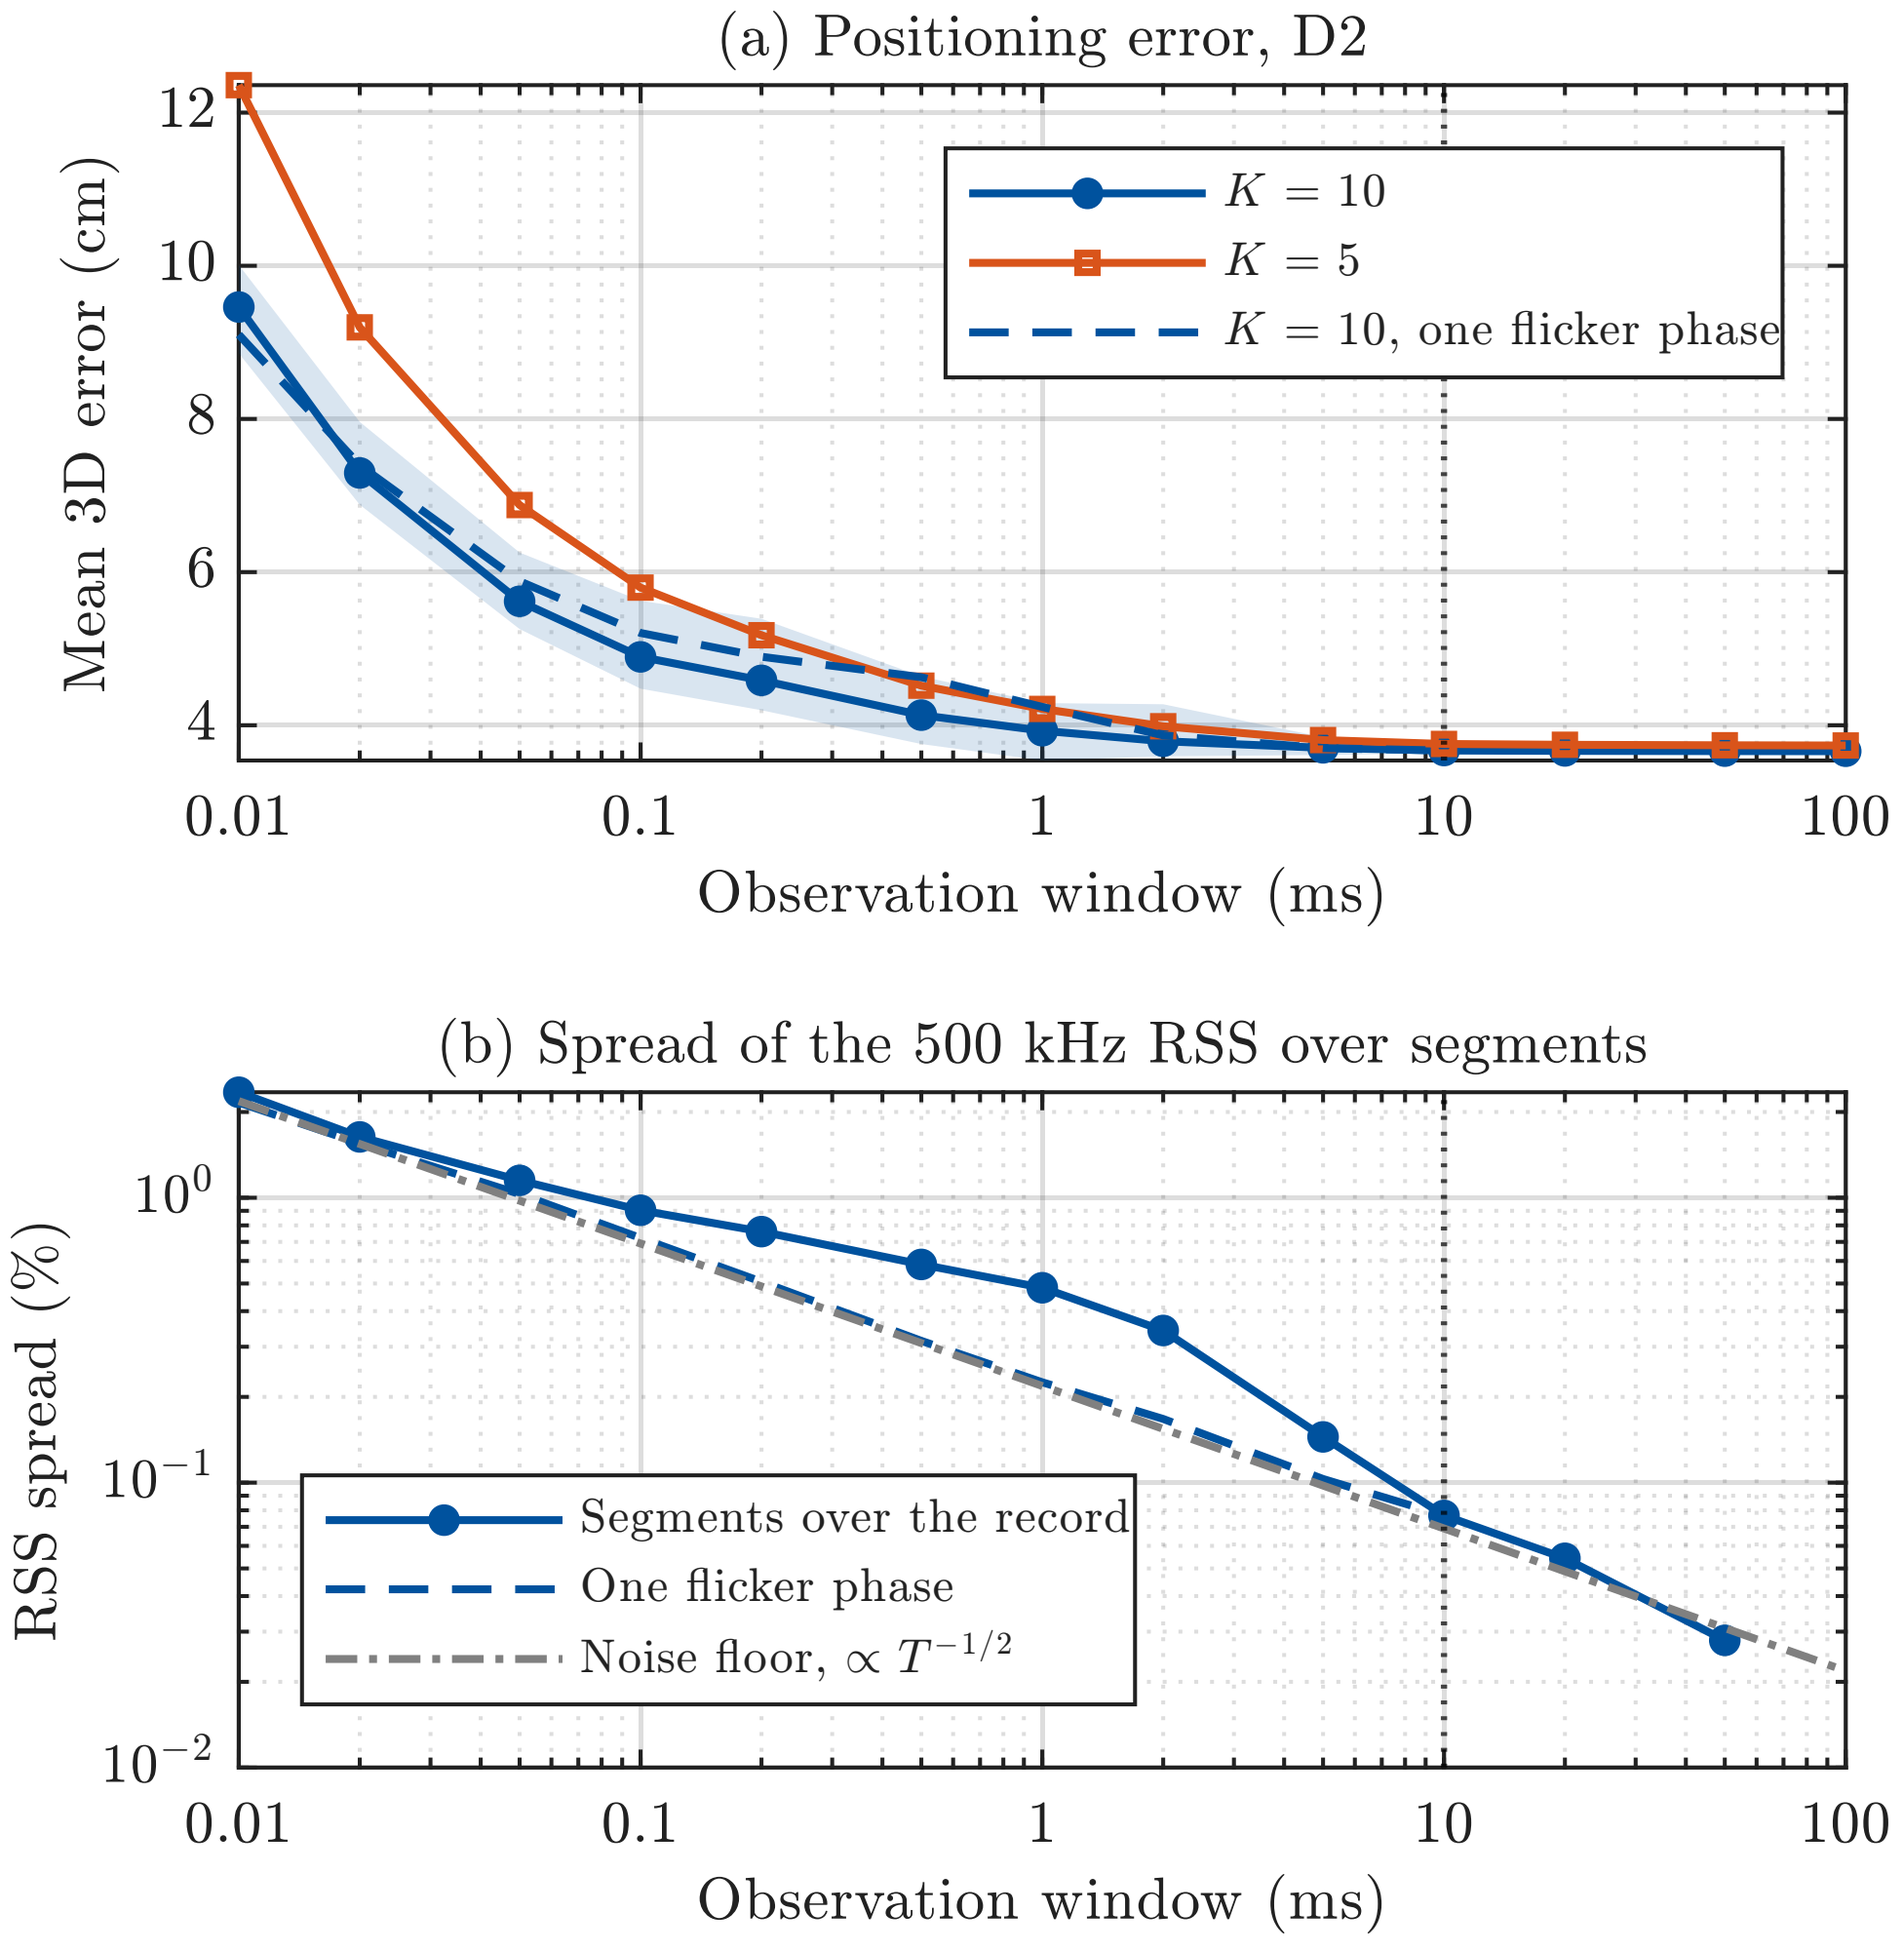

(a) Positioning error, D2
Mean 3D error (cm)
12
10
8
6
4
0.01
0.1
1
10
100
Observation window (ms)
$K = 10$
$K = 5$
$K = 10$, one flicker phase
(b) Spread of the 500 kHz RSS over segments
RSS spread (%)
10^{0}
10^{-1}
10^{-2}
0.01
0.1
1
10
100
Observation window (ms)
Segments over the record
One flicker phase
Noise floor, $\propto T^{-1/2}$