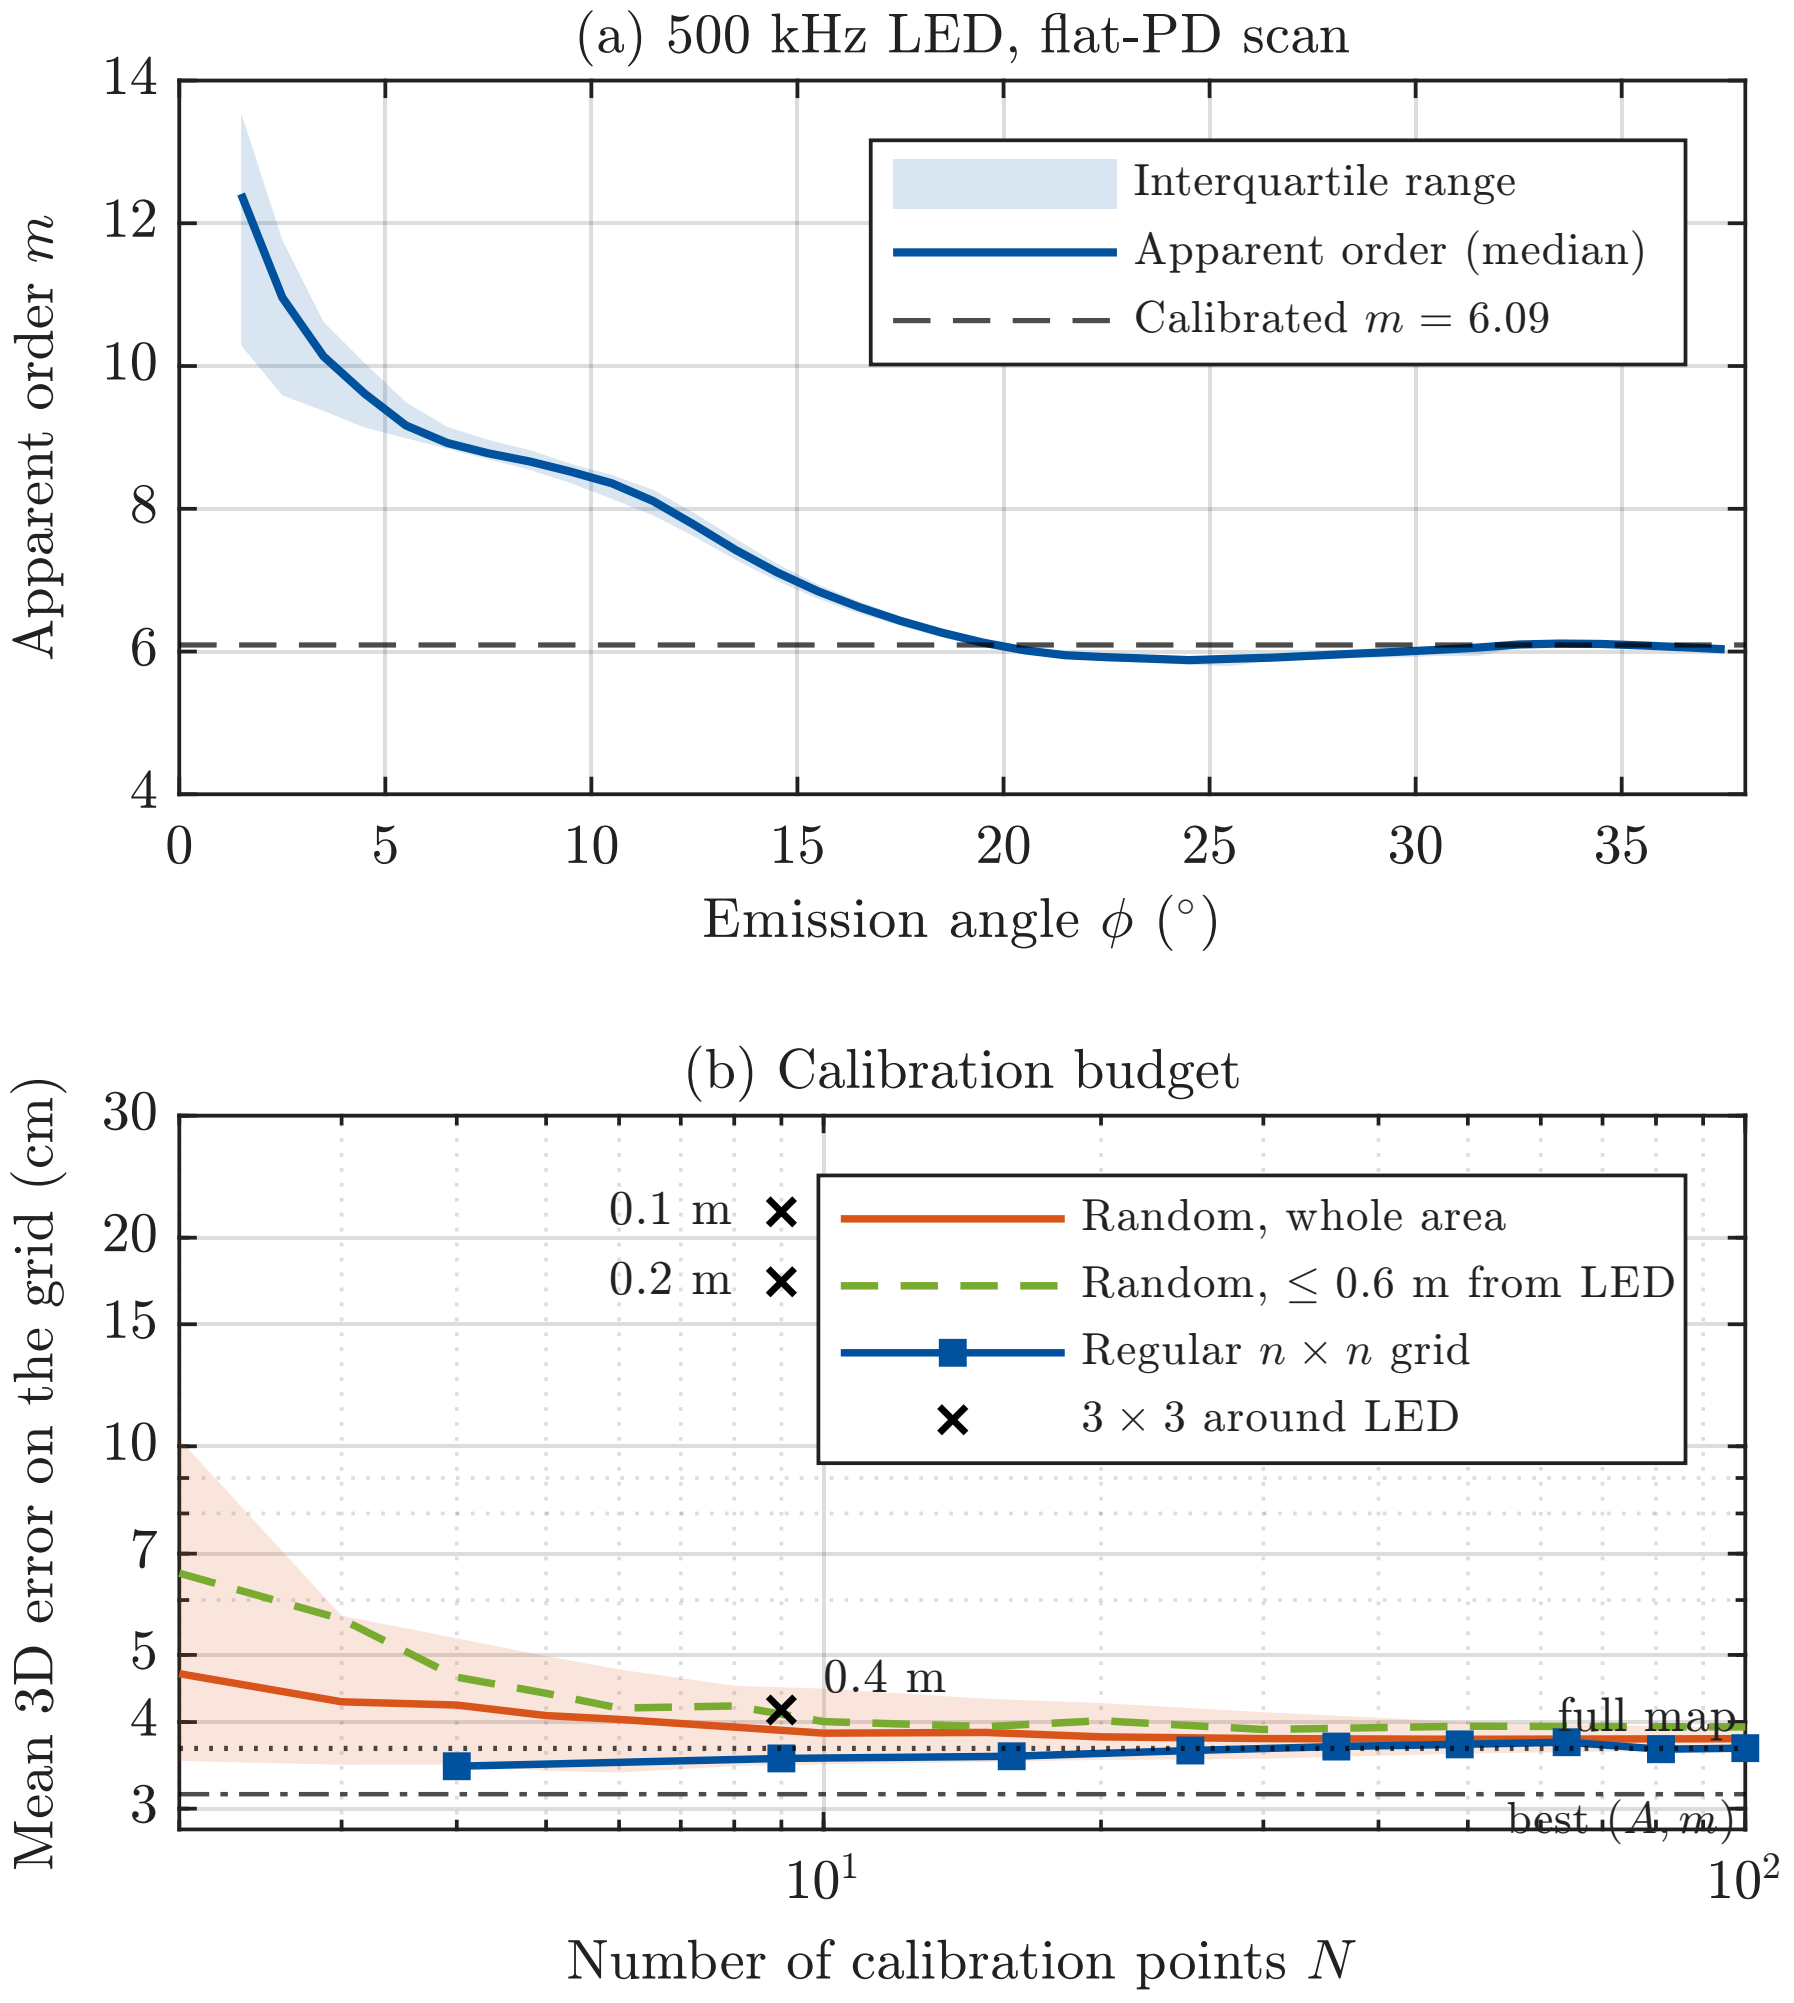
(a) 500 kHz LED, flat-PD scan
Apparent order m
Emission angle ϕ (°)
Interquartile range
Apparent order (median)
Calibrated $m = 6.09$
(b) Calibration budget
Mean 3D error on the grid (cm)
Number of calibration points N
0.1 m
0.2 m
0.4 m
Random, whole area
Random, ≤ 0.6 m from LED
Regular $n \times n$ grid
3×3 around LED
full map
best (A, m)