


Single-Source Single-PD 3D Optical Wireless Positioning

Kevin Jose ACUNA CONDORI



01/10/2026

RESPONSIVITY

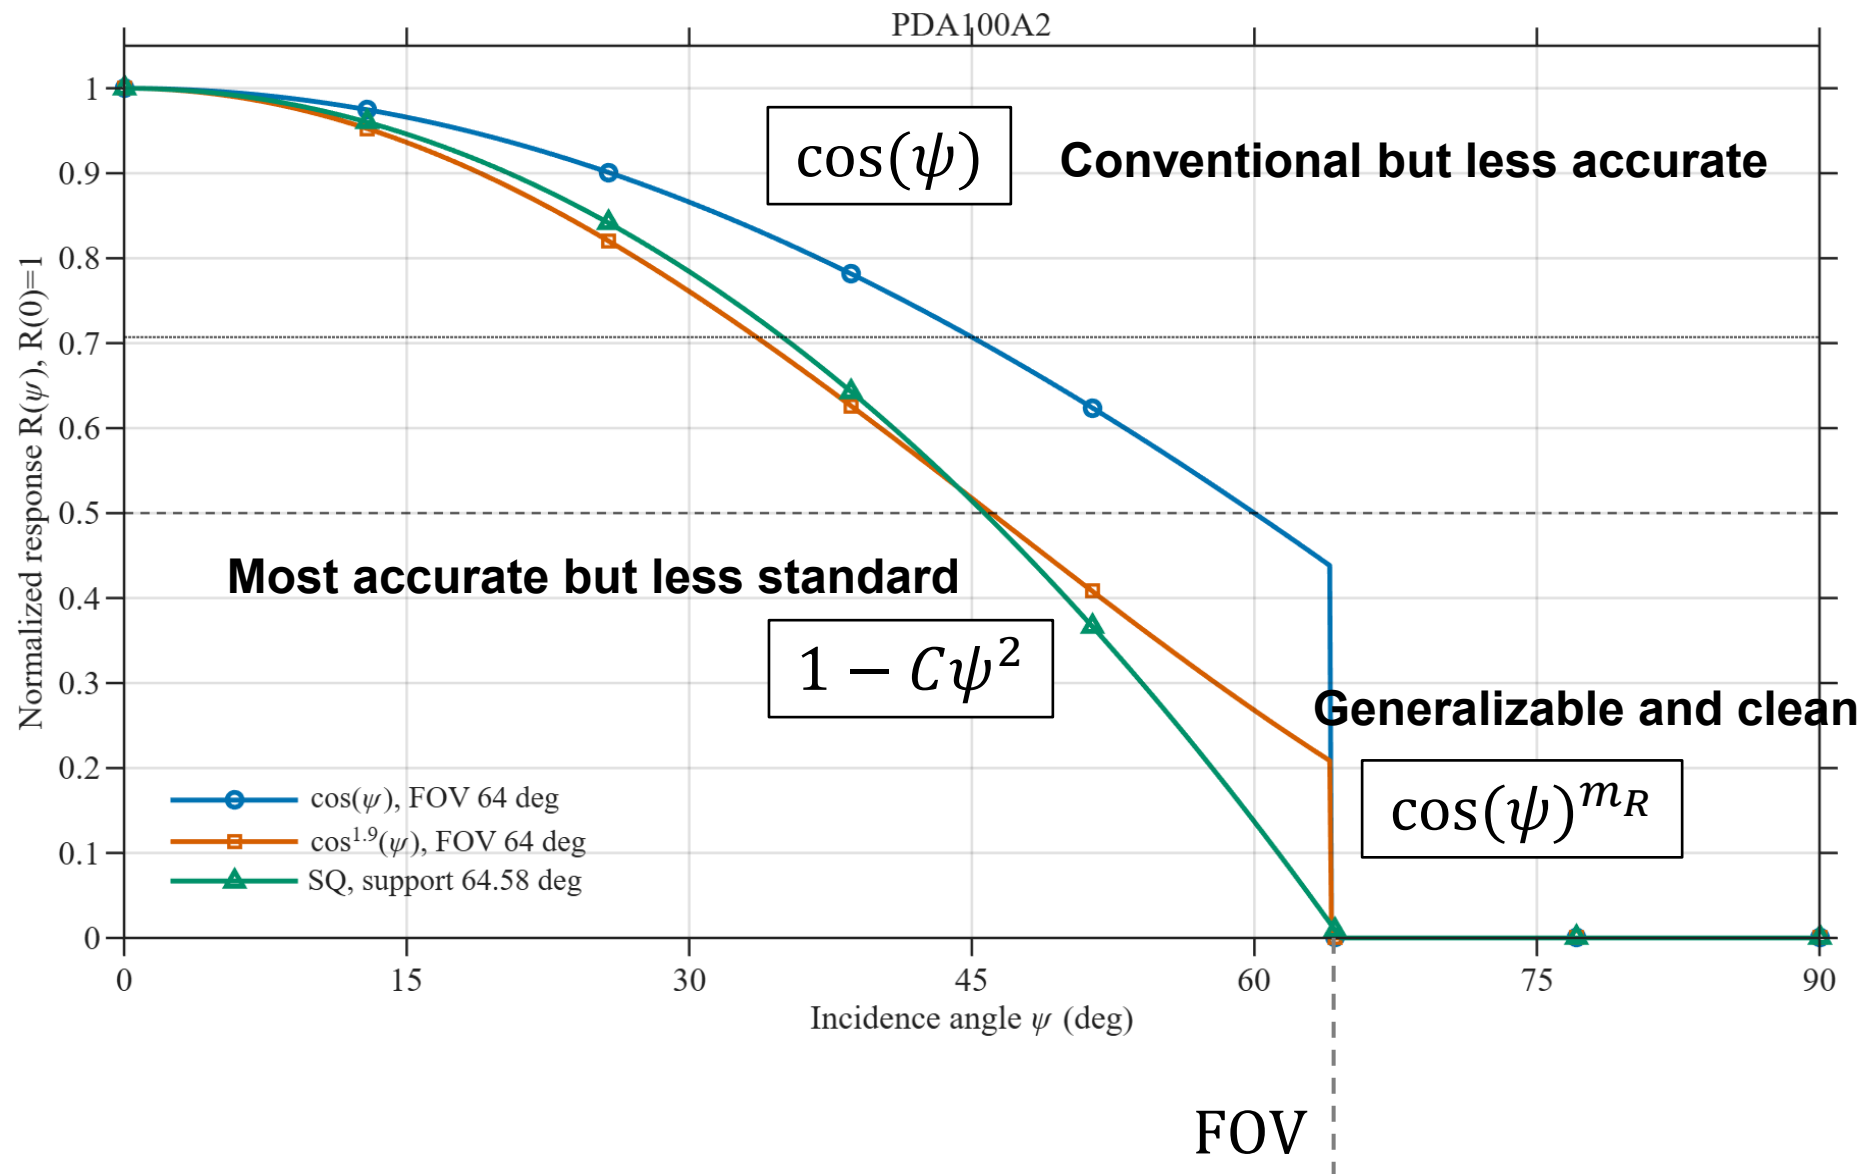



3D RMS PEB

- $\cos(\psi)$, FOV 64 deg
- $\cos^{1.9}(\psi)$, FOV 64 deg
- SQ, support 64.58 deg

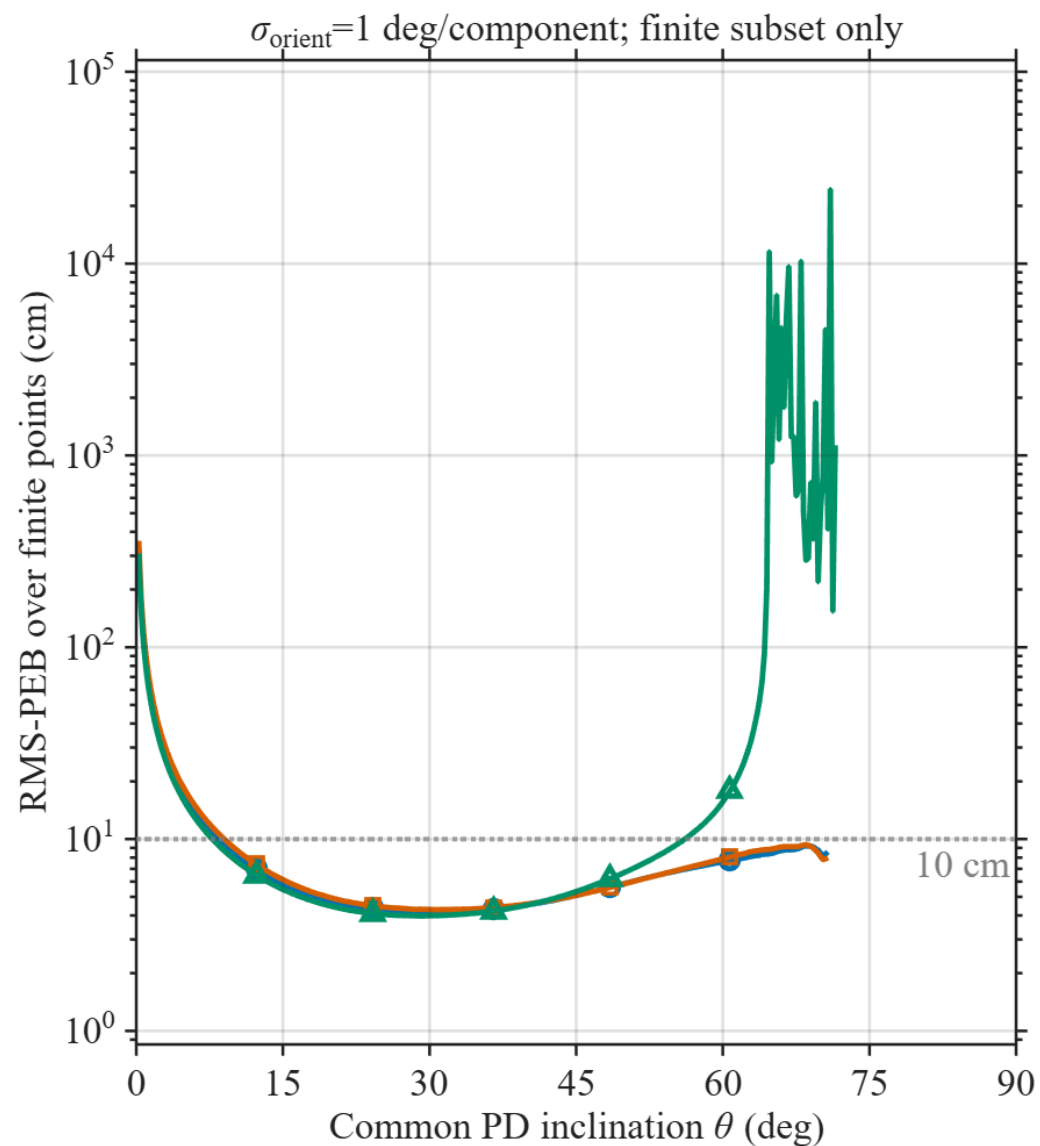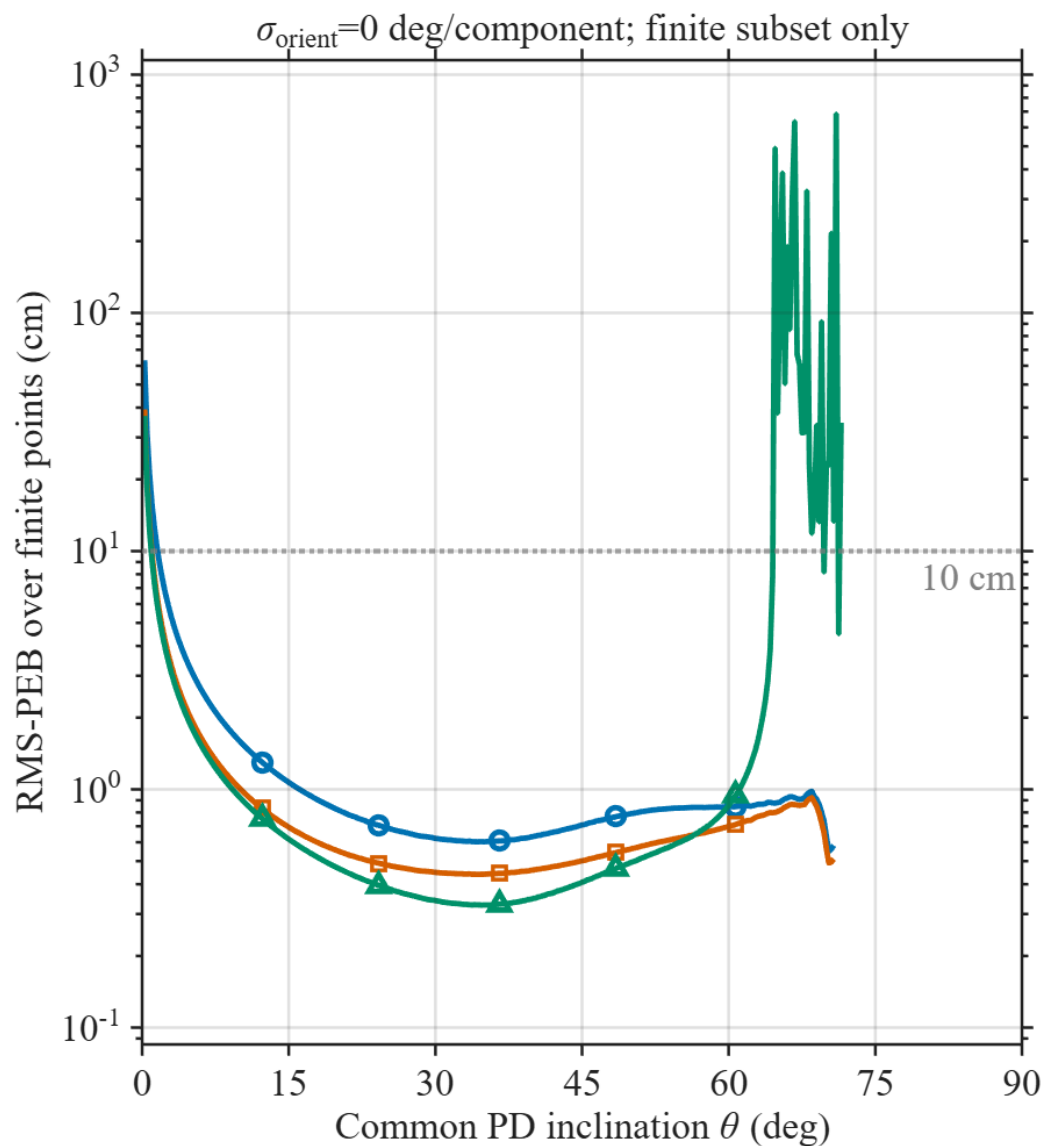

COVERAGE

- $\cos(\psi)$, FOV 64 deg
- $\cos^{1.9}(\psi)$, FOV 64 deg
- SQ, support 64.58 deg

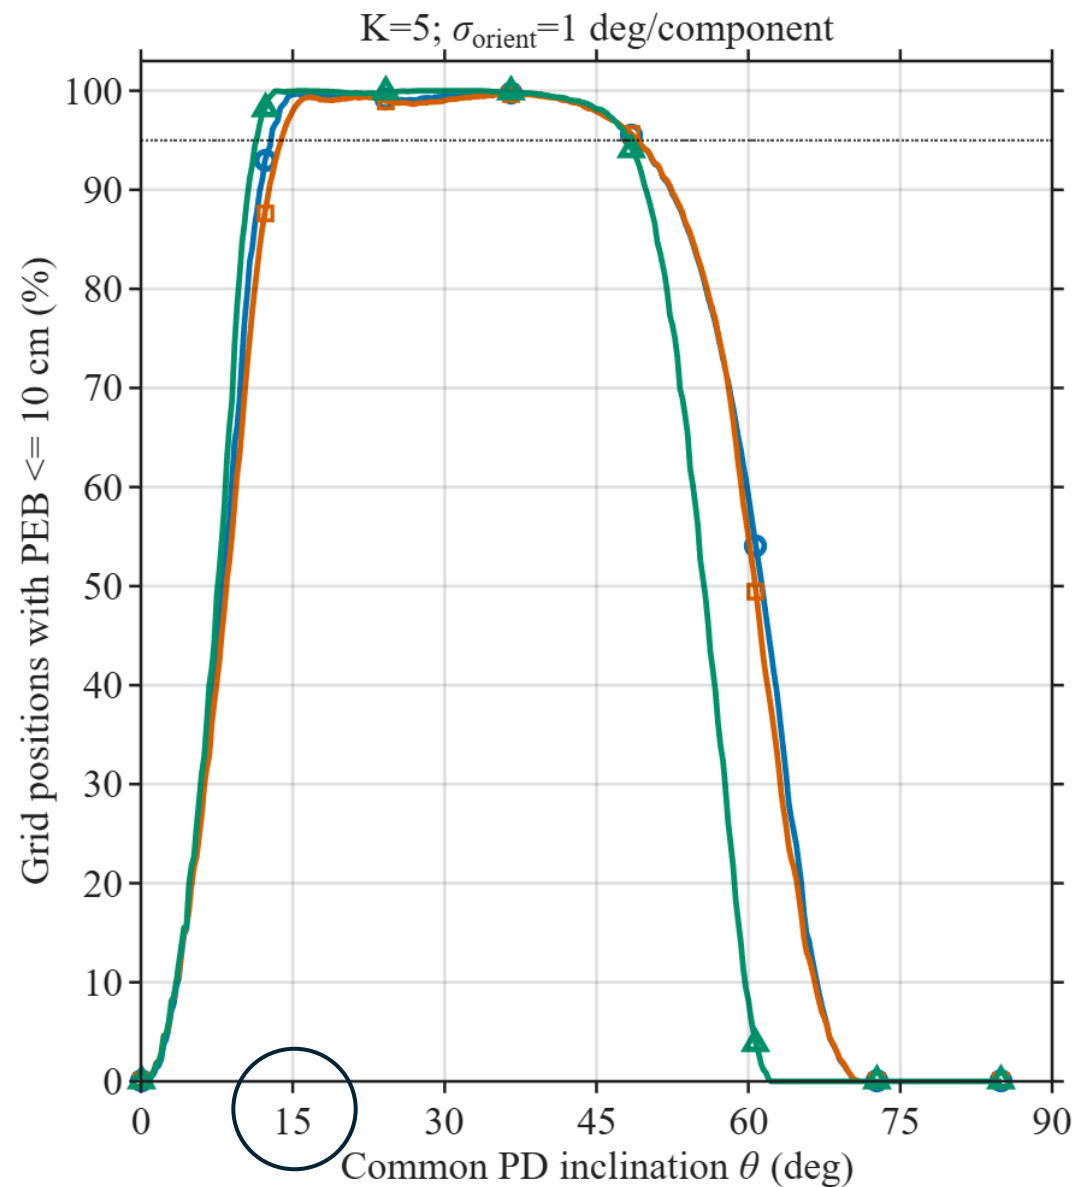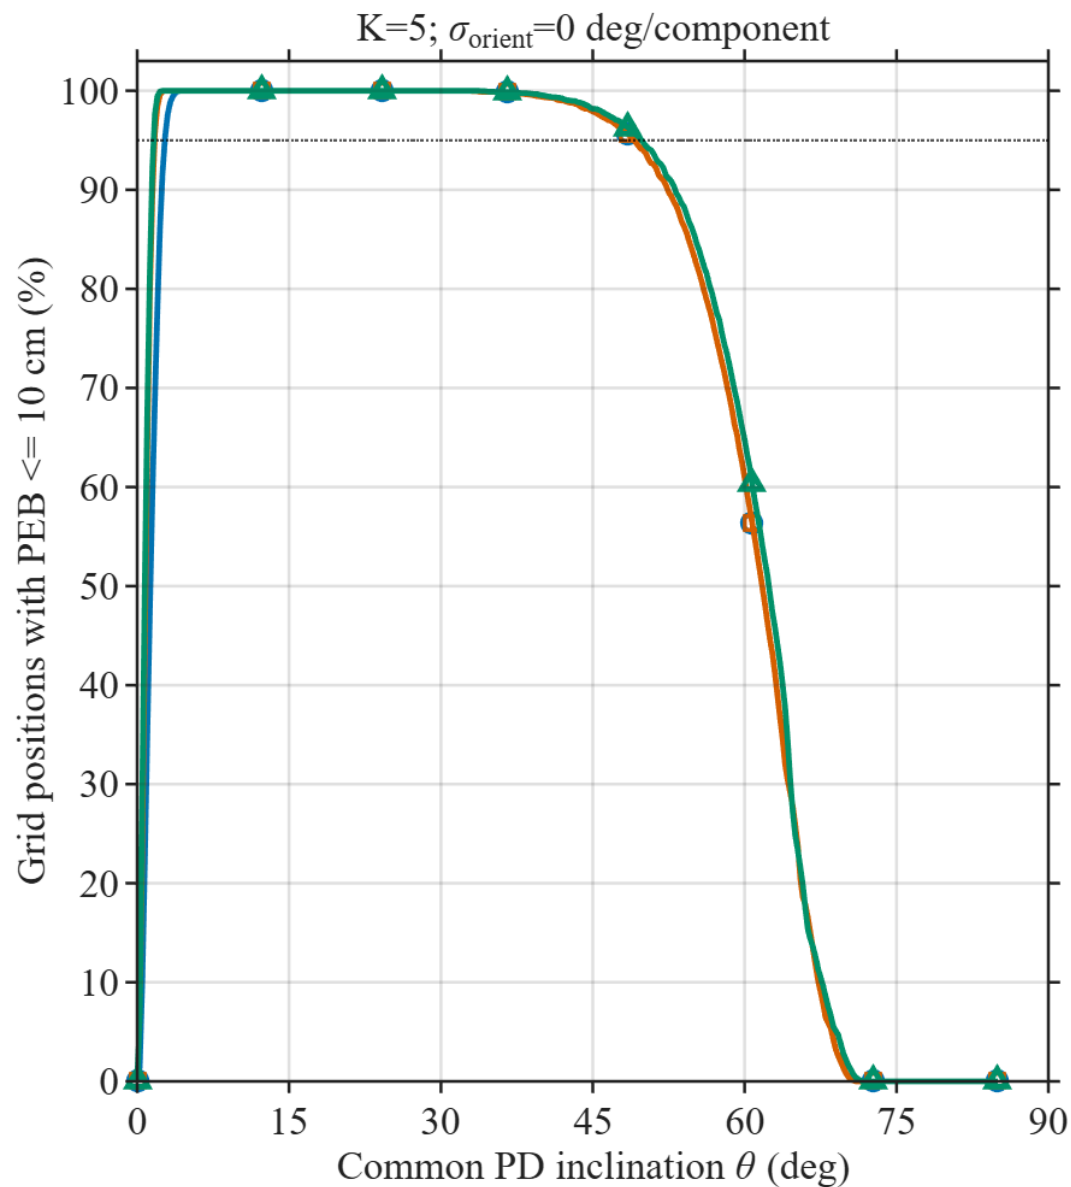



Proposed open research output: experimental VLP dataset to be published on Zenodo/Apollo

Measurement protocol

1. Move gantry to position (x,y,z)
2. Record K PD orientations
3. Repeat for all positions

