

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

2008 ENGINE

Accessory Drive - Edge & MKX

SPECIFICATIONS

GENERAL SPECIFICATIONS

Item	Specification
Accessory drive belt	6 ribs
Power steering pump drive belt	4-ribbed

TORQUE SPECIFICATIONS

Description	Nm	lb-in
Accessory drive belt tensioner bolts	11	97

DESCRIPTION AND OPERATION

ACCESSORY DRIVE

This vehicle is equipped with the following components:

- V-ribbed serpentine accessory drive belt
- Automatic drive belt tensioner
- V-ribbed power steering pump drive belt

The accessory drive system provides power to operate components which power other systems. These could include components such as the generator, power steering pump and A/C compressor. Each of these components is equipped with a pulley which is driven by the accessory drive belt. The accessory drive belt is driven by the engine crankshaft pulley. The automatic belt tensioner maintains correct belt tension and compensates for component wear and changes in system load. System load changes can be caused by the A/C compressor clutch engaging or disengaging or demand changes on other systems powered by the accessory drive belt. To maintain correct operation of this system, it is critical that the correct length drive belt be installed. The pulleys must also be correctly aligned and kept clean.

Accessory Drive Belt Routing

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

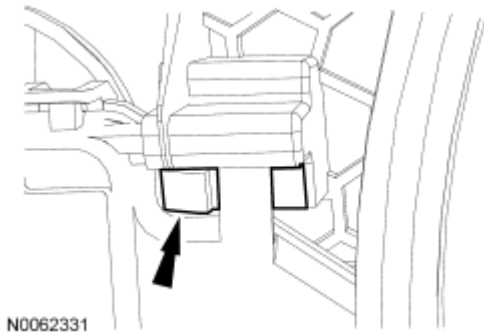


Fig. 1: Front End Accessory Drive (FEAD)
Courtesy of FORD MOTOR CO.

Item	Part Number	Description
1	6B209	Accessory drive belt tensioner pulley
2	10300	Generator pulley
3	19D784	A/C clutch pulley
4	8620	Accessory drive belt
5	6316	Crankshaft pulley

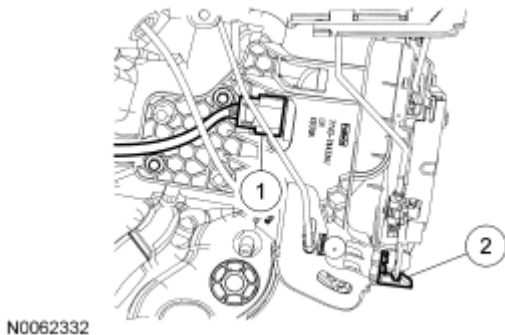


Fig. 2: Power Steering Pump Belt
Courtesy of FORD MOTOR CO.

Item	Part Number	Description
1	6C301	Power steering pump drive belt
2	6316	Crankshaft pulley
3	3D639	Power steering pump pulley

Belt Tensioner

Automatic tensioners are calibrated to provide the correct amount of tension to the belt for a given accessory drive system. Unless a spring or damping band within the tensioner assembly breaks or some other mechanical part of the tensioner fails, there is no need to check the tensioner for correct tension.

DIAGNOSTIC TESTS

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

ACCESSORY DRIVE

Inspection and Verification

NOTE: Under no circumstances should the accessory drive belt, tensioner or pulleys have any fluids or belt dressing applied to them as damage to the belt material and tensioner damping mechanism may occur.

1. Verify the customer concern by operating the system.
2. Visually inspect for obvious signs of mechanical damage.

VISUAL INSPECTION CHART


Mechanical
• Drive belt cracking/chunking/wear • Belt/pulley contamination • Incorrect accessory drive belt • Incorrectly routed accessory drive belt • Pulley misalignment or excessive pulley runout • Loose or mislocated hardware • Incorrectly routed power steering tubes (rubbing) • Loose accessory drive belt • Damaged pulleys • Tensioner arm misalignment

NOTE: Modular engine (without A/C) belt tensioner shown, others similar.

NOTE: Belt tensioner is shown in the free-state position against the arm travel stops.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

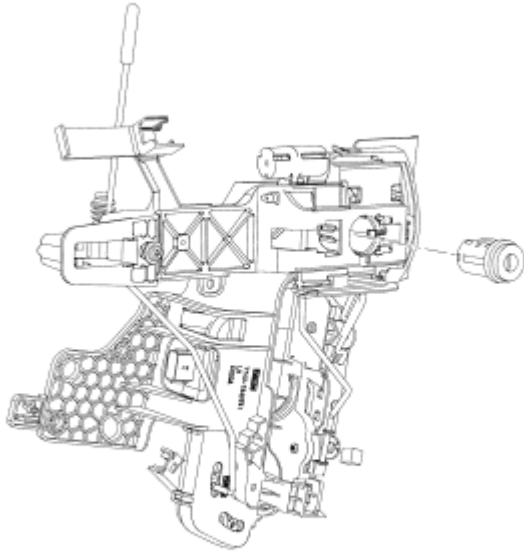

N0062182


Fig. 3: Belt Tensioner With Belt Length Indicator
Courtesy of FORD MOTOR CO.

Item	Part Number	Description
1	-	Belt length indicator
2	-	Acceptable belt installation and wear range
3	-	Belt replacement range
4	-	Belt tension relief point

3. Check that the belt length indicator, if equipped, on the belt tensioner is in the acceptable belt installation and wear range. If the indicator is in the belt replacement range, either an incorrect belt is installed or the belt is worn beyond the service limit. Install a new belt as necessary.
4. Eliminate all other non-belt related noises that could cause belt misdiagnosis, such as A/C compressor engagement chirp, A/C slugging noise, power steering cavitations at low temperatures, Variable Camshaft Timing (VCT) tick or generator whine.
5. If a concern is found, correct the condition before proceeding to the next step.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

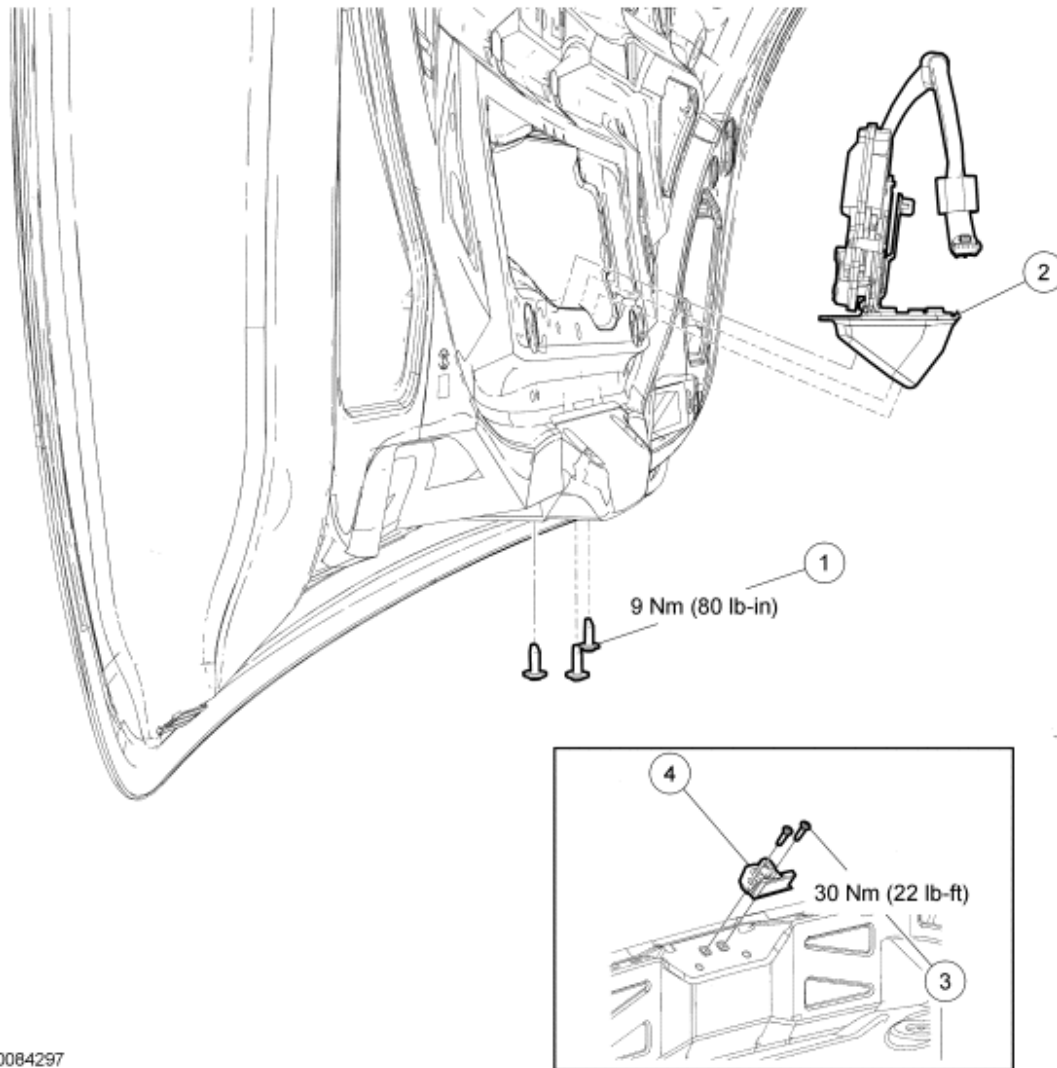

N0084297

Fig. 4: V-Ribbed Serpentine Drive Belt With Cracks Across Ribs
Courtesy of FORD MOTOR CO.

6. Check the belt for cracks. Up to 15 cracks in a rib over a distance of 100 mm (4.0 in) can be considered acceptable. If cracks exceed this standard, install a new belt.

NOTE: Piling is an excessive buildup in the V-grooves of the belt.


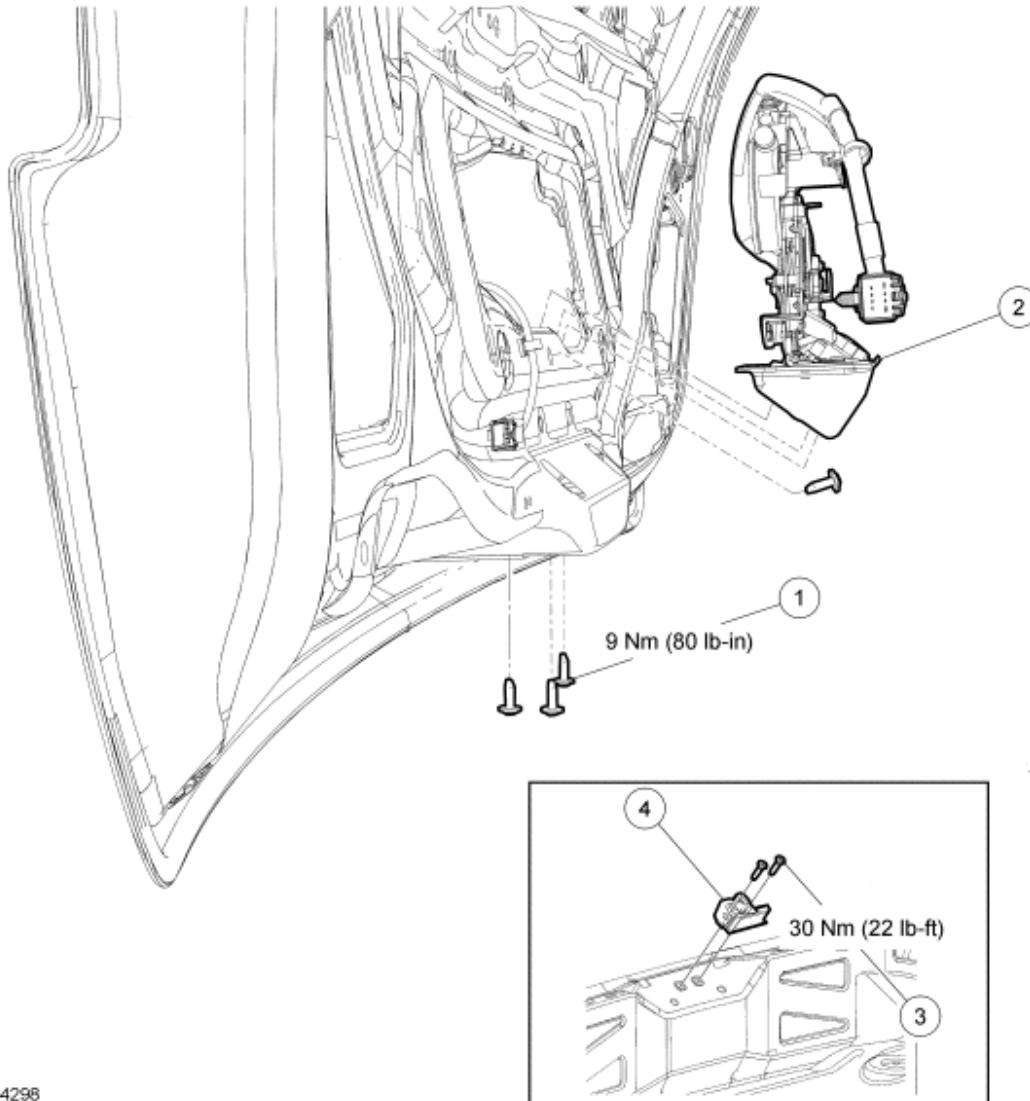


Fig. 5: Identifying V-Ribbed Serpentine Belt With Piling
Courtesy of FORD MOTOR CO.

7. The condition of the V-ribbed drive belt should be compared against the illustration and appropriate action taken.
 1. Small scattered deposits of rubber material. This is not a concern, therefore, installation of a new belt is not required.
 2. Longer deposit areas building up to 50% of the rib height. This is not considered a durability concern, but it can result in excessive noise. If noise is apparent, install a new belt.
 3. Heavy deposits building up along the grooves resulting in a possible noise and belt stability concern. If heavy deposits are apparent, install a new belt.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

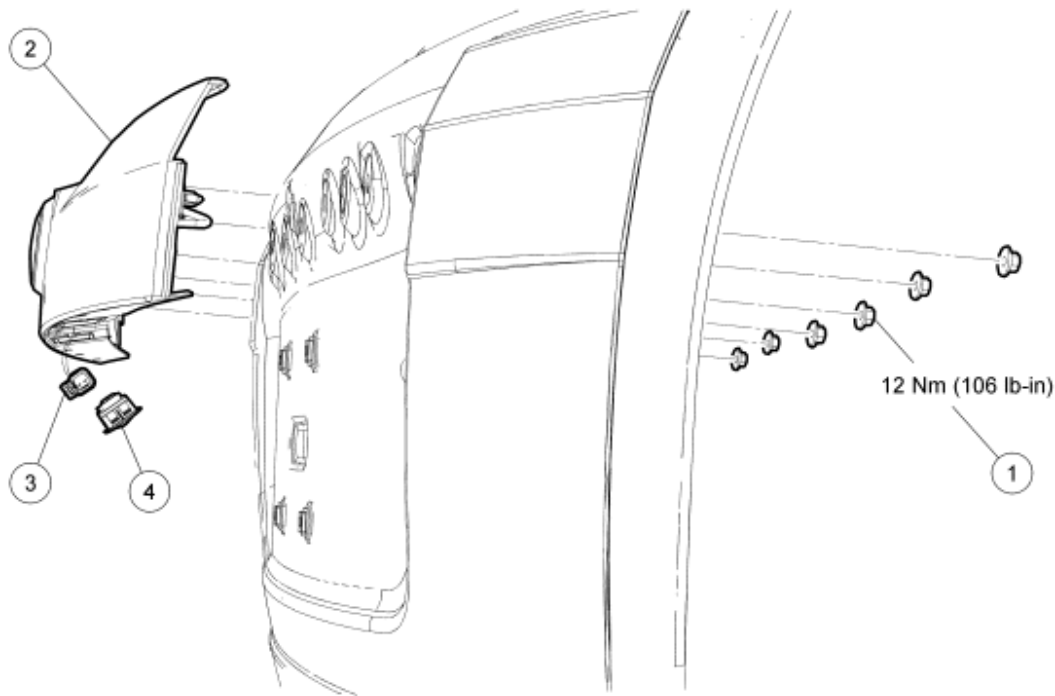

N0084299

Fig. 6: Identifying V-Ribbed Serpentine Belt With Chunks of Rib Missing
Courtesy of FORD MOTOR CO.

8. There should be no chunks missing from the belt ribs. If the belt shows any evidence of this, install a new accessory drive belt.
9. If the concern is not visually evident, verify the symptom and Go to **Symptom Chart**.

Symptom Chart

Symptom Chart

Condition	Possible Sources	Action
Accessory drive belt cracking (over 15 cracks in a rib over a distance of 100 mm [4.0 in])	Accessory drive belt	INSPECT the accessory drive belt. REFER to <u>Inspection and Verification</u>. INSTALL a new accessory drive belt as necessary.
Accessory drive belt chunking	Accessory drive belt	- INSPECT the accessory drive belt. REFER to <u>Inspection and Verification</u>. INSTALL a new accessory drive belt as necessary. - INSPECT the accessory drive belt pulley grooves for

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

	• Damaged pulley grooves	damage. INSTALL a new pulley or component as necessary.
• Accessory drive belt noise, squeal, chirping or flutter	• Defective/worn or incorrect accessory drive belt • Misaligned pulley(s) • Pulley runout • Damaged or worn accessory drive component or idler • Fluid contamination of accessory drive belt or pulleys • Damaged or worn accessory drive belt tensioner • Damaged pulley grooves	• REFER to <u>Component Tests</u>, Drive Belt - Noise/Flutter. REPAIR or INSTALL new parts as necessary. • REFER to <u>Component Tests</u>, Belt Tensioner - Mechanical and Belt Tensioner - Dynamics. INSTALL a new accessory drive belt tensioner as necessary. • INSPECT the accessory drive belt pulley grooves for damage. INSTALL a new pulley or component as necessary.
	• Accessory drive component failure • Accessory drive belt idler pulley bearing failure	• CHECK the accessory drive components. INSTALL new components as necessary. • INSPECT the accessory drive belt idler pulley for freedom of rotation and damage. INSTALL a new accessory drive belt idler pulley as necessary.
• Premature accessory drive belt wear	• Defective or incorrect accessory drive belt • Misaligned pulley(s) • Pulley runout • Damaged accessories • Incorrectly installed drive belt • Fluid contamination • Damaged pulley grooves	• REFER to <u>Component Tests</u>, Drive Belt - Noise/Flutter and Drive Belt - Incorrect Installation. REPAIR or INSTALL new parts as necessary. • INSPECT the accessory drive belt pulley grooves for damage. INSTALL a new

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

pulley or component as necessary.

Component Tests

Drive Belt - Noise/Flutter

NOTE: Under no circumstances should the accessory drive belt, tensioner or pulleys have any fluids or belt dressing applied to them as damage to the belt material and tensioner damping mechanism may occur.

Drive belt chirp occurs due to pulley misalignment or excessive pulley runout. It can be the result of a damaged or incorrectly aligned grooved pulley.

To correct, determine the area where the noise comes from. Check each of the pulleys in that area with a straightedge to the crankshaft pulley. Look for accessory pulleys out of position in the fore/aft direction or at an angle to the straightedge.

Drive belt squeal may be an intermittent or constant noise that occurs when the drive belt slips on an accessory pulley under certain conditions.

A short intermittent squeal may occur during engine start up and shut down or during very rapid engine acceleration and decelerations, such as:

- Wide Open Throttle (WOT) 1-2 and 2-3 shifts or 2-3 and 3-4 back-out shifts on automatic transmissions.
- WOT 1-2 and 2-3 shifts and any combination of rapid downshifting on manual transmissions.

These special short-term transient events are expected, and are due to the higher system inertias required to meet the electrical and cooling demands on today's vehicle systems. Constant or reoccurring drive belt squeal can occur:

- if the A/C discharge pressure goes above specifications:
 - the A/C system is overcharged.
 - the A/C condenser core airflow is blocked.
 - the A/C anti-slugging strategy executes after a long hot heat soak.
- if the A/C off equalized pressure (the common discharged and suction pressure that occurs after several minutes) exceeds specifications.
- if any of the accessories or idler pulley(s) are damaged or have a worn or damaged bearing. All accessories should be rotatable by hand in the unloaded condition. If not, inspect the accessory.
- if there is evidence of fluid contamination on the accessory drive belt. When the drive belt has been exposed to fluid contamination during vehicle operation, such as leaks from the power steering system, A/C system or cooling system, clean all pulleys with soap and water, rinse with clean water and install a new accessory drive belt. If the drive belt has been exposed to fluids in a localized area during routine vehicle service, such as replacement of hoses or fluids, the drive belt and pulleys should be washed with soap and water immediately (prior to starting the engine), and rinsed with clean water.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

- if the accessory drive belt is too long. A drive belt that is too long will allow the accessory drive belt tensioner arm to go all the way to the arm travel stop under certain load conditions, which will release tension to the drive belt. If the accessory drive belt tensioner indicator is outside the normal installation wear range window, install a new accessory drive belt.


NOTE: **The accessory drive belt tensioner arm should rotate freely without binding.**

- Install a new accessory drive belt tensioner if the drive belt tensioner is worn or damaged.

Drive Belt - Incorrect Installation

NOTE: **Incorrect accessory drive belt installation will cause excessive drive belt wear and may cause the drive belt to come off the pulleys.**

Non-standard accessory drive belts can track differently or incorrectly. If an accessory drive belt tracks incorrectly, install a new accessory drive belt to avoid performance failure or loss of the drive belt.

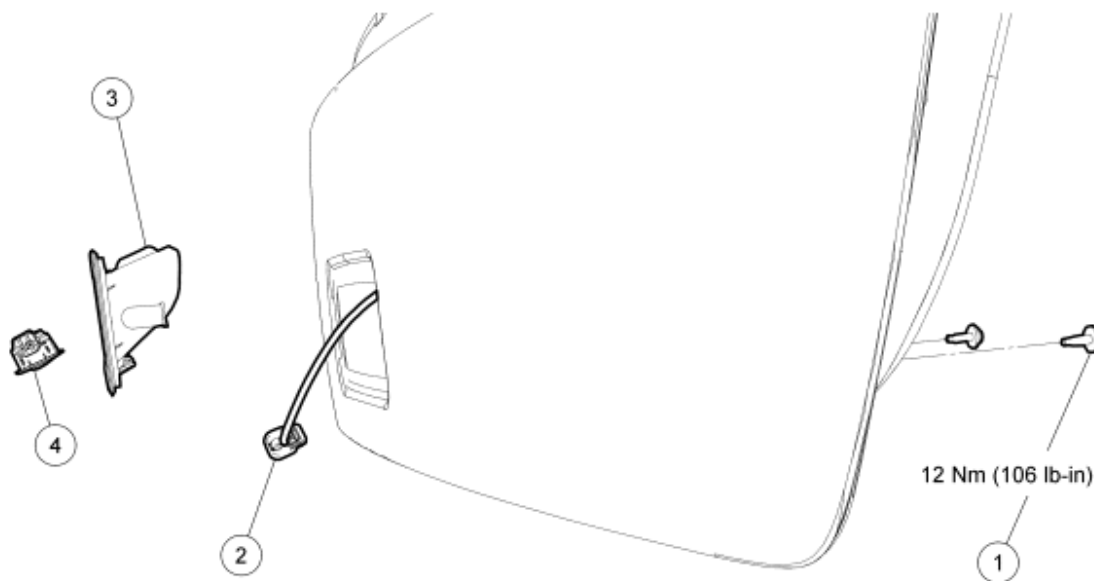

N0084300

Fig. 7: Identifying Drive Belt Incorrect Installation
Courtesy of FORD MOTOR CO.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

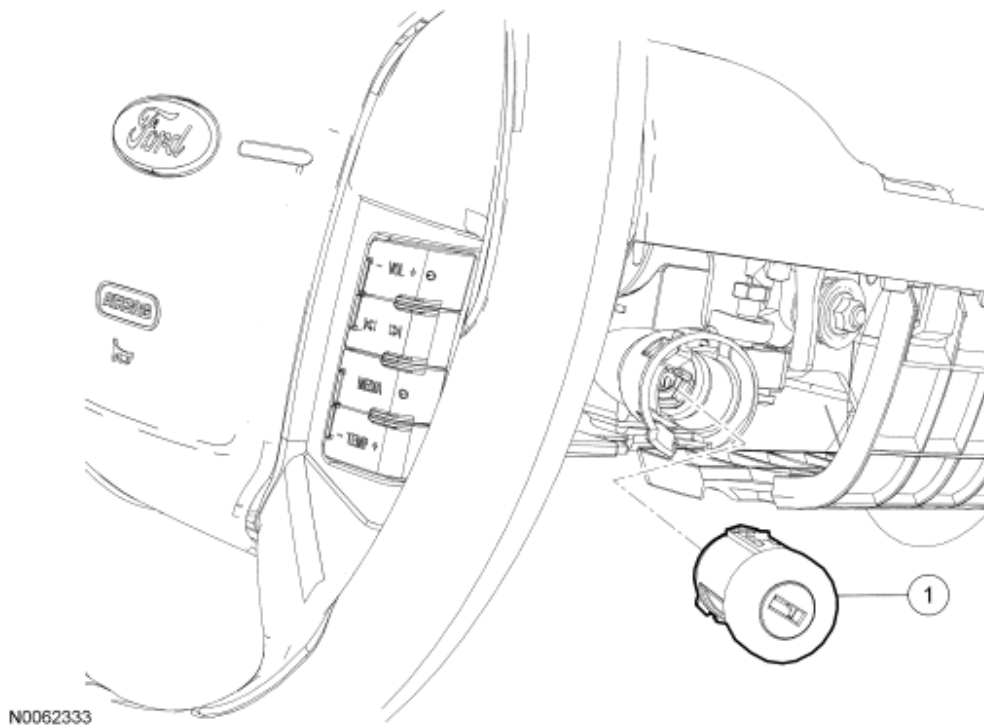


Fig. 8: Identifying Correct Installation Of Drive Belt
Courtesy of FORD MOTOR CO.

With the engine running, check accessory drive belt tracking on all pulleys. If the edge of the accessory drive belt rides beyond the edge of the pulleys, noise and premature wear will occur. Make sure the accessory drive belt rides correctly on the pulley. If an accessory drive belt tracking condition exists, proceed with the following:

- Visually check the accessory drive belt tensioner for damage and wear, especially the mounting pad surface and arm alignment. If the accessory drive belt tensioner is not installed correctly, the mounting surface pad will be out of position. If the tensioner arm is worn, the arm will be out of alignment. Either of these conditions will result in chirp and squeal noises.
- With the engine running, visually observe the grooves in the pulleys (not the pulley flanges or the pulley forward faces) for excessive wobble. Install new components as necessary.
- Check all accessories, mounting brackets and the accessory drive belt tensioner for any interference that would prevent the component from mounting correctly. Correct any interference condition and recheck the accessory drive belt tracking.
- Tighten all accessories, mounting brackets and accessory drive belt tensioner retaining hardware to specification. Recheck the accessory drive belt tracking.

Belt Tensioner - Mechanical

The only mechanical check that needs to be made is a check for tensioner stick, grab or bind.

1. With the engine off, check routing of the accessory drive belt. Refer to the illustrations under **Accessory Drive**.

NOTE: **The accessory drive belt tensioner spring is very strong and requires substantial force to release.**

2. Using a suitable, commercially available serpentine belt tensioner release tool, release the tension on the belt and detach the accessory drive belt from the tensioner. Carry out the following tests:
 - Using the release tool, move the tensioner from its relaxed position, through its full stroke and back to the relaxed position to make sure there is no stick, grab or bind, and to make sure that there is tension on the tensioner spring.
 - Rotate the tensioner pulley by hand and check for a binding, contaminated or seized condition.
 - Inspect the area surrounding the accessory drive belt tensioner for oil leaks or contamination and repair any leaks.
3. If the accessory drive belt tensioner does not meet the criteria in the previous step, install a new tensioner. If the accessory drive belt tensioner meets the criteria in the previous step, proceed to testing the tensioner dynamically.
4. If the tensioner is saturated with oil and grease internally, install a new tensioner.

Belt Tensioner - Dynamics

The accessory drive belt tensioner can be checked dynamically as follows:

1. With the engine running, observe the accessory drive belt tensioner movement. The accessory drive tensioner should move (respond) when the A/C clutch cycles (if equipped), or when the engine is accelerated rapidly. If the accessory drive belt tensioner movement is excessive without A/C clutch cycling or engine acceleration, check belt rideout. Excessive belt rideout (uneven depth of grooves in the belt) can cause excessive accessory drive belt tensioner movement. Check rideout condition by installing a new belt. If excessive accessory drive belt tensioner movement still exists, install a new accessory drive belt tensioner.

REMOVAL AND INSTALLATION

FRONT END ACCESSORY DRIVE (FEAD) - EXPLODED VIEW

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

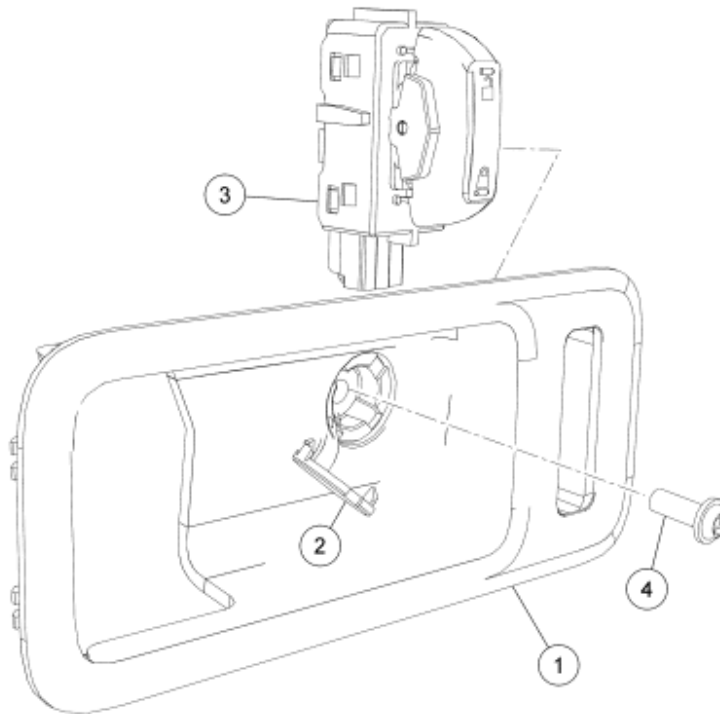


Fig. 9: Exploded View Of Front End Accessory Drive (FEAD) With Torque Specification
Courtesy of FORD MOTOR CO.

Item	Part Number	Description
1	8620	Accessory drive belt
2	W503278	Accessory drive belt tensioner bolt (3 required)
3	6B209	Accessory drive belt tensioner
4	6C301	Power steering pump drive belt

1. For additional information, refer to the appropriate procedure .

ACCESSORY DRIVE BELT

REMOVAL

CAUTION: Under no circumstances should the accessory drive belt, tensioner or pulleys be lubricated as potential damage to the belt material and tensioner damping mechanism will occur. Do not apply any fluids or belt dressing to the accessory drive belt or pulleys.

1. With the vehicle in NEUTRAL, position it on a hoist. For additional information, refer to **JACKING AND LIFTING** article.
2. Working from the top of the vehicle, using a suitable belt tensioner release tool, rotate the accessory drive belt tensioner clockwise and remove the accessory drive belt from the generator pulley.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

3. Remove the RH inner fender splash shield. For additional information, refer to **FRONT END BODY PANELS** article.
4. Working from under the vehicle, remove the accessory drive belt.

INSTALLATION

1. Working from under the vehicle, position the accessory drive belt on all pulleys, with the exception of the generator pulley.

NOTE: After installation, make sure the accessory drive belt is correctly seated on all pulleys.

2. Working from the top of the vehicle, using a suitable belt tensioner release tool, rotate the accessory drive belt tensioner clockwise and install the accessory drive belt.
3. Install the RH inner fender splash shield. For additional information, refer to **FRONT END BODY PANELS** article.

ACCESSORY DRIVE BELT TENSIONER

REMOVAL

CAUTION: Under no circumstances should the accessory drive belt, tensioner or pulleys be lubricated as potential damage to the belt material and tensioner damping mechanism will occur. Do not apply any fluids or belt dressing to the accessory drive belt or pulleys.

1. With the vehicle in NEUTRAL, position it on a hoist. For additional information, refer to **JACKING AND LIFTING** article.
2. Working from the top of the vehicle, using a suitable belt tensioner release tool, rotate the accessory drive belt tensioner clockwise and remove the accessory drive belt from the generator pulley.
3. Remove the RH inner fender splash shield. For additional information, refer to **FRONT END BODY PANELS** article.
4. Remove the 3 bolts and the accessory drive belt tensioner.

INSTALLATION

1. Install the accessory drive belt tensioner and the 3 bolts.
 - Tighten to 11 Nm (8 lb-ft).

NOTE: After installation, make sure the accessory drive belt is correctly seated on all pulleys.

2. Working from the top of the vehicle, using a suitable belt tensioner release tool, rotate the accessory drive belt tensioner clockwise and install the accessory drive belt on the generator pulley.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

3. Install the RH inner fender splash shield. For additional information, refer to **FRONT END BODY PANELS** article

POWER STEERING PUMP BELT

Special Tools

Illustration	Tool Name	Tool Number
 ST2973-A	Power Steering Belt Removal Tool	303-1252/1
 ST2974-A	Power Steering Belt Installation Tool	303-1252/2


REMOVAL

CAUTION: Under no circumstances should the accessory drive belt, tensioner or pulleys be lubricated as potential damage to the belt material and tensioner damping mechanism will occur. Do not apply any fluids or belt dressing to the accessory drive belt or pulleys.

1. With the vehicle in NEUTRAL, position it on a hoist. For additional information, refer to **JACKING AND LIFTING** article.
2. Working from the top of the vehicle, using a suitable belt tensioner release tool, rotate the accessory drive belt tensioner clockwise and remove the accessory drive belt from the generator pulley.
3. Remove the RH inner fender splash shield. For additional information, refer to **FRONT END BODY PANELS** article.
4. Position the accessory drive belt off the crankshaft pulley.
5. Install the special tool between the power steering pump belt and pulley, turning the crankshaft bolt clockwise to remove the power steering belt.

2008 Ford Edge SE

2008 ENGINE Accessory Drive - Edge & MKX

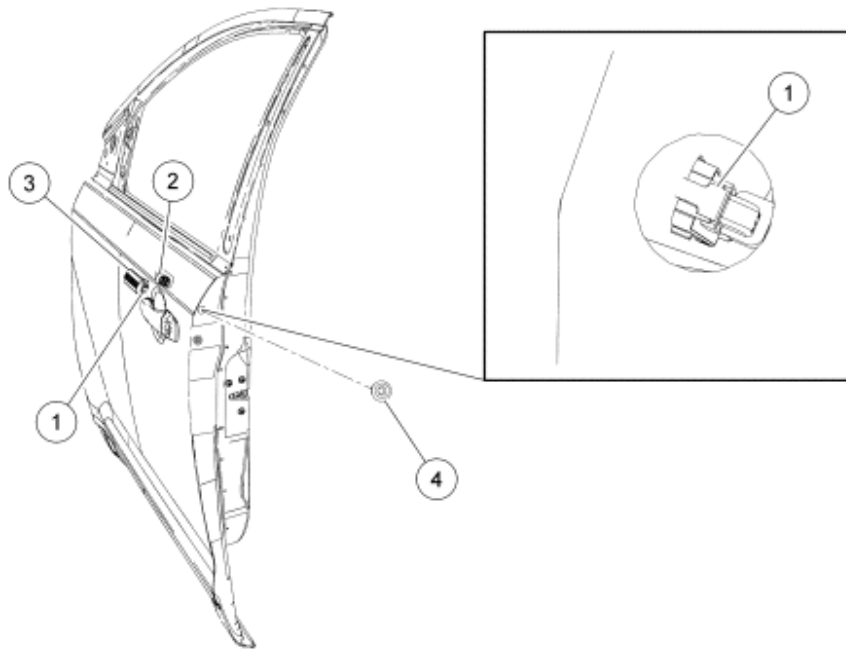

N0064651

Fig. 10: Installing Special Tool (303-1252/1) Between Power Steering Pump Belt & Pulley, Turning Crankshaft Bolt Clockwise
Courtesy of FORD MOTOR CO.

INSTALLATION

1. Install the power steering belt on the crankshaft pulley.

CAUTION: After installation, make sure the belt is correctly seated on the crankshaft and power steering pulleys.

2. Position the power steering belt around the special tool and the power steering pulley. Make sure that the belt is engaged with the power steering pulley and rotate the crankshaft clockwise to install the power steering belt.



N0068358

Fig. 11: Positioning Power Steering Belt Around Special Tool (303-1252/2) & Power Steering Pulley

2008 Ford Edge SE
2008 ENGINE Accessory Drive - Edge & MKX

Courtesy of FORD MOTOR CO.

3. Position the accessory drive belt on the crankshaft pulley.

NOTE: **After installation, make sure the accessory drive belt is correctly seated on all pulleys.**

4. Working from the top of the vehicle, using a suitable belt tensioner release tool, rotate the accessory drive belt tensioner clockwise and install the accessory drive belt.
5. Install the RH inner fender splash shield. For additional information, refer to **FRONT END BODY PANELS** article.