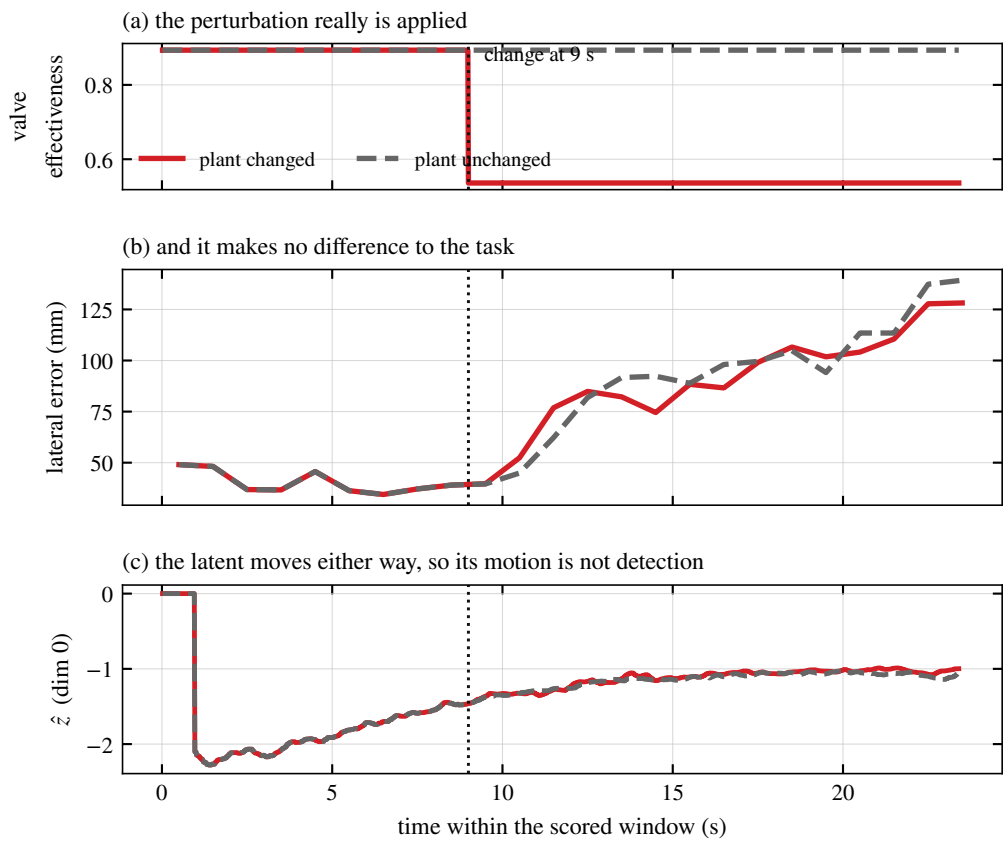
(a) the perturbation really is applied
valve effectiveness
0.8
0.6
change at 9 s
plant changed
plant unchanged
(b) and it makes no difference to the task
lateral error (mm)
125
100
75
50
(c) the latent moves either way, so its motion is not detection
$\hat{z}$ (dim 0)
0
−1
−2
0
5
10
15
20
time within the scored window (s)