
One physical electro-hydraulic actuator channel

instrumented asymmetric double-acting cylinder

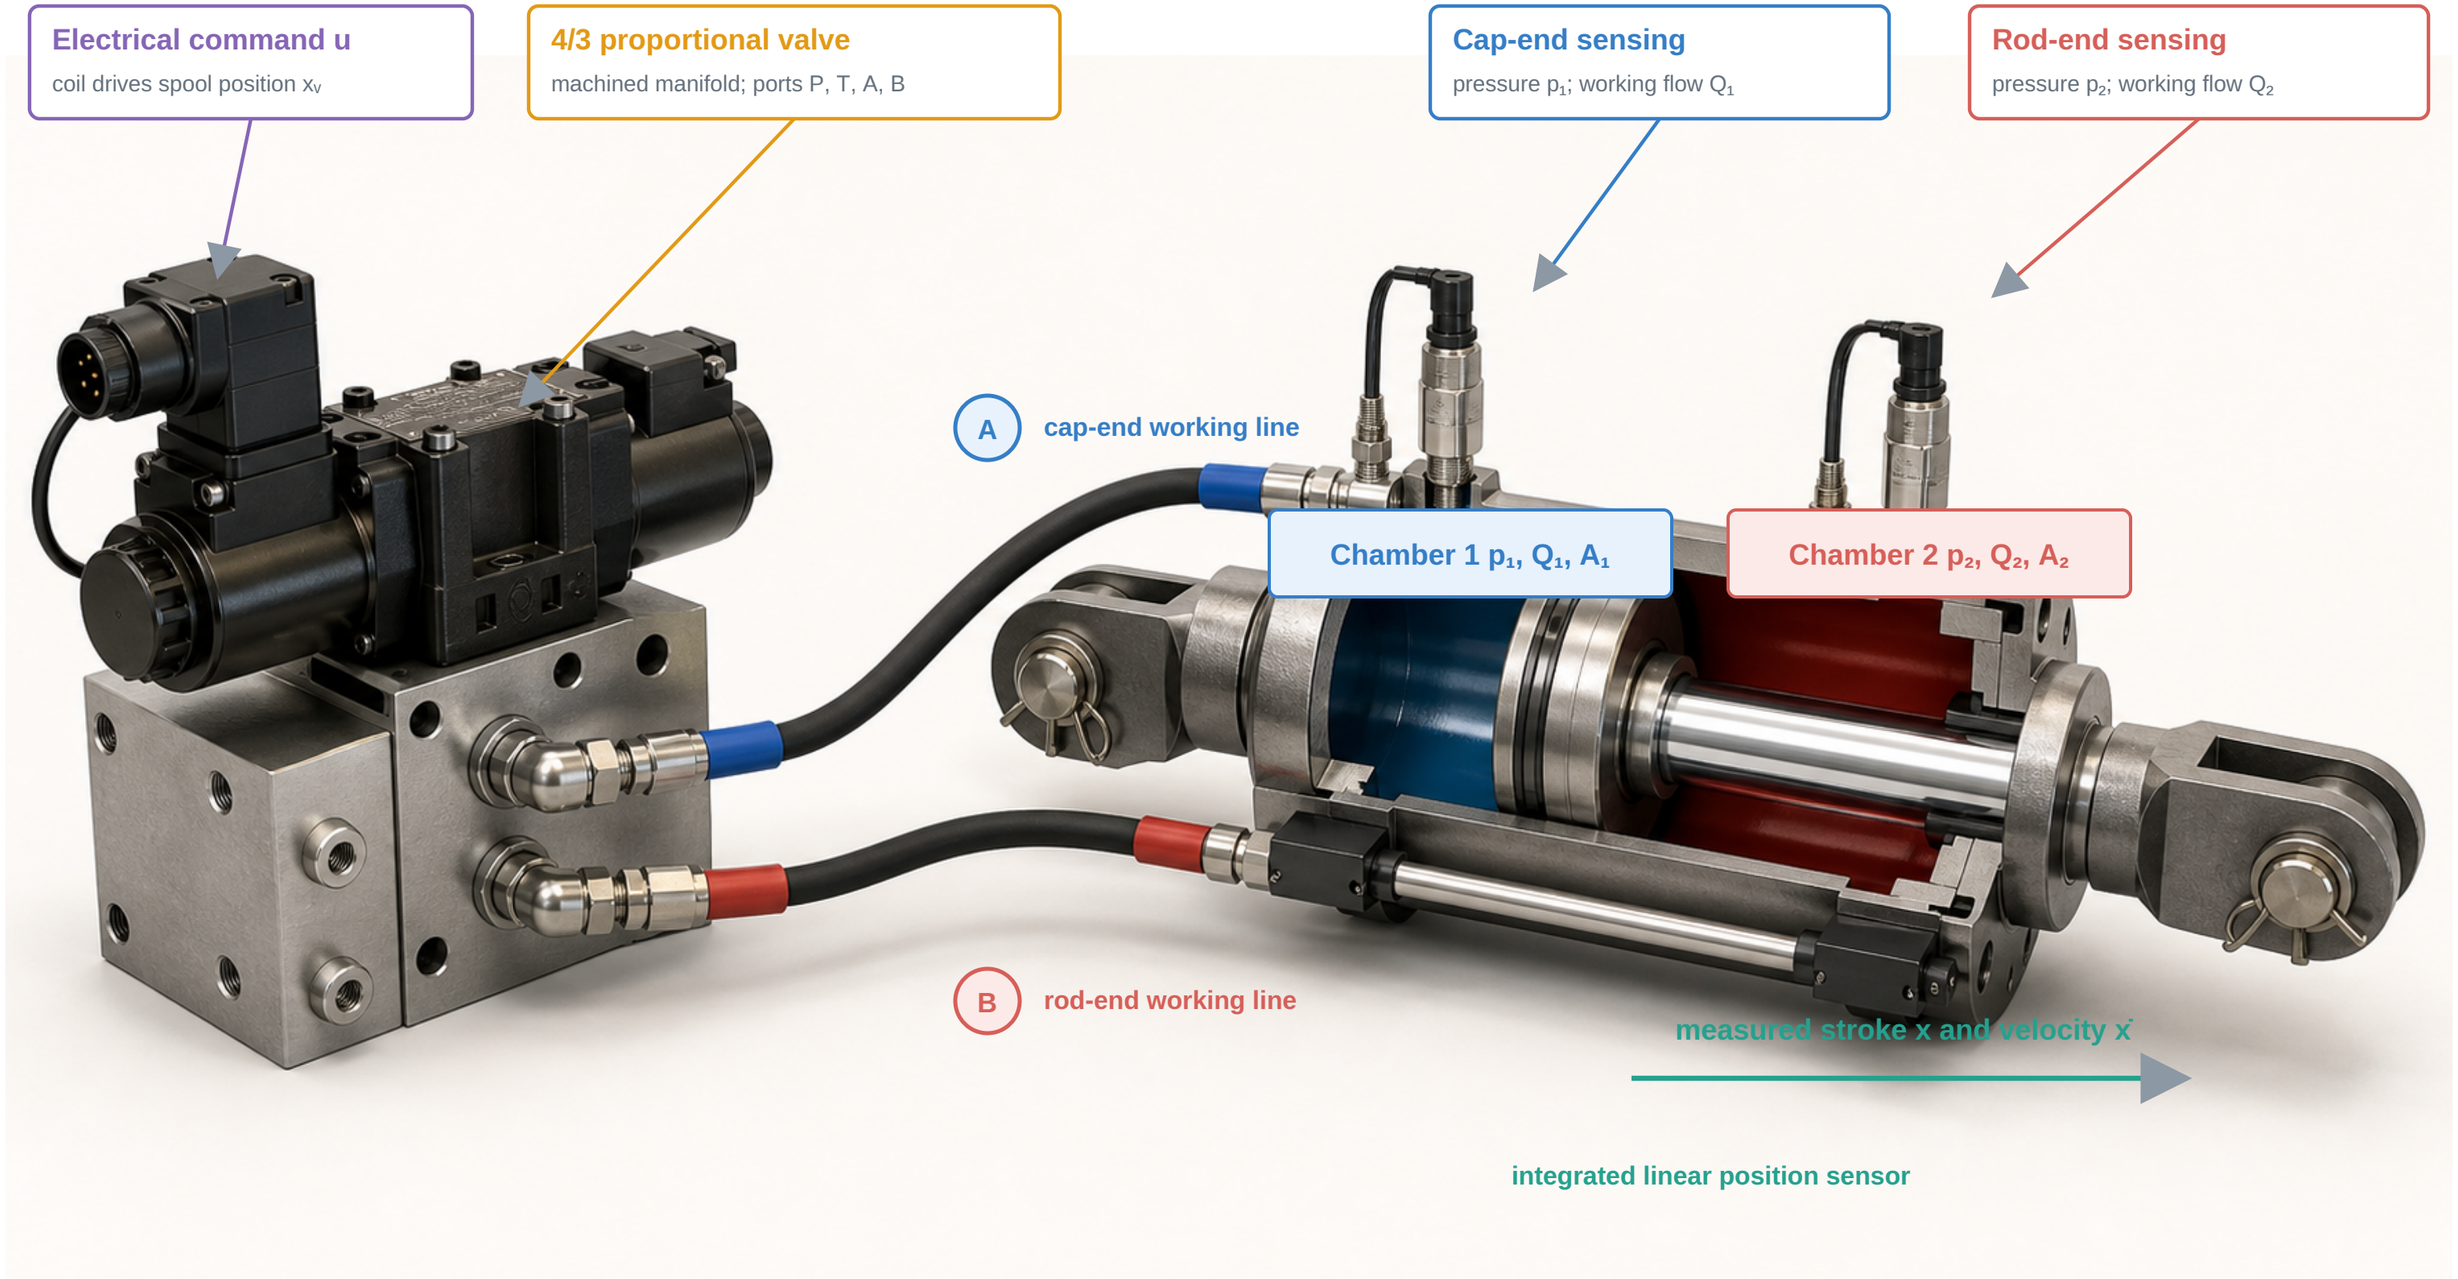

MECHANICAL INTERFACE

link k ↔ barrel clevis — prismatic stroke x — rod clevis ↔ link k+1

revolute – prismatic – revolute chain; axial load acts along the rod

HYDRAULIC → MECHANICAL COUPLING

$$F_h = p_1 A_1 - p_2 A_2$$

net motion opposed by Ffric(ẋ)