Four independent electro-hydraulic actuator channels


DRIVEN CAD LINK | DOUBLE-ACTING CYLINDER | 4/3 VALVE



C1 · J1

Slew

Drehzapfen

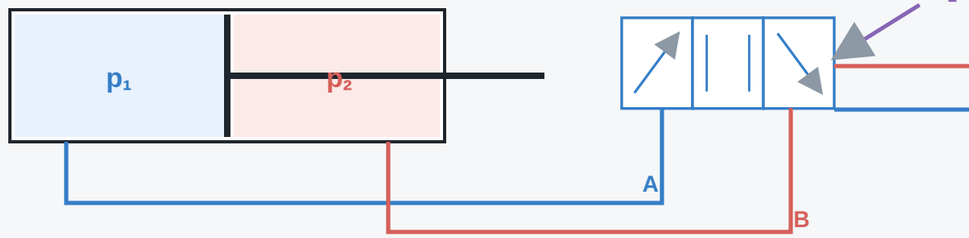




C2 · J2

Boom I

Ausleger I

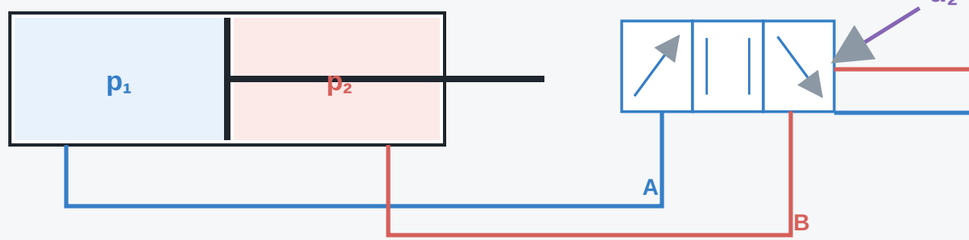




C3 · J3

Boom II

Ausleger II

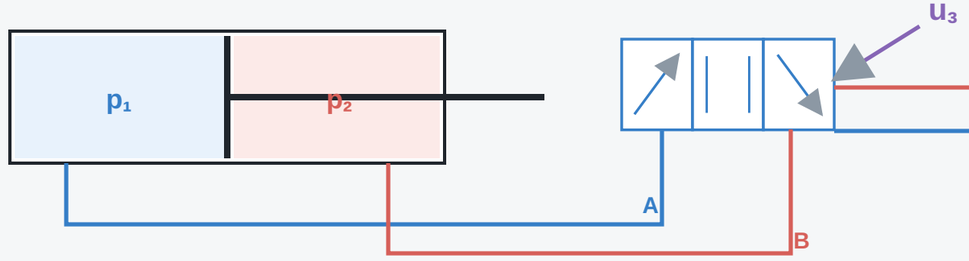




C4 · J4

Head pivot


Messerkopf-Schwenk

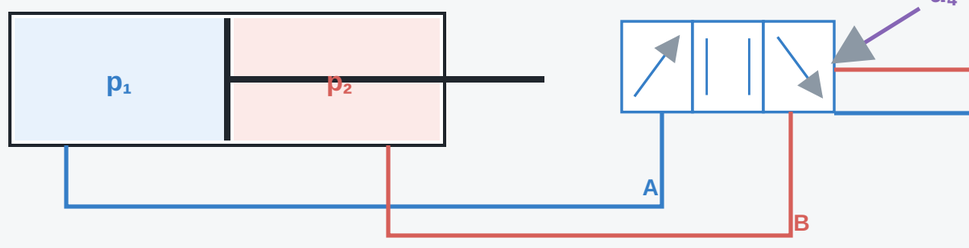

J5 is passive — no fifth valve or hydraulic cylinder branch.



Shared hydraulic power unit

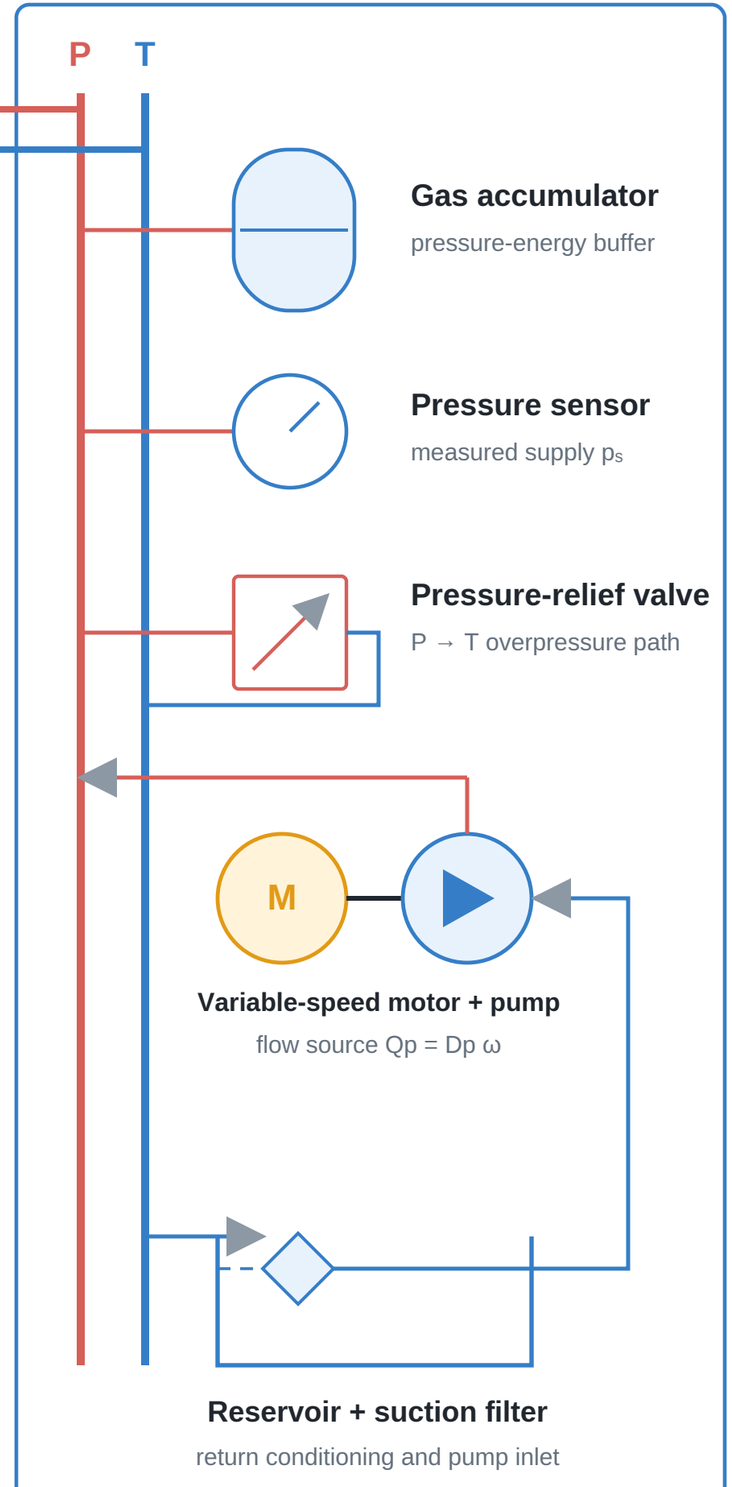

Gas accumulator

pressure-energy buffer

Pressure sensor

measured supply p_s

Pressure-relief valve

P → T overpressure path

Variable-speed motor + pump

flow source Qp = Dp ω

Reservoir + suction filter

return conditioning and pump inlet