et al. [Yamamori 26] instead shaped the physical actuator to match the simulation. A commercial valve and pump cannot be redesigned in that way, so this thesis learns the hydraulic realization while PhysX retains the rigid-body mechanics (Figure 2.3).

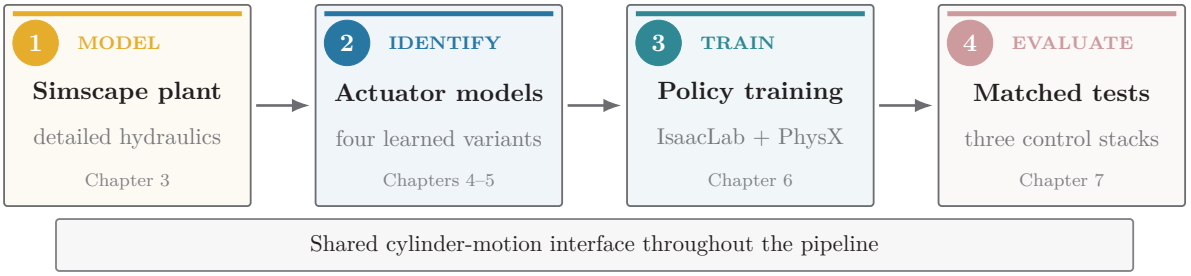


Figure 2.3: Workflow from the hydraulic plant model to matched evaluation. The separation between rigid-body physics and learned actuation follows the actuator-network approach in [Hwangbo 19]; all stages use the same cylinder-motion interface.