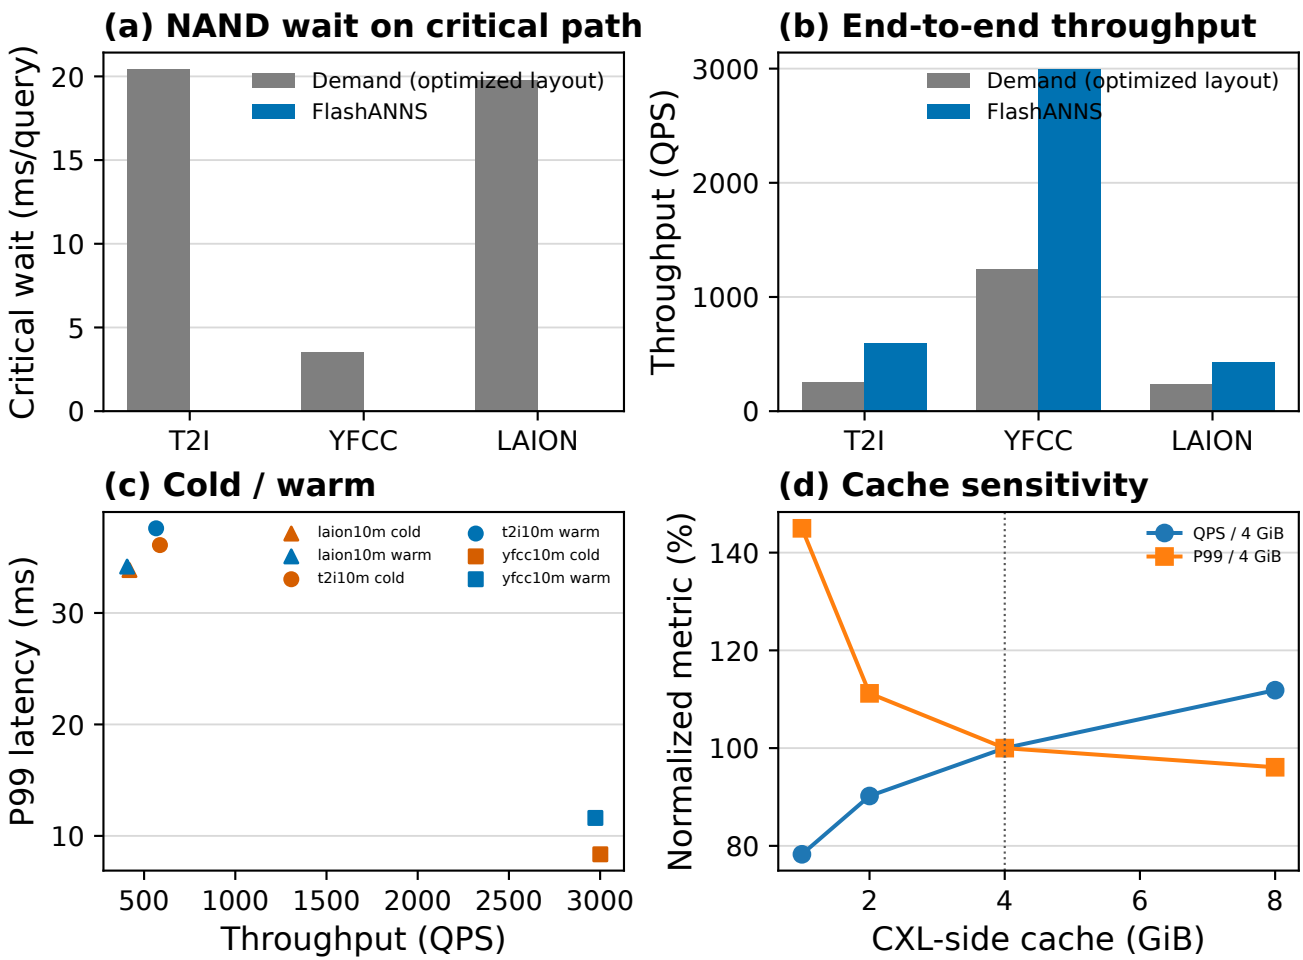
(a) NAND wait on critical path
Critical wait (ms/query)
Demand (optimized layout)
FlashANNS
T2I
YFCC
LAION
(b) End-to-end throughput
Throughput (QPS)
(c) Cold / warm
P99 latency (ms)
laion10m cold
laion10m warm
t2i10m cold
t2i10m warm
yfcc10m cold
yfcc10m warm
Throughput (QPS)
(d) Cache sensitivity
Normalized metric (%)
QPS / 4 GiB
P99 / 4 GiB
CXL-side cache (GiB)