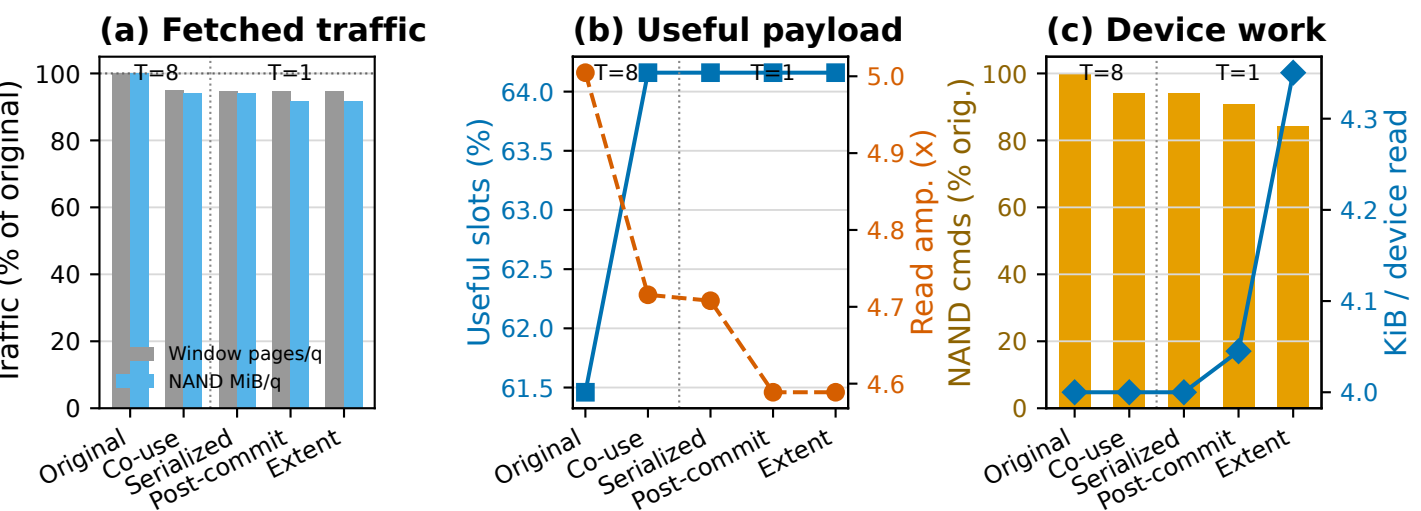
(a) Fetched traffic
Traffic (% of original)
100
80
60
40
20
0
T=8
T=1
Window pages/q
NAND MiB/q
Original
Co-use
Serialized
Post-commit
Extent
(b) Useful payload
Useful slots (%)
64.0
63.5
63.0
62.5
62.0
61.5
Read amp. (x)
5.0
4.9
4.8
4.7
4.6
T=8
T=1
Original
Co-use
Serialized
Post-commit
Extent
(c) Device work
NAND cmds (% orig.)
100
80
60
40
20
0
KiB / device read
4.3
4.2
4.1
4.0
T=8
T=1
Original
Co-use
Serialized
Post-commit
Extent