

INDEX

PART NAME	GROUP NUMBER	PART NAME	GROUP NUMBER
A		B - cont'd.	
Adapter (eng. oil filler)	6A868	Bushing (eng. aux. driveshaft)	6A875
Adapter assy. (eng. crankcase vent)	6A665	Bushing (eng. connecting rod)	6207
Adapter assy. (eng. oil filter)	6881	Bushing (eng. to frame mounting bolt)	6A049
Arm (eng. valve rocker)	6564	Bushing (eng. valve guide)	6510
Arm assy. (eng. timing chain tensioner)	6285		
Arrestor assy. (eng. crankcase vent flame)	6A827		
		C	
B		Camshaft (eng.)	6250
Baffle (eng. cylinder block vent)	6A630	Camshaft kit (eng.)	6A527
Baffle (eng. intake manifold oil)	6A630	Camshaft & tappets kit (eng.)	6250
Baffle (eng. oil pan upper)	6687	Cap (eng. valve stem exhaust)	6550
Baffle (eng. push rod crankcase vent)	6A630	Cap assortment (eng. oil filler & breather)	6766
Baffle (eng. valve push rod valley)	6524	Cap assy. (eng. oil filler & breather)	6766
Baffle (eng. valve rocker arm oil)	6524	Chain (eng. timing)	6268
Baffle (eng. valve spring oil)	6524	Chain & sprockets kit (eng. timing)	6268
Baffle (valve push rod vent)	6A669	Clip (eng. follower arm spring retaining)	6K532
		Connector (eng. crankcase vent hose)	6A706
Bearing (eng. camshaft)	6261-3, 6267, 6270	Connector (eng. oil cooler)	6A653
Bearing (eng. connecting rod)	6211	Conversion kit (eng. high performance)	6A044
Bearing (eng. crankshaft main)	6333-7	Conversion kit (eng. oil pump)	6600
Bearing kit (eng. camshaft)	6A251	Cooler assy. (eng. crankcase oil)	6A642
		Counterweight (eng. crankshaft)	6A360
Belt (eng. timing)	6268	Cover (crankcase vent)	6869
Block assy. (eng. cylinder)	6010	Cover (eng. cylinder block oil filter opening)	6A659
		Cover (eng. cylinder timing gear)	6017
Bolt (eng. connecting rod)	6214	Cover (eng. oil filter)	6737
Bolt (eng. crankshaft main bearing cap)	6345	Cover (eng. starter pinion)	6677
Bolt (eng. crankshaft pulley)	6A340	Cover (eng. valve push rod)	6519
Bolt (eng. cylinder block oil filter opening cover)	6A660	Cover (eng. valve rocker arm front support oil passage)	6A508
Bolt (eng. cylinder head)	6065	Cover assy. (eng. cylinder front)	6019
Bolt (eng. flywheel to crankshaft)	6379	Cover assy. (eng. flywheel housing)	6366
Bolt (eng. front support insulator)	6047	Cover assy. (eng. valve rocker arm)	6582, 6A582
Bolt (eng. insulator to cross member)	6047	Cover repair kit (eng. cylinder front)	6019
Bolt (eng. valve rocker arm shaft support)	6A527	Crankshaft assy. (eng.)	6303
Bolt (eng. valve rocker arm support)	6A527	Cylinder assy. (eng.)	6009
Bolt assy. (eng. oil filter adapter mounting)	6894	Cylinder head kit (eng.)	6049
Bolt & valve assy. (eng. oil filter center)	6741		
Bolt & washer (eng. oil pump attaching)	6638	D	
		Damper assy. (eng. crankshaft)	6316
Bracket (eng. crankcase vent valve hose clip)	6788	Damper assy. (eng. timing chain vibration)	6284
Bracket (eng. front support)	6028-31	Diaphragm (eng. oil filter)	6751
Bracket (eng. front support insulator)	6046	Dipstick (eng. oil level)	6750
Bracket (eng. oil cooler lower)	6B634	Distributor (eng. oil cooler)	6881
Bracket (eng. oil cooler upper)	6B633	Dowel (eng. camshaft sprocket to camshaft)	6253
Bracket (eng. rear support)	6096, 6120	Dowel (eng. connecting rod to cap)	6217
Bracket (eng. timing pointer mounting)	6M026	Dowel (eng. crankshaft main bearing cap)	6A346
Bracket (eng. to frame mounting bolt inner)	6B031	Dowel (eng. cylinder block)	6397
Bracket (eng. to frame mounting bolt outer)	6A047	Dowel (eng. cylinder head to block)	6A008
		Dress-up kit (eng. chrome finish)	6980
		Duct (eng. crankcase vent)	6A630

PART NAME	GROUP NUMBER	PART NAME	GROUP NUMBER
E		G - cont'd.	
Eccentric (eng. camshaft fuel pump drive)	6287	Gear (eng. camshaft)	6256
		Gear (eng. crankshaft)	6306
Elbow (eng. crankcase vent hose)	6767	Gear (eng. flywheel ring)	6384
Element (eng. crankcase vent oil separator)	6A631	Gear (eng. oil pump drive)	6652
Element assy. (eng. oil filter)	6731	Grommet (eng. crankcase vent retainer)	6A892
		Grommet (eng. power steering oil reservoir cover stud)	6570
Emission control kit (eng. exhaust)	6A603	Grommet (eng. rocker arm cover seal)	6570
Engine assy.	6007	Grommet (eng. valve push rod cover stud)	6570
Extension (eng. rear support)	6120	Guide (eng. disc)	6K297
		Guide (eng. valve push rod)	6A564
F		H	
Filter (eng. oil)	6731, 6734	Head (eng. cylinder)	6049
Fitting (eng. oil filter to adapter)	6882	Head kit (eng. cylinder)	6049
		Heat exchanger (eng. oil cooler assy.)	6653
Flange (eng. oil pan reinforcement)	6823	Heater assy. (eng. block)	6A051
Flywheel assy. (eng.)	6375	Heater assy. (eng. block)	6A051
		Heater kit (eng. block)	6D008
Fulcrum kit (eng. valve rocker arm)	6A585	Hose (eng. crankcase vent)	6A664, 6853
		Hose assy. (eng. oil cooler)	6A715
		Housing assy. (eng. flywheel)	6392
G			
Gasket (eng. crankcase vent oil separator)	6A632		
Gasket (eng. crankcase vent tube)	6870		
Gasket (eng. crankshaft rear bearing oil seal retainer)	6344		
		I	
Gasket (eng. cylinder front cover)	6020	Indicator (eng. oil level)	6750
Gasket (eng. cylinder head)	6051	Induction kit (eng. high performance)	6B068
		Insert (eng. oil filter mounting bolt)	6890
Gasket (eng. flywheel housing)	6435	Insert (eng. valve seat)	6057
		Insulator (eng. front support)	6038
Gasket (eng. oil distributor to oil filter)	6A734	Insulator (eng. front support rebound)	6039
Gasket (eng. oil filler & breather cap)	6789	Insulator assy. (eng. rear support)	6068
Gasket (eng. oil filter adapter)	6840	Insulator assy. (eng. rear support rebound)	6A061
Gasket (eng. oil filter adapter to cylinder block)	6A636		
Gasket (eng. oil filter center bolt to adapter)	6749		
Gasket (eng. oil filter center bolt to cover)	6749		
Gasket (eng. oil filter element)	6746	K	
Gasket (eng. oil filter mounting)	6838	Key (eng. camshaft gear to camshaft)	6B316-7
Gasket (eng. oil pan)	6710-1	Key (eng. crankshaft gear or sprocket to crankshaft)	6B316
Gasket (eng. oil pan drain plug)	6734	Key (eng. valve spring retainer)	6518
Gasket (eng. oil pump inlet tube)	6626		
Gasket (eng. oil pump to block)	6659		
Gasket (eng. valve push rod cover)	6521	KIT - refer to appropriate noun name	
Gasket (eng. valve rocker arm cover)	6584	For example	
		Emission control kit (eng. exhaust)	6A603
Gasket set (eng. complete overhaul)	6008	L	
Gasket set (eng. oil pan)	6781	Lifter assy. (eng. valve)	6500
Gasket set (eng. valve grind)	6079	Liner (eng. cylinder block)	6055

INDEX

PART NAME	GROUP NUMBER	PART NAME	GROUP NUMBER
N		R	
Nipple (eng. oil cooler)	6883	Reinforcement (eng. rear support)	6A042
Nut (eng. connecting rod)	6212		
Nut (eng. rear support insulator)	6041	Retainer (eng. camshaft sprocket)	6258
Nut (eng. valve rocker arm adjusting screw)	6552	Retainer (eng. camshaft thrust plate bolt)	6225
Nut (eng. valve rocker arm stud)	6A529		
		Retainer (eng. crankcase vent grommet)	6A892
O		Retainer (eng. crankcase vent oil separator element)	6A633
"O" ring (eng. block heater)	6B080	Retainer (eng. oil filter element)	6898
		Retainer (eng. piston pin)	6140
P		Retainer (eng. rear support)	6054
Packing (eng. crankshaft rear)	6701	Retainer (eng. valve spring)	6514
Pan assy. (eng. oil)	6675	Retainer assy. (eng. crankshaft rear bearing oil seal)	6335
Pin (eng. crankshaft rear oil seal)	6A302	Ring (eng. crankshaft retaining)	6307
Pin (eng. piston)	6135	Ring (eng. crankshaft thrust)	6334
Pin (eng. timing chain tensioner arm)	6286	Ring (eng. oil pump intermediate shaft retainer)	6629
Pipe (eng. oil filler)	6763	Ring (eng. piston)	6150
Piston assy. (eng.)	6108-9	Ring set (eng. piston complete)	6149
		Ring set (eng. piston partial)	6148
Plate (eng. aux. shaft retaining)	6613		
Plate (eng. camshaft thrust)	6269	Rod (eng. valve push)	6565
Plate (eng. cylinder front cover)	6B070	Rod assy. (eng. connecting)	6200
Plate (eng. flywheel reinforcing)	6A366		
Plate (eng. front support bracket)	6D047	Rotor & shaft assy. (eng. oil pump drive)	6608
Plate (eng. oil inlet tube bolt locking)	6A736		
Plate (eng. oil pump body)	6616		
Plate (eng. rear support)	6070		
		S	
Plug (eng.)	6026	Screen assy. (eng. oil pump)	6623
Plug (eng. camshaft rear bearing)	6266	Screen tube & cover assy. (eng. oil pump)	6622
Plug (eng. crankshaft)	6307		
Plug (eng. cylinder block water metering)	6D039	Screw (valve rocker arm adjusting)	6549
Plug (eng. cylinder head exhaust air supply)	6052		
Plug (eng. oil filter by-pass valve)	6666	Seal (eng. crankcase separator spigot)	6K777
Plug (eng. oil pan drain)	6730	Seal (eng. crankshaft rear main bearing cap)	6336
Plug (eng. oil pump relief valve)	6666, 6A616	Seal (eng. cylinder front cover oil)	6700
Plug (eng. valve oil metering)	6A580		
Plug (eng. valve rocker arm shaft)	6572	Seal (eng. flywheel housing cover plate)	6411
Plunger (eng. cylinder block main oil galley relief valve)	6674	Seal (eng. oil pan)	6722-3
Plunger (eng. oil pump relief valve)	6674	Seal (eng. rear cover plate)	6411, 6424
Pointer (eng. timing)	6023	Seal (eng. valve rocker arm cover baffle)	6A545
		Seal (eng. valve stem)	6571
Pulley assy. (eng. crankshaft)	6312	Seal kit (eng. crankshaft rear main bearing)	6A321
Pulley assy. (eng. crankshaft outer)	6A312		
Pulley assy. (eng. tensioner)	6K254	Seat (eng. valve rocker arm fulcrum)	6A528
Pump assy. (eng. oil)	6600	Seat (eng. valve spring)	6A536
		Separator assy. (eng. crankcase vent oil)	6A785


[illegible]

ENGINE IDENTIFICATION TAG

IN ALL INQUIRIES ALWAYS FURNISH THE COMPLETE TAG IDENTIFICATION INFORMATION

All engines for 1965 and subsequent model years include an engine identification tag. This tag describes C.I.D., model year, year and month of production, and change level number. On 8 cylinder 260 and 289 engines the tag is located under the water temperature sender (Basic 10884). On the 8 cylinder 390 Thunderbird engine it is located under the left front intake manifold attaching bolt. On all other engines the tag is located under the ignition coil attaching bolt. All engine code numbers consist of a basic number, a suffix, and in some cases a prefix. Generally the basic number is adequate for engine identification, if additional information is needed the prefix or suffix is included.

The catalog uses the change level number in the same manner as date restriction information is presently used. The change level number is advanced only when a replacing part or assembly being introduced and the old part or assembly it replaces are not completely interchangeable. These Engine Code Numbers and their designations are listed in the Engine Identification Chart which follows on pages 2, 3 and 4

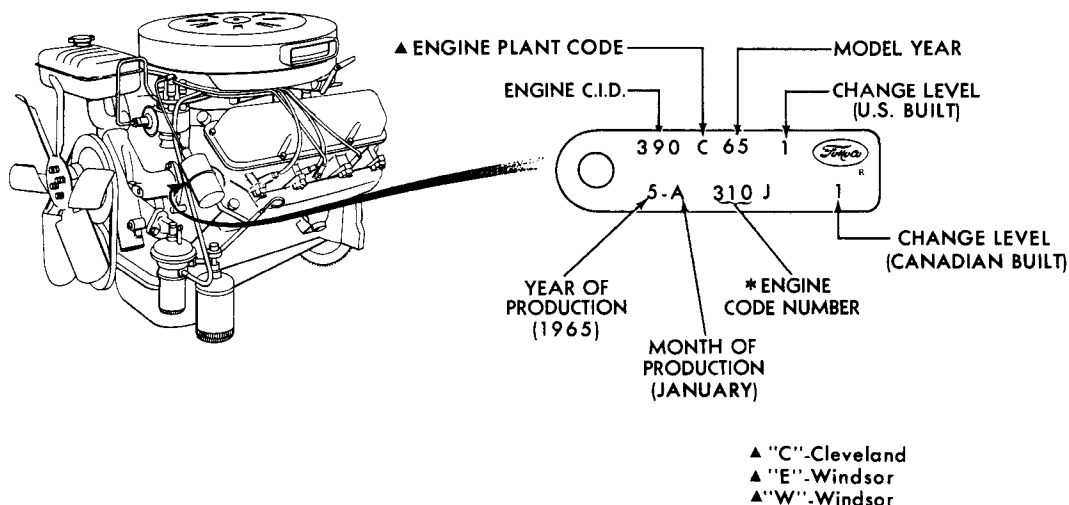

*Except when indicated in the chart below prefixes and suffixes are for Ford Motor Company use only and do not affect engine identification.

P.4469

ENGINE PARTS LISTS

Engine parts are cataloged in separate sections for each related family or group of engines as follows:

	ENGINE GROUP	PARTS LIST SECTION
4 CYLINDER	98, 122	60.1
6 CYLINDER	170, 200, 250	60.2
	240	60.3
8 CYLINDER	260, 289, 289 Spec.	60.4
	302, 302 Spec.	60.5
	351, 351 Spec.	60.5A
	352, 390	60.6
	400	60.7
	427	60.8
	428, 429, 429 Spec., 460	60.9

EXHAUST EMISSION CONTROL KIT

The exhaust emission control kit, part number D0AZ 6A603-G, listed in the appropriate sections of this catalog, fits all 6 and 8 cylinder 1959/67 passenger cars and all 6 and 8 cylinder 1959/67 trucks (under 6000 lbs. G.V.W.) except units initially sold and equipped with a California exhaust emission system.

ENGINE IDENTIFICATION CHART - continued

IDENT. TAG CODE	NO. CYL.	C.I.D.	CARB.	WARRANTY PLATE CODE	PARTS LIST NO.	IDENT. TAG CODE	NO. CYL.	C.I.D.	CARB.	WARRANTY PLATE CODE	PARTS LIST NO.
5	6	170	F-1	U	60.2	206	8	◇351	F-2	H	60.5A
6	6	170	F-1	U	60.2	207	8	◇351	F-2	H, W	60.5A
7	6	170	F-1	U	60.2	208	8	◇351	F-4	M	60.5A
8	6	170	F-1	U	60.2	209	8	◇351	F-4	M	60.5A
11	6	170	F-1	U	60.2	210	8	◇351	F-4	M	60.5A
12	6	170	F-1	U	60.2	211	8	◇351	F-4	M	60.5A
16	6	170	F-1	U	60.2	212	8	◇351	F-4	M	60.5A
17	6	170	F-1	F	60.2	213	8	◇351	F-4	M	60.5A
17	6	170	F-1	U	60.2	219	8	400	F-2	S	60.7
21	6	200	F-1	T	60.2	220	8	400	F-2	S	60.7
23	6	200	F-1	T	60.2	221	8	400	F-2	S	60.7
24	6	200	F-1	T	60.2	231	8	289	F-2	C	60.4
25	6	200	F-1	T	60.2	232	8	289	F-2	C	60.4
26	6	170	F-1	U	60.2	233	8	289	F-2	C	60.4
26	6	200	F-1	T	60.2	235	8	289	F-4, P/F	A	60.4
27	6	200	F-1	T	60.2	236	8	289	F-2	C	60.4
28	6	170	F-1	U	60.2	237	8	289	F-2	C	60.4
29	6	170	F-1, S/E	U	60.2	239	8	289	F-2	C	60.4
32	6	200	F-1	T	60.2	240	8	289	F-2	C	60.4
33	6	200	F-1	T	60.2	241	8	289	F-2	C	60.4
34	6	200	F-1	T	60.2	245	8	289	F-4	K	60.4
35	6	200	F-1	T	60.2	246	8	289	F-4	K	60.4
36	6	200	F-1	T	60.2	250	8	289	F-4, P/F	A	60.4
37	6	170	F-1	W	60.2	252	8	289	F-2	C	60.4
38	6	170	F-1	W	60.2	253	8	289	F-2	C	60.4
39	6	170	F-1	W	60.2	257	8	289	F-2	C	60.4
40	6	200	F-1	T	60.2	271	8	302	F-2	F, G	60.5
41 Δ	6	200	F-1	T	60.2	272	8	302	F-2	F, G	60.5
41●	6	250	F-1	L	60.2	273	8	302	F-2	F, G	60.5
42 Δ	6	200	F-1	T	60.2	274	8	302	F-2	F, G	60.5
42●	6	250	F-2	L	60.2	275	8	302	F-2	F	60.5
45	6	250	F-1	L	60.2	276	8	302	F-2	D, F	60.5
46	6	250	F-1	L	60.2	277	8	302	F-2	F	60.5
47	6	250	F-1	L	60.2	278	8	302	F-2	D	60.5
48	6	250	F-1	L	60.2	279	8	302	F-2	F, G	60.5
50	6	250	F-1, S/E	L	60.2	280	8	302	F-2	F, G	60.5
100	6	240	F-1	V	60.3	281	8	302	F-2	F	60.5
101	6	240	F-1	V	60.3	282	8	302	F-2	F	60.5
102	6	240	F-1, S/E	E	60.3	283	8	302	F-4	J	60.5
103	6	240	F-1	Δ	60.3	284	8	302	F-4	J	60.5
104	6	240	F-1	V	60.3	285	8	302	F-2	F	60.5
105	6	240	F-1, S/E	E	60.3	286	8	302	F-2	D	60.5
106	6	240	F-1	Δ	60.3	+287	8	302	F-2	F	60.5
200	8	◇351	F-2	H	60.5A	287	8	352	F-4	X	60.6
201	8	◇351	F-2	H	60.5A	288	8	302	F-2	F	60.5
202	8	◇351	F-2	H	60.5A	289	8	352	F-4	X	60.6
203	8	◇351	F-2	H	60.5A	296	8	302	F-2	G	60.5
204	8	◇351	F-2	W	60.5A	299	8	302-Spec.	H-4	G	60.5
205	8	◇351	F-2	H	60.5A	300	8	302-Spec.	H-4	G	60.5

Δ B - if in Police unit - E - if in Taxi unit

† Does not have Rocker Arm shaft

‡ Has Rocker Arm shaft

Δ 1970 and prior

● 1971 only

◇ Windsor-Built Engine - when the service identification is not available, the illustrations on Pages 18 and 19 of Illustration Section 60 identifies the Windsor 351 Engine.

ENGINE IDENTIFICATION CHART - continued

IDENT. TAG CODE	NO. CYL.	C. I. D.	CARB.	WARRANTY PLATE CODE	PARTS LIST NO.	IDENT. TAG CODE	NO. CYL.	C. I. D.	CARB.	WARRANTY PLATE CODE	PARTS LIST NO.
310	8	390	F-2	Y	60.6	500	8	260	F-2	F	60.4
311	8	390	F-2	Y	60.6	502	8	260	F-2	F	60.4
312	8	390	F-2	Y	60.6	504	8	260	F-2	F	60.4
313	8	390	F-4	Z	60.6	506	8	260	F-2	F	60.4
315	8	390	F-4	Z	60.6						
316	8	390	F-2	H, Y	60.6	534	8	260	F-2	F	60.4
317	8	390	F-2, P/F	X	60.6	536	8	260	F-2	F	60.4
318	8	390-GT	F-4	S	60.6	538	8	260	F-2	F	60.4
319	8	390-GT	F-4	S	60.6	540	8	260	F-2	F	60.4
						548	8	289	F-2	C	60.4
321	8	390-GT	F-4	S	60.6	549	8	289	F-2	C	60.4
322	8	390-GT	F-4	S	60.6						
324	8	390-GT	F-4	S	60.6	550B	8	289	F-4	D	60.4
						550J	8	289	F-2	C	60.4
341	8	390	F-4	Z	60.6	551B	8	289	F-4	D	60.4
343	8	390	F-4	Z	60.6	551J	8	289	F-2	C	60.4
348	8	390	F-4	P	60.6						
349	8	390	F-4	P	60.6	552	8	289	F-4	A	60.4
						554	8	289	F-4	K	60.4
						557	8	289	F-2	C	60.4
350	8	427	H-4	W	60.8	558	8	289	F-2	C	60.4
353	8	427	H-8	R	60.8						
357	8	390	F-4	Z	60.6	561	8	289	F-2	C	60.4
359	8	427-exc.S.O.H.C.	F-4	W	60.8	562	8	289	F-2	C	60.4
359	8	427-S.O.H.C.	H-8		60.8	563	8	289	F-4	K	60.4
						564	8	289	F-4	K	60.4
360	8	427	H-4	W	60.8	566	8	289	F-4, P/F	A	60.4
361	8	427	H-8	R, W	60.8	567	8	289	F-4, P/F	A	60.4
362	8	427	H-8	R	60.8						
363	8	427-S.O.H.C.	H-4		60.8	600	8	\$ 351	F-2	H	60.5A
364	8	427	H-4	W	60.8	601	8	\$ 351	F-2	H	60.5A
						602	8	\$ 351	F-2	H	60.5A
382	8	390-GT	F-4	S	60.6	604	8	\$ 351	F-2	H	60.5A
383	8	390-GT	F-4	S	60.6	606	8	\$ 351	F-2	H	60.5A
384	8	390-GT	F-4	S	60.6	608	8	\$ 351	F-4	M	60.5A
385	8	390-GT	F-4	S	60.6	609	8	\$ 351	F-4	M	60.5A
386	8	390-GT	F-4	S	60.6						
						610	8	\$ 351	F-2	H	60.5A
						611	8	\$ 351	F-2	H	60.5A
400	8	428	F-4	Q	60.9	612	8	\$ 351	F-4	M	60.5A
401	8	428	F-4	Q	60.9	613	8	\$ 351	F-4	M	60.5A
404	8	428	F-4	P	60.9	614	8	\$ 351	F-2	H	60.5A
405	8	428	F-4	P	60.9						
						615	8	\$ 351	F-2	H	60.5A
407	8	428-CJ	H-4	R	60.9	616	8	\$ 351	F-4	M	60.5A
408	8	428-CJ	H-4	R	60.9	617	8	\$ 351	F-4	M	60.5A</

\$ Cleveland-Built Engine - when the service identification is not available, the illustrations on pages 20 and 21 of Illustration Section 60 identifies the Cleveland 351 Engine.

[illegible]

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
71/		★6007	★	★			ENGINE ASSY. - Service details only
71/		D1FZ 6008-A	1				GASKET SET - COMPLETE OVERHAUL
	Consists of						
	1-D1FZ 6020-B	Gasket (cyl. front cover)	1-681F	6711-AA			Gasket (oil pan L.H.)
	1-D0RY 6051-B	Gasket (cyl. head)	1-681F	6722-AA			Seal (oil pan front)
	1-D0RY 6344-A	Gasket (crankshaft rear bearing oil seal)	1-681F	6723-AA			Seal (oil pan rear)
	4-D1FZ 6571-B	Seal (intake valve stem)	1-C2OZ	6734-A			Gasket (oil drain plug)
	4-D1FZ 6571-C	Seal (exhaust valve stem)	1-D1FZ	8255-B			Gasket (water outlet)
	1-D1FZ 6584-C	Gasket (rocker cover)	1-D0RY	9417-A			Gasket (fuel pump)
	1-D1FZ 6659-C	Gasket (oil pump to block)	1-D0RY	9441-A			Gasket (intake manifold to cyl. head)
	1-D1FZ 6700-B	Seal (cyl. front cover)	1-D1FZ	9447-D			Gasket (carb. to manifold)
	1-D1FZ 6701-A	Packing (crankshaft rear)	1-D0RY	9448-A			Gasket (exhaust manifold-inner)
	1-681F 6710-AA	Gasket (oil pan R.H.)	2-D0RY	9448-B			Gasket (exhaust manifold-outer)
			1-D1RY	12143-A			Seal (dist. to cyl. head)
71/		D1FZ 6008-B	1				
	Consists of						
	1-D1FZ 6020-A	Gasket (cyl. front cover)	1-71HM	6710-A1A			Gasket (oil pan R.H.)
	1-D1FZ 6051-A	Gasket (cyl. head)	1-71HM	6711-A1A			Gasket (oil pan L.H.)
	2-D1FZ 6336-A	Seal (crankshaft rear main bearing cap)	2-D1FZ	6722-A			Seal (oil pan)
	2-D1FZ 6570-A	Seal (rocker arm cover)	1-D1FZ	8255-A			Gasket (water outlet)
	4-D1FZ 6571-B	Seal (intake valve stem)	1-D1FZ	8507-A			Gasket (water pump)
	4-D1FZ 6571-D	Seal (exhaust valve stem)	1-D1FZ	8590-A			Gasket (thermostat)
	1-D2FZ 6584-A	Gasket (rocker cover)	1-D2RY	9417-A			Gasket (fuel pump)
	1-D1FZ 6626-A	Gasket (oil pump inlet tube)	1-D1FZ	9441-A			Gasket (intake manifold)
	3-D1FZ 6700-A	Seal (cyl. front cover oil)	1-D1FZ	9447-E			Gasket (carb. to manifold)
	1-D1FZ 6701-A	Packing (crankshaft rear)	1-D1FZ	9448-A			Gasket (exhaust manifold-inner)
			AR-D1FZ	9448-B			Gasket (exhaust manifold-outer)
71		CC9TZ 6D008-A	1				HEATER KIT - CYLINDER BLOCK
71		CC9DZ 6D008-A		1			
71		D1FZ 6009-A	1				CYLINDER ASSEMBLY
72	Exc. California		1				
72	California	D2FZ 6009-A	1				
71		D1FZ 6009-B		1			
72		D2FZ 6009-B		1			
		6010					BLOCK ASSEMBLY - CYLINDER
71/		D1FZ 6010-C	1				Includes (8) D1FZ 6500-A
71/		D1FZ 6010-A		1			
71/		E890100-S(AA5)		1			Ball-rear main oil gallery-11mm
71		D1AB 6B018-AA	1or2	1or2			WIRE ASSY. - CYLINDER BLOCK HEATER
		6019					COVER ASSY. - CYLINDER FRONT
71/72	"Before 7/1/72"	D2FZ 6019-A	1				Without timing marks or oil indicator hole
72	"From 7/1/72"	D1FZ 6019-C	1				Has timing marks and oil indicator hole
71/		D1FZ 6019-D		1			Outer-(front repair kit)-incl. (2) gaskets, (1) E800167-S bolt, (1) 866103-S clip
71/		D1FZ 6019-A		1			Front-upper
71		D1FZ 6019-B		1			Front-lower
72	California			1			
72	Exc. California	D2FZ 6019-B		1			Front-lower
71/		20344-S8(B42)	4				Bolt-1/4"-20 x 3/4" hex.hd.-attach cover to block
71		E834102-S(AK3)		3			Insulator (between 6019 & block)-16mm-female
71		E834103-S(AK5)		3			Insulator (between 6019 & block)-16 x 5, 8-male
71/		356184-S(XX113)		3			Washer (6019 to block)
71/		E-804127-S82 (AB110)		3			Bolt-hex.hd.-M6 x 16.3mm - attach timing gear cover to block
72	"Before 1/21/72"	E601112-S82 (AB8)		2			Bolt-hex.hd.-M6 x 35-attach cover front lower to block
72	"From 1/21/72"	E800172-S71		2			Bolt (att.cover to block)-M6 x 35(metric coarse)
71		E602529-S76 (AB53)		3			Bolt(attach cover front lower to block)-M6 x 20

● 1600 cc ▲ 2000 cc

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122	▲		
72		D2FZ 6C019-A	●		3		GROMMET - CYLINDER FRONT COVER
6020 GASKET - CYLINDER FRONT COVER							
71/		D1FZ 6020-B		1			
71/		D1FZ 6020-A		1			
72	California	D2FZ 6023-A		1			POINTER-TIMING
72	With A/C (California)	D2FZ 6023-B		1			
72	Without A/C (California)	D2FZ 6023-C		1			
72		E602163-S82(AB5)	2	2			Bolt (6023 & 6M026 to block)-hex.hd.-M6 x 10
72		E630025-S71 (AX10A)	2				Washer (6023 & 6M026 to block)-flat
72		E630024-S71(AX9)		2			Washer (6023 & 6M026 to block)-flat

6A023, 6068, 6096 REAR MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT	*BRACKET- REAR SUPPORT	*INSULATOR ASSEMBLY	*BRACKET	
						R.H.	L.H.
71/	M/T	98, 122	D2FZ 6A023-A Lower D1FZ 6A023-B Upper	D3FZ 6096-A	D1FZ 6068-B		
71/	A/T	98, 122	D2FZ 6A023-A Lower D1FZ 6A023-B Upper	D3FZ 6096-B	D1FZ 6068-B		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122	▲		
71/	M/T	N800005-S101 (AB88)	1	1			Screw & washer assy.-M12 x 35 hex.hd. locking-(attach bracket 6096 to transmission)
71/	A/T	350688-S(BB193)		2			Bolt-1/2"-13 x 1 1/4"(attach brkt.6096 to trans.)
71/	A/T	34809-S8 (X68)		2			Washer-1/2"
71/		382802-S2 (MM173JB)	1	1			Nut-3/8"-16-lock (6068 to 6069)
6026 PLUG - ENGINE							
71/		D0RY 6026-A	2				Plug-1.639" dia.-plug holes in block-cup type
71/		D0RY 6026-B	1				Plug-pipe 1/8" pipe x 3/8" slotted plug oil gallery holes in block
71/		D0RY 6026-D	3				Plug-.453" dia.-plug-(1) rear gallery oil drain and (2) rocker arm shaft holes
71/		D1FZ 6026-A		1			Main oil gallery hole - front
71/		D1FZ 6026-B		2			Plug - cup-std.-1 1/2" dia.-R.H. side of block
				1			Rear of cylinder head
		D1FZ 6026-C		AR			.065" O/S
71/		D1FZ 6026-D		1			Plug-expansion-rear of block
71/		D1FZ 6026-E		1			Plug-expansion-main oil gallery-front
71/							level indicator hole
71/		D1FZ 6026-F		1			Plug-in block or front cover in unused oil level indicator hole
71/		87650-S(P12)		AR			Pipe plug(water temp.indicator hole blanking 6049)
71/		87710-S(P16)		AR			Pipe plug (water jacket side of 6010)
72	California	D2FZ 6M026-A	1				BRACKET-TIMING POINTER MOUNTING
72	Without A/C-(California)	D2FZ 6M026-B		1			
72	With A/C-(California)	D2FZ 6M026-C		1			

6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT BRACKET		*BRACKET		*INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
71/		98, 122	D1FZ 6028-A	D3FZ 6029-A	D1FZ 6030-A	D1FZ 6031-A	Use 6038 kit	Use 6038 kit

* 1 required unless otherwise noted ● 1600 cc ▲ 2000 cc

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
71/		N800003-S100 (AB80)		6			Screw & washer ass.-M8 x 20 hex.hd.- (bracket 6030 & 6031 to engine)
71/		382802-S2 (MM173JB)		4			Nut-3/8"-16-lock (insulator to bracket)
71/		357235-S(BB136)	4	4			Bolt-hex. hd. 5/16"-18 x 7/8"-attach (6029) support bracket
		6030					BRACKET - FRONT SUPPORT - refer to Front Motor Mount Chart Group 6028
		6038					INSULATOR - FRONT SUPPORT - refer to Front Motor Mount Chart Group 6028
		6038					INSULATOR KIT - FRONT SUPPORT
71/		D3FZ 6038-D	1	1			R. H.
	Consists of						
	1-D3FZ 6030-A Bracket	1-D3FZ 6038-C Insulator					1-378489-S2 Nut
71/		D3FZ 6038-E	1	1			L. H.
	Consists of						
	1-D3FZ 6031-A Bracket	1-D3FZ 6038-C Insulator					1-378489-S2 Nut
71/		D1FZ 6A042-A	2	2			REINFORCEMENT - REAR SUPPORT
		★6D047					PLATE - FRONT SUPPORT BRACKET - serviced in 6210218-9 assy. only
		6049					HEAD - CYLINDER
71/		D1FZ 6049-A		1			Complete with valves
71/		D1FZ 6049-B	1				
71/		D1FZ 6051-A		1			GASKET - CYLINDER HEAD-asbestos & steel
71/		D0RY 6051-B	1				
71/		D1FZ 6052-A		2			PLUG - CYLINDER HEAD EXHAUST AIR SUPPLY- pipe - 3/4"-14
71/		D0RY 6055-A	AR				LINER - CYLINDER BLOCK - Std.-3.3150" O.D.- 3.152" I.D.
		D0RY 6055-B	AR				.020" O/S-3.152" I.D.
		6057					INSERT - VALVE SEAT
71/		D1FZ 6057-A	4				Exhaust - standard
		D1FZ 6057-B	AR				.010" O/S O.D.-depth-standard
		D1FZ 6057-C	AR				.010" O/S O.D.-depth .010" O/S
		D1FZ 6057-D	AR				.020" O/S O.D.-depth std.
		D1FZ 6057-E	AR				.020" O/S O.D.-depth .020" O/S
		D0RY 6057-A	4				Intake - standard
		D0RY 6057-B	AR				.010" O/S O.D.-depth standard
		D0RY 6057-C	AR				.010" O/S O.D.-depth .010" O/S
		D0RY 6057-D	AR				.020" O/S O.D.-depth standard
		D0RY 6057-E	AR				.020" O/S O.D.-depth .020" O/S
71/		D1FZ 6065-A		10			BOLT - CYLINDER HEAD
71/		D1FZ 6065-B	8				
71/		D1FZ 6065-C	2				
		6068					INSULATOR ASSY. - REAR SUPPORT - refer to Rear Motor Mount Chart Group 6A023
71/		D1FZ 6079-A	1				GASKET SET - VALVE GRIND
	Consists of						
	1-D0RY 6051-B	Gasket (cyl. head)				1-D0RY 9441-A	Gasket (intake manifold to cyl. head)
	4-D1FZ 6571-B	Seal (intake valve stem)					
	4-D1FZ 6571-C	Seal (exhaust valve stem)				1-D1FZ 9447-D	Gasket (carb. to manifold)
	1-D1FZ 6584-C	Gasket (rocker cover)				1-D0RY 9448-A	Gasket (exhaust manifold-inner)
	1-D1FZ 8255-B	Gasket (water outlet)				1-D0RY 9448-B	Gasket (exhaust manifold-outer)
71/		D1FZ 6079-B		1			
	Consists of						
	1-D1FZ 6051-A	Gasket (cyl. head)				1-D1FZ 8255-A	Gasket (water outlet)
	2-D1FZ 6570-A	Seal (rocker arm cover)				1-D1FZ 8590-A	Gasket (thermostat)
	4-D1FZ 6571-B	Seal (intake valve stem)				1-D1FZ 9441-A	Gasket (intake manifold)
	4-D1FZ 6571-D	Seal (exhaust valve stem)				1-D1FZ 9447-A	Gasket (carb. to manifold)
	1-D2FZ 6584-A	Gasket (rocker cover)				1-D1FZ 9448-A	Gasket (exhaust manifold-inner)
	1-D1FZ 6700-A	Seal (camshaft)				AR-D1FZ 9448-B	Gasket (exhaust manifold-outer)

* 1 required unless otherwise noted
May, 1975

• 1600 cc
COPYRIGHT © 1975 —

▲ 2000 cc
FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
		6096	●	▲			BRACKET - REAR SUPPORT - refer to Rear Motor Mount Chart Group 6A023
		6108					PISTON ASSEMBLY
71		D0RY 6108-A	4				Standard-wide grooves
		D0RY 6108-B	AR				.0025" O/S
		★D0RY 6108-C	AR				.030" O/S-repl.by D2FZ 6108-F (10-74)
72		D2FZ 6108-D	4				Standard-narrow grooves
		D2FZ 6108-E	AR				.0025" O/S
		D2FZ 6108-F	AR				.030" O/S
71		ΔD1FZ 6108-E		4			Standard
		ΔD1FZ 6108-F		AR			.020" O/S
		ΔD1FZ 6108-G		AR			.040" O/S
72		ΔD2FZ 6108-A		4			Standard
		ΔD2FZ 6108-B		AR			.020" O/S
		ΔD2FZ 6108-C		AR			.040" O/S
		6135-A					PIN - PISTON - Std.
71/		D0RY 6135-A	4				Std.
		D0RY 6135-C	AR				.002" U/S
71/		★6135				★	Included with piston
71/		D0RY 6140-A	8				RETAINER - PISTON PIN
		6148					RING SET - PISTON PARTIAL - consists of the necessary rings to re-ring (2) pistons
71		D1FZ 6148-E	2				Standard-use w/wide grooved piston
		D1FZ 6148-F	2				.0025" O/S
		D1FZ 6148-G	2				.015" O/S
		D1FZ 6148-H	2				.030" O/S
72		D2FZ 6148-A	2				Standard-use w/narrow grooved piston
		D2FZ 6148-B	2				.0025" O/S
		D2FZ 6148-C	2				.030" O/S
		6149					RING SET - PISTON COMPLETE -consists of the necessary rings to re-ring (4) pistons
71/		D1FZ 6149-C		1			Std.
		D1FZ 6149-D		1			.020" O/S
		D1FZ 6149-E		1			.040" O/S
71/		D1FZ 6200-A		4			ROD ASSY. - CONNECTING
71/		D0RY 6200-A	4				

6211 BEARING - CONNECTING ROD-CHART

In the standard column of the chart below (R) designates Red size - (B) designates Blue size
Red size and blue size are optional for selective fit

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER							
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S	
71/		98	4		D1FZ 6211-G(R) D1FZ 6211-V(B)	D1FZ 6211-AB	D1FZ 6211-H	D1FZ 6211-J	D1FZ 6211-K	D1FZ 6211-L	D1FZ 6211-M	
71/		98		4	D1FZ 6211-N(R) D1FZ 6211-W(B)	D1FZ 6211-AB	D1FZ 6211-P	D1FZ 6211-R	D1FZ 6211-S	D1FZ 6211-T	D1FZ 6211-U	
71/		122	4	4	D4RY 6211-A(R) D1FZ 6211-B(B)	D1FZ 6211-Z	D1FZ 6211-Y	D1FZ 6211-C	D1FZ 6211-E	D1FZ 6211-F		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
71/		D4FZ 6212-A		8			NUT - CONNECTING ROD - hex. M9X1 (metric fine)
71/		D1FZ 6214-A		8			BOLT - CONNECTING ROD
71/		D0RY 6214-A	8				
71/		D1FZ 6217-A	8				DOWEL - CONNECTING ROD TO CAP - 5/16" x 3/8"

Δ incl. piston pin

● 1600 cc

▲ 2000 cc

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
		6250					CAMSHAFT
71/		D1FZ 6250-A		1			Cast iron
71/		D1FZ 6250-B	1				Use w/.515" O.D. tappets
71/	All off highway vehicles	D12X 6250-AA	1				#D12X 6250-AA-at rear end-intake exhaust lift .268", duration 290° and overlap 74°
71/	All off highway vehicles	D12X 6250-AB	1				#D12X 6250-AB-at rear end-intake and exhaust lift .256", duration 282° and overlap 60°-stage 3
71/	All off highway vehicles	★D12X 6250-BB		1			Intake and exhaust lift .28", duration 300° and overlap 84°
71/	All off highway vehicles	D12X 6250-BC		1			Intake and exhaust lift .26", duration 288° and overlap 76°
71/		D0RY 6253-A	1				DOWEL - CAMSHAFT SPROCKET TO CAMSHAFT PULLEY ASSY. - TENSIONER
		6K254					
71/		D1FZ 6K254-B		1			
71/		E804126-S82 (AB112)		1			Bolt-shoulder-M8 x 46.5mm-holds spring & tension pulley in place
71/		E602187-S82 (AB17)		1			Bolt-M8 x 20mm-used as adjusting bolt for tension pulley
71/		E630027-S71 (AX13)		1			Washer (use w/E602187-S82)
71/		D0RY 6255-A	1				RETAINER - CAMSHAFT THRUST PLATE BOLT
71/		20324-S8(B41)	2				Bolt-1/4"-20 x 5/8" hex.hd.-attach retainer & plate to block
71/		D1FZ 6256-A		2			GEAR - CAMSHAFT - 38 teeth - (1) on camshaft & (1) on fuel pump, oil pump & dist.drive shaft
71/		D0RY 6256-A	1				SPROCKET - CAMSHAFT
71/		20371-GS(AB30)		2			Bolt (sprocket to camshaft)-M10 x 28 hex.hd.
71/		D0RY 6258-A	1				RETAINER - CAMSHAFT SPROCKET
71/		20326-S2(B49)	2				Bolt-5/16"-18 x 5/8" hex.hd.-attach retainer & sprocket to camshaft

6261, 6262, 6263 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
71/		98	Std. I.D. & O.D.	D0RY 6261-A		D0RY 6262-A		D0RY 6263-A
			Std. I.D. & .020 O/S O.D.	D0RY 6261-B		D0RY 6262-B		D0RY 6263-B
71/		122	Standard .015"U/S	D1FZ 6261-A		D1FZ 6262-A		D1FZ 6263-A
				D1FZ 6261-B		D1FZ 6262-B		D1FZ 6263-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
71/		D1FZ 6266-A	1				PLUG - CAMSHAFT REAR BEARING - Std. 2.011" O.D.
		D1FZ 6266-B	1				.060" O/S
71/		D0RY 6268-A	1				CHAIN-TIMING
71/		D1FZ 6268-A		1			BELT-TIMING - rubber
		6269					PLATE - CAMSHAFT THRUST
71/		D0RY 6269-A	1				
71/		D1FZ 6269-A		1			Front
71/		D1FZ 6269-B		1			Rear
71/		388294-GS40 (AB50)		2			Screw & washer-M6 x 12 (attach plate to cyl.head)
71/		D1FZ 6L273-A	1				SPRING - TENSIONER
71/		E840110-S(AN7)	1				Spring-pin (supports 6L273)
71/		D1FZ 6278-A		2			WASHER - CAMSHAFT SPROCKET - Flat - (1) on camshaft & (1) on fuel pump, oil pump & dist.drive shaft
71/		D1FZ 6284-A	1				TENSIONER ASSY. - TIMING CHAIN
71/		D1FZ 6285-A	1				ARM ASSY. - TIMING CHAIN TENSIONER

Identification marking
May, 1975• 1600 cc
COPYRIGHT © 1975 -▲ 2000 cc
FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122	▲		
71/		D1FZ 6286-A	1				PIN - TIMING CHAIN TENSIONER ARM
71/		D1FZ 6K291-A		2			SPACER - TIMING BELT COVER
71/		D1FZ 6K297-A		1			GUIDE - DISC - to prevent timing belt from falling off crankshaft gear
71/		6303					CRANKSHAFT ASSY.
71/		D4FZ 6303-B		1			
71/		D1FZ 6303-B	1				
71/		D0RY 6306-A	1				SPROCKET - CRANKSHAFT
71/		D1FZ 6306-A		1			GEAR - CRANKSHAFT
71/		D1FZ 6310-A	1				SLINGER - CRANKSHAFT OIL
		6312					PULLEY ASSY. - CRANKSHAFT
71	Without A/C	D1FZ 6312-B	1				Single sheave 4 3/4" O.D.
72	Without A/C (exc. California)	D1FZ 6312-B	1				
71/	Without A/C	D1FZ 6312-C	1				Double sheave-4 5/8" I.D.-5 7/32 O.D.
72	Without A/C (California)	D1FZ 6312-D	1				Single sheave -use w/D2FZ 6023-A
72	Without A/C	D2FZ 6312-A		1			#71HM 6A312-DA-single sheave-5 5/8" dia.
		6A312					PULLEY ASSY. - CRANKSHAFT - OUTER
71/72	With integral A/C	D2FZ 6A312-B		1			
71	Without A/C	D1FZ 6A312-B		1			Single sheave-5 5/8" O.D.
71	With hang-on A/C	★D1FZ 6A312-C		1			Double sheave-5 21/32" O.D. -repl.by D2FZ 6A312-B
72	Without A/C	D2FZ 6A312-D		1			Single sheave-4 5/8" O.D.
71/	With hang-on A/C	C9RZ 6A312-A	1				
71/		D1FZ 6B316-A		2			KEY - (6306 gear to 6303 crankshaft)(6A312 pulley to 6303 crankshaft)
71/		D0RY 6B316-A	1				(6306 sprocket to 6303 crankshaft)
71/		D1FZ 6B317-A		2			KEY (6256 gear to 6250 camshaft)(6256 gear to 6A739 shaft)

6333 BEARING - CRANKSHAFT MAIN - CHART

Red size and blue size are optional for selective fit

YEAR	S I Z E		U P P E R	L O W E R	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
	O. D.	I. D.							

4 CYL. 98 C.I.D. ENGINE

- L -

71/72	"Before 10/1/71"								
	Standard Std.(Red)	x	x	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A
	Standard Std.(Blue)			D0RY 6333-B	D0RY 6333-B	D0RY 6333-B	D0RY 6333-B	D0RY 6333-B	D0RY 6333-B
	Standard .002" U/S			D1FZ 6333-P	D1FZ 6333-P	D1FZ 6333-P	D1FZ 6333-P	D1FZ 6333-P	D1FZ 6333-P
	Standard .010" U/S			D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E
	Standard .020" U/S			D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F
	Standard .030" U/S			D0RY 6333-E	D0RY 6333-E	D0RY 6333-E	D0RY 6333-E	D0RY 6333-E	D0RY 6333-E
72	"From 10/1/71"								
	Standard Std.(Red)	x	x	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A	D2FZ 6333-A
	Standard Std.(Blue)			D2FZ 6333-B	D2FZ 6333-B	D2FZ 6333-B	D2FZ 6333-B	D2FZ 6333-B	D2FZ 6333-B
	Standard .010" U/S			D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E	D2FZ 6333-E
	Standard .020" U/S			D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F	D2FZ 6333-F
	Standard .030" U/S			D2FZ 6333-G	D2FZ 6333-G	D2FZ 6333-G	D2FZ 6333-G	D2FZ 6333-G	D2FZ 6333-G
71/72	"Before 10/1/71"								
	.015" O/S Std.(Red)	x	x	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H
	.015" O/S .010" U/S			D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C
	.015" O/S .020" U/S			D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J
	.015" O/S .030" U/S			D0RY 6333-J	D0RY 6333-J	D0RY 6333-J	D0RY 6333-J	D0RY 6333-J	D0RY 6333-J
72	"From 10/1/71"								
	.015" O/S Std.(Red)	x	x	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H	D2FZ 6333-H
	.015" O/S .010" U/S			D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C	D2FZ 6333-C
	.015" O/S .020" U/S			D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J	D2FZ 6333-J
	.015" O/S .030" U/S			D2FZ 6333-K	D2FZ 6333-K	D2FZ 6333-K	D2FZ 6333-K	D2FZ 6333-K	D2FZ 6333-K

Identification marking

● 1600 cc

▲ 2000 cc

6333 BEARING - CRANKSHAFT MAIN - CHART - continued

Red size and blue size are optional for selective fit

YEAR	S I Z E		U P P E R	L O W E R	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
	O. D.	I. D.							
4 CYL. 122 C.I.D. ENGINE									
71/	Standard	Std.(Red)	x	x	★D1FZ 6333-A R/B D4RY 6333-A (9-74)	★D1FZ 6333-A R/B D4RY 6333-A (9-74)	★D1FZ 6333-A R/B D4RY 6333-A (9-74)	★D1FZ 6333-A R/B D4RY 6333-A (9-74)	★D1FZ 6333-A R/B D4RY 6333-A (9-74)
	Standard	Std.(Blue)			D1FZ 6333-B	D1FZ 6333-B	D1FZ 6333-B	D1FZ 6333-B	D1FZ 6333-B
	Standard	.001" U/S			D1FZ 6333-R	D1FZ 6333-R	D1FZ 6333-R	D1FZ 6333-R	D1FZ 6333-R
	Standard	.002" U/S			D1FZ 6333-N	D1FZ 6333-N	D1FZ 6333-N	D1FZ 6333-N	D1FZ 6333-N
	Standard	.010" U/S			D1FZ 6333-C	D1FZ 6333-C	D1FZ 6333-C	D1FZ 6333-C	D1FZ 6333-C
	Standard	.020" U/S			D1FZ 6333-D	D1FZ 6333-D	D1FZ 6333-D	D1FZ 6333-D	D1FZ 6333-D
	Standard	.030" U/S			D4RY 6333-F	D4RY 6333-F	D4RY 6333-F	D4RY 6333-F	D4RY 6333-F
71/	.015" O/S	Std.(Red)	x	x	D1FZ 6333-G	D1FZ 6333-G	D1FZ 6333-G	D1FZ 6333-G	D1FZ 6333-G
	.015" O/S	Std.(Blue)			D1FZ 6333-H	D1FZ 6333-H	D1FZ 6333-H	D1FZ 6333-H	D1FZ 6333-H
	.015" O/S	.001" U/S			D1FZ 6333-S	D1FZ 6333-S	D1FZ 6333-S	D1FZ 6333-S	D1FZ 6333-S
	.015" O/S	.002" U/S			D1FZ 6333-T	D1FZ 6333-T	D1FZ 6333-T	D1FZ 6333-T	D1FZ 6333-T
	.015" O/S	.010" U/S			D1FZ 6333-J	D1FZ 6333-J	D1FZ 6333-J	D1FZ 6333-J	D1FZ 6333-J
	.015" O/S	.020" U/S			D1FZ 6333-K	D1FZ 6333-K	D1FZ 6333-K	D1FZ 6333-K	D1FZ 6333-K
	.015" O/S	.030" U/S			D1FZ 6333-L	D1FZ 6333-L	D1FZ 6333-L	D1FZ 6333-L	D1FZ 6333-L
YEAR	RESTRICTIONS		PART NUMBER		QUANTITY				PART NAME AND DESCRIPTION
					98	122			
					6334				RING - CRANKSHAFT THRUST
71/					D1FZ 6334-A	2			Lower-Std. #White
					D1FZ 6334-B	AR			Lower-.015" O/S
71/					D1FZ 6334-C	2			Upper-Std.-install in rear position only
					D1FZ 6334-D	AR			Upper-.015" O/S
71/					D1FZ 6335-C	1			RETAINER ASSY. - CRANKSHAFT REAR BEARING OIL SEAL
71/					D1FZ 6336-A	2			SEAL - CRANKSHAFT REAR MAIN BEARING CAP
					★6A336				Serviced in flywheel assy.
71/					D1FZ 6A340-A	1			BOLT - CRANKSHAFT PULLEY-Hex.M10 x 45 (metric coarse)
71/					DORY 6A340-A	1			
71/					DORY 6344-A	1			GASKET - CRANKSHAFT REAR BEARING OIL SEAL
71/					D1FZ 6345-A	10			BOLT - CRANKSHAFT MAIN BEARING CAP
71/					D1FZ 6345-B	10			
71/					20366-S8	2			Bolt (crankshaft seal & retainer to block)-5/16"-18 x 7/8" hex.hd.
71/					D1FZ 6A346-A	2			DOWEL - CRANKSHAFT MAIN BEARING CAP - No. 5 bearing
71/					D1FZ 6A346-B	2			No. 3 bearing
71					DORY 6A355-A	2			WASHER - CRANKSHAFT MAIN BEARING THRUST - Standard
72					D1FZ 6A355-A	2			Standard
71/					D1FZ 6A355-B	AR			.0025" O/S
					D1FZ 6A355-C	AR			.005" O/S
					D1FZ 6A355-D	AR			.0075" O/S
					D1FZ 6A355-E	AR			.010" O/S
					6375				FLYWHEEL ASSY.
71/	M/T				D1FZ 6375-B	1			135 teeth - includes ring gear
71/	A/T				D1FZ 6375-A	1			
71/	M/T				D1FZ 6375-C	1			135 teeth - includes ring gear
71/					D1FZ 6378-A	1			WASHER - CRANKSHAFT PULLEY RETAINING - 8.5mm (metric)
71/					DORY 6378-A	1			

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
71/		D0RY 6379-A	6	▲			BOLT - FLYWHEEL TO CRANKSHAFT
71/	M/T	D4FZ 6379-A		6			
71/	A/T	D1FZ 6379-B		6			M10 x 22 (metric coarse)
71/	M/T	D1FZ 6384-A	1	1			GEAR - FLYWHEEL RING - 135 teeth
71/	M/T(German trans.)	D1FZ 6392-A	1	1			HOUSING ASSY. - FLYWHEEL - aluminum
71/	M/T(British trans.)	D1FZ 6392-B	1				
71/	M/T	382535-S100 (MM173MX)	2	2			Nut (attach flywheel hsg. to eng.)-3/8"-16
71/	M/T	370967-S(BB158)	2	2			Screw and washer assy. (attach flywheel hsg. to eng.)-3/8"-16 x 2.00"
71/	M/T	382802-S2 (MM173JB)	2	2			Nut-3/8"-16 (attach flywheel hsg. to engine)
71/		N800012-S100 (AW46)		2			Stud-3/8"-16 x 2 3/4" lock (attach flywheel hsg. to engine)
71/		D1FZ 6397-C		2			DOWEL - CYLINDER BLOCK - to flywheel housing - Also align trans. to cyl. block
71/			4				
71/		D1FZ 6397-A	1	3			1/2" O.D.-3/8" long-to locate starter motor
71/		D1FZ 6397-B	3	3			Cyl. block to flywheel hsg. or clutch to flywheel
71/		D2RY 6411-A	1	1			SEAL (FLYWHEEL HOUSING COVER PLATE)
71/							
71/		D0RY 6500-A	8				TAPPET ASSY. - VALVE - Standard-mechanical - .436" stem O. D.
		D0RY 6500-B	AR				.004" O/S
71/		D1FZ 6500-A	8				Std. - .515" stem O. D.
		D1FZ 6500-B	AR				.004" O/S

6505-07 VALVE - INTAKE & EXHAUST - CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
71/	98				Std. .003" .015"		D0RY 6505-D D0RY 6505-E D0RY 6505-F			Std. .003" .015"		D0RY 6507-A D1FZ 6507-F D1FZ 6507-G
71/72	122	"Before 7/12/72"			Std. .008" .016" .024" .032"		D1FZ 6505-A D1FZ 6505-B D1FZ 6505-C D1FZ 6505-D D1FZ 6505-E			Std. .008" .016" .024" .032"		D1FZ 6507-A D1FZ 6507-B D1FZ 6507-C D1FZ 6507-D D1FZ 6507-E
72	122	"From 7/12/72"			Std. .008" .016" .024" .032"		D2FZ 6505-A D2FZ 6505-B D2FZ 6505-C D2FZ 6505-D D2FZ 6505-E			Std. .008" .016" .024" .032"		D1FZ 6507-A D1FZ 6507-B D1FZ 6507-C D1FZ 6507-D D1FZ 6507-E

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122			
		6510		▲			BUSHING - VALVE GUIDE
71/		D0RY 6510-A	AR				Intake-1.825" long-plain
71/		D0RY 6510-C	AR				1.825" long-shouldered
71/		D0RY 6510-B	AR				Exhaust-2.075" long-plain
71/		D0RY 6510-D	AR				2.075" long-shouldered
71/							
71/		D2RY 6513-A		8			SPRING - VALVE
71/		D1FZ 6513-D	8				#Yellow paint
71/	All off highway vehicles	D12X 6513-AA	8				Free length 31/64"-5 1/2 coils-13/16" I.D.-1 1/8" O.D.
71/							
71/		D1FZ 6514-A		8			RETAINER - VALVE SPRING
71/		D1FZ 6514-B	8				1.08" O.D.-.40" thick

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98 ●	122 ▲			
		6518					KEY - VALVE SPRING RETAINER
71/		D1FZ 6518-A		16			
71/		D1FZ 6518-B	16				
71/		D1FZ 6K524-A		8			SPRING - FOLLOWER ARM
71/		D0RY 6A527-A	4				BOLT - VALVE ROCKER ARM SHAFT SUPPORT
71/		D1FZ 6A527-A		8			STUD - VALVE ROCKER ARM SUPPORT
71/		D0RY 6A528-A	4				SEAT - VALVE ROCKER ARM FULCRUM - .062" thick-.69" dia.-.38" I.D.
71/		D1FZ 6A529-A		8			NUT - VALVE ROCKER ARM STUD
71/		D0RY 6531-A	4				SUPPORT - VALVE ROCKER ARM SHAFT
71/		D1FZ 6K532-A		8			CLIP - FOLLOWER ARM SPRING RETAINING
71/		D0RY 6549-B	8				SCREW - VALVE ROCKER ARM ADJUSTING
71/		D0RY 6563-B	1				SHAFT - VALVE ROCKER ARM - 14.82" long
71/		72034-S(N45)	2				Pin-cotter-1" long
71/		D0RY 6564-C	4				ARM - VALVE ROCKER - L.H. -includes screw
71/		D0RY 6564-D	4				R.H. -includes screw
71/		D1FZ 6564-A		8			
71/		D0RY 6565-A	8				ROD - VALVE PUSH
		6570					GROMMET
71/		D1FZ 6570-A		2			Steel-used as rocker arm cover seal
		6571					SEAL - VALVE STEM
71/		D1FZ 6571-B	4	4			Intake-incl. (1) valve seal cap
		D1FZ 6571-C	4				Exhaust
		D1FZ 6571-D		4			Exhaust-incl. (1) valve seal cap
71/		D1FZ 6578-A		1			TUBE ASSY. - LUBRICATION VALVE DRIVE - Steel
71/		E630024-S71(AX9)		3			Washer (attach tube assy. to cyl. head)-M6 flat
71/		E800132-S82 (AB15A)		3			Bolt (tube assy. to cyl. head)-M6 x 9 hex. hd.
71/		D1FZ 6582-A		1			COVER ASSY. - VALVE ROCKER ARM
71/		D1FZ 6582-B	1				
71/		31080-S8(U60)	4				Screw-1/4"-20 x 5/8"-pan hd.(valve cover to cyl. head)
71/		E602165-S82 (AB16)		10			Bolt-hex,hd.-M6 x 14MM (valve cover to head)
71/		34805-S8(X62)		10			Washer (6582 to head)
71/72	"Before 2/1/72"	D1FZ 6584-B		1			GASKET - VALVE ROCKER ARM COVER
72	"From 2/1/72"	D2FZ 6584-A		1			
71/		D1FZ 6584-C	1				

● 1600 cc ▲ 2000 cc

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98 ●	122 ▲			
71/		D0RY 6587-A	3				SPRING - VALVE ROCKER ARM TO SHAFT LOCATING
			1				Oil pump screen cover to inlet tube
71/		D0RY 6590-A	4				WASHER - VALVE ROCKER ARM SHAFT - flat type
71/		D1FZ 6598-A	2				WASHER - VALVE ROCKER ARM SHAFT - spring type
71/		D1FZ 6600-A		1			PUMP ASSY. - OIL
71/		D1FZ 6600-C	1				
71/		20386-S8(B53)	3				Bolt (pump to block)-5/16"-18 x 1" hex. hd.
71/		E944100-S(AN10)		1			Pin spring rolled-M16 x 10
71/		D1FZ 6608-A		1			ROTOR & SHAFT ASSY. - OIL PUMP DRIVE
71/		D1FZ 6608-B	1				
71/		D1FZ 6613-A		1			PLATE - AUXILIARY SHAFT RETAINING
71/		E803103-S(AB105)		2			Screw & washer-socket head(attach plate 6613 to block)
71/		D1FZ 6616-A		1			PLATE - OIL PUMP BODY
71/		D1FZ 6616-B	1				
71/		20344-S8(B42)	3				Bolt-1/4"-20 x 3/4" hex.hd.--attach cover to pump-(opt. with 43263-S8)
71/		43263-S8(U3)	3				Bolt-1/4"-20 x 5/8"-attach cover to pump - (opt. with 20344-S8)
71/		E602529-S76 (AB53)		3			Screw (cover to pump) & lock washer-M6 x 20
71/		116682-ES(AK4)	1				RING (OIL PUMP COVER SEALING)
71/		D1FZ 6A616-A		1			PLUG - OIL PUMP RELIEF VALVE
71/		D1FZ 6617-A	1				TUBE ASSY. - OIL PUMP PICK UP
71/		D1FZ 6A618-A		1			SHAFT ASSY. - OIL PUMP INTERMEDIATE
71/		D1FZ 6K621-A		1			TUBE ASSY. - OIL PUMP INLET
71/		E800159-S(AB26)		2			Bolt-M6 x 22 hex.hd. (attach tube assy.(6K621) to oil pump)
71/		D1FZ 6623-A	1				SCREEN ASSY. - OIL PUMP
71/		D1FZ 6626-A		1			GASKET - OIL PUMP INLET TUBE
72		D2FZ 6629-A		1			RING - OIL PUMP INTERMEDIATE SHAFT RETAINING
71/		D1FZ 6A630-A		1			BAFFLE - CYLINDER BLOCK VENTILATION
71/		E844100-S(AN4)		3			Pin drive cyl. blk.vent.-M4.6 x 12 (6A630 to block)
71/		D1FZ 6638-A		2			BOLT & WASHER - OIL PUMP ATTACHING
71/		D0RY 6652-A	1				GEAR - OIL PUMP DRIVE
71/		72432-S(N82E)	1				Pin (attach 6652 to 6608)-1/8" x 13/16"
71/		D0RY 6K656-A	1				TUBE - RELIEF VALVE OIL RETURN-7 1/4" long
71/		D1FZ 6659-A	1				GASKET - OIL PUMP TO BLOCK

11

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			98	122	▲		
71/		C2OZ 6734-A	1				GASKET - OIL PAN DRAIN PLUG
71/		D1FZ 6734-B		1			
71/		D1FZ 6A736-A		1			PLATE - OIL INLET TUBE BOLT LOCKING
71/		D1FZ 6A739-A		1			SHAFT ASSY. - FUEL PUMP, OIL PUMP & DIST. DRIVE
		6750					INDICATOR - OIL LEVEL
71/		★D3FZ 6750-A		1			
		R/B D4FZ 6750-B (10-74)					
71/		D1FZ 6750-B	1				
		6754					TUBE ASSY. - OIL LEVEL INDICATOR
71/		D1FZ 6754-B	1				
71/		D1FZ 6754-C		1			.395" O.D.
		6766					CAP ASSY. - OIL FILLER & BREATHER
71/		D1FZ 6766-B (EC-15)	1				
71/		D1FZ 6766-D (EC-12-B)		1			
		6775					SHIELD - SPLASH
71/	Except S/W	★D1FZ 6775-A		1			
		R/B D2FZ 6775-A (9-74)					
72	Station Wagon	D2FZ 6775-A		1			
		6K777					SEAL - CRANKCASE SEPARATOR SPIGOT
71/		D0RY 6K777-A	1				
		6K777		★			Improvise from Permatex-Formagasket
		6781					GASKET SET - OIL PAN
71/		D1FZ 6781-B	1				
	Consists of						
	1-D1FZ 6659-A	Gasket (oil pump to block)	1-681F	6722-AA	Seal (oil pan front)		
	1-681F 6710-AA	Gasket (oil pan R.H.)	1-681F	6723-AA	Seal (oil pan rear)		
	1-681F 6711-AA	Gasket (oil pan L.H.)	1-C2OZ	6734-A	Gasket (oil drain plug)		
71/		D1FZ 6781-C		1			
	Consists of						
	2-D1FZ 6336-A	Seal (crankshaft rear main bearing cap)	1-71HM	6710-A1A	Gasket (oil pan R.H.)		
			1-71HM	6711-A1A	Gasket (oil pan L.H.)		
	1-D1FZ 6626-A	Gasket (oil pump inlet tube)	2-D1FZ	6722-A	Seal (oil pan)		
71/		D1FZ 6A785-A		1			SEPARATOR ASSY. - CRANKCASE VENT OIL
71	"Before 8/10/70"	D0RY 6A785-A	1				
71/	"From 8/10/70"	D1FZ 6A785-B	1				
		★ 6853		★			HOSE - CRANKCASE VENTILATION - cut to fit from D1FZ 6A664-B
71/		D1FZ 6A875-A		1			BUSHING - AUXILIARY DRIVE SHAFT -Standard .40 U/S
		D1FZ 6A875-B		AR			
71/		D1FZ 6890-A		1			INSERT - OIL FILTER MOUNTING BOLT
71/		D1FZ 6890-B	1				
		6A892					RETAINER - CRANKCASE VENTILATION - grommet
71/		C8SZ 6A892-A	1	1			P.C.V. valve to oil separator

FORD CAR PARTS

SECTION 60.2
6 CYL. - 170, 200, 250

1

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
		6007	★	★	★	ENGINE ASSEMBLY - service details
65/	Consists of	C0DZ 6008-C	1			GASKET SET - COMPLETE OVERHAUL
	1-C0DE 6020-B Gasket	1-C0DE 6700-A				1-C2DE 6723-A Seal
	1-C0DE 6051-C Gasket	2-C9OZ 6701-A				1-C2OZ 6734-A Gasket
12-D2DZ 6571-A	Seal	1-C9DE 6710-C				1-C9AZ 8255-A Gasket
1-D0DZ 6584-A	Gasket	1-C9DE 6711-C				1-C0DE 8507-A Gasket
1-C0DZ 6626-A	Gasket	1-C2DE 6722-A				1-A8TZ 9417-A Gasket
65/	Consists of	C3OZ 6008-B		1		
	1-C0DE 6020-B Gasket	1-C0DE 6700-A				1-D3DE 6723-AA Seal
	1-C9DZ 6051-A Gasket	2-C9OZ 6701-A				1-C2OZ 6734-A Gasket
12-D2DZ 6571-A	Seal	1-C9DE 6710-C				1-C9OZ 8255-A Gasket
1-D0DZ 6584-A	Gasket	1-C9DE 6711-C				1-C0DE 8507-A Gasket
1-C0DZ 6626-A	Gasket	1-D3DE 6722-AA				1-A8TZ 9417-A Gasket
69/	Consists of	C9OZ 6008-A			1	
	1-C9DZ 6020-A Gasket	1-C3AZ 6700-A				1-C2OZ 6734-A Gasket
	1-C9DZ 6051-B Gasket	2-C9OZ 6701-A				1-C9AZ 8255-A Gasket
12-D2DZ 6571-A	Seal	1-C9DE 6710-D				1-C9DZ 8507-A Gasket
1-D0DZ 6584-A	Gasket	1-C9DE 6711-D				1-A8TZ 9417-A Gasket
1-C9DZ 6626-A	Gasket	2-D3DE 6722-BA				
72		CD0AZ 6D008-A	1	1	1	HEATER KIT - CYL BLOCK - 600 watt
		6009				CYLINDER ASSY.-incl. cyl. block w/all internal parts of the eng. but does not incl. cyl. heads, tappets, oil pan or cyl. front cover unless indicated
65/67	B, F, X	C5DZ 6009-C	1			
66/	P, U	C8DZ 6009-D	1			Incl. (12) C8AZ 6500-A hyd. tappets-used to service units w/mechanical or hydraulic tappets
65/67		C7OZ 6009-B		1		3.68" bore
68/		D0DZ 6009-B		1		
72	B, F, P (exc. Calif.)	D2DZ 6009-C			1	Includes (12) D2DZ 6565-A push rods
69/71					1	
72	B(P/C, Taxi)-(California)	D2DZ 6009-D			1	
72	B(exc. P/C, Taxi), F, P(Calif.)	D2DZ 6009-B			1	
65/		6010				ΔBLOCK ASSY. - CYLINDER
65/67		D0TZ 6010-A	1			Hydraulic tappets
		C5DZ 6010-B		1		Hydraulic tappets-7 main bearings-use with 5/16" intermediate distributor shaft hole
68/		D0DZ 6010-B		1		Hydraulic tappets
69	F-Economy 1/B	C9DZ 6010-B			1	Hydraulic tappets
69/	B, F (exc. Economy 1/B), P	D2DZ 6010-A			1	Includes (12) D2DZ 6565-A push rods
65/69		73249-S(N88)	2	2		Dowel (cyl. block to clutch housing)-3/8" x 9/16"
65/70	B, X	★73279-S	2			Dowel (cyl. block to clutch housing)-3/8" x 3/4"
		6B018				WIRE ASSY. - CYL. BLOCK HEATER
65/66		CC1TF 6B018-E	1	1		
67		C7TE 6B018-A	1	1		2 conductor-use w/3 terminal heater - (dummy ground)
67		C7TE 6B018-C	1	1		3 conductor-use w/3 terminal heater - (green ground connector)
71	F	D1AZ 6B018-AA		1 or 2		
72	All	D2AZ 6B018-A	1	1	1	
		6019				REPAIR KIT - CYLINDER FRONT COVER
69/		D2DZ 6019-B			1	
65/		D2DZ 6019-A	1	1		Includes (1) C0DE 6020-B gasket (1) D2DE 6059-CA cover (2) 55247-S bolt (1/4"-20 x 1 3/8") (7) 377387-S bolt (1/4"-20 x 1 13/16")
65/71		373071-S7 (BB554M)	7	7		Screw & washer assy.(cylinder front cover to block)-1/4"-20 x 5/8"
65/		20464-S78(B43EA)	AR	AR		Bolt-1/4"-20 x 1 1/2"
69/		56105-S(B319D)			4	Bolt-1/4"-20 x 1"
69/		56109-S(B319G)			3	Bolt-1/4"-20 x 2"
		6020				GASKET - CYLINDER FRONT COVER
65/		C0DE 6020-B	1	1		
69/		C9DZ 6020-A			1	

Δ 6015 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6010 assembly.

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

SECTION 60.2
6 CYL. - 170, 200, 250

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
				170	200	250	
65/67		C2OZ 6023-B		1	1		POINTER - TIMING-3 1/8" overall length-
68/71		C8OZ 6023-A		1	1		(2) 17/64" holes -Also refer to Group 3A634-5
69/71		C9DZ 6023-A				1	Not used on units w/single sheave damper
72	Except Calif.					1	
72	Calif. only	D2DZ 6023-A		1	1		Steel
72	Calif. only	D2DZ 6023-B				1	Steel

6A023, 6068, 6096 & 6120 REAR MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT	*BRACKET- REAR SUPPORT	* INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- B -							
65	B(M/T & H/D clutch)	200			C3OZ 6068-B	C2OZ 6120-J	C2OZ 6120-K
65	B(M/T & R/D clutch)	200	★C2OZ 6A023-B		C3OZ 6068-B		
65	B(C4)	200	C2OZ 6A023-D		C3OZ 6068-B	C2OZ 6120-J	C2OZ 6120-K
66	Taxi(M/T & H/D clutch)- "Before 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-A	C6DZ 6120-B
66	Taxi - "From 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
66	B(M/T & R/D clutch)- exc. 76 - "Before 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-A	C6DZ 6120-B
66	B(M/T & R/D clutch)- exc. 76 - "From 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
66	B (C4)-exc.76 - "Before 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-C	C6DZ 6120-D
66	B (C4)-exc. 76 - "From 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
66	B (76) -M/T - "Before 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-A	C6DZ 6120-A	C6DZ 6120-B
66	B (76) -C4 - "Before 12/15/75"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-A	C6DZ 6120-C	C6DZ 6120-D
66	B(76)"From 12/15/65"	200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-A	C6DZ 6120-E	C6DZ 6120-F
67	Taxi	200	C6OZ 6A023-B	C6OZ 6096-C(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-H
67	B(M/T)-exc. 76 - "Before 4/3/67"	200	C6OZ 6A023-B	C6OZ 6096-C(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-H
67	B(M/T)-exc. 76 - "From 4/3/67"	200	C6OZ 6A023-B	C6OZ 6096-E(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-H
67	B (C4) -except 76 - "Before 4/3/67"	200	C6OZ 6A023-A	C6OZ 6096-C(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-H
67	B(C4)-exc. 76 - "From 4/3/67"	200	C6OZ 6A023-A	C6OZ 6096-E(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-H
67	B(76)- "Before 4/3/67"	200	C6OZ 6A023-B	C6OZ 6096-C(RH) C6OZ 6096-G(LH)	C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-H
67	B(76)-"From 4/3/67"	200	C6OZ 6A023-B	C6OZ 6096-E(RH) C6OZ 6069-G(LH)	C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-H
68	B(76)	200	C6OZ 6A023-B	C6OZ 6096-F(RH) C6OZ 6096-G(LH)	C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
68	B(exc. 76)	200	C6OZ 6A023-B	C6OZ 6096-F(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
69	B(76)	250	C6OZ 6A023-C	C6OZ 6096-F	C9OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
69	B(exc. 76)	250	C6OZ 6A023-C	C6OZ 6096-G	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
70	B (exc. 57, 76) - "Before 5/4/70"	250	D0OZ 6A023-A	D0OZ 6096-A(RH) D0OZ 6096-B(LH)	D1ZZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
70	B (57, 76) - "Before 5/4/70"	250	D0OZ 6A023-A	D0OZ 6096-A(RH) D0OZ 6096-B(LH)	D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
70/71	B (exc. 57, 76) - "From 5/4/70"	250	D0OZ 6A023-A	D0OZ 6096-C(RH) D0OZ 6096-D(LH)	D1ZZ 6068-B	Use 6096	Use 6096
70/71	B (57, 76) - "From 5/4/70"	250	D0OZ 6A023-A	D0OZ 6096-C(RH) D0OZ 6096-D(LH)	D0OZ 6068-A	Use 6096	Use 6096
72	B-M/T	250			D3OZ 6068-A		
72	B-C4	250			D3OZ 6068-A		

* (1) Required unless otherwise noted

FORD CAR PARTS

SECTION 60.2
6 CYL. - 170, 200, 250

3

6A023, 6068, 6096 & 6120 REAR MOTOR MOUNT CHART - continued

YEAR	MODEL	C.I.D.	*SUPPORT	*BRACKET- REAR SUPPORT	* INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- F -							
65	F(3/M/T)	170,200	C5ZZ 6A023-A	C5ZZ 6096-B	C8ZZ 6068-A		
65	F(4/M/T)	170,200	C5ZZ 6A023-A		C8ZZ 6068-D		
65	F(C4)	170,200	C5ZZ 6A023-A		C8ZZ 6068-D		
66	F(3/M/T)	200	C6ZZ 6A023-A	C5ZZ 6096-B	C8OZ 6068-B		
66	F(C4 & 4/M/T)	200	C6ZZ 6A023-A		C8ZZ 6068-D		
67	F(3/M/T)	200	C7ZZ 6A023-D		C8ZZ 6068-A		
67	F(C4)	200	C7ZZ 6A023-D		C8ZZ 6068-D		
68/70	F(76)	200	C7ZZ 6A023-D		C8ZZ 6068-D		
68/70	F(exc. 76)	200	C7ZZ 6A023-D		C8ZZ 6068-A		
69	F(S/E, 1/B)-76	250			C8OZ 6068-A		
69	F(76)	250	C9ZZ 6A023-B		C8ZZ 6068-D		
69	F(exc. 76)	250	C9ZZ 6A023-B		C8ZZ 6068-A		
70/	F	250	C9ZZ 6A023-B		C8ZZ 6068-A		
- P -							
70	P	170, 200, 250	D1DZ 6A023-B		D1ZZ 6068-B		
71/	P(M/T-floor shift)	170,200	D1DZ 6A023-B		D1ZZ 6068-D		
71/	P(M/T-column shift)	170,200	D1DZ 6A023-B		D1ZZ 6068-B		
71/	P(A/T)	170,200, 250	D1DZ 6A023-B		D1ZZ 6068-B		
- U -							
66/	U	170	C6TZ 6A023-B	C6TZ 6096-A	#C6TZ 6068-D		
- X -							
65	X	170, 200	C1DZ 6A023-A		C1DZ 6068-A		
66	X(M/T)- "Before 12/15/65"	170,200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-A	C6DZ 6120-B
66	X (C4) - "Before 12/15/65"	170, 200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-C	C6DZ 6120-D
66	X "From 12/15/65"	170, 200	C6OZ 6A023-B	C6OZ 6096-A(RH) C6OZ 6096-D(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
67	X "Before 4/3/67"	170, 200	C6OZ 6A023-B	C6OZ 6096-C(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
67	X "From 4/3/67"	170,200	C6OZ 6A023-B	C6OZ 6096-F(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
68/69	X	170, 200	C6OZ 6A023-B	C6OZ 6096-F(RH) C6OZ 6096-G(LH)	C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
70	X	200	C6OZ 6A023-B	C6OZ 6096-F(RH) C6OZ 6096-G(LH)	D1ZZ 6068-B	C6DZ 6120-E	C6DZ 6120-F

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/70		20411-S7(B184)	2	2		Bolt (rr.suppt.to frame)-7/16"-20x 1 1/8"-hex.hd.
		34671-S8(M67)	2	2		Nut-7/16"-20
		356590-S(XX171)	2	2		Washer-flat-.47" I.D.-.78" O.D.-.10" thick-steel
		357625-S7-8(XX304)	2	2		Lockwasher-7/16"
65/70	X(4/S/T)	377785-S100(BB513F)	1			Bolt (6A061 suppt. & spring to insul. & 6A023 support)
65/70	B	350688-S (BB193)	4			Bolt (brkt. to underbody)-1/2"-13 x 1 1/4"
		44735-S8(X32)	2			Washer-flat-1/2"
		375707-S7-8(BB687D)	2			Bolt (brkt. to support)-1/2"-13 x .88"-square neck
		375710-S7-8(MM173F)	2			Nut-hex.washer lock-1/2"-13
65/70	B	376905-S7-8(BB838H)	2	2		Bolt-1/2"-13 x 1 3/8"-square neck
65/70	B, F, X	371951-S8(MM151)		2		Nut(support to crossmember)-7/16"-14
65/68	B, X	371426-S(PP83)	1			Plug-cup type (cylinder head end)-1 3/4" diam.
65/68	B, X	87710-S(P16)	1			Plug (cylinder head hot water heater outlet)-3/8"
69	B, F, U, X	376043-S41(PP82)	1	1	1	Plug (core holes in head)-1 3/4" cup type

* (1) Required unless otherwise noted
May, 1975

† Used with cantilever support
COPYRIGHT © 1975 — FORD MOTOR COMPANY — DEARBORN, MICHIGAN

(2) required

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
		6026				PLUG - ENGINE
65/		C8AZ 6028-A	1	1	1	1 3/4" O.D. -plug clean out hole in head
			3	5	5	Plug clean out holes in block
		C8AZ 6026-B	AR	AR	AR	.060" O/S
65/		C5AZ 6026-G	AR	AR	AR	2.072" O.D. -cup shaped-plug core holes in block or head-also used as camshaft rear bearing plug
		C5AZ 6026-H	AR	AR	AR	.060" O/S
65/		C8DZ 6026-A	4	4	4	1 1/64" O.D. Std. in cyl. head
			2	2	2	in block & in intake manifold
		C8DZ 6026-B	AR	AR	AR	.060" O/S
		C8DZ 6026-C	AR	AR	AR	.125" O/S
65/70	B, X	376635-S(PP66A)	1			Plug-cup type (oil gallery-front)
65/70	B, X	87837-S(P15)	1			Plug (rear of main gallery)-1/4"-18 x 27/64"-
69	F			1	2	pipe-steel
65/70	X, B		1	1	2	(Plug cylinder block hole over filter pad)
72			1	1	1	(Plug oil gallery in block)
72			1	1	1	(Plug drain holes)
65/70	B, X	371426-S(PP83)	1			Plug (cylinder block side)-cup type-1 3/4" diam.
65/70	X	354942-S(PP81)	AR			Plug (cylinder block side)-cup type-O/S-1.790" & 1.775" O.D.
69/	M/T	376635-S(PP66A)	1	1		Plug (oil passages in block)-29/64"
		6A027				SPACER - SUPPORT INSULATOR
65/71	B	C2OZ 6A027-A	2	2		Front
66/	U	C6TZ 6A027-A	2			Rear

6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	* SUPPORT BRACKET		* BRACKET		* INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
- B -								
65	B	200	C2OZ 6028-A	C2OZ 6029-A	C3OZ 6030-A	C3OZ 6031-A	C3OZ 6038-B	C3OZ 6038-B
66/68	B (exc. 76)	200	C6DZ 6028-B	C6DZ 6029-B			C6DZ 6038-E	C6DZ 6038-E
66	B (76)	200	C6DZ 6028-B	C6DZ 6029-B			C6DZ 6038-E	C6DZ 6038-B
67/68	B(76)	200	C6DZ 6028-B	C6DZ 6029-B			C6DZ 6038-E	C6DZ 6038-E
69	B(76)	250	C9OZ 6028-A	C9OZ 6029-A	C9OZ 6030-A	C9OZ 6031-A	C9OZ 6038-B	C9OZ 6038-B
69	B(exc. 76)	250	C9OZ 6028-A	C9OZ 6029-A	C9OZ 6030-A	C9OZ 6031-A	D0OZ 6038-C	D0OZ 6038-C
70/71	B(exc. 76)	250	D0OZ 6028-C	D0OZ 6029-C	C9OZ 6030-A	C9OZ 6031-A	D0OZ 6038-B	D0OZ 6038-B
70/71	B(76)	250	D0OZ 6028-C	D0OZ 6029-C	C9OZ 6030-A	C9OZ 6031-A	D0OZ 6038-C	D0OZ 6038-C
72	B	250			D2OZ 6030-A	D2OZ 6031-A	D4OZ 6038-G	D2OZ 6038-B
- F -								
65	F(63, 65, 76)	170, 200	C2DZ 6028-B	C2DZ 6029-B			C4UZ 6038-A	C4UZ 6038-B
66	F(63, 65, 76)	200	C6ZZ 6028-A	C6ZZ 6029-A			C4UZ 6038-A	C4UZ 6038-B
67/69	F(76) - "Before 3/10/69"	200	C7ZZ 6028-A	C7ZZ 6029-A			C7ZZ 6038-D	C7ZZ 6038-D
67/69	F(except 76) - "Before 3/10/69"	200	C7ZZ 6028-A	C7ZZ 6029-A			C6DZ 6038-E	C6DZ 6038-E
69	F(76) - "From 3/10/69"	200	C9ZZ 6028-A	C9ZZ 6029-A			C9ZZ 6038-A	C9ZZ 6038-A
69	F(exc. 76) - "From 3/10/69"	200	C9ZZ 6028-A	C9ZZ 6029-A			C9ZZ 6038-B	C9ZZ 6038-B
69	F(76)	250	C9ZZ 6028-A	C9ZZ 6029-A	C9OZ 6030-A	C9OZ 6031-A	C9ZZ 6038-A	C9ZZ 6038-A
69	F(exc. 76)	250	C9ZZ 6028-A	C9ZZ 6029-A	C9OZ 6030-A	C9OZ 6031-A	C9ZZ 6038-B	C9ZZ 6038-B
70	F	200	C9ZZ 6028-A	C9ZZ 6029-A			C9ZZ 6038-A	C9ZZ 6038-A
70	F(exc. 76)	250	C9ZZ 6028-A	C9ZZ 6029-A	C9OZ 6030-A	C9OZ 6031-A	C9ZZ 6038-A	C9ZZ 6038-A
70	F(76)	250	C9ZZ 6028-A	C9ZZ 6029-A	C9OZ 6030-A	C9OZ 6031-A	C9ZZ 6038-B	C9ZZ 6038-B
71/	F(exc. 76)	250	D0OZ 6028-C	D0OZ 6029-C	C9OZ 6030-A	C9OZ 6031-A	D0OZ 6038-B	D0OZ 6038-B
71/	F(76)	250	D0OZ 6028-C	D0OZ 6029-C	C9OZ 6030-A	C9OZ 6031-A	D1ZZ 6038-C	D1ZZ 6038-C
- P -								
70/	P	170, 200	D0DZ 6028-A	D0DZ 6029-A	D0DZ 6030-A	D0DZ 6031-A	D0DZ 6038-C	D0DZ 6038-C
71/	P	250	D0DZ 6028-A	D0DZ 6029-A	D0DZ 6030-B	D0DZ 6031-C	D0DZ 6038-C	D0DZ 6038-C
- U -								
66/	U	170	REFER 5057	REFER 5058			C6TZ 6038-E	C6TZ 6038-E
- X -								
65	X	170, 200	C2DZ 6028-B	C2DZ 6029-B			C4UZ 6038-A	C4UZ 6038-B
66/70	X	170, 200	C6DZ 6028-B	C6DZ 6029-B			C6DZ 6038-E	C6DZ 6038-E

* (1) Required unless otherwise noted

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/71	A	34671-S8(M67)	4	4		Nut-7/16"-14
65/71	B, F, X	★353622-S100	2			Washer-flat(engine frt. supports to insulator)-5/16"
65/71	B	34670-S7-8(M54)	6			Nut (bracket to underbody)-7/16"-14 hex.
		34808-S8(X67)	6			Lockwasher-7/16"
		373403-S8 (MM173J)	2	2		Nut (insulator to bracket)-3/8"-16 hex. lock
		373403-S8 (MM173J)	4			Nut (insulator to bracket)-3/8"-16 hex. lock
65	B, X	44735-S8(X32)	2	2		Washer-flat (insulator to front bracket)-15/32"
70/	P	56340-S2(B323)	4	4		Bolt (insulator to bracket)-3/8"-16 x 1 5/32"
		383406-S100 (MM173MY)	2	2		Washer-3/8"
65/	B, X	20348-S2(B-77)	2	2	2	Bolt-3/8"-16 x 3/4" hex.hd.-attach insulator to bracket
		6030-1				BRACKET - FRONT SUPPORT-refer to Front Motor Mount Chart (Group 6028)
		6038				INSULATOR - FRONT SUPPORT-refer to Front Motor Mount Chart (Group 6028)
65/66	B	C2OZ 6039-B	2	2		INSULATOR - FRONT SUPPORT REBOUND
69/	B	33771-S4(M89-L)		AR		Nut-3/8"-16-washer face
		6A042				REINFORCEMENT - REAR SUPPORT
68/69	B, X(NOTE 1)	C8OZ 6A042-C	1	1	1	R. H.
		C8OZ 6A042-D	1	1	1	L. H.
70/	B(exc. 76)	D0OZ 6A042-A			1	R. H.
		D0OZ 6A042-C			1	L. H.
		6046				BRACKET - FRONT SUPPORT INSULATOR -Also refer to Basic No's. 6028, 6029 & 6038
66/69	B, X	C5DZ 6046-A	1	1		R. H.
		C5DZ 6046-B	1	1		L. H.
67/69	F "Before 3/10/69"	C7ZZ 6046-C		1		R. H.
		C7ZZ 6046-C		1		L. H.
69/71	F "From 3/10/69"	C9ZZ 6046-A		1		R. H.
		C9ZZ 6046-B		1		L. H.
65/66	B	C2OZ 6047-A		2		BOLT - FRONT SUPPORT INSULATOR - 3/8"-16 x 3 3/16"-with 1/2" shoulder
72	B	D2OZ 6047-A		2		BOLT - INSULATOR TO CROSSMEMBER-hex.head piloted-3/8"-16 x 15"
		6049				ΔHEAD - CYLINDER
65	F	C3OZ 6049-K	1			Includes (6) C9DZ 6505-A exhaust valves (6) C5DZ 6507-A intake valves & (1) C6DZ 10884-B heat sender
65/66	B, F, U, X(exc. T/E)	C9DZ 6049-F	1	1		Includes (1) C6DZ 10884-A heat sender
67	B, F, U, X(Imco)		1	1		
67/68	B, F, X(Imco with C4)		1	1		
68	X(C4)		1			
69	F, U, X(Imco)		1	1		
66/67	B, F, U, X(T/E)	C9DZ 6049-G	1	1		
68	U, X(S/T)		1			
68/69	B, F, X(S/T)-T/E			1		
69	B, F "Before 11/1/68"	C9DZ 6049-C			1	
69/	B, F "From 11/1/68"	C9DZ 6049-D		1	1	
70/	P, X			1	1	
70/	P, U	D0DZ 6049-A		1		
65/70	B, F, X	C0DE 6051-C	1			GASKET - CYLINDER HEAD-steel
66/68	U		1			
70/	P, U		1			
69	U	C9DZ 6051-A	1			Asbestos & steel-.077" thick
65/69	B, F, X		1	1		
69/		C9DZ 6051-B			1	Asbestos & steel-.046" thick-optional with C9DZ 6051-C
70/					1	
69/		C9DZ 6051-C			1	Steel-optional with C9DZ 6051-B
70/					1	

Δ 6090 is a casting number and generally cannot be referenced to a service number. It will be used as a means of identification only when casting number is unique to one 6049 assembly.

NOTE 1 - Not required on Model 76 "From 12/1/67"

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
66/69		C6AZ 6052-A	6	6		PLUG - CYLINDER HEAD EXHAUST AIR SUPPLY- to plug holes when T/E is not used-1/2"-20 x 1 11/32" hex. head
65	X(S/T-with cantilever spring type engine rear support)	C1DZ 6B056-B	1	1		SPRING - REAR SUPPORT - approx. 11 15/32" long
65	X(4 speed trans.)	★C2DZ 6B056-A	1			Not replaced
65	X(S/T with interlock)	C3DZ 6B056-A	1	1		
65	X(C4 trans.)		1	1		
65	X	373889-S(BB429)	2			Bolt (spring to housing)-3/8"-16 x 1 1/4"
		6A061				INSULATOR ASSY. - REAR SUPPORT REBOUND Lower
65	X(w/cantilever spring type engine rear support)	C1DZ 6A061-A	1	1		
66	U- "Before Ser. 886,001"	C6TZ 6A061-B	1			Crossmember (6A023) to transfer case
66/	U- "From Ser. 886,001"	C6TZ 6A061-D	1			Crossmember (6A023) to transfer case
66/	U	C6TZ 6A061-A	2			Lower
66/	U	383406-S100 (MM-173-MY)	1			Nut-3/8"-16 (attach 6A061 to 6A023)
65	X(with cantilever spring type engine rear support)	375412-S(BB513E)	1			Bolt (insulator to support)-3/8"-24 x 2.38"-hex. shoulder lock
65	X(with cantilever spring type engine rear support)	375390-S(XX203A)	1			Washer-flat
65	X(with cantilever spring type engine rear support)	375391-S2(MM208)	1			Retainer assy. (nut)-3/8"-24
65/70	X(4 speed trans.)	377785-S100 (BB513F)	1			Bolt (insulator & 6B056 spring to 6068 insulator and 6A023 support)
65/68	B, F, X	C1DZ 6065-E	2	2		BOLT - CYLINDER HEAD - right front & 3rd from rear right side-7/16"-14 x 4 3/8" hex. head nylon lock No. 5-R. H. side R. H. front bolt hole R. H. No. 3 position from rear bolt hole R. H. front bolt hole R. H. Front
66/68	U		1			
69/70	B, F, X - "Before 6/15/70"		1		1	
69/	U		1			
70/	P		1	1	1	
70/	B, F, X-w/A/C "From 6/15/70"			1	1	
65/	B, F, X	★C1GY 6065-A	1	1	1	Left rear - 7/16" - 14 x 3.06"
70/	P		1	1		
65/68	B(A/C)	C3OZ 6065-A	2	2		7/16"-14 x 3 1/16"-overall length 4 13/32"-used in No. 3 position with C3DZ 2882-A bracket
65/70	X(A/C)		2			
66/	U	C1DZ 6065-B	13			Except No. 5-R. H. side-7/16"-14 x 3 5/32"
65/70	B, F, P, X "Before 6/15/70"		12	12	12	Except right front & 3rd from rear right side
70/	B, F, P w/A/C-		13	13	13	
	"From 6/15/70"					
70/	B, F, P w/o A/C-		14	14	14	
	"From 6/15/70"					
69/	B, F, P				14	Crankshaft main bearing cap bolt
		6068				INSULATOR ASSY. - REAR SUPPORT-refer to Rear Motor Mount Chart (Group 6A023)
66/67	B, X	C6OZ 6070-A	2	2		PLATE - REAR SUPPORT - approx. 4 3/4" long- 3 5/16" wide
68/71	B(76)			2	2	
66/	U	★C6TA 6070-C	2			Sheet steel-2 1/2" square-5/8" center hole- dealer improvise
68/71	B, X	C8OZ 6070-A	1	1	1	R. H.
		C8OZ 6070-B	1	1	1	L. H.
65/		C1DZ 6079-B	1			GASKET SET - VALVE GRIND
	Consists of					
	1-C0DE 6051-C	Gasket (cylinder head)		1-D0DZ 6584-A	Gasket (rocker arm cover)	
	12-D2DZ 6571-A	Seal (valve stem)		1-C9AZ 8255-A	Gasket (water outlet)	
65/		C3OZ 6079-B		1		
	Consists of					
	1-C9DZ 6051-A	Gasket (cyl. head)		1-D0DZ 6584-A	Gasket (rocker arm cover)	
	12-D2DZ 6571-A	Seal (valve stem)		1-C9AZ 8255-A	Gasket (water outlet)	
69/		C9OZ 6079-A			1	
	Consists of					
	1-C9DZ 6051-B	Gasket (cylinder head)		1-D0DZ 6584-A	Gasket (rocker arm cover)	
	12-D2DZ 6571-A	Seal (valve stem)		1-C9AZ 8255-A	Gasket (water outlet)	

⊕ Use in place of C1DE 6065-B or C1DZ 6065-B when required

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
68/71		CC2AF 6B080-A	1	1		"O" RING - CYL. BLOCK HEATER - use with C7AE 6D008-A heater kit
65/70	B(P/S, C4, extra cooling)	★C2OE 6B089-A	2	2		SPACER - TIMING POINTER-serviced in C2OZ 3A635-B kit-used as spacer between 6023 & 6019
65/70	F(P/S and/or A/C)		2	2		
65/70	X(P/S and/or A/C)		2	2		
66/	B, F, X, U(T/E)		2	2		
		6096				BRACKET - REAR SUPPORT - refer to Rear Motor Mount Chart (Group 6A023)

♦ 6108 PISTON ASSEMBLY - CHART

In the Standard column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	RINGS	QTY.	PART NUMBER					
					STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65/		170	3	Δ	C5DZ 6108-A(R) C5GY 6108-D(B)	C5DZ 6108-K	C5DZ 6108-B	C5DZ 6108-C	C5DZ 6108-D	C2OZ 6108-K
65/		200	3	Δ	C9DZ 6108-A(R) C9DZ 6108-B(B)	C9DZ 6108-C	C9DZ 6108-D	C9DZ 6108-E	C9DZ 6108-F	
		250								

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
		6120				EXTENSION - REAR SUPPORT - refer to Rear Motor Mount Chart (Group 6A023)
65/		B2AZ 6135-A	6	6	6	PIN - PISTON - # Green-.9121" O.D. -.600" I.D. - 3.023" long-std.
		B2AZ 6135-B	6	6	6	.001" O/S

6148 RING SET - PISTON PARTIAL - CHART

(Consists of the necessary rings to re-ring (2) pistons)

YEAR	MODEL	C.I.D.	RINGS	TYPE	PART NUMBER				
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65/67		170	3	Hi Lo	C0DZ 6148-F	C0DZ 6148-G	C0DZ 6148-H	C0DZ 6148-J	C0DZ 6148-E
68/		170	3	Hi Lo	C0DZ 6148-F	C0DZ 6148-G	C0DZ 6148-H	C0DZ 6148-J	C0DZ 6148-K
65/		200	3	Hi Lo	C3OZ 6148-E	C3OZ 6148-F	C3OZ 6148-G	C3OZ 6148-H	
		250							

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/		C3OZ 6200-B	6	6		ROD ASSY. - CONNECTING
69/		C9DZ 6200-A			6	

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER LOWER	PART NUMBER and SIZE				
				STANDARD	.002" U/S	.010" U/S	.020" U/S	.030" U/S
65/		170, 200, 250	6/6	C3OZ 6211-G	C3OZ 6211-H	C3OZ 6211-J	C3OZ 6211-K	C3OZ 6211-L
65/70	• Unique competition part	170, 200	6/6	D1DZ 6211-A				

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/		C3DZ 6212-A	12	12	12	NUT - CONNECTING ROD-5/16"-24-hex.
65/		C3AZ 6214-A	12	12	12	BOLT - CONNECTING ROD-5/16"-24 x 2.08"
66/	U	C0DZ 6250-B	1			CAMSHAFT - #GABC - mechanical tappets - cast iron-14 tooth distributor gear
65/	B, F, P, X	C7OZ 6250-A	1	1		Hydraulic tappets - # VD or BC-14 tooth
69/71		C9DZ 6250-A			1	Hydraulic tappets #BD
72	Except Calif.				1	
72	Calif.	D2DZ 6250-A			1	# DG

♦ 6110 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6108 assembly. Δ Includes piston pin

Identification marking

• Refer to appropriate muscle parts catalog

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR COMPANY

-DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/		C9OZ 6A251-A	1	1	1	BEARING KIT - CAMSHAFT - standard
	Consists of					
	1-C9DZ 6261-B Front	1-C0DZ 6267-B Front Intermediate				1-C5AZ 6026-G Plug
	1-C0DE 6263-B Rear	1-C0DE 6270-B Rear Intermediate				
65/	B, F, P, U, X	C0DE 6256-A	1	1		SPROCKET - CAMSHAFT - cast iron - 38 teeth
69/	B, F (exc. F Economy 1/B, A/T)	C9DZ 6256-A			1	Cast iron-42 teeth
70/	P				1	
69	F (Economy 1/B, A/T)	C9DZ 6256-B			1	Cast iron-42 teeth
65/		373118-S (NN54)	1	1	1	Pin-dowel (sprocket to camshaft)-1/4" dia. x .31" long
65/		371643-S (BB296)	1	1	1	Bolt (sprocket to camshaft)-7/16"-14 x 1 1/8"
		34808-S8 (X67)	1	1	1	Lockwasher-7/16"

6261, 6263, 6267 & 6270 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65/		170, 200, 250	Standard .015" U/S	C9DZ 6261-B C9DZ 6261-C	C0DE 6267-B C0DE 6267-C		C0DE 6270-B C0DE 6270-C	C0DE 6263-B C0DE 6263-C

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/		C0DZ 6265-A	1	1	1	SPACER - CAMSHAFT GEAR OR SPROCKET - 1.010" I.D. x 1.36" I.D. -.165" thick
		6267				Refer to Camshaft Bearing Chart (Basic No. 6261-63)
65/		C0DE 6268-A	1	1		CHAIN - TIMING-50 links
69/		C9DZ 6268-A			1	
69/71	• Unique competition part	D1DZ 6268-A			1	CHAIN and SPROCKETS KIT - TIMING

Consists of

1-D1DE 6256-AA

Sprocket camshaft

1-D1DE

6268-A1A or A2A

Timing chain

1-D1DE 6306-A1A or A2A Sprocket crankshaft

65/		C0DE 6269-A	1	1	1	PLATE - CAMSHAFT THRUST-(2)11/32" bolt/stud holes-(1)1.43" dia. center hole-3.52" overall length-.160" thick
65/		20326-S7 (B49)	2	2	2	Bolt (camshaft thrust plate to cylinder block)-5/16"-18 x 5/8"
65/		34806-S7 (X64)	2	2	2	Washer-5/16"
		6270				Refer to Camshaft Bearing Chart (Basic No. 6261-63)
65/		C3AZ 6278-A	1	1	1	WASHER - CAMSHAFT SPROCKET-1.26" O.D. -.46" I.D. -.25" thick
69/		C9DZ 6284-A			1	DAMPER ASSY. - TIMING CHAIN VIBRATION
65/		C0DZ 6A302-A	1	1	1	PIN - CRANKSHAFT REAR OIL SEAL-.095" O.D. -.31" long-pointed
		6303				CRANKSHAFT ASSY.
65/		C2DZ 6303-A	1			29.005" overall length
65/		C5OZ 6303-A		1		7 main bearings
69/		C9DZ 6303-A			1	7 main bearings-#2H
65/		C0DZ 6306-A	1	1		SPROCKET - CRANKSHAFT-19 teeth-used with or without slinger
69/		C9DZ 6306-A			1	21 teeth
65/		372854-S (LL11)	1	1		Key-3/16" x 1.75"
69/		379153-S (LL11A)			1	Key-3/16" x 1.72"
65/66		C0DE 6310-A	1	1		SLINGER-CRANKSHAFT OIL-3.52" O.D.-1.258" I.D.
69/		C9DZ 6310-A			1	3.18" O.D. -1.381" I.D.
		6312				PULLEY ASSY. - CRANKSHAFT - Also refer to Basic No. 6A312
65/	Without A/C	C2DZ 6312-A	1	1		Single sheave-5 55/64" dia. pulley-1 49/64" long
69/71		D2DZ 6312-A			1	#D2DE 6316-A1A or A2A-double sheave pulley-1 6 15/16" O.D.-replaces pulley ident. C9DE 6316-A
72	Calif.		1	1		
72	Except Calif.				1	
68/71		D2DZ 6312-B	1	1		Replaces pulley ident. C8DE 6316-A - double sheave
72	Calif.		1	1		
72	Except Calif.				1	

Identification marking

† Includes damper

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/71	B(P/S, X/C)	†C2DZ 6A312-A	1	1		PULLEY ASSY. - CRANKSHAFT-OUTER-single sheave-5 29/32" pulley diam. -(3) holes equally spaced-Also refer to Basic No. 6312
65/67	B(with 40,52,53 & 60 amp.alt.)		1	1		
65	F(P/S)		1			
65	X(P/S)		1	1		
66/67	B, F, X(R/A cover em/re, P/S)-exc. A/C		1	1		
66/67	F, X(T/E, Std. Steering)-except A/C		1	1		
66/67	B (Std. Steering, 38 amp.alt., T/E)			1		
65/67	B(A/C)	†C2OZ 6A312-A	1	1		Single sheave
65/67	F, X(A/C and/or P/S)		1	1		
68	X(P/S with or without A/C)	C8DZ 6A312-A	1	1		Single sheave-5 1/4" pulley diameter
70/	P(P/S with or without A/C)		1	1		
68	F(P/S with or without A/C)			1		
69/70	F(P/S)			1		
69/	P/S	C9ZZ 6A312-A			1	#C9ZE 6312-A-single sheave-6 15/32" dia. - uses 3/8" belt
65/67	X(A/C)	C0DZ 6A312-A		1		Double sheave-6 1/16" pulley diam. -2.39" long

6333, 6337 & 6342 BEARING-CRANKSHAFT MAIN-CHART

In the size column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

6 CYLINDER ENGINES 4 MAIN BEARINGS

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65/		170	Std. .001" .002" .010" .020" .030"	x	x	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F		C1DZ 6337-A C1DZ 6337-B C1DZ 6337-C C1DZ 6337-D C1DZ 6337-E C1DZ 6337-F	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F

6 CYLINDER ENGINES 7 MAIN BEARINGS

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT (1)	FRONT INTERMEDIATE		CENTER (4)	REAR INTERMEDIATE		REAR (7)
							(2)	(3)		(5)	(6)	
65/		200	Std. .001" .002" .010" .020" .030"	x	x	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F	C1DZ 6337-A C1DZ 6337-B C1DZ 6337-C C1DZ 6337-D C1DZ 6337-E C1DZ 6337-F	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F	C1DZ 6333-A C1DZ 6333-B C1DZ 6333-C C1DZ 6333-D C1DZ 6333-E C1DZ 6333-F	
69		250	Std. .001" .002" .010" .020" .030"	x		D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6337-C C9DZ 6337-B D0TZ 6337-E D0TZ 6337-F D0TZ 6337-G D0TZ 6337-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	
70/		250	Std. .0952" .001" .002" .010" .020" .030"	x		D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6337-C D0TZ 6337-D D0TZ 6337-E D0TZ 6337-F D0TZ 6337-G D0TZ 6337-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	

Identification marking

† Includes damper

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6333, 6337 & 6342 BEARING-CRANKSHAFT MAIN-CHART - continued

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT (1)	FRONT INTERMEDIATE		CENTER (4)	REAR INTERMEDIATE		REAR (7)
							(2)	(3)		(5)	(6)	
69/		250	Std. .001" .002" .010" .020" .030"		x	C5TZ 6333-AA C5TZ 6333-AB C9AZ 6333-C C5TZ 6333-AD C5TZ 6333-AE C9AZ 6333-F	C5TZ 6333-AA C5TZ 6333-AB C9AZ 6333-C C5TZ 6333-AD C5TZ 6333-AE C9AZ 6333-F	C5TZ 6333-AA C5TZ 6333-AB C9AZ 6333-C C5TZ 6333-AD C5TZ 6333-AE C9AZ 6333-F	C5TZ 6333-AA C5TZ 6333-AB C9AZ 6333-C C5TZ 6333-AD C5TZ 6333-AE C9AZ 6333-F	C9AZ 6337-A C9AZ 6337-B C9AZ 6337-C C6AZ 6337-J C6AZ 6337-K	C5TZ 6333-AA C5TZ 6333-AB C9AZ 6333-C C5TZ 6333-AD C5TZ 6333-AE C9AZ 6333-F	C5TZ 6333-AA C5TZ 6333-AB C9AZ 6333-C C5TZ 6333-AD C5TZ 6333-AE C9AZ 6333-F
65/70	• Unique competition part	170, 200	Std.	x	x	D1DZ 6333-A	D1DZ 6333-A	D1DZ 6333-A	D1DZ 6333-A	★ D1DZ 6337-A Not Replaced	D1DZ 6333-A	D1DZ 6333-A

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/		C1TE 6A340-B	1	1	1	BOLT - CRANKSHAFT PULLEY-9/16"-18 x 1 3/4" hex. head
		34810-S7-8(X69)	1			Lockwasher-9/16"
		6345				BOLT - CRANKSHAFT MAIN BEARING CAP - Also refer to Basic 6065
65/	B, F, P, X	D2DZ 6345-A	8	14	14	7/16"-14 x 2.70"
66/	U(except No. 3 cap)		7			
66/	U (No. 3 cap)	C6TZ 6345-B	1			7/16"-14 x 3.61"-also attach.oil inlet tube to block
69/	U	33799-S8(M52)	1			Nut-3/8"-16
69/	U	34807-S8(X66)	1			Lockwasher-3/8"
		6366				COVER ASSY. - FLYWHEEL HOUSING - Also refer to Group 7007
65	B, Taxi(H/D clutch)	C2OZ 6366-A	1			
65/68	B, Taxi(S/T & H/D 10 1/2" clutch)			1		
65/68		20310-S8(B48)	4	4		Bolt(bottom cvr.to flywheel hsg.)-5/16"-18x1/2"
		34806-S7(X64)	4	4		Lockwasher-5/16"
65/	A/T	C0DE 6A366-A	1	1		PLATE - FLYWHEEL REINFORCING-3 5/8"O.D.-23/64" I.D. -5/64" thick-(6) 29/64" holes
69/	A/T	C2OZ 6A366-A			1	
		6375				FLYWHEEL ASSY.
65	B, F, X(3/4/S/T)	C3DZ 6375-C	1	1		#C4OE 6380-B-10 3/4" dia. (6) 5/16"-18 pressure
66	F, X(3/4/S/T-8 1/2" clutch)		1	1		plate attaching holes on 9 3/8" bolt circle-
67	X(3/4/S/T-8 1/2" clutch)-exc. fully synchronized		1			includes 132 tooth ring gear
65/70	B, X(C4)	C3DZ 6375-B	1	1		Does not include ring gear-see Group 7902 or 7950
65/70	F(C4)		1	1		
70/	P (A/T)		1	1		
66/67	B, F, X(3/4/S/T-9" clutch)	C6DZ 6375-A		1		#C6DE 6380-A-includes 136 tooth ring gear-
66/	U		1			11 7/64" diam. -(6) 5/16"-18 pressure plate attach
67	X (fully synchronized)		1			holes on 10 1/4" bolt circle
68/70	B, F, X(3/4/S/T)		1	1		
70/	P (S/T)		1	1		
66/67	B, Taxi (S/T, 10 1/2" clutch)	C6OZ 6375-C		1		#C7OE-B-157 tooth ring gear-(6) 5/16"-18
						pressure plate attaching holes on 11 3/8" bolt circle
69/	B, F(S/T)	C9DZ 6375-A			1	#C9DE-A-157 tooth ring gear-13 9/32" diam. -
						(6) 5/16"-18 pressure plate attaching holes on
						10 7/8" bolt circle
69/	B, F(A/T)(exc. F Econ.1/B, A/T)	C9OZ 6375-A			1	Includes 157 tooth ring gear
70/	P(A/T)				1	
69	F (Economy 1/B, A/T)	C5TZ 6375-T			1	164 tooth ring gear
65/		C0DZ 6378-A	1	1	1	WASHER - CRANKSHAFT PULLEY RETAINING-1.76" O.D. - .58" I.D. - .230" thick
65/	B, F, X, U(S/T)	B8AZ 6379-A	6	6	6	BOLT - FLYWHEEL TO CRANKSHAFT -
						7/16"-20 x 15/16"-A/T used w/6A366 plate
69/	B, F, X(A/T)		6	6	6	
70/	P		6	6	6	
72	B, F, P(A/T)	D2AZ 6379-B			6	7/16"-20 x 3/4"-used w/o 6A366 plate
65/68	X, B, A/T	C3AZ 6379-B	6	6		Bolt (plate to flywheel to crankshaft)-7/16"-20 x .84"-hex.head lock

Identification marking

• Refer to appropriate muscle parts catalog

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65	B, F, X(S/T)	C0DE 6384-A	1	1		GEAR - FLYWHEEL RING-132 teeth-11.158"O.D.
66	F, X(3/4/S/T-8 1/2" clutch)		1	1		
67	X(3/S/T-8 1/2" clutch)- exc. fully synchronized		1			
65/67	B, Taxi(S/T & H/D clutch)	C2OZ 6384-B	1	1		157 teeth-13 1/4" O.D.
69/	B, F(S/T)				1	
66/67	B, F, X(3/S/T-9" clutch)	C6DZ 6384-A		1		136 teeth
67	X (fully synchronized)		1			
66/67	U(Std. or H/D 9" clutch)		1			
68/70	B, F, X, U(3/S/T)		1	1		
70/	P (S/T)		1	1		
71/	U		1			
65	F, X(3/S/T)	C3DZ 6392-D	1	1		HOUSING ASSY. - FLYWHEEL -
66	X		1			#C3DA 6394-B-aluminum-consists of (1)
67	X (except fully synchronized)		1			C3DA 6392-C housing & (1) D0DZ 7007-A plate -
						Also refer to Groups 7007, 7505 & 7975
65	B(S/T-except H/D clutch)	★ C3OZ 6392-D Not replaced	1	1		#C3OA 6394-C-includes (1)C5DZ 7007-B plate
65/66	F, X(4/S/T)	C2DZ 6392-C	1	1		#C3DA 6394-A-aluminum-includes (1)
						C5DZ 7007-B plate
67/71	B, F, X(3/S/T-9" clutch)-fully synchronized	C7ZZ 6392-B	1	1		Includes C8OZ 7515-C lever
70 /	P (3/S/T-9" clutch)		1	1		
65/68	B, Taxi(3/S/T-H/D 10 1/2" clutch)	C5OZ 6392-A		1		#C5OA 6394-A
66/67	B, F, X(3/S/T-9" clutch)- except fully synchronized	C6OZ 6392-A		1		#C6OA 6394-C-aluminum
69/	M/T	D2OZ 6392-A			1	Includes (1) C8OZ 7515-A lever assy.
65/68	X, B	20534-S8(B90)	4			Bolt (housing to cyl. block)-3/8"-16 x 2 1/4"
		34807-S7-8(X66)	4			Lockwasher-3/8"
69/	F, X, U	34807-S8(X66)	4	4		Lockwasher (housing to block)-3/8"
69/	F, X, U	45534-S2(B95)	2	2		Bolt (housing to block)-3/8"-16 x 3"
69/	B, F, P	20508-S8(B110)			2	Bolt (housing to block)-7/16"-14 x 1 3/4"
69/	B, F, P	34808-S2(X67)			6	Washer (housing to block)-7/16"
69/	F, X	20524-S7-8(B111)			4	Bolt (housing to block)-7/16"- 14 x 2"
71	U	376058-S(BB157A)	4			Bolt (housing to block)-3/8"-16 x 1 1/2"
72	P, U(M/T)	34807-S8(X66)	4	4		Lockwasher (housing to block)-3/8"
70/	P, U(M/T)	58642-S2(B94Z)	2	2		Bolt (housing to block)-1/2"-13 x 3"
72	P(M/T)	304860-S(B90A)	2	2		Bolt (housing to block)-3/8"-16 x 2 1/4"
69/		EAD 6397-A			2	DOWEL - CYLINDER BLOCK - 1/2" x 1"-block to flywheel
66/	U	C4AZ 6500-B	12			TAPPET ASSY. - VALVE-mechanical-. 8742"O.D. 1. 85" long
65/	B, F, P, X	C8AZ 6500-A	12	12	12	Hydraulic- 1.82" long

6505-07 VALVE-INTAKE and EXHAUST-CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
65	170	F	4.19"	1.28"	Std. .003" .015" .030"	.3094" .3124" .3244" .3394"	C0DE 6505-J C0DE 6505-L C0DE 6505-K C0DE 6505-M	4.19"	1.53"	Std. .003" .015" .030"	.3104" .3134" .3234" .3404"	C1DE 6507-A C1DE 6507-B C1DE 6507-C C1DE 6507-D
65/71	200, 250		4.19"	1.38"	Std.	.3101"	D2DZ 6505-A	4.19"	1.65"	Std.		D2DZ 6507-A
65/71	170	P, U, X			.003" .015" .030"		C9DZ 6505-B ★C9DZ 6505-C R/B D2DZ 6505-C (9-74) C9DZ 6505-D			.003" .015" .030"		D2DZ 6507-B D2DZ 6507-C ★C5DZ 6507-D R/B D2DZ 6507-D (9-74)

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6505-07 VALVE-INTAKE and EXHAUST-CHART - continued

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
72	170,200, 250	F, P, U	4.19"	1.39"	Std.	.3101"	D2DZ 6505-A	4.19"	1.65"	Std.	.3101"	D2DZ 6507-A
72	250	B(exc.P/C, Taxi)			.003"		D2DZ 6505-B			.003"		D2DZ 6507-B
					.015"		D2DZ 6505-C			.015"		D2DZ 6507-C
					.030"		D2DZ 6505-D			.030"		D2DZ 6507-D
72	250	B(Taxi, P/C)	4.26"	1.39"	Std.	.310"	D2DZ 6505-E	4.26"	1.65"	Std.	.310"	D2DZ 6507-E
					.003"		D2DZ 6505-F			.003"		D2DZ 6507-F
					.015"		D2DZ 6505-G			.015"		D2DZ 6507-G
					.030"		D2DZ 6505-H			.030"		D2DZ 6507-H

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/66	B, F, X, U-"Before 5/4/66" use with C1DZ 6531-A	ΔC0DE 6A508-A	1	1		COVER - VALVE ROCKER ARM FRONT SUPPORT OIL PASSAGE
		6510				BUSHING - VALVE GUIDE
65/		D1DZ 6510-A NOTE 1	AR	AR	AR	Intake & exhaust-1.88" long-.436" O.D. -.281" I.D.
66/	U	C0DE 6513-A	12			SPRING - VALVE-2" long-7.25 coils-1" I.D.
65/71	B, F, P, X	C3DZ 6513-A	12	12	12	1.79" long-1.014" I.D. -#Light Red
72			12	12		
72	Except Calif.				6	Intake
72	Except Calif.	D2DZ 6513-A			6	Exhaust-1.79" long-1.014" I.D. -#Green
72	Calif.				12	Intake & exhaust
65/71		C0DE 6514-A	12	12	12	RETAINER - VALVE SPRING-1.28" flange O.D. -.347" hole diameter-.420" overall height
72					6	Intake
72			12	12		
72		D2DZ 6514-A			6	Exhaust-1.32" flange O.D. -.411" overall height
65/71		B3Q 6515-A	AR	AR	AR	SPACER - VALVE SPRING-1.36" O.D. -1" I.D. -.030" thick
65/71		C0DE 6517-A	12	12	12	SLEEVE - VALVE SPRING RETAINER-.720" & .520" O.D. -.36" overall height
72			12	12		
72					6	Intake only
65/		C0DE 6518-A	24	24	24	KEY - VALVE SPRING RETAINER -.380" height -#Green
65/		C1DZ 6A527-C	6	6	6	BOLT - VALVE ROCKER ARM SHAFT SUPPORT-3/8"-16 x 2 31/32"
		370347-S(XX314)	6	6	6	Washer-3/8"
65/		C1DZ 6531-A	6	6	6	SUPPORT KIT - VALVE ROCKER ARM SHAFT

Consists of

1-D2DE 6531-AA Support

1-370347-S Flat washer-3/8"

65	F	B6A 6549-C	12			SCREW - VALVE ROCKER ARM ADJUSTING - standard-7/16"-20 x 1.40" long
66/	U	C2AZ 6549-A	AR			.0023" O/S
66/	U	C0DZ 6563-A	1			SHAFT - VALVE ROCKER ARM-23.94" long- includes (2) EAA 6572-A plugs
65/	B, F, P, X	C3DZ 6563-A	1	1	1	Use w/hyd, tappets- includes (2) EAA 6572-A plugs
		6564				ARM - VALVE ROCKER
65/	B, P, X	C4DZ 6564-A	12	12	12	
65/	F			12	12	
65	F	C0DZ 6564-A	12			Includes screw
66/	U		12			
65	F	C0DE 6565-B	12			ROD - VALVE PUSH-approx. 8 1/8" long-(1) ball & (1) cup type end
66/	U		12			
65/	B, P, X	C4DZ 6565-A	12	12		Standard-8.35" long
65/70	F			12		
		C4DZ 6565-B	12	12		.060" O/S
		C4DZ 6565-C	12	12		.060" U/S
69/71		C9DZ 6565-A			12	9.32" long
		C9DZ 6565-B			AR	.060" O/S
		C9DZ 6565-C			AR	.060" U/S
72		D2DZ 6565-A			12	9.37" long

Identification marking

Δ Not used from 5/4/66

NOTE 1 - Bushing must be reamed to size of valve

FORD CAR PARTS

SECTION 60.2
6 CYL. - 170, 200, 250

13

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
		6571				SEAL - VALVE STEM
65/		D2DZ 6571-A	12	12	12	Use with std. size valves
65/		D2DZ 6571-B	12	12	12	Use with O/S valves
65/		EAA 6572-A	2	2	2	PLUG - VALVE ROCKER ARM SHAFT-cup shaped .536" diameter
		6582				COVER ASSY. - VALVE ROCKER ARM
65/70		C3DZ 6582-H	1	1	1	Includes (1) 378727-S installed grommet
71/	U	D1DZ 6582-A	1			
71/	B, F, P	D1DZ 6582-B	1	1	1	
65/71		20324-S8(B41)	7			Bolt (cover to cyl.head)-1/4"-20 x 5/8"
		34805-S8(X62)	7			Lockwasher-1/4"
72		356748-S	6	6	6	Screw & washer-1/4"-20 x 5/8(attach 6582 to 6049)
65/		D0DZ 6584-A	1	1	1	GASKET - VALVE ROCKER ARM COVER-cork & rubber
65/70		C0DZ 6584-C	1	1	1	Cork & rubber-optional with D0DZ 6584-A
65/		C0DE 6587-A	5	5	5	SPRING - VALVE ROCKER ARM TO SHAFT LOCATING-2.10"free length-6 coils-.80" I.D.
65/		C0DE 6598-A	2	2	2	WASHER - VALVE ROCKER ARM SHAFT - spring 1.12" O.D. -.80" I.D. -.015" thick
65/71		372929-S(NN103)	2	2		Pin-spring-1/8" x 1 1/8"
		6600				PUMP ASSY. - OIL - less screen tube and cover
65	F	C4DZ 6600-A	1			Includes (1) C0DZ 6626-A gasket-use with C4DZ 6A618-A shaft
65/	B, X, P	C5DZ 6600-A	1	1		Includes & used with (1) C0DZ 6626-A gasket
65/70	F			1		
69/		C9DZ 6600-A			1	Includes (1) C9DZ 6626-A gasket
65/		20386-S8(B53)	2	2	2	Bolt (pump to block)-5/16"-18 x 1"
66/		34806-S7(X64)	2	2	2	Lockwasher-5/16"
69/		378644-S(NN61B)	1	1	1	Dowel-split (pump to block)-1/2" x 13/32"
65/	Converts to high volume- for all off highway operations	*D1DZ 6600-A	1	1		CONVERSION KIT - OIL PUMP
	Consists of					
	1-D1DE 6616-AA	Cover plate	1-57626-S			Screw & 1/washer-1/4"-20 x 1 1/2"
	1-D1DE 6622-AA	Screen & cover assy.	1-57638-S			Screw & 1/washer-5/16"-18 x 1 3/4"
	1-D1DE 6625-AA	Gasket-inlet tube	1-C2DZ 6666-A			Plug
	1-D1DE 6670-AA	Spring-relief valve	1-Instruction sheet			
65/67	All(exc. Calif.)	D0AZ 6A603-G (EK-6-A)	1	1		EMISSION CONTROL KIT - EXHAUST
	Consists of					
	1-D0AE 12A091-C	Valve assy.dist.	1-D2AE 9C485-AA			Tag eng.exh.emission I.D.
	1-D0AE 12226-J	Hose dist.vac.3" long	1-ESB M4G92-A			Sealer, silicone rubber
	1-Instruction sheet					
		6608				ROTOR and SHAFT ASSY. - OIL PUMP DRIVE
65	F	C4DZ 6608-A	1			Use with C4DZ 6A618-A shaft
65/	B, X, P, U	C5DZ 6608-A	1	1		5/16" drive-2.53" long-use with C5DZ 6A618-A
65/70	F			1		
69/		C9DZ 6608-A			1	
65/		C3DZ 6616-A	1	1		PLATE - OIL PUMP BODY
69/		B8A 6616-C			1	
65/		370519-S(BB125)	3	3		Bolt (cover plate to body)-1/4"-20 x 7/8"
		34805-S8(X62)	3			Lockwasher-1/4"
69/		42911-S(B41A)			4	Bolt (cover plate to pump)-1/4"-20 x 5/8"
		6A618				SHAFT ASSY. - OIL PUMP INTERMEDIATE
65	F	C4DZ 6A618-A	1			4 1/2" long-use with C4DZ 6600-A pump
65/	B, X, P, U	C5DZ 6A618-A	1	1		5.14" long-5/16" hex. drive
65/70	F			1		
69/		C9DZ 6A618-A			1	5/16" hex 4 13/16" long

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
		6622				SCREEN, TUBE and COVER ASSY. - OIL PUMP - Also refer to Group 6345
65	F	C4DZ 6622-A	1			
65/70	B, X	C5DZ 6622-A	1	1		
65/70	F			1		
70/	P		1	1		
69/		C9DZ 6622-A			1	
66/70	U	C6TZ 6622-B	1			
71/	U	D1TZ 6622-B	1			
65/68	X	20346-S8(B50)	1			Bolt (screen to oil pump)-5/16"-18 x 3/4"
69/		20386-S8(B53)			2	Bolt (screen & cover to pump)-5/16"-18 x 1" hex. hd.
69/		34806-S7(X64)	AR	AR	AR	Washer-5/16"
69/		358805-S(BB561)	1	1		Screw & washer (screen & cover to pump)- 5/16"-18 x 1 1/4"
69/		371065-S(BB549)	1	1		Bolt (screen & cover to pump)-5/16"-18 x 5/8" hex. washer hd.
71/	U	34807-S8(X66)	1			Washer-3/8"
		6626				GASKET - OIL PUMP INLET TUBE
65/		C0DZ 6626-A	1	1		.010" thick
69/		C9DZ 6626-A			1	
		6A664				HOSE - CRANKCASE VENTILATION Also refer to Basic No. 6853 Intake Manifold Type
		C9PZ 6A664-A (KCV-1)	AR	AR	AR	15/32" I.D. - 25 ft. long-cut as required
		C9PZ 6A664-B (KCV-2)	AR	AR	AR	5/8" I.D. - 25 ft. long-cut as required
69	B, F, X	BPA 18572-A	AR	AR	AR	Clamp-hose
						Rocker Arm Cover Type
65/68	B, F, X, U "Before Chg./L9"	★C3DE 6A664-B	1	1		26 1/4" long-attach 6A666 to manifold-cut from B4C 4090-A bulk hose
69	U		1			
68/71	B, F, X "Chg./L9/"	C8DZ 6A664-B	1	1		27" long-attach 6A664 to manifold
70	U		1			
69/70	B, F, X	C9DZ 6A664-A	1	1	1	1 1/2" one end 3/8" other end-27 1/2" long
70	P		1	1	1	
71/	B, F, P, U	D1DZ 6A664-A	1	1	1	1 1/2" I.D. - 3/8" I.D. other end-15 1/2" long- attach P.C.V. valve to carb. spacer
65/70		379001-S7(II-191D)	1	1		Nipple-3/8"-attach 6A664 to manifold
69		97329-S35(E6)	1	1	1	Clamp-hose (attach. hose to valve) & (attach. hose to carb.)
65/		C2DZ 6666-A	1	1		PLUG - OIL PUMP RELIEF VALVE-in oil pump body-cup type-.558" & .572" O.D.-.20" height
69/		C5AZ 6666-A			1	
65/70		72070-S(N46)	1	1		Cotter pin-3/32" x 1 1/2"
		6A666				VALVE - POSITIVE CRANKCASE VENTILATION- (P.C.V.)
65/67	B, F, X, U(R/A cover em/re)-	D0DZ 6A666-A	1	1		
68	B, F, X, U(Imco)	(EV-49)	1	1		
70/			1	1	1	
68	B, F, X, U(T/E)	C8OZ 6A666-A		1		
69	F, X, U(S/T)	(EV-43)	1	1		
69	B, F, F-Economy 1/B				1	
69	X(A/T)	C9DZ 6A666-A	1			
69	F, X(A/T)	(EV-47)		1		
65/69	X	★375540-S2	1			Clip (valve to tube)-5/16" x 1 1/2" tube-use w/elect. w/s wiper & emission reduction-dlr. improvise
65/		B8A 6670-A	1	1		SPRING - OIL PUMP RELIEF VALVE - rotor type pump-14 coils-approx. 1.89" free length- .468" O.D.
69/		C5AZ 6670-A			1	
65/		B9AE 6674-B	1	1		PLUNGER - OIL PUMP RELIEF VALVE - 1.81" long-.4933" O.D. for .77"-.18" O.D. for 1"
69/		C5AZ 6674-A			1	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/	B, F, P, X	C4DZ 6675-B	1	1		PAN ASSY. - OIL - includes (1) C2DZ 6750-B & (1) C2DZ 6754-A
66/70	U	C6TZ 6675-A	1			7 quart capacity
71/	U	D1TZ 6675-D	1			#D1TE 6675-AB
69/		C9DZ 6675-A			1	
65/68		20324-S8(B41)	18			Screw (oil pan to cyl. block)-1/4"-20 x 5/8"
		34805-S8(X62)	18			Lockwasher-1/4"
65/68		20346-S7(B50)	2			Bolt (pan to block)-5/16"-18 x 3/4"
		34806-S7(X64)	2			Lockwasher-5/16"
65/68		20346-S7(B50)	2			Bolt (pan to cyl. front cover)-5/16"-18 x 3 1/4"
		34806-S7(X64)	2			Lockwasher-5/16"
69/		373071-S7(BB554M)	AR	AR	AR	Screw & lockwasher (oil pan to cyl. block & oil pan to front cover)-1/4"-20 x 5/8"
69/		42847-S7-8(U14)	2	2	2	Screw & washer (oil pan to block & oil pan to cover)-5/16"-18 x 1"
65/		C0DE 6700-A	1	1		SEAL - CYLINDER FRONT COVER OIL - 2.378" O.D. - 1.750" I.D. - .437" thick
69/		C3AZ 6700-A			1	
65/		C9OZ 6701-A	2	2	2	PACKING - CRANKSHAFT REAR - rope type
65/		C9AZ 6701-B	2	2		Split lip type
69/		◇C9ZZ 6701-A			2	Split lip type
		6710-11				GASKET - OIL PAN-supplied only in 6781 gskt. set
		6722-23				SEAL - OIL PAN-supplied only in 6781 gasket set
65/		*D1AZ 6730-A R/B D1AZ 6730-B (11-74)	1	1	1	PLUG - OIL PAN DRAIN
65/	B, F, P, X, U	*C1AZ 6731-A (FL-1)	1	1	1	ELEMENT ASSY. - OIL FILTER-"Spin-on" one piece filter-has 3/4"-16 female threads
65/	B, F, P, U, X	*CC1AZ 6731-A (FL-1)	1	1	1	"Spin-on" type
65/68	B(Taxi)	†C1TZ 6731-D (FL-147)	1	1		Used with cartridge type oil filter
Consists of						
	1-C0TE 6744-A	Element	2-EAA	6746-A	Gasket	
	or		1-EAA	6749-A	Gasket	
	1-D4PJ 6744-AA	Element	1-EAA	6838-A	Gasket	
65/		C2OZ 6734-A	1	1	1	GASKET - OIL PAN DRAIN PLUG - #nylon-13/16" O.D. - 1/2" I.D. - 5/64" thick
65/68	B(Taxi)	B2A 6741-A	1	1		BOLT and VALVE ASSY. - OIL FILTER CENTER-used with cartridge type oil filter
65/68	B(Taxi)	*EAA 6746-A	1	1		GASKET - OIL FILTER ELEMENT - 1.24" O.D. - .72" I.D. - .12" thick-supplied in 6731 kit-used with cartridge type oil filter
65/68	B(Taxi)	EAA 6749-A	2	2		GASKET - OIL FILTER CENTER BOLT TO ADAPTER & COVER-1.18" O.D. - .77" I.D. - .06" thick-used with cartridge type oil filter
65/	B, F, P, X	6750 C2DZ 6750-B	1	1		INDICATOR - OIL LEVEL 10.42" shield to full 11.14" shield to add 12.00" shield to end
66/70	U	C6TZ 6750-B	1			14.39" shield to full 14.81 shield to add 15.81" shield to end
71/	U	D1TZ 6750-A	1			14.33" shield to full 14.98" shield to add mark 15.81" shield to end
69/72	" Before 8/27/71"	*C9DZ 6750-A R/B D2DZ 6750-A (10-74)			1	12.04" shield to full 12.74" shield to add 1 mark 13.36" shield to add 2 mark 14.28" shield to end
72	" From 8/27/71"	D2DZ 6750-A			1	12.36" shield to full 13.17" shield to add 1 mark 13.81" shield to add 2 mark 14.73" shield to end

† When used on 170 Engine use C2OZ 6838-A in place of EAA 6838-A

Identification marking

* U.S. only

• Canada only

◇ When using C9ZZ 6701-A remove pin from M, B cap

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			170	200	250	
65/68	B(Taxi)	B4A 6751-B	1			DIAPHRAGM - OIL FILTER-4.68" O. D. -used with cartridge type oil filter
65/	B, F, P, X	C2DZ 6754-A	1	1	1	TUBE ASSY. - OIL LEVEL INDICATOR-3.74" long-must be used with C4DZ 6675-A, pan & C2DZ 6750-A indicator
66/	U	C6TZ 6754-B	1			Includes bracket
65/67		C0DE 6758-A	1	1		TUBE - CRANKCASE VENTILATION- non-emission reduction-attaches to cyl. block-approx. 13"-includes bracket- Also refer to Basic No's 6A664 & 6853
		6766				CAP ASSY. - OIL FILLER and BREATHER
65		B6AZ 6766-A	1	1		Emission or non-emission
65/70		C4TZ 6766-B (EC-31)	1	1	1	Closed system rocker arm cover type- or thermactor type-#Black-optional with C5ZZ 6766-D
		C5ZZ 6766-D (EC-10)	1	1	1	Closed system rocker arm cover type-#Chrome-optional with C4TZ 6766-B
71/		D1AZ 6766-A (EC-8-A)	1	1	1	#Black
72		D1ZZ 6766-A (EC-508)	1	1	1	# Chrome-optional w/specified black cap
		6767				ELBOW - CRANKCASE VENTILATION HOSE
71/		C8AZ 6767-A	1	1	1	90° - 5/8" - Filler cap to hose - Also refer to Basic No. 9600
		6781				GASKET SET - OIL PAN
65/		D0DZ 6781-A	1	1		
Consists of						
1-C9DE 6710-C Gasket (R. H.)			1-D3DE 6722-AA Seal (front)			
1-C9DE 6711-C Gasket (L. H.)			1-D3DE 6723-AA Seal (rear)			
1-C2OZ 6734-A Gasket (oil drain plug)						
69/		D0DZ 6781-B			1	
Consists of						
1-C9DE 6710-D Gasket (R. H.)			2-D3DE 6722-BA Seal (front & rear)			
1-C9DE 6711-D Gasket (L. H.)			1-C2OZ 6734-A Gasket (oil drain plug)			
66/	U	C6TZ 6823-A	1			FLANGE - OIL PAN REINFORCEMENT - Front-(2) holes 5" apart
		C6TZ 6823-B	1			Rear-(2) holes 5 3/4" apart
65/68	B, Taxi	★C2OZ 6838-A	1	1		GASKET - OIL FILTER MOUNTING-3.78" O. D. - 3.42" I. D. -used with cartridge type oil filter
65/68	B, Taxi	C2OZ 6840-A	1	1		GASKET - OIL FILTER ADAPTER-3.02" O. D. - .78" I. D. -.06" thick-used with cartridge type oil filter
		6853		★	★	HOSE - CRANKCASE VENTILATION - Cut to fit from bulk hose 4090
						Also refer to Group 6A664
65/68	B, Taxi	B2A 6889-A	1	1		SPRING - OIL FILTER ELEMENT RETAINING - approx. .94" free length-4 active coils-used with cartridge type oil filter
65/68	B, Taxi	EAA 6890-C	1			INSERT - OIL FILTER MOUNTING BOLT-1 1/4" hex. -1 1/16"-12 external thread-3/4"-16 internal thread-5/8" overall length-steel-undercut bottom flange-used with cartridge type oil filter-att. bolt & valve assy. to cylinder block
65/68	B, Taxi	C2OZ 6890-B	1	1		1.25" hex. -3/4"-16 external & internal threads-overall length 1.76"-used with cartridge type oil filter-att. bolt & valve assy. to cyl. block
65/70/	B, F, X, U P	B8A 6890-A	1	1	1	3/4"-16 external threads-1/2" I. D. -1.30" long-use with "Spin-On" type filter-att. filter to adaptor or cylinder block
		6A892				RETAINER - CRANKCASE VENTILATION - grommet-also refer to Group 9600
65/71/		C8SZ 6A892-A	1	1	1	Holds 6A666 in 6582-1-7/16" O. D. -23/32" I. D.
		C8AZ 6A892-A	1	1	1	Holds elbow to filler cap-1 7/16" O. D. -1" I. D.
65/68	B, Taxi	B2A 6898-A	1	1		RETAINER - OIL FILTER ELEMENT-1 1/4" O. D. -49/64" I. D.-used with cartridge type oil filter

Identification marking

FORD CAR PARTS

SECTION 60.3
6 CYL. - 240

1

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6007	★			ENGINE ASSEMBLY-service details
YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
65/67		6008				GASKET SET - COMPLETE OVERHAUL
		C5AZ 6008-B	1			
	Consists of					
	1-C8AZ 6020-A	Gasket (front cover)		1-C9AE 6711-A	Gasket (oil pan-L. H.)	
	1-D2AZ 6051-A	Gasket (cyl. head)		1-C5AE 6722-A	Seal (oil pan-front)	
	1-C5AZ 6521-A	Gasket (valve cover)		1-C5AE 6723-A	Seal (oil pan-rear)	
	6-B9A 6570-A	Grommet (valve cover)		1-C2OZ 6734-A	Gasket (oil pan drain plug)	
	12-C5AZ 6571-D	Seal (valve stem)		1-C9AZ 8255-A	Gasket (water connection)	
	1-C6AZ 6584-A	Gasket (rocker cover)		1-C5AZ 8507-A	Gasket (water pump)	
	1-C5AZ 6626-B	Gasket (oil pump inlet)		1-A8TZ 9417-A	Gasket (fuel pump)	
	1-C3AZ 6700-A	Seal (crankshaft-front)		1-C5AZ 9448-B	Gasket (manifold)	
	1-C5AZ 6701-B	Seal (crankshaft-rear)		1-C5AZ 9461-A	Gasket (intake manifold)	
	1-C9AE 6710-A	Gasket (oil pan-R. H.)				
68/70	Taxi, P/C-"Before Chg./L18"	C8TZ 6008-A	1			
	Consists of					
	1-C8AZ 6020-A	Gasket (front cover)		1-C9AE 6710-A	Gasket (oil pan-R. H.)	
	1-D2AZ 6051-A	Gasket (cylinder head)		1-C9AE 6711-A	Gasket (oil pan-L. H.)	
	1-C5AZ 6521-A	Gasket (valve cover)		1-C5AE 6722-A	Seal (oil pan-front)	
	6-C5AZ 6571-D	Seal (valve stem-intake)		1-C5AE 6723-A	Seal (oil pan-rear)	
	6-C5TZ 6571-B	Seal (valve stem-exhaust)		1-C2OZ 6734-A	Gasket (oil pan drain plug)	
	1-D0AZ 6584-D	Gasket (rocker cover)		1-C9AZ 8255-A	Gasket (water connection)	
	1-C5AZ 6626-B	Gasket (oil pump inlet)		1-C5AZ 8507-A	Gasket (water pump)	
	1-C3AZ 6700-A	Seal (crankshaft-front)		1-A8TZ 9417-A	Gasket (fuel pump)	
	1-C5AZ 6701-B	Seal (crankshaft-rear)		1-C5AZ 9461-A	Gasket (intake manifold)	
68/70/	A	C8AZ 6008-A	1			
	Taxi, P/C-"Chg./L18"		1			
	Consists of					
	1-C5AZ 6020-B	Gasket (front cover)		1-C9AE 6710-A	Gasket (oil pan-R. H.)	
	1-D2AZ 6051-A	Gasket (cylinder head)		1-C9AE 6711-A	Gasket (oil pan-L. H.)	
	1-C5AZ 6521-A	Gasket (valve cover)		1-C5AE 6722-A	Seal (oil pan-front)	
	12-C5AZ 6571-D	Seal (valve stem-intake)		1-C5AE 6723-A	Seal (oil pan-rear)	
	1-D0AZ 6584-D	Gasket (rocker cover)		1-C2OZ 6734-A	Gasket (oil pan drain plug)	
	1-C5AZ 6626-B	Gasket (oil pump inlet)		1-C9AZ 8255-A	Gasket (water connection)	
	1-C3AZ 6700-A	Seal (crankshaft-front)		1-C5AZ 8507-A	Gasket (water pump)	
	1-C5AZ 6701-B	Seal (crankshaft-rear)		1-A8TZ 9417-A	Gasket (fuel pump)	
				1-C5AZ 9461-A	Gasket (intake manifold)	
65/		C2OZ 6A008-A	2			DOWEL - CYLINDER HEAD TO CYLINDER BLOCK-.676" O. D. -.55" I. D. -.44" height-split
		6D008				HEATER KIT - CYLINDER BLOCK
67/71	A	C7TE 6D008-A	1			
72	A	CD0TZ 6D008-A	1			600 watt
		6009				CYLINDER ASSY. - includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated
65/69	A	"Before 9/15/68"				
65/	Taxi, P/C	D2AZ 6009-B	1			
69/	A	"From 9/15/68"				
		D3TZ 6009-A	1			
		6010				♦ BLOCK ASSY. - CYLINDER
65/		ΔD3TZ 6010-A	1			
65/71		73249-S(N88)	2			Dowel (cyl. block to clutch housing)-3/8" x 9/16"

Δ When used as replacement for 1966/67 units before Chg./L8, No.5 bearing cap with oil pump pickup tube supports stud must be changed from right to left side.

♦ 6015 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6010 assembly.

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6B018				WIRE ASSY. - BLOCK HEATER
65/66		CC1TE 6B018-E	1			
67		C7TE 6B018-A	1			2-conductor-use w/3 terminal heater - (dummy ground)
67		C7TE 6B018-C	1			3-conductor-use w/3 terminal heater - (green ground connector)
71		D1AB 6B018-AA	1or2			
72		D2AZ 6B018-A	1			74" long - use w/6A051 heater assy.
65/		D2AZ 6019-A	1			COVER ASSY. - CYLINDER FRONT
65/70		376256-S(BB545A)	6			Bolt (front cover to block)-5/16"-18 x 1"
69/		382781-S(BB544W)	6			Bolt (cover to block)-5/16"-18 x 7/8"
		6020				GASKET - CYLINDER FRONT COVER
65/		C8AZ 6020-A	1			.030" thick
		6023				POINTER - TIMING - Also refer to Group 3A634-5
67		C6TZ 6023-A	1			
68/71		C6TZ 6023-B	1			
72		D2TZ 6023-D	1			Steel
		6026				PLUG - ENGINE
65/67		C5AZ 6026-E	5			Std. 1.64" O.D. -cup shape-to plug side water jacket holes in block
		C5AZ 6026-B	AR			.090" O/S
65/67		C5AZ 6026-G	2			Std. 2 5/64" O.D. -(1) used at rear of cyl. head-(1) used at rear of cylinder block
		C5AZ 6026-D	AR			.060" O/S
65/		C9AZ 6026-A	1			Std. -.259" O.D. -plug dist. oil access hole in cyl. block
		C9AZ 6026-B	1			.060" O/S
68/		C5AZ 6026-E	5			Std. 1 5/8" O.D. -cup plug to plug clean out holes in block
		C5AZ 6026-F	AR			.060" O/S
68/		C5AZ 6026-G	AR			2 5/64" O.D. -(1) used at rear of cylinder head-(1) used at rear of cylinder block
		C5AZ 6026-H	AR			.060" O/S
69/		87837-S(P15)	2			Plug (cyl. block main oil lines)-1/4"-18 x 27/64" pipe-steel
65/71		87651-S (P12A)	1			Pipe plug (drain hole)-1/4"-18
72		376301-S(PP67A)	1			Cup plug (air brake hole in cyl.block)-1/2" dia.
65/		87710-S(P16)	2			Pipe plug (front & rear main oil gallery)-3/8"-18
65/		*371485-S	4			Pipe plug (plug holes in top of coil head)-3/4"-14-hex. socket head

6028,6029 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT BRACKET		*MOUNTING BRACKET		*INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
65/68		240	C5AZ 6028-A	C5AZ 6029-A			C5AZ 6038-A	C5AZ 6038-A
69/		240	C9AZ 6028-A	C9AZ 6029-A			C5AZ 6038-A	C5AZ 6038-A

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
65/68		34671-S8(M67)	2			Nut-7/16"-14
65/		373403-S8(MM173J)	2			Nut (insulator to bracket)-3/8"-16 hex. lock
65/68		20936-S8(B130C)	2			Bolt (attach R. H. insulator to spacer)-9/16-12 x 1"
69/		382636-S100 (MM313)	2			Nut (insulator to bracket)-1/2"-13
69/		373112-S7(XX304A)	2			Washer-lock-7/16"
69/		376275-S7-8 (BB181A)	2			Bolt (insulator & spacer to eng.)-7/16"-14 x 2 9/16"
69/		354150-S8(BB177)	1			Bolt (insulator to spacer)-7/16"-14 x 1 3/4"
69/		357450-S(BB172)	4			Bolt (att.brackets (R.H. & L.H.) to frame & insulator to eng.)-7/16"-14 x 7/8" hex.
69/		20368-S8(B79)	4			Bolt (att.brackets lwr.(R.H. & L.H.) to side member)-3/8"-16 x 7/8" hex.
72		379719-S2(MM192PC)	1			Nut-3/8"-16 (6028 & 6029 to side member)
		6038				INSULATOR - FRONT SUPPORT - refer to Front Motor Mount Chart Group 6028

* (1) Required unless otherwise noted

FORD CAR PARTS

SECTION 60.3
6 CYL. - 240

3

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
65		★C5AA 6046-A	2			BRACKET - ENGINE FRONT SUPPORT INSULATOR-serviced in 6038 assy. - Also refer to Front Engine Mount Chart (Basic No.6028)
		6049				◇ HEAD - CYLINDER
65		D2AZ 6049-B	1			Has 3/8" tapped hole for Temp. Sending Unit
66/71		D2AZ 6049-C	1			Include (6) C6AZ 6052-A plugs
72		D2AZ 6049-A	1			
65/		D2AZ 6051-A	1			GASKET - CYLINDER HEAD - asbestos & steel
72		D2AZ 6A051-C	1			HEATER ASSY. - BLOCK - use with 6B018 Wire Assy.
66/71		C6AZ 6052-A	6			PLUG - CYLINDER HEAD EXHAUST AIR SUPPLY (to plug holes when T/E not used) - 1/2"-20 x 1 11/32"
		6054				RETAINER - REAR SUPPORT
65/68	M/T, O/D and C4	C5AZ 6054-A	1			
65/67	C/M	C5AZ 6054-B	1			
68	C/M	C8AZ 6054-A	1			7 13/32" long
69/71	"Before 7/1/71"	C9AZ 6054-A	1			
71	M/T "From 7/1/71"		1			
71/	A/T "From 7/1/71"	D2AZ 6054-A	1			
65/		20411-S7(B184)	2			Bolt (rear suppt. to frame)-7/16"-20 x 1 1/8" hex. hd.
		34671-S8(M67)	2			Nut-7/16"-20
		356590-S(XX171)	2			Washer-flat-.47" I.D. -.78" O.D. -.10" thick-steel
		357625-S7-8(XX304)	2			Lockwasher-7/16"
65/		C5AZ 6A059-A	1			SPACER - FRONT MOUNTING BRACKET - triangle type-used on R. H. side only
		6065				BOLT - CYLINDER HEAD
65/		C2OZ 6065-B	14			7/16"-14 x 3.91"
		6068				INSULATOR ASSY. - REAR SUPPORT
65/68	C/M	C9AZ 6068-E	1			
65/68	M/T and C4	C8AZ 6068-B	1			
69/71	(C4)	D2AZ 6068-C	1			
69/71	M/T		1			
69/	C/M	D2AZ 6068-A	1			
65/		20411-S7(B184)	2			Bolt (rear suppt. to frame)-7/16"-20 x 1 1/8" hex. hd.
		34671-S8(M67)	2			Nut-7/16"-20
		356590-S(XX171)	2			Washer-flat-.47" I.D. -.78" O.D. -.10" thick-steel
		357625-S7-8(XX304)	2			Lockwasher-7/16"
69/		373403-S8	1			Nut (rear suppt. to frame)-3/8"-16
		(MM173J)				
		6079				GASKET SET - VALVE GRIND
65/67		C5AZ 6079-B	1			
68/	(Exc. P/C,Taxi)		1			
70/	Taxi,P/C-"Chg./L18/"		1			
	Consists of					
	1-C5AZ 6051-B	Gasket (cyl. head)			1-C6AZ 6584-A	Gasket (rocker cover)
	1-C5AZ 6521-A	Gasket (valve cover)			1-C5AZ 8255-A	Gasket (water connection)
	6-B9A 6570-A	Grommet (valve cover)			1-C5AZ 9448-B	Gasket (manifold)
	12-C5AZ 6571-A	Seal (valve stem)			1-C5AZ 9461-A	Gasket (intake manifold)
68/70	Taxi, P/C-"Before Chg./L18"	C5TZ 6079-B	1			
	Consists of					
	1-D2AZ 6051-A	Gasket (cylinder head)			1-C6AZ 6584-A	Gasket (rocker cover)
	1-C5AZ 6521-A	Gasket (valve cover)			1-C9AZ 8255-A	Gasket (water connection)
	6-B9A 6570-A	Grommet (valve cover)			1-C5AZ 9448-B	Gasket (manifold)
	6-C5AZ 6571-D	Seal (valve stem-intake)			1-C5AZ 9461-A	Gasket (intake manifold)
	6-C5TZ 6571-B	Seal (valve stem-exhaust)				
68/71		CC5AF 6B080-A	1			"O" RING - CYL. BLOCK HEATER - use with C7TE 6D008-A heater kit

◇ 6090 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6049 assembly.

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			

♦ 6108 PISTON ASSEMBLY - CHART

In the Standard column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	RINGS	INCL.	QTY.	PART NUMBER					
						STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65/69	"Before Chg./L16"	240	3	Δ	6	C9OZ 6108-N(R) C9OZ 6108-R(B)	C8OZ 6108-S	C9OZ 6108-T	C9OZ 6108-U	C9OZ 6108-V	
69/	"From Chg./L16/"	240	3	Δ	6	C8AZ 6108-C(R) C8AZ 6108-D(B)	C8AZ 6108-E	C8AZ 6108-F	C8AZ 6108-G	C8AZ 6108-H	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6135				PIN - PISTON
65/69	"Before Chg./L16"	B2AZ 6135-A	6			#Green-.9121" O.D. -.600" I.D. -3.023" long
69/	"From Chg./L16/"	B8A 6135-AA	6			.9752" O.D. -3.165" long
		B8A 6135-AB	AR			.001" O/S

6148 RING SET - PISTON PARTIAL - CHART - consists of the necessary rings to re-ring (2) pistons

YEAR	MODEL	C.I.D.	RINGS	TYPE	PART NUMBER					
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S	
65/		240	3	Hi Lo	C3AZ 6148-F	C3AZ 6148-G	C3AZ 6148-H	C3AZ 6148-J		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6200				ROD ASSY. - CONNECTING
65/69	"Before Chg./L16"	C5AZ 6200-A	6			
69/	"From Chg./L16/"	C8AZ 6200-B	6			

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER							
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S	
65/69	Before 9/15/68	240	6	6	C5AZ 6211-R	C5AZ 6211-S	C5AZ 6211-T	C5AZ 6211-U	C5AZ 6211-MC	C5AZ 6211-Y		
69/	From 9/15/68	240	6	6	C5AZ 6211-R	C5AZ 6211-S	C5AZ 6211-T	C5AZ 6211-U	C5AZ 6211-V	C5AZ 6211-Y		
65/					C9AZ 6212-B		12					NUT - CONNECTING ROD-3/8"-24-.557" hex. chamfered
69/							1					Used to att.exh.manifold to int. manifold
65/					C4OZ 6214-B		12					BOLT - CONNECTING ROD
					6250							CAMSHAFT - Less gear
65/					C5TZ 6250-A		1					#VP w/white stripe or #VP
65/					★74148-S		1					Key (att.gear to shaft)-No.9
65/					C5AZ 6256-A		1					GEAR - CAMSHAFT - 58 teeth

6262 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65/		240	Standard .015" U/S	C5AZ 6262-A C5AZ 6262-B	C5AZ 6262-A C5AZ 6262-B		C5AZ 6262-A C5AZ 6262-B	C5AZ 6262-A C5AZ 6262-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
65/		C5AZ 6265-A	1			SPACER - CAMSHAFT GEAR OR SPROCKET - 1 1/2" O.D. -1 1/4" I.D.
		6266				PLUG - CAMSHAFT REAR BEARING
65/		C5AZ 6266-A	1			Standard-2.199" O.D.
		C5AZ 6266-B	1			.060" O/S
65/		C5AZ 6269-A	1			PLATE - CAMSHAFT THRUST
65/		20346-S8(B50)	2			Bolt (plate to cyl. block)-5/16"-18 x 3/4"

Identification marking

Δ Includes piston pin

♦ 6110 is a casting number and generally cannot be cross-referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6108 assembly.

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6303				CRANKSHAFT ASSY.
65/		★C5AZ 6303-D R/B D2AZ 6303-D (10-74)	1			# IL or ILA - cast iron
		6306				GEAR - CRANKSHAFT
65/		C5AZ 6306-B	1			29 teeth
65/		379153-S(LL11A)	1			Woodruff key (gear to c/shaft)-3/16 x 1 23/32" x 19/54"
		6310				SLINGER - CRANKSHAFT OIL
65/67	"Before 10/1/66"	▲C5AZ 6310-A	1			3 19/64" O. D. -1 3/8" I. D.
		6312				PULLEY ASSY. - CRANKSHAFT- Also refer to Basic No. 6A312
65/	A, Taxi, P/C	C5AZ 6312-G	1			# C8AE 6316-B-single sheave-6 11/16" diameter- 1 7/8" long-uses 3/8" belt
67	A, Taxi, P/C	D4TZ 6312-A	1			#D4TE 6316-BA-triple sheave-replaces pulley
68	A, Taxi, P/C(S/T)		1			I.D. C8TE 6316-D
72	A, Taxi, P/C		1			
65/	A, Taxi, P/C	377850-S(BB273A)	1			Bolt (pulley to c/shaft)-5/8"-18 x 2"
		6A312				PULLEY ASSY. - CRANKSHAFT - OUTER - Also refer to Basic No. 6312
65/67	A, Taxi, P/C(P/S)	C5AZ 6A312-A	1			#C5AE-A-single sheave uses 3/8" belt-6 45/64" pulley diameter
68	A, Taxi, P/C(w/P/S & std. alt.)		1			
65/67	A, Taxi, P/C(A/C, T/E)-with or w/out P/S) "Before 6/1/66"	C5AZ 6A312-B	1			#C5AE 6A359-B-double sheave-uses 1/2" outer belt & 3/8" inner belt-7" outer pulley dia. - 6 45/64" inner pulley dia. 1 13/32" long
69	A, Taxi, P/C(hang-on A/C)		1			
67/68	A, Taxi, P/C (A/C, T/E)-with or w/o P/S) "From 6/1/66"	C7AZ 6A312-C	1			Single sheave-7 1/32" dia. -53/64" long-uses 1/2" belt
66/67	A, Taxi, P/C(exc. A/C) - "Before 6/1/67"	C6AZ 6A312-B	1			#C6AE 6A312-A-double sheave-6 23/32" pulley dia. 1 13/32" long-uses (1) 3/8" belt & (1)1/2" belt
68/70	A, Taxi, P/C(w/55 amp. alt. w/or w/o P/S)- "Before 12/1/69"		1			
69/	A, Taxi, P/C-w/P/S w/o H/D alt.	C6TZ 6A312-A	1			#C6TE 6A312-A-single sheave-6 45/64" dia. -uses 1/2" belt
67	A, Taxi, P/C(exc. A/C) - "From 6/1/67"		1			
70	A, Taxi, P/C(w/55 amp. alt. w/or w/o P/S)- "From 12/1/69"		1			
72	A-w/hang-on A/C	D2AZ 6A312-D	1			Single sheave
68	A(dual sheave alt.)	42998-S8(B252A)	1			Bolt (outer pulley to crankshaft)-3/8"-16 x 1"

6333, 6337 & 6342 BEARING-CRANKSHAFT MAIN-CHART

6 CYLINDER ENGINES 7 MAIN BEARINGS

YEAR	MODEL	C.I.D.	SIZE	U P P E R	L O W E R	FRONT (1)	FRONT INTERMEDIATE		CENTER (4)	REAR INTERMEDIATE		REAR (7)
							(2)	(3)		(5)	(6)	
65/ 66	Before Chg/L4	240	Std. .001" .002" .010" .020" .030"	x		D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	C5TZ 6337-P C5TZ 6337-R ★C5TZ 6337-S C5TZ 6337-T C5TZ 6337-U C5TZ 6337-V	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H	D0TZ 6333-C D0TZ 6333-D D0TZ 6333-E D0TZ 6333-F D0TZ 6333-G D0TZ 6333-H
65/66	Before Chg/L4	240	Std. .001" .002" .010" .020" .030"	x		C5TZ 6333-AA C5TZ 6333-AB C5TZ 6333-AC C5TZ 6333-AD C5TZ 6333-AE C5TZ 6333-AF	C5TZ 6333-AA C5TZ 6333-AB C5TZ 6333-AC C5TZ 6333-AD C5TZ 6333-AE C5TZ 6333-AF	C5TZ 6333-AA C5TZ 6333-AB C5TZ 6333-AC C5TZ 6333-AD C5TZ 6333-AE C5TZ 6333-AF	C5TZ 6333-AA C5TZ 6333-AB ★C5TZ 6337-AC C5TZ 6337-AD C5TZ 6337-AE C5TZ 6337-AF	C5TZ 6333-AA C5TZ 6333-AB C5TZ 6333-AC C5TZ 6333-AD C5TZ 6333-AE C5TZ 6333-AF	C5TZ 6333-AA C5TZ 6333-AB C5TZ 6333-AC C5TZ 6333-AD C5TZ 6333-AE C5TZ 6333-AF	C5TZ 6333-AA C5TZ 6333-AB C5TZ 6333-AC C5TZ 6333-AD C5TZ 6333-AE C5TZ 6333-AF

Identification marking

May, 1975

▲ Not used "From 10/1/66"

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6333.6337 & 6342 BEARING-CRANKSHAFT MAIN-CHART - continued

**6 CYLINDER ENGINES
7 MAIN BEARINGS**

YEAR	MODEL	C.I.D.	SIZE	UPPER LOWER	FRONT (1)	FRONT INTERMEDIATE		CENTER (4)	REAR INTERMEDIATE		REAR (7)
						(2)	(3)		(5)	(6)	
66/69	"Chg./L4"	240	Std.	x	D0TZ 6333-C	D0TZ 6333-C	D0TZ 6333-C	D0TZ 6333-C	D0TZ 6337-C	D0TZ 6333-C	D0TZ 6333-C
			.001"		D0TZ 6333-D	D0TZ 6333-D	D0TZ 6333-D	D0TZ 6333-D	D0TZ 6337-D	D0TZ 6333-D	D0TZ 6333-D
			.002"		D0TZ 6333-E	D0TZ 6333-E	D0TZ 6333-E	D0TZ 6333-E	C6AZ 6337-B	D0TZ 6333-E	D0TZ 6333-E
			.010"		D0TZ 6333-F	D0TZ 6333-F	D0TZ 6333-F	D0TZ 6333-F	D0TZ 6337-F	D0TZ 6333-F	D0TZ 6333-F
			.020"		D0TZ 6333-G	D0TZ 6333-G	D0TZ 6333-G	D0TZ 6333-G	D0TZ 6337-G	D0TZ 6333-G	D0TZ 6333-G
			.030"		D0TZ 6333-H	D0TZ 6333-H	D0TZ 6333-H	D0TZ 6333-H	D0TZ 6337-H	D0TZ 6333-H	D0TZ 6333-H
70/		240	Std.	x	D0TZ 6333-C	D0TZ 6333-C	D0TZ 6333-C	D0TZ 6333-C	D0TZ 6337-C	D0TZ 6333-C	D0TZ 6333-C
			.001"		D0TZ 6333-D	D0TZ 6333-D	D0TZ 6333-D	D0TZ 6333-D	D0TZ 6337-D	D0TZ 6333-D	D0TZ 6333-D
			.002"		D0TZ 6333-E	D0TZ 6333-E	D0TZ 6333-E	D0TZ 6333-E	D0TZ 6337-E	D0TZ 6333-E	D0TZ 6333-E
			.010"		D0TZ 6333-F	D0TZ 6333-F	D0TZ 6333-F	D0TZ 6333-F	D0TZ 6337-F	D0TZ 6333-F	D0TZ 6333-F
			.020"		D0TZ 6333-G	D0TZ 6333-G	D0TZ 6333-G	D0TZ 6333-G	D0TZ 6337-G	D0TZ 6333-G	D0TZ 6333-G
			.030"		D0TZ 6333-H	D0TZ 6333-H	D0TZ 6333-H	D0TZ 6333-H	D0TZ 6337-H	D0TZ 6333-H	D0TZ 6333-H
66/	"Chg./L4"	240	Std.	x	C5TZ 6333-AA	C5TZ 6333-AA	C5TZ 6333-AA	C5TZ 6333-AA	C6AZ 6337-G	C5TZ 6333-AA	C5TZ 6333-AA
			.001"		C5TZ 6333-AB	C5TZ 6333-AB	C5TZ 6333-AB	C5TZ 6333-AB	C6AZ 6337-M	C5TZ 6333-AB	C5TZ 6333-AB
			.002"		C5TZ 6333-AC	C5TZ 6333-AC	C5TZ 6333-AC	C5TZ 6333-AC	C6AZ 6337-H	C5TZ 6333-AC	C5TZ 6333-AC
			.010"		C5TZ 6333-AD	C5TZ 6333-AD	C5TZ 6333-AD	C5TZ 6333-AD	C6AZ 6337-J	C5TZ 6333-AD	C5TZ 6333-AD
			.020"		C5TZ 6333-AE	C5TZ 6333-AE	C5TZ 6333-AE	C5TZ 6333-AE	C6AZ 6337-K	C5TZ 6333-AE	C5TZ 6333-AE
			.030"		C5TZ 6333-AF	C5TZ 6333-AF	C5TZ 6333-AF	C5TZ 6333-AF	C6AZ 6337-L	C5TZ 6333-AF	C5TZ 6333-AF

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6337				Refer to Main Bearing Chart Group 6333
		6345				BOLT - CRANKSHAFT MAIN BEARING CAP
65/		C2OZ 6345-A	14			
		6A366				PLATE - FLYWHEEL REINFORCING
65/		C2OZ 6A366-A	1			3 27/32" O.D. - 2 1/8" I.D. - .075" thick - (6) 29/64" holes
		6375				FLYWHEEL ASSY.
65/	A/T	C5TZ 6375-T	1			164 tooth ring gear - (4) converter attaching holes on 11 7/16" bolt circle
65/71	M/T and 9 1/2" clutch	C5AZ 6375-R	1			#C7AE-B, #C6AE-C-164 tooth ring gear - (6) 5/16"-18 pressure plate attaching holes on 10 3/4" bolt circle
65/71	M/T and 11" clutch	C5TZ 6375-N	1			#C7AE-C-164 tooth ring gear (6) 5/16"-18 pressure plate attaching holes on 12 3/8" bolt circle
65/		C3OZ 6378-A	1			WASHER - CRANKSHAFT PULLEY RETAINING- 1 3/4" O.D. - 21/32" I.D. - 1/8" thick
		6379				BOLT - FLYWHEEL TO CRANKSHAFT
65/	C4	C3AZ 6379-B	6			7/16"-20 x 13/16"-used w/ 6A366 plate
72	C4	D2AZ 6379-B	6			7/16"-20 x 3/4"-used w/o 6A366 plate
65/71	M/T	B8AZ 6379-A	6			7/16"-20 x 15/16"
		6384				GEAR - FLYWHEEL RING
65/71		C5AZ 6384-D	1			164 teeth - replaces 168 tooth gear
		6392				HOUSING ASSY. - FLYWHEEL
65/68	M/T	C5AZ 6392-D	1			#C5AA 6394-B-6 engine mounting holes-use lever #C8AA 7515-B
69/71	M/T	C9AZ 6392-A	1			#C9AA 6394-A
65/71		20546-S8(B114)	AR			Bolt (flywheel housing to cyl. block)- 7/16"-14 x 2 1/2"
		34808-S8(X67)	AR			Lockwasher-7/16"
69/71		20508-S8(B110)	3			Bolt (flywheel housing & plate to block)- 7/16"-14 x 1 3/4"
69/71	M/T	20430-S2(B104)	4			Bolt (flywheel housing to trans.)- 7/16"-14 x 1 1/4"-hex.
65/		EAD 6397-A	2			DOWEL - CYLINDER BLOCK-to flywheel housing- 1/2" x 1"
		6500				TAPPET ASSY. - VALVE - hydraulic
65/70		D1AZ 6500-A	12			
71/		D1AZ 6500-B	12			

Identification marking

FORD CAR PARTS

SECTION 60.3
6 CYL. - 240

7

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			

6505-07 VALVE-INTAKE and EXHAUST-CHART													
YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE					
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	
65/66 67/	240	All (exc. Taxi & P/C)	4.81"	1.56"	Std. .003" .015" .030"	.3419"	★C5AZ 6505-A R/B D5TZ 6505-E (1-75) C5AZ 6505-B C5AZ 6505-C C5AZ 6505-D	4.81"	1.78"	Std. .003" .015" .030"	.3419"	C5TZ 6507-A C5TZ 6507-B C5TZ 6507-C C5TZ 6507-D	
67/70	240	Taxi, P/C - "Before Chg./L18"	4.81"	1.56"	Std. .003" .015" .030"	.3419"	C5TZ 6505-A C5TZ 6505-B C5TZ 6505-C C5TZ 6505-D	4.81"	1.78"	Std. .003" .015" .030"	.3419"	C5TZ 6507-A C5TZ 6507-B C5TZ 6507-C C5TZ 6507-D	
70/	240	Taxi, P/C - "Chg./L18/"	4.81"	1.55"	Std. .003" .015" .030"	.3420	D0TZ 6505-A D0TZ 6505-B D0TZ 6505-C D0TZ 6505-D	4.81"	1.78"	Std. .003" .015" .030"	.3419"	C5TZ 6507-A C5TZ 6507-B C5TZ 6507-C C5TZ 6507-D	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			

		6510			BUSHING - VALVE GUIDE - NOTE 1
66/		D1AZ 6510-A	AR		Exhaust-2.29" long-.501" O.D.-.313" I.D.
66/		D1AZ 6510-C	AR		Intake-2.18" long-.501" O.D.-.313" I.D.
		6513			SPRING - VALVE
65/66		C5AZ 6513-A	12		6 active coils-1.99" free length
67/	A(intake & exhaust)	C5AZ 6513-A	12		1.99" free length
67/	Taxi, P/C(intake)		6		
67/	Taxi, P/C(exhaust)	C5TZ 6513-A	6		1.87" free length
		6514			RETAINER - VALVE SPRING
65/66		C7AZ 6514-A	12		
67/	A(intake & exhaust)		12		
67/	Taxi, P/C(intake)		6		
67/70	Taxi, P/C(exhaust) - "Before Chg./L18"	C5TZ 6514-A	6		1" height
70/	Taxi, P/C (exhaust) - "Chg./L18/"	D0TZ 6514-A	6		
65/		7HA 6518-A	24		KEY - VALVE SPRING RETAINER
		6519			COVER - VALVE PUSH ROD
65/		C5AZ 6519-B	1		3/64" thick-(6) 17/32" bolt holes or (6) 11/32" bolt holes
65/67	"Before 6/1/67"	20386-S8(B53)	6		Bolt (cover to block)-5/16"-18 x 1"
67/	"From 6/1/67"	382041-S(BB551BC)	6		Bolt (cover to block)-5/16"-18 x 1" hex. head
		6521			GASKET - VALVE PUSH ROD COVER
65/		C5AZ 6521-A	1		26 23/64" x 4 11/32"
65/		C5AZ 6A527-A	12		STUD - VALVE ROCKER ARM SUPPORT - std. - 3/8"-24 x 2 5/8"- .3717" dia. at non-threaded end
		C5AZ 6A527-B	AR		.006" O/S
		C5AZ 6A527-D	AR		.010" O/S
		C5AZ 6A527-C	AR		.015" O/S
65/		C2OZ 6A528-C	12		SEAT - VALVE ROCKER ARM FULCRUM -
65/		C2DZ 6A529-A	12		NUT - VALVE ROCKER ARM STUD-3/8"-24
65/67		C5AZ 6A545-A	1		SEAL - VALVE ROCKER ARM COVER BAFFLE
65/		C5AZ 6564-A	12		ARM-VALVE ROCKER-#E
		6565			ROD - VALVE PUSH
65/		C5AZ 6565-A	12		#C5AE 6565-A-10.16" long-ball type
		6570			GROMMET
65/		B9A 6570-A	6		Used on valve push rod cover stud - rubber-.32" I.D. -1" O.D. -1/2" thick
65/			1		Also used on power steering oil reservoir cover stud

Identification marking
May, 1975

NOTE 1 - Bushing must be reamed to size of valve
COPYRIGHT © 1975 — FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
65/66	Intake and exhaust	6571				SEAL - VALVE STEM
67/	A(intake & exhaust)	C5AZ 6571-D	12			.90" O.D. - .58" high
67/	Taxi, P/C (intake)		12			
70/	Taxi, P/C (exhaust)-		6			
	"From Chg./L18/"		6			
67/70	Taxi, P/C(exhaust)-	C5TZ 6571-B	6			"O" ring type-.40" O.D. -.29" I.D.
	"Before Chg./L18"					
65	★A	6582				COVER ASSY. - VALVE ROCKER ARM
65	Taxi, P/C	C5AZ 6582-K	1			#Primed
66/70			1			
65	★A	CC5AE 6582-F	1			
71/		C8TZ 6582-A	1			#Primed
65	Non em/re	†377393-S(KK24C)	1			Grommet (holds 6758 in 6582)-1 7/8" O.D. - 31/32" I.D.
65	Em/re	†377394-S(KK23F)	1			Grommet (holds 6A666 in 6582)-1 7/8" O.D. - 23/32" I.D. -use in cover with 1 1/4" dia.hole
65/		20326-S7(B49)	7			Bolt (attach V.R.A. cover)-5/16"-18 x 5/8" hex.hd.
65/		34806-S7(X64)	7			Lockwasher-5/16"
65/67		6584				GASKET - VALVE ROCKER ARM COVER
65/67		C5AZ 6584-B	1			Rubber
68/		C5AZ 6584-A	1			Cork & rubber - optional with C5AZ 6584-B
		D0AZ 6584-D	1			Cork & rubber
65/		6600				PUMP ASSY. - OIL
65/		C5AZ 6600-A	1			Includes and used with (1) C5AZ 6626-B gasket
69/		42911-S(B41A)	4			Bolt (pump cover to pump body)-1/4"-20 x 5/8"
65/67	All (exc. Calif.)	378644-S(NN61B)	1			Dowel (pump to block)-1/2" x 13/32"
		D0AZ 6A603-G	1			EMISSION CONTROL KIT - EXHAUST
		(EK-6-A)				
Consists of						
1-D2AE 9C485-AA Tag eng.exh.emission I.D.			1-ESB-M4G92-A Sealer, silicone rubber			
1-D0AE 12A091-C Valve assy. dist.			1-Instruction sheet			
1-D0AE 12226-J Hose dist.vac.3" long						
65/		6608				ROTOR and SHAFT ASSY. - OIL PUMP DRIVE
		C4TZ 6608-A	1			2 1/4" long
65/		6616				PLATE - OIL PUMP BODY
		B8A 6616-C	1			
65/		6A618				SHAFT ASSY. - OIL PUMP INTERMEDIATE
		C5AZ 6A618-A	1			4.52" long-includes retainer
65/		6622				SCREEN, TUBE and COVER ASSY. - OIL PUMP
65/		C5AZ 6622-A	1			
65/		42911-S(B41A)	4			Bolt (cover to oil pump)-1/4"-20 x 5/8"
65/		C5AZ 6626-B	1			GASKET - OIL PUMP INLET TUBE
		6629				RING - OIL PUMP INTERMEDIATE SHAFT RETAINER
65/		C4AZ 6629-A	1			.307" O.D. -.272" I.D. -use 5/16" shaft
65/	Without oil filter	B2AZ 6A659-A	1			COVER - CYLINDER BLOCK OIL FILTER
65/	Without oil filter	B2AZ 6A660-A	1			OPENING-4.92" O.D. -49/64" hole-1.20" height
						BOLT - CYLINDER BLOCK OIL FILTER
						OPENING COVER-3/4"-16 x 1.76"-special hex. washer head
		6A664				HOSE - CRANKCASE VENTILATION -
						Also refer to Basic No.6853
						Intake Manifold Type
		C9PZ 6A664-A	AR			15/32" I.D.-25 ft.long-cut as required
		(KCV-1)				
		C9PZ 6A664-B	AR			5/8" I.D.-25 ft.long-cut as required
		(KCV-2)				
69/71	A	97329-S35(E6)	2			Clamp-hose
65	A, Taxi, P/C	★C3AE 6853-C	1			Rocker Arm Cover Type
65	A	★C4TE 6853-E	1			13 1/4" long-attach valve to manifold-cut from B4C 4090-A
						13" long-5/8" O.D. -attach oil cap to air cleaner

Identification markings

† Also Basic 6A892

★ U.S. only

♦ Canada only

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

SECTION 60.3
6 CYL. - 240

9

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6A664				HOSE - CRANKCASE VENTILATION - Also refer to Basic No. 6853 - continued
						Thermactor Type
66/67		C6AZ 6A664-D	1			20" long-3/8" I.D. one end-1/2" I.D. other end - att. 6A666 valve to manifold
66/68		★ C6AZ 6A664-G	1			5/8" I.D. molded hose-air cleaner to oil filler cap
71/		★ C6DE 6A664-A	1			22 1/4" long-attach valve to manifold-cut from E4C 4090-A bulk hose
65/		C5AZ 6666-A	1			PLUG - OIL PUMP RELIEF VALVE - cup type - .793" O.D.
		6A666				VALVE - POSITIVE CRANKCASE VENTILATION - (P.C.V.)
65/	A, Taxi, P/C	D0DZ 6A666-A (EV-49)	1			Replaces valve #C5UE-A
		6670				SPRING - OIL PUMP RELIEF VALVE
65/		C5AZ 6670-A	1			20 active coils-3.03" free length
		6674				PLUNGER - OIL PUMP RELIEF VALVE
65/		C5AZ 6674-A	1			2.21" long-.75" diameter
65/		C5AZ 6675-A	1			PAN ASSY. - OIL
65/		20326-S7(B49)	25			Bolt (oil pan to cyl. block)-5/16"-18 x 5/8"-hex. head
		34806-S7(X64)	25			Lockwasher-5/16"
65/		C3AZ 6700-A	1			SEAL - CYLINDER FRONT COVER OIL
		6701				PACKING - CRANKSHAFT REAR
65/		C5AZ 6701-B	1			Oil seal-crankshaft-rear
		6710-1				GASKET - OIL PAN - refer to Group 6781
		6722-3				SEAL - OIL PAN - refer to Group 6781
65/		★D1AZ 6730-A R/B D1AZ 6730-B (11-74)	1			PLUG - OIL PAN DRAIN
65/	Taxi, P/C	C1TZ 6731-B (FL-20)	1			ELEMENT ASSY. - OIL FILTER - not used with disposable ("Spin-On") one piece type oil filter
Consists of 1-C3TE 6744-A, Element Δ1-EAA 6746-A Gasket 1-EAA 6838-A Gasket C4TE 6744-A2, 1-EAA 6749-A Gasket C5RA 6744-A or D4PJ 6744-BA						
65/	★A	C1AZ 6731-A (FL-1)	1			"Spin-on"one piece filter-has 3/4"-16 female threads
65/	▲A	CCIAZ 6731-A (FL-1)	1			"Spin-on"
65/		C2OZ 6734-A	1			GASKET - OIL PAN DRAIN PLUG - #Nylon-13/16" O.D. -1/2" I.D. -5/64" thick
65/	Taxi, P/C	EAA 6737-B	1			COVER - OIL FILTER
65/	Taxi, P/C	B2A 6741-A	1			BOLT and VALVE ASSY. - OIL FILTER CENTER - used with cartridge type oil filter
65/	Taxi, P/C	★EAA 6746-A	1			GASKET - OIL FILTER ELEMENT - 1.24" O.D. -.72" I.D. -.12" thick-supplied in 6731 kit-used with cartridge oil filter
65/	Taxi, P/C	EAA 6749-A	1			GASKET - OIL FILTER CENTER BOLT TO COVER-1.18" O.D. -.77" I.D. -.06" thick-used with cartridge oil filter
		6750				INDICATOR - OIL LEVEL
65/		C5AZ 6750-E	1			#C6AE 6750-B-Black plug in handle 12.38" shield to full; 13.36" shield to add; 13.98" shield to end
65/		C5AZ 6754-B	1			TUBE ASSY. - OIL LEVEL INDICATOR
		6758				TUBE - CRANKCASE VENTILATION - emission reduction - also refer to basic No's 6A664 & 6853
65/71		C5AZ 6758-D	1			Attaches to int. manifold
72		C5TZ 6758-C	1			
65	▲A	CC5AE 6758-B	1			Used as road draft tube

Identification marking

Δ Not required with C5RA 6744-C element

★ U.S. only

▲ Canada only

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			240			
		6766				CAP ASSY. - OIL FILLER and BREATHER - non emission reduction
65	▲A	C0AZ 6766-A		1		
65/68		C3AZ 6766-E (EC-564)		1		#Chrome
						Emission reduction
65/66/70	Closed em/re With T/E or Imco	C4TZ 6766-B (EC-31)		1		Rocker arm cover type with straight spout- #Black-optional with C5ZZ 6766-D
		C5ZZ 6766-D (EC-10)		1		Closed system rocker arm cover type-#Chrome- optional with C4TZ 6766-B
65/67	Without T/E	C3AZ 6766-D (EC-64)		1		Open system rocker arm cover type
71/72		D1AZ 6766-A		1		#Black
		D1ZZ 6766-A (EC-508)		1		#Chrome-optional w/specified Black cap
		6767				ELBOW - CRANKCASE VENTILATION HOSE
72		C8AZ 6767-A				90° - 5/8" x 5/8"-used in oil filler cap-also refer to basic No. 9600
		6781				GASKET SET - OIL PAN
65/		D0AZ 6781-E		1		
Consists of 1-C9AE 6710-A Gasket (R.H.) 1-C5AE 6722-A Seal (front) 1-C2OZ 6734-A Gasket (drain plug) 1-C9AE 6711-A Gasket (L.H.) 1-C5AE 6723-A Seal (rear)						
65	▲A	CC5AE 6789-A		1		GASKET - OIL FILLER & BREATHER CAP
65/	Taxi, P/C	EAA 6838-A		1		GASKET - OIL FILTER MOUNTING-4.96" O.D. - 4.40" I.D. -.06" thick-used with cartridge type oil filter-also used without oil filter
65/	Taxi, P/C	C5AZ 6840-A		1		GASKET - OIL FILTER ADAPTER -3-1/64" O.D. - 49/64" center hole-1/32" hole
		6853		★		HOSE - CRANKCASE VENTILATION Cut from B4C 4090-A-3/8" I.D. Cut from C9PZ 6A664-A-15/32" I.D. Cut from C3AZ 6A664-A-1/2" I.D. Cut from C3AZ 6A664-B-5/8" I.D. Cut from C9PZ 6A664-B-5/8" I.D. Also refer Basic 6A664
		6A868				ADAPTOR - OIL FILLER
65/67		C5AZ 6A868-A		1		
68/71		C5AZ 6A868-B		1		
65/	Taxi, P/C	C5AZ 6881-A		1		ADAPTER ASSY. - OIL FILTER - use with cartridge type oil filter
65/70	Taxi, P/C	C1AZ 7A294-A		1		"O" ring-1 7/64" I.D. -1/8" thick-fits in adaptor
65/	Taxi, P/C	B2A 6889-A		1		SPRING - OIL FILTER ELEMENT RETAINING - approx. .94" free length-4 active coils-used with cartridge type oil filter
		6890		1		INSERT - OIL FILTER MOUNTING BOLT
65/	Taxi, P/C	EAM 6890-B		1		Plain-3/4"-16 internal & 1 1/16"-12 external threads-.52" overall length-use with cartridge type oil filter-attach bolt & valve assy. to cyl. block
65/	A(exc. Taxi, P/C)	D1AZ 6890-A		1		3/4"-16 & 1 1/16"-12 male threads-1 13/64" long
65/71		C8SZ 6A892-A		1		RETAINER - CRANKCASE VENTILATION- grommet (holds 6A666 in 6582)-1 7/16" O.D.- 23/32" I.D.
72		C8AZ 6A892-A		1		Elbow to oil filler cap-1 7/16" O.D.-37/64" I.D.- L.H. side
		★6A892				Refer to basic No. 9600
65/	Taxi, P/C	C5AZ 6894-A		1		BOLT ASSY. - OIL FILTER ADAPTER MOUNTING -use with cartridge type filter
65/	Taxi, P/C	B2A 6898-A		1		RETAINER - OIL FILTER ELEMENT-1 1/4"O.D. - 49/64" I.D.-used with cartridge type oil filter

Identification marking

▲ Canada only

FORD CAR PARTS

SECTION 60.4
8 CYL. - 260,289

1

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 Spec	
6008						
65/66	"Before Chg/L10"	C3AZ 6008-D	1	1	GASKET SET - COMPLETE OVERHAUL	
Consists of						
	1-C2OZ 6020-A	Gasket (front cover)			1-C2OZ 6734-A Gasket (oil pan drain plug)	
	2-C3AZ 6051-C	Gasket (cylinder head)			2-C2OZ 6870-A Gasket (vent tube)	
16	-C3AZ 6571-B	Seal (valve stem)			1-C9AZ 8255-A Gasket (water outlet)	
	2-D0AZ 6584-B	Gasket (rocker arm cover)			1-C2OZ 8507-B Gasket (water pump)-"Before CHG/L10"	
	1-B8TZ 6626-A	Gasket (oil pump flange)			1-C5AZ 8507-B Gasket (water pump)-"From CHG/L10"	
	1-C2OZ 6659-C	Gasket (oil pump)			1-C5AZ 8513-A Gasket (pump cover)-"From CHG/L10"	
	1-C3AZ 6700-A	Seal (crankshaft-front)			1-C3AZ 9417-C Gasket (fuel pump)	
	2-C9OZ 6701-A	Packing (crankshaft-rear)			1-D1OZ 9A424-A Seal (intake manifold-rear)	
	1-C9OE 6710-B	Gasket (oil pan-R. H.)			1-D1OZ 9A425-A Seal (intake manifold-front)	
	1-C9OE 6711-B	Gasket (oil pan-L. H.)			2-C3AZ 9441-D Gasket (intake manifold)	
	2-D3OE 6722-A	Seal (oil pan-front & rear)				
66/67	"Chg/L10 to Chg/L13"	C6AZ 6008-D		1		
Consists of						
	1-C2OZ 6020-A	Gasket (front cover)			2-D3OE 6722-AA Seal (oil pan)	
	2-C3AZ 6051-C	Gasket (cylinder head)			1-C2OZ 6734-A Gasket (oil pan drain plug)	
16	-C6AZ 6571-B	Seal (valve stem)			1-C9AZ 8255-A Gasket (water outlet)	
	2-D0AZ 6584-B	Gasket (rocker arm cover)			1-C5AZ 8507-B Gasket (water pump)	
	1-B8TZ 6626-A	Gasket (inlet tube)			1-C5AZ 8513-A Gasket (water pump cover)	
	1-C2OZ 6659-C	Gasket (oil pump)			1-C3AZ 9417-C Gasket (fuel pump)	
	1-C3AZ 6700-A	Seal (crankshaft)-front			1-D1OZ 9A424-A Seal (intake manifold)-rear	
	2-C9OZ 6701-A	Packing (crankshaft)-rear			1-D1OZ 9A425-A Seal (intake manifold)-front	
	1-C9OE 6710-B	Gasket (oil pan)-R. H.			2-C3AZ 9441-D Gasket (intake manifold)	
	1-C9OE 6711-B	Gasket (oil pan)-L. H.				
67	"Chg/L14/"	C7AZ 6008-B		1		
68	M/T			1		
Consists of						
	1-C2OZ 6020-A	Gasket (cyl. front)			2-D3OE 6722-AA Seal (oil pan-front)	
	2-C3AZ 6051-C	Gasket (cylinder head)			1-C2OZ 6734-A Gasket (oil pan drain plug)	
16	-C7AZ 6571-B	Seal (valve stem)			1-C9AZ 8255-A Gasket (water outlet)	
	2-D0AZ 6584-B	Gasket (rocker arm cover)			1-C5AZ 8507-B Gasket (water pump)	
	1-B8TZ 6626-A	Gasket (inlet tube)			1-C5AZ 8513-A Gasket (water pump cover)	
	1-C2OZ 6659-C	Gasket (oil pump)			1-C3AZ 9417-C Gasket (fuel pump)	
	1-C3AZ 6700-A	Seal (crankshaft-front)			1-D1OZ 9A424-A Seal (intake manifold-rear)	
	2-C9OZ 6701-A	Packing (crankshaft-rear)			1-D1OZ 9A425-A Seal (intake manifold-front)	
	1-C9OE 6710-A	Gasket (oil pan-R. H.)			2-C3AZ 9441-D Gasket (intake manifold)	
	1-C9OE 6711-A	Gasket (oil pan-L. H.)				
68	A/T	D1AZ 6008-B		1		
Consists of						
	1-C2OZ 6020-A	Gasket (front cover)			2-D3OE 6723-AA Seal (oil pan)	
	2-D0OZ 6051-A	Gasket (cylinder head)			1-C2OZ 6734-A Gasket (drain plug)	
16	-C7AZ 6571-B	Seal (valve stem)			1-C9AZ 8255-A Gasket (water outlet)	
	2-D0AZ 6584-B	Gasket (rocker arm cover)			1-C5AZ 8507-B Gasket (water pump)	
	1-B8TZ 6626-A	Gasket (inlet tube)			1-C5AZ 8513-A Gasket (water pump cover)	
	1-C2OZ 6659-C	Gasket (oil pump)			1-D0AZ 8513-A Gasket	
	1-C3AZ 6700-A	Seal (crankshaft-front)			1-C3AZ 9417-C Gasket (fuel pump)	
	2-C9OZ 6701-A	Seal (crankshaft-rear)			1-D1OZ 9A424-A Seal (intake manifold-rear)	
	1-C9OE 6710-B	Gasket (oil pan-R. H.)			1-D1OZ 9A425-A Seal (intake manifold-front)	
	1-C9OE 6711-B	Gasket (oil pan-L. H.)			2-C3AZ 9441-D Gasket (mounting manifold)	
65/68		C2OZ 6A008-A	4	4	DOWEL - CYLINDER HEAD TO CYLINDER BLOCK-. 676" O. D. -. 55" I. D. -. 44" height-split	
67/68		C7DE 6D008-A		1	HEATER KIT - CYLINDER BLOCK	
6009						
CYLINDER ASSY. - Includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, pan or cylinder front cover unless indicated						
65		C4OZ 6009-B	1		Use with C4AZ 6019-A cover	
65/68	2/B	C5AZ 6009-E		1	#Stud on No. 3 main bearing cap	
65	4/B carb. R.F	C4AZ 6009-B		1	#(5) bolt holes for flywheel housing	

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			260	289	289	Spec	
6009							CYLINDER ASSY. - continued
65/67	4/B carb. P.F.- "Before 4/15/67"	C5OZ 6009-D			1		#(6) holes for flywheel housing
67	4/B carb. P.F.- "From 4/15/67"	C7OZ 6009-C			1		
65		C4OZ 6009-E			1		#(5) bolt holes for flywheel housing
65/67		C5OZ 6009-B			1		#(6) bolt holes for flywheel housing
6010							ΔBLOCK ASSY. - CYLINDER
65		C4OZ 6010-D		1			Hydraulic tappets-uses front cover without oil fill hole-(5) holes for flywheel housing-3.8" bore
65	4/B carb. R.F.	★C4AZ 6010-B Not replaced			1		Hydraulic tappets-uses front cover without oil fill hole-(5) bolt holes for flywheel housing-4" bore
65/68	2/B,4/B P.F.	D1TZ 6010-B			1		Hydraulic tappets includes C5OZ 6269-D plate -4" bore
65		★C4OZ 6010-C			1		Mechanical tappets-uses front cover without oil fill hole-(5) holes for flywheel housing -4" bore
65/67		C5OZ 6010-C			1		Mech. tappets-4" bore -includes (1) C5OZ 6269-D plate
65/67	A	73249-S(N88)			2		Dowel (cyl. block to clutch housing)-3/8" x 9/16"
6B018							WIRE ASSY. - CYLINDER BLOCK HEATER
65/66	All	CC1TF 6B018-E			1		
67	All	C7TE 6B018-A			1		2 conductor-use with 3 terminal heater-(dummy ground)
67	All	C7TE 6B018-C			1		3 conductor-use with 3 terminal heater-(green ground connector)
6019							COVER ASSY. - CYLINDER FRONT
65	A,B,F,X (2/B carb.)	C4AZ 6019-B		1	1		Includes (1) 376962-S cup plug to plug unused oil filler pipe hole
65	B,F (4/B R.F. & P.F.)- "Before Chg/L8"				1		
65	B & F Specials (4/B)- "Before Chg/L8"					1	
66	B, F, X(2/B, 3/4/M/T, non T/E)	C4AZ 6019-B			1		Use with C5AZ 8501-B, K water pump-includes (1) 376962-S cup plug to plug unused oil filler pipe hole
65/67	A,B,F,U(2/B,4/B P.F.) "Chg/L8/"	D3OZ 6019-A			1		Aluminum-includes (1) C8AZ 6023-B timing pointer & (1) 378371-S7 screw
67	X (2/B) 3 or 4/M/T				1		
68	B, F, X, U (2/B)				1		
65/67	B & F Specials (4/B carb.)- "Chg/L8/"					1	
65/68	B	376258-S(BB545C)			3		Bolt (water pump & cover to block)-5/16"-18 x 3 7/16"
65/68	B	376259-S(BB545D)			1		Bolt (water pump & cover to block)-5/16"-18 x 4 5/8"-hex, washer head
65/68		376256-S(BB545A)	AR	AR			Bolt (cover to block)-5/16"-18 x 1" hex, washer hd.
65/68		376257-S(BB545B)	AR	AR			Bolt (cover to block)-5/16"-18 x 2"-hex, washer hd.
65/68		C2OZ 6020-A		1	1	1	GASKET - CYLINDER FRONT COVER - .030" thick
68		C8AZ 6023-B			1		POINTER - TIMING

6A023, 6054, 6068 & 6120 REAR MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	* SUPPORT	*BRACKET- REAR SUPPORT	*INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- A -							
65/67	A (C/M)	289		C5AZ 6054-B	C9AZ 6068-E		
65/67	A(M/T, O/D, C4)	289		C5AZ 6054-A	C8AZ 6068-B		
- B -							
65	B (2/B)	289	C2OZ 6A023-D	C1SS 6054-A	C3OZ 6068-B	C2OZ 6120-J	C2OZ 6120-K
65	B (4/B-P, F.)-4/M/T	289					
65	B Spec. (4/B)-4/M/T	289					
65	B(4/B-P.F.)-exc. 4/S/T	289	C2OZ 6A023-D		C3OZ 6068-B	C2OZ 6120-J	C2OZ 6120-K
65	B Spec.(4/B)-exc. 4/M/T	289					

Δ 6015 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6010 assy. # Identification marking

* 1 Required unless otherwise noted

YEAR	MODEL	C.I.D.	* SUPPORT	*BRACKET- REAR SUPPORT	* INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
6A023,6054,6068 & 6120 REAR MOTOR MOUNT CHART - continued							
- B -							
66	B(exc.76)- "Before 12/15/65"	289	C6OZ 6A023-B		C8OZ 6068-B	C6DZ 6120-C	C6DZ 6120-D
66	B(exc.76)- "From 12/15/65"	289	C6OZ 6A023-B		C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
66	B(76)- "Before 12/15/65"	289	C6OZ 6A023-B		C8OZ 6068-A	C6DZ 6120-C	C6DZ 6120-D
66	B(76)- "From 12/15/65"	289	C6OZ 6A023-B		C8OZ 6068-A	C6DZ 6120-E	C6DZ 6120-F
67	B(2/B,exc. 76)	289	C6OZ 6A023-B		C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-H
67	B(2/B, 76)	289	C6OZ 6A023-B		C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-H
68	B(2/B)-76	289	C6OZ 6A023-B		C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
68	B(2/B)-exc. 76	289	C6OZ 6A023-B		C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-J

- F -							
65	F(2/B)	260,289	C5ZZ 6A023-A		C8ZZ 6068-A		
65	F(4/B-R, F. or P. F.)	289					
65	F Spec.(4/B)-exc. 4/S/T	289	C5ZZ 6A023-A		*C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
65	F Spec.(4/B)-4/S/T	289	C5ZZ 6A023-A		C5ZZ 6068-C		
66	F(2/B, 4/B-P. F.)	289	C6ZZ 6A023-A		C8ZZ 6068-A		
66/67	F Spec.(4/B)- "Before 11/1/66"	289	C6ZZ 6A023-A		C5ZZ 6068-C		
67	F Spec. (4/B)-4/S/T- "From 11/1/66"	289	C7ZZ 6A023-D		*C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
67	F Spec. (4/B)-C4- "From 11/1/66"	289	C7ZZ 6A023-D		C9ZZ 6068-D		
67	F(2/B, 4/B P. F.)	289	C7ZZ 6A023-D		C8ZZ 6068-A		
68	F(2/B)	289	C7ZZ 6A023-D		*C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		

- X -							
65	X(2/B, 4/B-P. F.)	289	C1DZ 6A023-A		C1DZ 6068-A		
66	X(2/B, 4/B-P. F.) - "Before 12/15/65"	289	C6OZ 6A023-B		C8OZ 6068-B	C6DZ 6120-C	C6DZ 6120-D
66	X(2/B, 4/B-P. F.) - "From 12/15/65"	289	C6OZ 6A023-B		C8OZ 6068-B	C6DZ 6120-E	C6DZ 6120-F
67/68	X(2/B, 4/B-P. F.)	289	C6OZ 6A023-B		C8OZ 6068-A	C6DZ 6120-E	C6DZ 6120-F

- U -							
66/68	U	289	C6TZ 6A023-B	C6TZ 6096-A	*C6TZ 6068-D		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec	
65/68	B	376905-S7-8(BB838H)		2		Bolt-1/2"-13 x 1 3/8"-square neck
65/68	B	20432-S7-8(B121)		2		Bolt (rear support to extension)-1/2"-13 x 1 1/8"
		34809-S8(X68)		AR		Lockwasher-1/2"
		354580-S(BB167)		1		Bolt-3/8"-16 x 3 1/4"
		34057-S8(M161)		1		Nut-3/8"-16
		34807-S7-8(X66)		AR		Lockwasher-3/8"

		6026	PLUG - ENGINE				
65/68		B2A 6026-B	1	1		At distributor boss-.273" O.D.-acorn shape-.20" overall length	
65/68		C8AZ 6026-C	2	2		1 1/2" O.D. plug core holes in head	
		C8AZ 6026-D		6		Plug core holes in block	
65/67		C8AZ 6026-A		AR		.060" O/S	
65/68		376301-S(PP67A)		3		Plug (cyl. head end)-1 3/4" O.D.	
65/68		376099-S(PP73A)	1	1		Plug (cylinder block oil passages)-1/2" cup	
68		353055-S7(PP29)		3		Plug (cyl. block rear)-cup type-3/4"	
				2		Plug (cyl. block oil passages)-1/4"-18 pipe (plug drain holes in back)	

		6A027	SPACER - SUPPORT INSULATOR				
66/68	U	C6TZ 6A027-A		2		Rear	

* 1 Required unless otherwise noted

Two required

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

6028,6029,6030,6031 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT BRACKET		BRACKET		*INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
- A -								
65/67	A (2/B)	289	C5AZ 6028-B	C5AZ 6029-B			C9AZ 6038-J	C9AZ 6038-J
- B -								
65	B(2/B, 4/B-P. F.)	289	C5OZ 6028-A	C5OZ 6028-A	C5OZ 6030-A	C5OZ 6030-A	C5ZZ 6038-A	C5ZZ 6038-A
65	B Spec. (4/B)	289						
66/68	B (2/B)-76	289	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-H	D0OZ 6038-H
66/68	B(2/B)-exc.76	289	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-G	D0OZ 6038-G
- F -								
65	F(63, 65)-2/B	260,289	C3DZ 6028-C	C3DZ 6029-C	C3DZ 6030-A	C3DZ 6031-A	C3AZ 6038-G	C3AZ 6038-H
65	F(63, 65)-4/B-R. F. or P. F.	289						
65	F(76)-2/B	260,289	C3DZ 6028-C	C3DZ 6029-C	C3DZ 6030-A	C3DZ 6031-A	C4DZ 6038-A	C4DZ 6038-B
65	F(76)-4/B-R. F. or P. F.	289						
65	F Spec. (4/B)	289	★C5ZZ 6028-A	C5ZZ 6029-A	C5ZZ 6030-A	C5ZZ 6031-A	C5ZZ 6038-A	C5ZZ 6038-A
66	F(2/B, 4/B-P. F.-exc. 76- 'Before 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	C3AZ 6038-G	C3AZ 6038-H
66	F Spec. (4/B)-exc. 76- 'Before 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	C5ZZ 6038-A	C5ZZ 6038-A
66	F(2/B, 4/B-P. F.)-exc. 76- 'From 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	D0OZ 6038-G	D0OZ 6038-G
66	F Spec. (4/B)-exc. 76- 'From 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	D0OZ 6038-G	D0OZ 6038-G
66	F(2/B, 4/B-P. F.)-76- 'Before 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	C4DZ 6038-A	C4DZ 6038-B
66	F Spec. (4/B)-76- 'Before 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	C5ZZ 6038-A	C5ZZ 6038-A
66	F(2/B, 4/B-P. F.)-76- 'From 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	D0OZ 6038-H	D0OZ 6038-H
66	F Spec. (4/B)-76- 'From 11/1/65"	289	C6ZZ 6028-B	C6ZZ 6029-B	C6ZZ 6030-A	C6ZZ 6031-A	D0OZ 6038-H	D0OZ 6038-H
67	F(2/B, 4/B-P. F.)	289	D0ZZ 6028-D	C7ZZ 6029-B	D0ZZ 6030-B	D0ZZ 6031-B	D0ZZ 6038-B	D0ZZ 6038-B
67	F Spec. (4/B)	289	D0ZZ 6028-D	C7ZZ 6029-B	D0ZZ 6030-B	D0ZZ 6031-B	D0ZZ 6038-B	D0ZZ 6038-B
68	F (2/B)-exc. 76	289	D0ZZ 6028-C	D0ZZ 6029-C	D0ZZ 6030-B	D0ZZ 6031-B	D0OZ 6038-G	D0OZ 6038-G
68	F (2/B)-76	289	C8ZZ 6028-B	D0ZZ 6029-D	C8ZZ 6030-A	C8ZZ 6031-A	D0ZZ 6038-B	D0ZZ 6038-B
- X -								
65	X(76)-2/B, 4/B-P. F.- 'From 3/3/64"	260,289	C3DZ 6028-C	C3DZ 6029-C	C3DZ 6030-A	C3DZ 6031-A	C4DZ 6038-A	C4DZ 6038-B
65	X(exc. 76)-2/B-4/B-P. F.- 'From 3/3/64"	260,289	C3DZ 6028-C	C3DZ 6029-C	C3DZ 6030-A	C3DZ 6031-A	C3AZ 6038-G	C3AZ 6038-H
66/68	X(2/B, 4/B-P. F.)-exc. 76	289	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-G	D0OZ 6038-G
66/68	X(2/B, 4/B-P. F.-76)	289	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-H	D0OZ 6038-H
- U -								
66/68	U	289	Refer 5057	Refer 5058			C7TZ 6038-G	C7TZ 6038-G
YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION		
			260	289	289 spec			
65/68	A	★20372-S8	2	2		Bolt (ret. to trans. ext.)-1/2"-13 x 7/8" hex. head		
65/68	A	20411-S7(B184)	2	2		Bolt(rear suppt. to frame)-7/16"-20 x 1 1/8" hex. hd.		
65/68	A	34671-S8(M67)	2	2		Nut-7/16"-20		
65/68	A	356590-S(XX171)	2	2		Washer-flat-.47" I. D. -.78" O. D. -.10" thick-steel		
65/68	A	357625-S7-8(XX304)	2	2		Lockwasher-7/16"		
66/68	B, F, X	371951-S8(MM151)		2		Nut (support to crossmember)-7/16"-14		
65/68	B	34670-S7-8(M54)	AR	AR		Nut-7/16"-14		

* One required unless otherwise noted

6028,6029,6030,6031 & 6038 FRONT MOTOR MOUNT CHART - continued

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec.	
65/68	B	34808-S8(X67)	2	2		Lockwasher-7/16"
65/68	B	34808-S8(X67)	4	4		Lockwasher-7/16"
		33799-S7(M52)	4	4		Nut-3/8"-16
		34807-S7-8(X66)	4	4		Lockwasher-3/8"
		20390-S8(B102)		4		Bolt(engine front support insulator to cyl. block)-7/16"-14 x 1"-hex. head
65/67	A			4		
65/67	A	34671-S8(M67)		4		Nut-7/16"-14
65/67	A	357625-S7-8(XX304)		4		Lockwasher-7/16"
65/68	B, F, X	44735-S8(X32)	2	2		Washer-flat(insulator to bracket)-15/32"
66/68	B,X	20348-S2(B77)		2		Bolt (att.insulator to bracket)-3/8"-16 x 3/4" hex. head
6030-1						BRACKET - FRONT SUPPORT - Refer to Front Motor Mount Chart (Group 6028)
6038						INSULATOR - FRONT SUPPORT - Refer to Front Motor Mount Chart (Group 6028)
65/68	A, F, X	C3DZ 6C038-A	2	2		SHIELD - MOTOR MOUNT HEAT - 8" long
65/67	F(4/B carb. -R. F. or P. F.)			2		
65/68	B, (B & F Specials-4/B carb.)	C2OZ 6039-A	2	2	2	INSULATOR - FRONT SUPPORT REBOUND
		6A042				REINFORCEMENT - REAR SUPPORT
68	B, X(exc. 76-Δ)	C8OZ 6A042-C		1		R. H.
		C8OZ 6A042-D		1		L. H.
		6A044				CONVERSION KIT - HIGH PERFORMANCE
68	F, X(2/B)	†C8DZ 6A044-A		1		
68	B(2/B)-54A, 65A, 71D			1		
Consists of						
1-C8DZ 6C056-A Cylinder head kit			1-C8DZ 6A257-A Cam kit			
1-C6AZ 6108-AE Piston kit						
6046						BRACKET - FRONT SUPPORT INSULATOR - Refer to Front Motor Mount Chart (Group 6028)
65	A	★C5AA 6046-C		1		R. H. - serviced in 6038 assy.
		★C5AA 6046-B		1		L. H. - serviced in 6038 assy.
65	B & F Specials (4/B carb.)	C3OZ 6046-A			2	
6047						BOLT - FRONT SUPPORT INSULATOR
65	B	379891-S2(BB838K)		2		7/16"-14 x 3 21/32"-(round head)
6049						HEAD - CYLINDER
65		★C4OZ 6049-A	2			#C4OE 6090-A
66	T/E "Before Chg./L10"	C6OZ 6049-C		2		
66	T/E "Chg./L11/12"	★C6AZ 6049-H		2		
68	Imco	C9OZ 6049-G		2		
68	M/T-T/E	C8DZ 6049-D		2		
65/68	High Perf. , B, F	D1OZ 6049-B		2		Valve seats must be ground to accomodate high perf. valves
6049						HEAD KIT - CYLINDER
65/66	Exc. T/E-"Before Chg./L10"	C3AZ 6049-AF		2		
Consists of						
1-C6OE 6049-N Head			4-C4AZ 6507-A Valve			
			or 4-C4OZ 6507-A Valve			
66	Exc. T/E- "Chg./L10"	C6OZ 6049-AF		2		
Consists of						
1-C6OE 6049-N Head			8-C8AZ 6513-A Spring	8-C7AZ 6571-B Seal		
			8-C7AZ 6514-A Retainer			
66/67	Exc. T/E-"Chg./L11/"	C6AZ 6049-AG		2		
Consists of						
1-C7OZ 6049-D Head			8-C8AZ 6513-A Spring	8-C7AZ 6571-B Seal		
			8-C7AZ 6514-A Retainer			
66	T/E	C6OZ 6049-C		2		
Consists of						
1-C6OE 6049-M Head			8-C8AZ 6513-A Spring	8-C7AZ 6571-B Seal		
			8-C7AZ 6514-A Retainer			
67	T/E	C7OZ 6049-E		2		
Consists of						
1-C7OE 6049-B Head			8-C8AZ 6513-A Spring	8-C7AZ 6571-B Seal		
			8-C7AZ 6514-A Retainer			

† Not to be sold where illegal
May, 1975

Δ Not used on Model 76 from 12/1/67
COPYRIGHT © 1975 — FORD MOTOR COMPANY — DEARBORN, MICHIGAN

Identification marking
FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec.	
		6049	HEAD KIT - CYLINDER - continued			
65/68		C7ZZ 6049-C			2	
67	T/E				2	
Consists of						
4-C6AZ 6052-A		Plugs	4-C4OZ 6507-A		Valve	
67	A, B, F, X, U w/T/E	351418-S(UU-136)			2	Insert 7/16"-14 female thd, 5/8"-11 male thd, x 1 3/16" long-to reduce 9B450 attaching hole in front of head-also used for cylinder head plug
67	A, B, F, X, U w/T/E	351693-S(UU-135)			2	Insert 3/8"-16 female thd, 5/8"-11 male thd, x 15/16" long-to reduce 9B450 attaching hole in front of head-also used for cylinder head plug
		6051	GASKET - CYLINDER HEAD			
65/68		D0OZ 6051-A		2	2	Asbestos & steel-.047" thick
66/68		C6AZ 6052-A			8	8 PLUG - CYL. HEAD EXHAUST AIR SUPPLY- 1/2"-20 x 1 11/32"(to plug holes when T/E not used)
		6054	RETAINER - REAR SUPPORT - Refer to Rear Motor Mount Chart (Group 6A023)			
65	X (3 speed S/T)	C3DZ 6B056-A			1	SPRING - REAR SUPPORT
65/68	X (C/M, C4)	C4GY 6B056-A			1	
65/68	X (4 speed trans.)	C3DZ 6B056-G			1	7 3/8" long
65	A	*C5AA 6A059-B			1	SPACER - FRONT MOUNTING BRACKET - serviced in C5AZ 6028-B & C5AZ 6029-B
		6A061	INSULATOR ASSY. - REAR SUPPORT REBOUND			
65	X	C1DZ 6A061-A			1	Lower
66/68	U	C6TZ 6A061-A			2	Lower
66	U "Before Ser. 886, 001"	C6TZ 6A061-B			1	6A023 cross member to transfer case
66/68	U "From Ser. 886, 001"	C6TZ 6A061-D			1	6A023 cross member to transfer case
65/68		C2OZ 6065-A	10	10	10	BOLT - CYLINDER HEAD -7/16"-14 x 2, 29"
65/68		C2OZ 6065-B	10	10	10	7/16"-14 x 3, 91"
		6B066	STRAP - REAR SUPPORT REBOUND			
65/68	X (3 or 4 speed trans. & F/M/2)	C4DZ 6B066-B		1		7" long
		6068	INSULATOR ASSY. - REAR SUPPORT - Refer to Rear Motor Mount Chart (Group 6A023)			
		6B068	INDUCTION KIT - HIGH PERFORMANCE			
65	F	-C4DZ 6B068-A		1		(Cobra)-used to convert to (3) 2/B carb.-refer to 9B843 for accelerator control kit
Consists of						
1-C2OZ 6524-A	Baffle (valve push rod)	1-C4RA 9819-A				Tube (thermo. choke control outlet)
1-C2OZ 6A630-A	Dust (c/case vent)	1-C1AE 9B841-A				Rod (carb. throttle-front)
1-C2OZ 6A631-A	Element (c/case vent)	1-C1AE 9B842-A				Rod (carb. throttle-rear)
1-C2OZ 6A633-A	Retainer (c/case vent element)	1-C5AA 9865-A				Insulator (thermo. choke control tube)
1-C3RA 6869-A	Cover (c/case vent)	1-C1AF 18599-A				Elbow (heater connection)
1-C2OZ 6870-A	Gasket (c/case vent to intake manifold)	1-C3RA 19D531-A				Medallion (kit)
1-C4RA 9D280-C	Manifold (carb. fuel supply)	2-34079-S8				Nut (No. 10-32-lock throttle rods)
3-C1AE 9D281-A	Hose (carb. fuel) or	4-40922-S8				Screw (1/4"-28 x 1/2"-opt. with 92060-S
3-C1AE 9D281-B		3-42718-S8				Screw & washer (5/16"-18 x 1 1/2"-C/case vent to 9424
1-C4RA 9424-A	Manifold (intake)	12-88376-S				Stud (5/16"-18-24 x 1 5/16"-carb. mtg.
1-C2OZ 9A424-A	Seal (int. manifold to cyl. blk.-rear)	4-92060-S				Screw (No. 14-9 x 3/8"-opt. with 40922-S8
1-C2OZ 9A425-A	Seal (int. manifold to cyl. blk.-front)	12-351089-S8				Nut (5/16"-24-carb. to int. manifold)
2-C2OZ 9441-A	Gasket (int. manifold to cyl. block)	4-351253-S8				Washer (13/64" I.D.-7/16" O.D. att. rods to carb.)
3-B8A 9447-A	Gasket (carb. to int. manifold)	1-357940-S				Comp. sleeve (1/4" thermo. tube to choke)
1-C4GF 9510-H	Carb. (2/B-center)	1-357980-S				Comp. nut (1/4"-24-thermo. tube to choke)
2-C4GF 9510-J	Carb. (2/B front & rear)	2-358871-S8-S100				Wing nut (1/4"-20)
4-C3AE 9E544	End (carb. throttle synchro. rod)	2-370970-S8				Stud (1/4"-20 x 3"-air cleaner mounting)
1-EDJ 9601-A	Element (air cleaner)	1-372145-S				Washer (No. 10-spacer synchro throttle end)
1-C4RA 9A612-A	Tray (air cleaner)	1-372146-S				Nut (No. 8-32 throttle pin to throttle ends)
3-C1AE 9654-A	Gasket (air cleaner to carb.)	1-372175-S				Plug (vacuum hole in manifold)
1-C4RA 9661-A	Cover (air cleaner)	6-375416-S8-S35				Hose clamp (9/16" fuel line to outlet tube)
1-C3RA 9724-A	Bellcrank (accel.)					
1-C3AE 9780-A	Rod (bellcrank to carb.)					

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			260	289	289 spec.		
6B068							
65	B, X-M/T	C4DZ 6B068-B			1	1	INDUCTION KIT - HIGH PERFORMANCE - cont'd. To convert to (3) 2/B carbs. - Refer to 9B843 for accelerator control kit
66/68	B, X				1		
65/68	F				1	1	
6070							
66/67	B, X(2/B & 4/B carb. - P.F.)	C6OZ 6070-A			2		PLATE - REAR SUPPORT Approx. 4 3/4" long-3 5/16" wide
68	B(76)				2		
68	B, X (2/B)	C8OZ 6070-A			1		R. H.
		C8OZ 6070-B			1		L. H.
66/68	U	★C6TA 6070-C			2		Make from .18" thick steel-2 1/2" sq. -5/8" centered hole
6079							
65/		D1AZ 6079-B		1	1		GASKET SET - VALVE GRIND
Consists of							
2-D0OZ 6051-A Gasket		1-C9AZ 8255-A Gasket		▲1-D1OZ 9A425-A Seal			
16-C7AZ 6571-B Seal		▲1-D1OZ 9A424-A Seal		▲2-C3AZ 9441-D Gasket			
2-D0AZ 6584-B Gasket		▲ Serviced in D1AZ 9433-B					
68		C9AF 6B080-A			1		"O" RING - CYLINDER BLOCK HEATER - use with C7DE 6D008-A heater kit
6096							
BRACKET - REAR SUPPORT - Also Refer to Groups 6A023, 6054, 6068 & 6120							
66	B, X(2/B & 4/B carb. - P.F.)	C6OZ 6096-A			1		R. H.
		C6OZ 6096-D			1		L. H.
67	B, X(2/B & 4/B carb. - P.F.)	C6OZ 6096-C			1		R. H.
	"Before 4/3/67"	C6OZ 6096-G			1		L. H.
67	B, X(2/B, 4/B-P.F.)-	C6OZ 6096-F			1		R. H.
	"From 4/3/67"	C6OZ 6096-G			1		L. H.
68	B, X (2/B)	C6OZ 6096-F			1		R. H.
		C6OZ 6096-G			1		L. H.

6108-9 PISTON ASSEMBLY - CHART

In the Standard column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	RINGS	INCL.	QTY.	PART NUMBER					
						STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65		260	3	△	8	C2OZ 6108-L	C2OZ 6108-U	C2OZ 6108-M	C2OZ 6108-N	C2OZ 6108-R	C2OZ 6108-S
65/68	2/B	289	3	△	8	C8OZ 6108-N(R)	C8OZ 6108-S	C9OZ 6108-T	C9OZ 6108-U	C9OZ 6108-V	
65	4/B-R.F.	289				C8OZ 6108-R(B)					
65/68	4/B-P.F.	289	3	△	8	C5OZ 6108-F(R) C5GY 6108-C(B)	C5OZ 6108-G	C5OZ 6108-H	C5OZ 6108-J	C5OZ 6108-K	
65/67		289 Spec.	3	△	8	C3OZ 6108-L	C3OZ 6108-M				
65/68	All High Perf.Veh.- R.H.-deflector dome & cast in valve relief-use w/351 cyl. heads	289	3	△	4	C9OZ 6108-AB					
65/68	All High Perf.Veh.- L.H.-deflector dome & cast in valve relief -use w/351 cyl. head	289	3	△	4	★C9OZ 6109-C					

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
				260	289	289 spec	
6120							
BRACKET ASSY.-REAR SUPPORT-Refer to Rear Motor Mount Chart (Group 6A023)							
65/68		B2AZ 6135-A		8	8	8	PIN - PISTON-#Green-.9121" O.D. -.600" I.D. - 3.023" long -std. .001" O/S
		B2AZ 6135-B		8	8	8	
65/68	All High Perf. vehicles	B2AZ 6135-A			8		Use w/pop-up piston & 351 cyl. heads

△ Includes piston pin

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

RING SET - PISTON PARTIAL - CHART - Consists of the necessary rings to re-ring (2) pistons

YEAR	MODEL	C.I.D.	RINGS	TYPE	PART NUMBER				
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65		260	3	Hi Lo	B6AZ 6148-A	B6AZ 6148-B	B6AZ 6148-C	B6AZ 6148-D	C2AZ 6148-B
65/68		289	3	Hi Lo	C3AZ 6148-F	C3AZ 6148-G	C3AZ 6148-H	C3AZ 6148-J	
63/67		289 SPEC.	3	Hi Lo	C3AZ 6148-F	None used	None used	None used	None used
65/68	All High Perf. Veh. -use with C9OZ 6108-AB & C9OZ 6109-C	289	3	Hi	★C9OZ 6148-A				

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec	
		6200				ROD ASSY. - CONNECTING
65/68		C3AZ 6200-D	8	8		
65/67		C9ZZ 6200-B			8	
65/68	All High Perf. Vehicles	★C9OZ 6200-B		8		Use w/302 crankshaft

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER						
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S
65/68		+260,	8	8	C2OZ 6211-R	C2OZ 6211-S	C2OZ 6211-T	C2OZ 6211-U	C2OZ 6211-V	C2OZ 6211-Y	C2OZ 6211-Z
		+289	8	8							
65/67		+289 Spec.	8	8	C3OZ 6211-M	C3OZ 6211-N	C3OZ 6211-P	C3OZ 6211-R	C3OZ 6211-S	C3OZ 6211-T	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec	
65/67		C9AZ 6212-B			16	NUT - CONNECTING ROD - 3/8"-24-.557" hex, chamfered
65/68		C3DZ 6212-A	16	16		5/16"-24-hex,

		6214				BOLT - CONNECTING ROD
65/68		C3AZ 6214-A	16	16		5/16"-24 x 2 5/64"
65/67		C4OZ 6214-B			16	3/8"-24 x 2 1/8"

		6250				CAMSHAFT
65		C3OZ 6250-B	1			Less gear-includes (1) 378189-S dowel
65/68	Exc. F(GT 350)	C3AZ 6250-V		1		#UA-includes 378189-S dowel pin
65/67		C3OZ 6250-C			1	#VE
65/68	All High Perf. Vehicles	★C9OZ 6250-C		1		Hydraulic lifters-use w/high riser aluminum manifold or 351 cyl. heads
67/68	F(GT 350)			1		For mechanical lifters
67/68	F(GT 350)	★C7FE 6250-A		1		
65/68	All High Perf. Vehicles			1		
65/68		378189-S(NN54J)	1	1		Dowel-5/16" x 1 3/8"
65/68		C2OZ 6A251-A	1	1		BEARING KIT - CAMSHAFT-standard

Consists of

1-C2OZ 6261-A Front

1-C2OZ 6263-A Rear

1-C2OZ 6270-A Rear Intermediate

1-C2OZ 6262-A Center

1-C2OZ 6267-A Front Intermediate 1-C2OZ 6266-A Plug

65	"Before Chg/L7"	C3OZ 6256-C	1	1		SPROCKET - CAMSHAFT -cast iron-5.01" O.D. -
65	"Before Chg/L7"	C3OZ 6256-A			1	Cast iron-13/32" thick-42 teeth
65/68	"Chg/L7/"	C5OZ 6256-B		1		Nylon-42 teeth
65/67	"Chg/L7/"				1	
65/68		376058-S(BB157A)	1	1		Bolt (sprocket to camshaft)-3/8"-16 x 1 1/2"

6261, 6262, 6263, 6267 & 6270 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65/68		260, 289, 289 SPEC.	Standard .015" U/S	C2OZ 6261-A C2OZ 6261-B	C2OZ 6267-A C2OZ 6267-B	C2OZ 6262-A C2OZ 6262-B	C2OZ 6270-A C2OZ 6270-B	C2OZ 6263-A C2OZ 6263-B

Identification marking

† Bearing with oil hole optional with solid bearing

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			260	289	289 spec		
65	"Before Chg/L7"	▲C2OZ 6265-A	1	1			SPACER - CAMSHAFT GEAR OR SPROCKET - 7/32" thick-1 9/16" O. D. -21/64" gap
65		C3OZ 6265-A			1		3/8" thick-1 9/16" O. D. -7/8" I. D. -21/64" gap
68		378189-S(NN54J)			1		Dowel (spacer to sprocket & eccentric to camshaft)-5/16" x 1 3/8"
65/68		C2OZ 6266-A	1	1	1		PLUG - CAMSHAFT REAR BEARING-standard-2.156" O.D.-cup shaped
		C5AZ 6266-A	1	1	1		.060" O/S
		6267					Refer to Camshaft Bearing Chart (Basic No.6261)
65	"Before Chg/L7"	C2OZ 6268-A	1	1			CHAIN - TIMING -58 links
65/68	"Chg/L7/"	C3OZ 6268-A			1		58 links
65/67					1		
		6269					PLATE - CAMSHAFT THRUST
65	"Before Chg/L7"	C3OZ 6269-B	1	1			Std. -.22" thick-(2) 19/64" stud holes-(1) 47/64" center hole -(2) oil grooves 180° apart on rear face
65	"Before Chg/L7"	C3OZ 6269-A			1		3/8" thick
65/68	"Chg/L7/"	C9OZ 6269-A		1	1		Std. -1/4" thick
		C9OZ 6269-B		1	1		.002" O/S-#2
		C9OZ 6269-C		1	1		.004" O/S-#4
65/68		375932-S(BB807G)	2	2			Screw 1/4"-20 x 5/8"-special head (plate to sprocket)
65/68		42911-S(B41A)	2	2	2		Bolt (6269 to cylinder block)-1/4"-20 x 5/8"
		6270					Refer to Camshaft Bearing Chart (Group 6261)
65/68		C2OZ 6278-A	1	1	1		WASHER - CAMSHAFT SPROCKET -1.20" O. D. - .406" I. D. -.224" thick
65/68		C3AZ 6287-B	1	1	1		ECCENTRIC - CAMSHAFT FUEL PUMP DRIVE - (1) .325" diam.hole
68		43002-S(B257)			1		Bolt (eccentric, sprocket, spacer to camshaft)-3/8"-16 x 1/2"
65/68		C0DZ 6A302-A		1	1		PIN - CRANKSHAFT REAR OIL SEAL-.095" O. D. -.31" long-pointed
65/68		C3AZ 6303-F	1	1			CRANKSHAFT ASSY.
65/67		C3OZ 6303-B			1		
65	"Before Chg/L7"	C2OZ 6306-A	1	1			SPROCKET - CRANKSHAFT -21 teeth-steel or sintered iron
65/68	"Chg/L7/"	C5OZ 6306-A		1			21 teeth
65/67		C3OZ 6306-A			1		21 teeth-steel
69	All off highway vehicles	▲D1ZX 6306-AA			1		21 teeth-1 3/8" I.D.-2 1/2" pitch dia.-7 timing keyways
65/68		372890-S(LL17)	1	1	1		Key (sprocket to crankshaft)-3/16" x 1.40"
		6310					SLINGER - CRANKSHAFT OIL
65/68		C3OZ 6310-B	1	1	1		
65	A, B, F, X	C2OZ 6312-A	1	1			PULLEY ASSY. - CRANKSHAFT -single sheave-6 1/8" sheave diameter -2 1/2" long
65	F(2/B & 4/B carb.-R. F.)		1	1			
65/67	A (standard prod., X/C)	C5AZ 6312-B			1		#C5AE-A-single sheave-6 23/64" diam. -uses 3/8" belt
65/67	B (2/B & 4/B-P. F.)-std. prod. -X/C				1		
65/67	F,X(2/B & 4/B-P.F.)-std.prod.			1			
65/67	F (2/B & 4/B-P. F.)-X/C without P/S			1			
65	B Special (4/B carb.)-std. prod. -40 amp. alternator				1		
65/67	F Special(4/B carb.)-std. prod. alt.				1		
66/67	X (2/B, 4/B)-std. steer., R/A cover em/re-exc. A/C			1			
66/67	B (38 amp. alt., std. steer., R/A cover em/re-exc. A/C			1			
66/68	U (exc. T/E)			1			
67	B,F,X(2/E,4/B-P.F.P/S, 38 amp. alt., except T/E	C5AZ 6312-E			1		#C7AE 6312-A-double sheave-use 1/2" outer belt & (1) 3/8" inner belt-6-11/32" pulley diameters-3 1/64" long
67	A(P/S,X/C, 38 amp. alt.)				1		

Identification marking
May, 1975

▲ None used Chg/L7
COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 Spec	
6312			PULLEY ASSY. - CRANKSHAFT - continued			
65	F (P/S)	C2OZ 6312-B	1			Triple sheave-2.43" long-6 3/8" dia. at rear
65	F(4/B carb.)-X/C			1		sheave-6 1/8" dia. at front sheave-uses (2)
65/67	A(P/S, 40 or 60 amp. alt.)			1		3/8" belts & (1) 1/2" belt
65	F(P/S, A/C, X/C)		1			
65	F(4/B carb.) (P/S & A/C)			1		
65/68	A(A/C, T/E, A/C, T/E & 52 or 53 amp. alt.)	*C5AZ 6312-D R/B C8OZ 6A312-B (10-74)		1		#C5AE-B-triple sheave-7 19/64" outer pulley diam. -6 5/8" inner pulley diameters-uses (1) 1/2" belt & (2) 3/8" belts -3 3/4" long-includes (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
65	B (P/S & 53 or 55 amp. alt.)			1		
65	A(53, 55 amp. alt.)			1		
66/68	X (2/B, 4/B)-A/C			1		
66/68	B (A/C)			1		
66/68	F(2/B, T/E, A/C, P/S)			1		
66/67	F(4/B, -P.F., C4, T/E, A/C)			1		
66/67	F(4/B-P.F., 3 or 4/S/T, T/E, P/S, A/C, X/C, A/C)			1		
66/68	F(2/B, C4, 3/S/T, A/C, P/S, exc. T/E)			1		
66/67	F(4/B-P.F., C4, A/C, P/S, exc. T/E)			1		
67/68	A, B, X(2/B, 4/B-P.F., X/C, P/S, 53, 55, 60 amp. alt., exc. T/E)			1		
65/67	A, B(2/B carb.)-P/S, P/S & X/C	C5AZ 6312-E		1		#C7AE 6312-A-double sheaves-6 23/64" pulley diam. -uses (1) 3/8" & (1) 1/2" belt
65/67	B(4/B-P.F.)-P/S, P/S & X/C			1		
65/67	X(2/B & 4/B-P.F.)-P/S			1		
65/67	B & F Specials (4/B carb.)-P/S, P/S & X/C			1		
65/67	F(2/B & 4/B-P.F.)-P/S, P/S & X/C			1		
65/68	A	34810-S(X69)	1	1		Lockwasher-9/16"
6A312			PULLEY ASSY. - CRANKSHAFT - OUTER -			
66/67	A, B, F, X(2/B, 4/B-P.F.-std. steering-53, 55 amp. alt.-except T/E)	C5TZ 6A312-A		1		#C5TE 6312-A single sheave
66/67	A, B, F, X, U (2/B, 4/B-P.F.)-3 or 4/S/T	C6TZ 6A312-B		1		#C6TE 6A312-D-double sheave-use to service pulley ident. C6OE 6312-A-includes (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
66/68	F, X(4/B-P.F.)			1		
66/67	F Spec. (4/B, P/S)-T/E-"Before 1/3/67"			1		
66/67	A, B, F, X(2/B, C4)-exc. T/E			1		
66/67	A, B, F, X(2/B, C4)-T/E-"Before 11/14/66"			1		
67	F Special (4/B)-T/E-"From 1/3/67"			1		#C6TE 6A312-D-double sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
68	U			1		
68	B, X (P/S) 1	C8OZ 6A312-A		1		#C8OE 6312-A-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"-repl. pulley ident. C5OE 6312-A
65/67	A (std. prod., P/S, X/C, P/S & X/C, super X/C)			1		
65/67	B, F(2/B, 4/B-P.F.)-A/C, P/S			1		
65/67	B(2/B & 4/B-P.F.)-X/C			1		
65/67	B, F Spec. (4/B carb.)-A/C, P/S, P/S & A/C			1		
65/67	X (2/B & 4/B-P.F.)-X/C & A/C, P/S & X/C, P/S, A/C			1		
66/67	B (P/S, 55 amp. alt)			1		
66/67	A(P/S, 53, 55, 60 amp. alt)			1		
68	B, F, X (2/B) P/S, A/C	C8OZ 6A312-B		1		#C8OE 6312-B-triple sheave -incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
68	B, F, X(2/B)S/T, less A/C	C8OZ 6A312-C		1		#C8OE 6312-C-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"-repl. pulley ident. C7OE 6312-A or C7OE 6A312-C
67	A, B, F, X(2/B, C4)-T/E-"From 11/14/66"			1		
68	A, B, F, X-T/E			1		
68	B, F, X(S/T w/Imco)			1		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	spec	
		6316				DAMPER ASSY. - CRANKSHAFT
65		C4OZ 6316-A	1			#C4OE 6316-A-6 3/8" O.D.
65	4/B-R.F.	C3AZ 6316-B		1		#C4AE 6316-C or D
65/68	2/B,4/B-P.F.	C5AZ 6316-B		1		
65/67		C5OZ 6316-C				1 6 1/2" O.D.-3 37/64" long

6333 & 6337 BEARING - CRANKSHAFT MAIN - CHART

In the size column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65		260	Std. (R) .0959" .001" .002" .010" .020" .030"	x		C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6337-P C3AZ 6337-R C3AZ 6337-S C3AZ 6337-T C3AZ 6337-U C3AZ 6337-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V
65		260	Std. .0959" .001" .002" .010" .020" .030"		x	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6337-AA C3AZ 6337-AB C3AZ 6337-AC C3AZ 6337-AD C3AZ 6337-AE C3AZ 6337-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF
65/68		289 289 Spec.	Std. .0959" .001" .002" .010" .020" .030"	x		C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6337-P C3AZ 6337-R C3AZ 6337-S C3AZ 6337-T C3AZ 6337-U C3AZ 6337-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V
65/68		289 289 Spec.	Std. .0959" .001" .002" .010" .020" .030"		x	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6337-AA C3AZ 6337-AB C3AZ 6337-AC C3AZ 6337-AD C3AZ 6337-AE C3AZ 6337-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	spec	
65/68	A, B, F, X	C2OZ 6345-A	10	10	10	BOLT - CRANKSHAFT MAIN BEARING CAP - 7/16"-14 x 3.15"
66/68	U(exc. #3 cap-R.H. side)	C6TZ 6345-C		9		Stud-3/8"-16-7/16"-14 x 4.09"
66	U(#3 cap-R. H. side)			1		
65/67		C3OZ 6A360-A			1	COUNTERWEIGHT - CRANKSHAFT
65/68		C2OZ 6A366-A		1	1	PLATE - FLYWHEEL REINFORCING - 3 27/32" O.D. -2 1/8" I.D. -.075" thick-(6) 29/64" holes

		6375				FLYWHEEL ASSY.
65	F(C4 trans.)	C4OZ 6375-B	1			#C4OE 6375-B-includes 160 tooth ring gear-(14) 1/4" holes on 10 3/4" diam. bolt circle
65	F(3 or 4/S/T & O/D)	C4OZ 6375-D	1			#C7OE-E-157 tooth ring gear-(6) 5/16"-18 pressure plate attaching holes on 11 3/8" bolt circle
65/66	F,X(2/B, 3 or 4/S/T)	C3AZ 6375-J		1		#C6ZE-A,C7ZE-B-on eng. side-157 tooth ring gear-(6) 5/16"-18 pressure plate attaching holes on 11 3/8" bolt circle
65/67	F,X(4/B, 3 or 4/S/T-10" clutch)			1		
67/68	F(2/B, 3 or 4/S/T)			1		
65/68	B, F, X(A/T)	C3AZ 6375-L		1		#C8OP-C or D-157 tooth ring gear-(4) 7/16" converter attaching holes on 10 1/2" bolt circle

Identification marking
May, 1975

Full oil groove and (1) slot
COPYRIGHT © 1975 — FORD MOTOR COMPANY

Plain

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec.	
		6375				FLYWHEEL ASSY. - continued
65/68	A, B(2/B)-3 or 4/S/T or O/D-10" or 10 1/2" clutch	C5AZ 6375-S			1	#C7AE-A on eng. side-164 tooth ring gear (6) 5/16"-18 pressure plate attaching holes on 11 3/8" bolt circle
65	B(4/B P. F.)-3 or 4/S/T				1	
66	U(2/B)-10" clutch				1	
67/68	X(2/B)-3 or 4/S/T, 10"clutch				1	
66/68	U(11" clutch)	C6TZ 6375-C			1	#C7TE-A on eng. side-164 tooth ring gear-(6) 5/16"-18 pressure plate attaching holes on 12 3/8" bolt circle
65/67	A(A/T)	C5AZ 6375-T			1	Includes 164 tooth ring gear-(4) converter attaching holes on 11 7/16" bolt circle
65/67	F Spec. (M/T)	C3OZ 6375-E			1	# C7ZE-A-157 tooth ring gear (6) 5/16"-18 pressure plate attaching holes-on 11 3/8" bolt circle
65/67	A/T	C4OZ 6375-E			1	#C7ZP-A-157 tooth ring gear-(4) 7/16" converter attaching holes on 10 1/2" bolt circle
65	B Special (M/T)	C5OZ 6375-B			1	#C7OE-A-164 tooth ring gear-(6) 5/16"-18 pressure plate attaching holes on 11 3/8" bolt circle
65/68		B8A 6378-A		1	1	WASHER - CRANKSHAFT PULLEY RETAINING - 1.76" O.D.-.66" I.D.-.212" thick
65/67		C3OZ 6378-A			1	1 3/4" O.D. -21/32" I.D. -1/8" thick
65/68		B8AZ 6379-A		6	6	BOLT - FLYWHEEL TO CRANKSHAFT - 7/16"-20 x 15/16"
65	F (S/T & O/D)	C2OZ 6384-B		1		GEAR - FLYWHEEL RING - 157 tooth
65/67	F Special (4/B)-S/T				1	
65/68	F(2/B)-3 or 4/S/T				1	
65/67	F, X(4/B P. F.)-3 or 4/S/T-10" clutch				1	
65/66	X(2/B)-3 or 4/S/T-10" clutch				1	
65/68	A, B(2/B)-S/T, 10", 11" clutch	C5AZ 6384-D			1	164 teeth
65	B Special (4/B)-S/T				1	
65	B(4/B, P. F.)-S/T				1	
66/68	U				1	
67/68	X(2/B)-3 or 4/S/T, 10", 11" clutch				1	
65/68	A, B(2/B carb.)-3 or 4 S/T or O/D, 10" clutch- "Before 2/15/68"	C5AZ 6392-D			1	HOUSING ASSY. - FLYWHEEL #C5AA 6394-B-6 engine mounting holes-use lever C8OA 7541-A
67/68	X(2/B, 3 or 4/S/T, 10" clutch)- "Before 2/15/68"				1	
65	B Special (4/B carb.)-4/S/T				1	
65	B(4/B carb.-P. F.)-3/4/S/T				1	
68	B, X(2/B)-S/T- "From 2/15/68"				1	
65	F(3/4 S/T)	C3OZ 6392-E		1		# C3AA 6394-C - 5 engine mounting holes-includes (1) C3AZ 7513-A dust shield
65	F Spec. (4/B carb.)-4/S/T- "Before 8/20/64"				1	
65	F(4/B carb.-R. F.)-3/4/S/T				1	
65/66	X(2/B-3 or 4/S/T)	D2OZ 6392-A			1	#C5DA 6394-A or C9OA 6394-A-6 engine mounting holes-has hole that does not align-use flat washer for mounting-use lever #C8OA 7515-A
65/68	F(2/B)-3 or 4/S/T				1	
65/67	F Spec. (4/B carb.)-4/S/T- "From 8/20/64"				1	
65/67	F, X(4/B carb. -P. F.), 4/S/T				1	
66/68	U(2/B carb.)-3/S/T	D1TZ 6392-D			1	
55/68	A, B, U, X	20546-S8(B114)		AR	AR	Bolt (flywheel hsg. to cyl. block)-7/16"-14 x 2 1/2"
		34808-S8(X67)		AR	AR	Lockwasher-7/16"
68	F	20524-S7-8(BB111)			4	Bolt (flywheel housing to cyl. block)-7/16"-14 x 2"
65/68		EAD 6397-A			2	DOWEL - CYLINDER BLOCK - to flywheel housing-1/2" x 1"
65/68	M/T	C4OZ 6424-A		1	1	1 SEAL - REAR COVER PLATE - 5 3/4" O.D.-4 1/4" I.D.
65/68		D1AZ 6500-A		16	16	TAPPET ASSY. - VALVE - hydraulic
65/68	High Perf. , B, F	★C9OZ 6500-A			16	Hydraulic
65/68		D1ZZ 6500-B			16	Mechanical

6505-07 VALVE-INTAKE and EXHAUST-CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
65	260		4.87"	1.45"	Std. .003" .015" .030"	.3410"	C3OZ 6505-A C3OZ 6505-B C3OZ 6505-C C3OZ 6505-D	5.02"	1.67"	Std. .003" .015"	.3420" .3449" .3569"	C3OZ 6507-A C3OZ 6507-B C3OZ 6507-C
65/66	289	A,B,F,X,Taxi,P/C, .240"-from end of stem to beginning of slot- "Before Chg/L10"	4.87"	1.45"	Std. .003" .015" .030"	.3410"	C3OZ 6505-A C3OZ 6505-B C3OZ 6505-C C3OZ 6505-D		1.78"	Std. .003" .015" .030"	.3420"	C4OZ 6507-A C4OZ 6507-B C4OZ 6507-C C4OZ 6507-D
66/67	289	A(Taxi & P/C)- chrome finish on foot-"Chg/L10/"	4.87"	1.45"	Std. .003" .015" .030"	.3415	C7AZ 6505-A C7AZ 6505-B C7AZ 6505-C C7AZ 6505-D	4.87"	1.78"	Std. .003" .015" .030"	.3420"	C7AZ 6507-J C7AZ 6507-K C7AZ 6507-L C7AZ 6507-M
66/68	289	A(exc,Taxi & P/C), B,F,X,U- "Chg/L10/"	4.87"	1.45"	Std. .003" .015" .030"	.3415	C6AZ 6505-J C6AZ 6505-K C6AZ 6505-L C6AZ 6505-M	4.87"	1.78"	Std. .003" .015" .030"	.3420"	C7AZ 6507-J C7AZ 6507-K C7AZ 6507-L C7AZ 6507-M
65/67	289 SPEC.	Chrome finish on intake valves	4.87"	1.45"	Std. .003" .015" .030"	.3410" .3440" .3560" .3710"	C3OZ 6505-A C3OZ 6505-B C3OZ 6505-C C3OZ 6505-D	4.87"	1.78"	Std. .003" .015" .030"	.3420"	C4OZ 6507-A C4OZ 6507-B C4OZ 6507-C C4OZ 6507-D
65/68	289	High Perf., B, F- use w/351 High Perf. cyl. heads	5.07"	1.54"	Std.	.3414	D2AZ 6505-A	5.07"	1.84"	Std.	.3419	C9OZ 6507-J
65/68	289	High Perf., B, F- use w/351 High Perf. cyl. heads	5.07"	1.64"	Std.	.3414	★C9OZ 6505-AA	5.07"	1.87"	Std.	.3419	C9OZ 6507-AA

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 Spec	
65/68		DIAZ 6510-A		AR		BUSHING - VALVE GUIDE - must be reamed to size of valve
		6513				SPRING - VALVE
65/66	"Before Chg/L10"	B6A 6513-A	16	16		One piece design-7 coils-2.09" free length
66/67	"Chg/L10/13"	C6AZ 6513-B		16		One piece design-6 1/2 coils-1.86" free length
67	"Chg/L14/"	C7AZ 6513-E		16		#Dark Green
68		C8AZ 6513-A		16		#Black or Gray
65/67		C3OZ 6513-A			16	Two piece design-#Red paint-consists of the following-1-valve spring, 1 Damper spring
65/68	High Perf., B, F	C9OZ 6513-E		16		Use w/High riser manifold & 351 cyl. heads
65/68	High Perf., B, F	C9OZ 6513-A		16		Use w/351 cyl. heads & Std. manifold
65/68	High Perf., B, F	C9OZ 6513-C		16		Use w/351 cyl. heads & high output hyd.camshaft
		6514				RETAINER - VALVE SPRING
65/66	"Before Chg/L10"	C7AZ 6514-A	16	16		
66/67	"Chg/L10/13"	C6AZ 6514-B		16		1 1/4" O.D. - 1/2" high
67/68	"Chg/L14/"	C7AZ 6514-A		16		
65/67		C3OZ 6514-A			16	
65/68	High Perf., B, F	★C9OZ 6514-D		16		One piece design-use w/351 cyl. heads
65/68	High Perf., B, F	★C9OZ 6514-E		16		Two piece design-use w/351 cyl. heads
65/66	"Before Chg/L10"	B3Q 6515-A	AR	AR		SPACER - VALVE SPRING -1.36" O.D. - 1" I.D. - .030" thick
66	"Chg/L10/"	C6AZ 6515-A		AR		1.36" O.D. - .88" I.D. - .030" thick
65/68		7HA 6518-A	32	32	32	KEY - VALVE SPRING RETAINER
65/68	High Perf., B, F	C9ZZ 6518-A		32		Use w/351 cyl. heads
65/68		C2OZ 6524-A	1	1	1	BAFFLE - VALVE PUSH ROD VALLEY
65/68	High Perf., B, F	C2OZ 6524-A		1		Use w/high riser intake manifold
68		381709-S(UU52G)		2		Screw (baffle to intake manifold)-1/4"-20 x 3/8"
65/68		C5AZ 6A527-A	16	16		STUD - VALVE ROCKER ARM SUPPORT-std. - 3/8"-24-.3713"O.D. at non-threaded end-2.57"long .006" O/S-(2) grooves at base .015" O/S
		C5AZ 6A527-B	AR	AR		
		C5AZ 6A527-C	AR	AR		
65/67		C3OZ 6A527-B			16	2 1/2" long-3/8"-24 one end-7/16"-14 at base end

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec.	
65/68		C2OZ 6A528-C	16	16	16	SEAT - VALVE ROCKER ARM FULCRUM -
65/68		C2DZ 6A529-A	16	16	16	NUT - VALVE ROCKER ARM STUD - 3/8"-24 hex. locking
65/66	"Before Chg/L11"	C2OZ 6564-A	16	16	16	ARM - VALVE ROCKER - #A
65/67	High Perf., B, F					Use w/hydraulic cam and 351 W cyl. heads
65/68				16		
66/68	"Chg/L11/"	C6OZ 6564-B			16	
65/68	High Perf., B, F	★C9OZ 6A564-B			8	GUIDE - VALVE PUSH ROD - use w/351 cyl. heads
65/68		C2OZ 6565-B	16	16	16	ROD - VALVE PUSH -6.825" long
65/68		★C9OZ 6565-F			16	6.905" long-hardened steel
		6570				GROMMET
65/68		B9A 6570-A	1	1		Used on power steering oil reservoir cover stud-rubber-.32" I.D.-1" O.D.-1/2" thick
		6571				SEAL - VALVE STEM
65/66	"Before Chg/L10"	C3AZ 6571-B	16	16		Intake & exhaust
66/67	2/B "Chg/L10/13"	C6AZ 6571-C			16	
65/67		C3OZ 6571-C			16	Intake & exhaust
66/67	4/B-P,F-"Chg/L10/13"				16	
67/68	"Chg/L14/"	C7AZ 6571-B			16	Rubber-57/64" O.D.-23/32" high
65/68	High Perf., B, F	C7AZ 6571-B			16	Use w/high riser manifold and/or 351 cyl. heads

6582 COVER ASSY. - VALVE ROCKER ARM - CHART

YEAR	MODEL	C.I.D.	PAINTED		CHROME	
			R.H.	L.H.	R.H.	L.H.
65	F(2/B,4/B R.F. or P.F.)-NOTE 1	260,289	C6AZ 6582-G #Blue	ΔC6AZ 6582-G #Blue	C6ZZ 6582-A	C6ZZ 6582-A
65	F(2/B,4/B R.F. or P.F.)-NOTE 2	260,289, 289 Spec.	C6AZ 6582-G #Blue	ΔC6AZ 6582-B #Primed	C6ZZ 6582-A	ΔC6ZZ 6582-B
65	2/B,4/B	260,289	★C6AZ 6582-G #Blue	★C6AZ 6582-B Δ#Primed	★C6ZZ 6582-A Δ	★C6ZZ 6582-B Δ
65	2/B	289	ΔCC5AE 6582-E #Gold	ΔC6AZ 6582-B Δ#Primed		
65	4/B	289	ΔCC5AE 6582-D #Gold	ΔC6AZ 6582-B Δ#Primed		
65/66	"Before 5/2/66"	289, 289 Spec.	C6AZ 6582-G #Blue	ΔC6AZ 6582-B Δ#Primed	ΔC6ZZ 6582-A	ΔC6ZZ 6582-B
66/68	"From 5/2/66"	289, 289 Spec.	D2OZ 6582-D	D2OZ 6582-C	ΔC6ZZ 6582-H	ΔC6ZZ 6582-J

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec.	
		6582				COVER ASSY. - VALVE ROCKER ARM-continued
68		373071-S2(BB554M)		12		Screw & washer (cover to block)-1/4"-20 x 5/8"
65/68		20324-S8(B41)		7	7	Bolt (cover to cyl. head)-1/4"-20 x 5/8"
		34805-S8(X62)		7	7	Lockwasher-1/4"
		6A582				COVER ASSY. - VALVE ROCKER ARM
67/68	F(GT 350)	S2MS 6A582-A		1		R.H.
		S2MS 6A582-B		1		L.H.
		6584				GASKET - VALVE ROCKER ARM COVER
65/68		D0AZ 6584-B	2	2	2	Cork & rubber-optional w/C6OZ 6584-B
65/68		C6OZ 6584-B	2	2	2	Cork & rubber-optional w/D0AZ 6584-B
65/68		C2OZ 6600-A	1	1	1	PUMP ASSY. - OIL - rotor type - hex. drive - includes (1) each C2OZ 6626-C & C2OZ 6659-C gaskets
68		20428-S8(B82)		2		Bolt (pump to block)-3/8"-16 x 1 1/4"
		34807-S8(X66)		2		Lockwasher-3/8"
65/67	All (exc. Calif.)	D0AZ 6A603-G (EK-6-A)	1	1	1	EMISSION CONTROL KIT - EXHAUST

Consists of

1-D2AE 9C485-AA Tag eng. exh. emission I.D.

1-D0AE 12A091-C Valve assy. dist.

1-D0AE 12226-J Hose dist. vac. 3" long

1-ESB-M4G92-A Sealer, silicone rubber

1-Instruction sheet

65/68		B8A 6608-A	1	1	1	ROTOR and SHAFT ASSY. - OIL PUMP DRIVE - rotor type pump
-------	--	------------	---	---	---	--

Identification marking

Δ Has em/re hole

Δ Has oil fill hole

Δ "Solid" - does not have oil fill hole

NOTE 1 - Used with non-em/re or intake manifold type em/re

NOTE 2 - Used with non-em/re or rocker arm cover type em/re

★ U.S. only

● Canada only

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 Spec	
65/68		B8A 6616-C	1	1	1	PLATE - OIL PUMP BODY
65/68		20324-S(B41)	4	4		Bolt (cover plate to body)-1/4"-20 x 5/8"
		34805-S(X62)	4	4		Lockwasher-1/4"
68		42911-S(B41A)		4		Bolt (cover plate to body)-1/4"-20 x 5/8" hex. hd.
65/68		C2OZ 6A616-A	1	1	1	PLUG - OIL PUMP RELIEF VALVE - cup type-.642" & .650" O.D.-.361" height
65/68		C2OZ 6A618-A	1	1	1	SHAFT ASSY. - OIL PUMP INTERMEDIATE - 7.44" long-includes retaining ring
		6622				SCREEN, TUBE and COVER ASSY.-OIL PUMP
65/68	A,B,F,X	C3OZ 6622-A	1	1	1	
66/68	U	C6TZ 6622-D		1		
68	U	33799-S8(M52)		1		Nut (screen,tube and cover to crank bearing cap bolt)-3/8"-16
		34807-S8(X66)		1		Lockwasher-3/8"
68		357235-S(BB136)		2		Bolt (screen, tube and cover assy.to pump)-5/16"-18 x 7/8"
65/68		B8TZ 6626-A	1	1	1	GASKET - OIL PUMP INLET TUBE
65/68		B8A 6629-A	1	1	1	RING - OIL PUMP INTERMEDIATE SHAFT RETAINER -.52" O.D.-6 prongs
65/68	4/B	★C2OZ 6A630-A		1	1	DUCT - CRANKCASE VENTILATION
65		C2OZ 6A631-A (FA-58)	1			ELEMENT - CRANKCASE VENTILATION OIL SEPARATOR -1.62" O.D.-.60" I.D.-1.90" long
65/67		★C5OZ 6A631-A			1	
65		C2OZ 6A633-A	1			RETAINER - CRANKCASE VENTILATION OIL SEPARATOR ELEMENT -1.79" flange O.D.-1.90" long
65/68		C2OZ 6659-C	1	1	1	GASKET - OIL PUMP TO BLOCK -.010" thick
		6A664				HOSE - CRANKCASE VENTILATION - Also Refer to Group 6853
						INTAKE MANIFOLD TYPE
		C9PZ 6A664-A	AR	AR	AR	1/2" I.D.-25 ft.long-cut as required
						ROCKER ARM COVER TYPE
		C9PZ 6A664-A	AR	AR	AR	1/2" I.D.-25 ft.long-cut as required
65	F (2/B carb.)	★C4AE 6A664-A	1			5 3/4" long-attach 6A666 to 9A589
65	F (4/B carb.)			1		
65/67	B & F Specials (4/B carb.)				1	
66/68	A,B,F,X,U(2/B,4/B-P.F.)- "From 5/2/66"	C6AZ 6A664-N		1		12" long-attach 6A666 to 9A589
66/67	F Spec.(4/B)-"From 5/2/66"				1	
66/68	A,B,F,X,U(2/B,4/B)- "From 5/2/66"	C6AZ 6A664-P		1		13-1/2" long-attach oil filler cap to air cleaner
66/67	F Spec.(4/B)-"From 5/2/66"	★C6ZZ 6A664-A			1	11" long-attach oil filler cap to air cleaner
65/68	A,B,X	378754-S(II-22M)		1		Elbow-90°-attach 6A664 to 6A666
						THERMACTOR TYPE
65	A,B,F,X(2/B carb.)	C3DZ 6A665-B	1	1		ADAPTER ASSY. - CRANKCASE VENTILATION - use with 3.08" hose
65	F (4/B carb.-R.F.)			1		
65/68	A,B (B & F Specials) X, F	20310-S8(B48)	3		3	Bolt (adapter to manifold)-5/16"-18 x 1/2"
		34806-S7(X64)	3	3	3	Lockwasher-5/16"
		6A666				VALVE (POSITIVE CRANKCASE VENTILATION) (P.C.V.)
65		C7OZ 6A666-A (EV-42)		1		
65/68		D0AZ 6A666-A (EV-50)			1	
65/68		C2OZ 6670-A	1	1	1	SPRING - OIL PUMP RELIEF VALVE - 2,13" free length-15 active coils
65/68		C2OZ 6674-A	1	1	1	PLUNGER - OIL PUMP RELIEF VALVE - (rotor type pump)-3 grooves on .5603" O.D.-1.57" long
65/68	A,B,F,X	D0OZ 6675-C	1	1	1	PAN ASSY. - OIL
66/68	U	C6TZ 6675-D		1		
65/68		356748-S(BB124)	AR	AR		Bolt (1/4"-20 x 5/8" oil pan to front cover 2 req'd) oil pan to cyl. block (16 req'd)
65/68		357235-S(BB136)	AR	AR		Bolt (5/16"-18 x 7/8")-oil pan to front cover oil pan to cyl. block

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec.	
65/68		C3AZ 6700-A	1	1	1	SEAL - CYLINDER FRONT COVER OIL
65/68		C9OZ 6701-A	2	2	2	PACKING - CRANKSHAFT REAR - approx. 6 13/16" long rope type
65/68		C9ZZ 6701-A	2	2	2	Split lip type
6710-11						GASKET - OIL PAN - supplied only in 6781 gasket set
6723						SEAL - OIL PAN - supplied only in 6781 gasket set
65/68		★D1AZ 6730-A R/B D1AZ 6730-B (11-74)	1	1	1	PLUG - OIL PAN DRAIN - 1/2"-20 includes (1) C2OZ 6734-A gasket
65/68		★CIAZ 6731-A (FL-1)	1	1	1	ELEMENT ASSY. - OIL FILTER - "spin-on" one piece filter-has 3/4"-16 female threads
65/68		★CC1AZ 6731-A (FL-1)	1	1	1	
65/68	B(2/B carb.)-S/T	C1TZ 6731-D		1		Used with cartridge type oil filter
65/67	B Special(4/B carb.)-S/T	(FL-147)			1	
Consists of						
1-C0TE 6744-A, Element			2-ΔEAA 6746-A		Gasket	
1-C5RA 6744-A or			1- EAA 6749-A		Gasket	
1-D4PJ 6744-AA			1- EAA 6838-A		Gasket	
65/68		C2OZ 6734-A	1	1	1	GASKET - OIL PAN DRAIN PLUG - #Nylon-13/16" O.D. - 1/2" I.D. - 5/64" thick
65/68	B (M/T)	B8C 6737-A		1	1	COVER - OIL FILTER - used with cartridge type oil filter
65/68	B (M/T)	B2A 6741-A	1	1	1	BOLT AND VALVE ASSY. - OIL FILTER Center-used with cartridge type oil filter
65/68	B (M/T)	★EAA 6746-A		1	1	GASKET - OIL FILTER ELEMENT - 1.24" O.D. - .72" I.D. - .12" thick-supplied in 6731 kit-used with cartridge type oil filter
65/68	B (M/T)	EAA 6749-A	1	1	1	GASKET - OIL FILTER CENTER BOLT TO COVER - 1.18" O.D. - .77" I.D. - .06" thick-used with cartridge type oil filter
65	F(40 or 60 amp.alt.)	C2OZ 6750-B	1			INDICATOR ASSY. - OIL LEVEL - 20.59" shield to full
65	F (F Special-4/B carb.)-40 or 60 amp.alt.-"Before 8/20/64"		1		1	21.37" shield to add
65	A,B,F,X(exc.40 & 60 amp.alt.)	C3OZ 6750-B	1	1		22.48" shield to end
65	F (F Special-4/B carb.)- "From 8/20/64"				1	23.32" shield to full
65/67	A, F, X (2/B carb.)	C5AZ 6750-G		1		24.44" shield to end
65/67	F Special (4/B carb.)				1	#Black handle
65	B,X(4/B carb.-P.F.)			1		17.62" shield to full
65/67	B(2/B carb.)-w/Ford alt.			1		18.39" shield to add
65	B(4/B carb.-P.F.)-w/Ford alt.			1		19.40" shield to end
65	B Special (4/B carb.)-w/Ford alt.				1	
67	U (2/B carb.)			1		
68	B, F, X, U(2/B)			1		
65	B Special (4/B carb.)-exc. Ford alt.	C5OZ 6750-C			1	#Chromed handle
67	A, B, F, X, U(2/B, 4/B P.F.)			1		17.62" shield to full
67	F Special (4/B)				1	18.39" shield to add
65	B (2/B carb.)-L/N alt.	C5AZ 6750-A		1		19.40" shield to end
65	B(4/B carb.-P.F.)-L/N alt.			1		#Black plug in handle
65	B Spec. (4/B carb.)-L/N alt.				1	15.50" shield to full
						16.26" shield to add
						17.26" shield to end
66	U(2/B)	C6TZ 6750-D		1		16.48" top of shield to end
						14.98" top of shield to add
						14.55" top of shield to full
65	F	C2OZ 6754-A	1			TUBE ASSY. - OIL LEVEL INDICATOR - without 40 or 60 amp.alternator-includes bracket-approx. 15.83" developed length
65	F,(F Special-4/B carb.)- "Before 8/20/64"				1	

Identification Marking Δ Not required with C5RA 6744-C element
◇ When using C9ZZ 6701-A, remove pin from M. B. cap

☆ U.S. only • Canada only

FORD CAR PARTS

SECTION 60.4
8 CYL. - 260, 289

17

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 spec	
6754						TUBE ASSY. - OIL LEVEL INDICATOR -cont'd.
65	A, F, X (2/B carb.)	C5AZ 6754-A		1		Approx. 9" long
65	F(4/B carb. -P. F.)			1		
65	F Special (4/B carb.)- "From 8/20/64"				1	
65	B(2/B carb.)-exc. L/N alt.			1		
65	B(4/B carb. -P. F.)-Ford alt.			1		
65	B Spec. (4/B carb.)-Ford alt.				1	
65	B (2/B carb.)-L/N alt.	C5OZ 6754-A		1		
65	B(4/B carb. -P. F.)-L/N alt.			1		
65	B Spec. (4/B carb.)-L/N alt.				1	
66/67	A, B, F, X	C6AZ 6754-A		1	1	Approx. 11 1/4" long-includes bracket
66/68	U	C6TZ 6754-E		1		14-53/64" long
68	B, F, X	C8AZ 6754-A		1		Approx. 10 1/4" long-includes bracket
68		20345-S8(B150A)		1		Bolt (tube to cyl. head)-1/4"-28 x 3/4"
		351487-SXX291)		1		Lockwasher-3/8"
65/67	A, B (2/B carb.)	C2OZ 6758-A		1		TUBE - CRANKCASE VENTILATION - non-
65	B Special (4/B carb.)		1		1	emission reduction-attaches at rear on intake
65	F (2/B carb.)			1		manifold-includes bracket
65	F(4/B carb. -R. F.)				1	
65	F Special (4/B carb.)				1	
65/67	A, B, F(2/B carb.)	C4AZ 6758-B	1	1		To convert to non em/re-attaches to rocker arm
65	B Spec. (4/B carb.)				1	cover
65	A, B, F (2/B carb.)	C5AZ 6758-C		1		Attaches to rocker arm cover
65	B, F(4/B carb. -P. F.)			1		
65	X	★C5DZ 6758-A		1		Attaches to rocker arm cover
65	X	◆CC5DE 6758-A		1		
65/67	B & F Specials (4/B carb.)	★C5OZ 6758-A			1	Attaches to rocker arm cover
65	F(4/B carb. -R. F.)	20408-S7(B81)		1		Bolt (tube to brkt. to cyl. block)-3/8"-16 x 1 1/8"
		34807-S7-8(X66)		1	1	Lockwasher-3/8"
65/68		C2OZ 6763-A	1	1	1	PIPE - OIL FILLER - includes bracket
65/68	A, B, X	20308-S7(B40)	1	1		Bolt (to generator bracket)-1/4"-20 x 1/2"
		34805-S8(X62)		1	1	Lockwasher-1/4"
		44719-S8(X17)		1	1	Washer-flat-1/4"
65		B6AZ 6766-A (EC-61)		1		CAP ASSY. - OIL FILLER AND BREATHER - non-
		C2SZ 6766-B			1	emission reduction- #Black
6766						CAP - OIL FILLER & BREATHER - emission reduction
						INTAKE MANIFOLD TYPE
65		B6AZ 6766-A (EC-61)		1	1	#Black
		C2SZ 6766-B		1	1	#Chrome
						ROCKER ARM COVER TYPE OPEN
65		B6AZ 6766-A (EC-61)		1		#Black
		C2SZ 6766-B		1		#Chrome
65/66	"Before 5/2/66"	B6AZ 6766-A (EC-61)			1 1	#Black
		C2SZ 6766-B			1 1	#Chrome
66/66	"From 5/2/66"	C3AZ 6766-D (EC-64)			1	#Black
		C2SZ 6766-B			1	#Chrome
66/67	"From 5/2/66"	B6AZ 6766-A (EC-61)			1	#Black
		C3AZ 6766-E (EC-564)			1	#Chrome
						ROCKER ARM COVER - T/E
65/68		C4TZ 6766-B (EC-31)	1	1	1	#Black-upturned spout
		C5ZZ 6766-D (EC-10)		1		#Chrome

Identification Marking
May, 1975

★ U.S. only
COPYRIGHT © 1975 —

◆ Canada only
FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			260	289	289 Spec	
66/68		C4TZ 6766-B (EC-31)		1	1	ROCKER ARM COVER - CLOSED
66/68		C5ZZ 6766-D (EC-10)		1	1	
68		C8AZ 6766-A (EC-1)		1		#Black
		C8AZ 6766-B (EC-2)		1		#Chrome
68		C8AZ 6767-A		1		ELBOW - CRANKCASE VENTILATION HOSE - 90°-5/8" x 5/8"
65/68		D0OZ 6781-A	1	1	1	GASKET SET - ENGINE OIL PAN
Consists of						
1-C9OE 6710-B Gasket (R.H.)			2-C2OE 6723-A Seal (front & rear)			
1-C9OE 6711-B Gasket (L.H.)			1-C2OZ 6734-A Gasket (drain plug)			
65/68	B (M/T)	EAA 6838-A		1	1	GASKET - OIL FILTER MOUNTING -4.955" O.D. - 4.40" I.D. -.06" thick-used with cartridge type oil filter
65/68	B (M/T)	C5AZ 6840-A		1	1	GASKET - OIL FILTER ADAPTER
		★ 6853	★	★	★	HOSE - CRANKCASE VENTILATION Cut from B4C 4090-A 3/8" I.D. Cut from C3AZ 6A664-A 1/2" I.D. Cut from C3AZ 6A664-B 5/8" I.D. Also Refer to Basic 6A664
66/68		C5AZ 6A868-A		1	1	ADAPTER - OIL FILLER - Also refer to Group 6763
65		C2OZ 6870-A		1		GASKET - CRANKCASE VENTILATION TUBE - (3) 11/32" holes-.030" thick
65/68	B (M/T)	C2OZ 6881-B		1	1	ADAPTER ASSY. - OIL FILTER - includes (1) EAA 6890-C insert-used with cartridge type filter
65/68	B (M/T)	B2A 6889-A		1	1	SPRING - OIL FILTER ELEMENT RETAINING - approx. -.94" free length-4 active coils-used with cartridge type oil filter
65/68	B (M/T)	EAA 6890-C		1		INSERT - OIL FILTER MOUNTING BOLT -1 1/4" hex. -1-1/16"-12 male thread-3/4"-16 female thread-5/8" overall length-steel-undercut bottom flange-used with cartridge type oil filter-attach 6741 bolt & valve assy. to 6881 filter adaptor
65/68		D1AZ 6890-A	1	1	1	3/4"-16 & 1-1/16"-12 male threads-1 13/64" long- shoulder type-attach filter to cylinder block-use with "Spin-On" type filter
65/68	B (M/T)	EAM 6890-B		1	1	Plain-3/4"-16 internal & 1 1/16"-12 external threads-.52" overall length-use with cartridge type oil filter-attach 6881 filter adaptor to cyl. block
		6A892				RETAINER - CRANKCASE VENTILATION - GROMMET
65/68	Em/re "Before 5/2/66"	C8SZ 6A892-A		1	1	Grommet (holds 6A666 in 6582)-1 7/16" O.D. - 23/32"
65/68	Non-em/re		1	1		Holds 6758 in 6582
66/68	Em/re "From 5/2/66"	D0OZ 6A892-A		1	1	
68		C8AZ 6A892-A		1		Elbow to oil filler cap-1 7/16" O.D.-3 7/64" I.D. BOLT ASSY. - OIL FILTER ADAPTER MOUNTING
		6894				
65/68	B (M/T)	C4GY 6894-A		1	1	3/4"-16-4 9/32" long-used with cartridge type oil filter
65/68	B (M/T)	B2A 6898-A		1	1	RETAINER - OIL FILTER ELEMENT - 1 1/4" O.D.- 49/64" I.D.-used w/cartridge type oil filter
67/68	B, F, X(2/B, 4/B P.F.)	★C7OZ 6980-A				DRESS-UP KIT - CHROME FINISH
Consists of						
1-C5ZZ 6582-B Cover (rocker arm-L.H.)			1-C5OZ 9600-A Cleaner (air) alternate			
1-C4RA 6582-A Cover (rocker arm-R.H.)			1-C4RA 9A616-A Cap (air cleaner inlet)			
1-C5OZ 6750-A Dip stick (oil level)			12-20364-S Bolt (1/4"-20 x 7/8")			
1-C4DZ 6766-C Cap (oil breather)			12-354610-S40 Flat washer (1/4")			
1-C2SZ 8100-A Cap (radiator)			1-370971-S8 Stud (1/4"-18-20 x 3 51/64")			
1-C5ZZ 9600-W Cleaner (air)			1-378727-S Plug (1")			

Identification marking

FORD CAR PARTS

SECTION 60.5
8 CYL. 302,302 SPEC.

1

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302			
		6007					ENGINE ASSEMBLY - service details
		6008					GASKET SET - COMPLETE OVERHAUL
68/70	(2/B)M/T	C7AZ 6008-B	1				
	Consists of						
	1-C2OZ 6020-A	Gasket (cylinder front)			2-D3OE 6722-AA	Seal (oil pan-front)	
	2-C3AZ 6051-C	Gasket (cylinder head)			1-C2OZ 6734-A	Gasket (oil pan drain plug)	
	16-C7AZ 6571-B	Seal (valve stem)			1-C9AZ 8255-A	Gasket (water outlet)	
	2-D0AZ 6584-B	Gasket (rockerarm cover)			1-C5AZ 8507-B	Gasket (water pump)	
	1-B8TZ 6626-A	Gasket (inlet tube)			1-C5AZ 8513-A	Gasket (water pump cover)	
	1-C2OZ 6659-C	Gasket (oil pump)			1-C3AZ 9417-C	Gasket (fuel pump)	
	1-C3AZ 6700-A	Seal (crankshaft-front)			1-D1OZ 9A424-A	Seal (intake manifold-rear)	
	2-C9OZ 6701-A	Packing (crankshaft-rear)			1-D1OZ 9A425-A	Seal (intake manifold-front)	
	1-C9OE 6710-A	Gasket (oil pan-R. H.)			2-C3AZ 9441-D	Gasket (intake manifold)	
	1-C9OE 6711-A	Gasket (oil pan-L. H.)			1-D0AZ 8513-A	Gasket (water pump cover) (exc.Bronco)	
68/68/71/	(4/B)M/T A/T B, F, P-M/T	D1AZ 6008-B	1 1 1				
	Consists of						
	1-C2OZ 6020-A	Gasket			2-C9OZ 6701-A	Seal	1-C5AZ 8513-A Gasket
	2-D0OZ 6051-A	Gasket			1-C9OE 6710-B	Gasket	1-D0AZ 8513-A Gasket
	16-C7AZ 6571-B	Seal			1-C9OE 6711-B	Gasket	1-C3AZ 9417-C Gasket
	2-D0AZ 6584-B	Gasket			2-D3OE 6723-AA	Seal	1-D1OZ 9A424-A Seal
	1-B8TZ 6626-A	Gasket			1-C2OZ 6734-A	Gasket	1-D1OZ 9A425-A Seal
	1-C2OZ 6659-C	Gasket			1-C9AZ 8255-A	Gasket	2-C3AZ 9441-D Gasket
	1-C3AZ 6700-A	Seal			1-C5AZ 8507-B	Gasket	
71/	U-M/T	★D1TZ 6008-A	1				Replaced by D1AZ 6008-B (8-74)
	Consists of						
	1-C2OZ 6020-A	Gasket			2-C9OZ 6701-A	Seal	1-C5AZ 8513-A Gasket (Bronco)
	2-D0OZ 6051-A	Gasket			1-C9OE 6710-B	Gasket	1-D0AZ 8513-A Gasket (other trucks)
	16-C7AZ 6571-B	Gasket			1-C9OE 6711-B	Gasket	1-C3AZ 9417-C Gasket
	2-D0AZ 6584-B	Gasket			2-D3OE 6723-AA	Seal	1-D1OZ 9A424-A Gasket
	1-B8TZ 6626-A	Gasket			1-C2OZ 6734-A	Gasket	1-D1OZ 9A425-A Gasket
	1-C2OZ 6659-C	Gasket			1-C9AZ 8255-A	Gasket	2-C3AZ 9441-D Gasket
	1-C3AZ 6700-A	Seal			1-C5AZ 8507-B	Gasket (Bronco)	
69/71		C9ZZ 6008-B	1				
	Consists of						
	1-C2OZ 6020-A	Gasket (front cover)			1-C9OE 6711-B	Gasket (oil pan-L.H.)	
	2-D1ZZ 6051-B	Gasket (cyl. head)			2-D3OE 6722-AA	Seal (oil pan-front & rear)	
	16-C9ZZ 6571-A	Seal (valve stem)			1-C2OZ 6734-A	Gasket (oil pan plug)	
	2-D0OZ 6584-A	Gasket (rocker arm cover)			1-C9AZ 8255-A	Gasket (water connection)	
	1-B8TZ 6626-A	Gasket (oil pump inlet)			1-C5AZ 8507-A	Gasket (water pump)	
	1-C2OZ 6659-C	Gasket (oil pump)			1-C5AZ 8513-A	Gasket (water pump)	
	1-C3AZ 6700-A	Seal (crankshaft - front)			1-C3AZ 9417-C	Gasket (fuel pump)	
	2-C9ZZ 6701-A	Seal (crankshaft-rear)			1-D1OZ 9A424-A	Seal (intake manifold-front)	
	1-C9OE 6710-B	Gasket (oil pan-R.H.)			1-D1OZ 9A425-A	Seal (intake manifold-rear)	
					2-C9ZZ 9441-A	Gasket (intake manifold to head)	
68/		C2OZ 6A008-A	4	4			DOWEL - CYLINDER HEAD TO CYLINDER BLOCK
		6D008					HEATER KIT - CYLINDER BLOCK
68/71		C7DE 6D008-A	1				
72		CD0DZ 6D008-A	1				600 watt
		6009					CYLINDER ASSY. - Includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated
68/68/71	A, F, P, U, X B	D1TZ 6009-E	1 1 1 1				
72	B-M/T						
72	B-A/T(exc. Calif.)						
72	B(A/T)(Calif.)	D2OZ 6009-C	1				
69/71		D1ZZ 6009-C		1			4 bolt M. B. caps

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302	Spec		
6010							△BLOCK ASSY. - CYLINDER
68/		D1TZ 6010-B	1				Hydraulic tappets-includes (1) C50Z 6269-D thrust plate
69/71		D1ZZ 6010-B		1			
6B018							WIRE ASSY. - BLOCK HEATER
71		D1AB 6B018-AA	1				
72		D2AZ 6B018-A	1				74" long-use with 6A051 heater assy.
6019							COVER ASSY. - CYLINDER FRONT
68/		D3OZ 6019-A	1	1			
68/71		357235-S(BB136)	2				Bolt (cover to block)-5/16"-18 x 7/8"
69/71		376256-S(BB545A)	4	2			Bolt (cover to block)-5/16"-18 x 1"
69/71		56126-S(B319M)		2			Bolt (cover to block)-5/16"-18 x 2"
69/71		384039-S(WW135B)		2			Stud (cover to block) 5/16"-18 x 3 1/8"
72	A,B,F,P	300958-S(B73B)	2				Bolt (cover to block)-5/16"-24 x 5"-hole #13
68/		C2OZ 6020-A	1	1			GASKET - CYLINDER FRONT COVER - .030" thick
6023							POINTER - TIMING
68/69		C8AZ 6023-B	1	1			
69			1				
70/71	U		1				
72	U(exc. Calif.)		1				
72	U(Calif.)	D2TZ 6023-B	1				Steel
70/71	A,Taxi,P/C,B,F,P	C9TZ 6023-A	1				
72	A,B,F,P(exc. Calif.)		1				
72	A,B,F,P(Calif.)	D2OZ 6023-A	1				Steel
70/71		D0ZZ 6023-A		1			Steel
69/		56126-S(B319M)	2	2			Bolt (pointer & cover to block)-5/16"-18 x 2"
72	U(Calif.)	★383112-S2	1				Screw (attach 6023 to block)-No.10-24 x 5/16"
70/	U(exc. Calif.)	373913-S(UU40)	1				Screw (attach 6023 to 6059)-No.10-24 x 5/16"
70/71		33770-S4(M89K)		2			Nut-5/16"-18-att.6023 & 6019 to block

6A023, 6054, 6068 & 6120 REAR MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT	*BRACKET- REAR SUPPORT	* INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- A -							
68	A-M/T, C4	302		C8AZ 6054-A	C8AZ 6068-B		
68	A-C/M	302		C8AZ 6054-A	C9AZ 6068-E		
69/71	A-C/M "Before 7/1/71"	302		C9AZ 6054-A	C9AZ 6068-F		
71/	A-C/M "From 7/1/71"	302		D2AZ 6054-A	D2AZ 6068-A		
69/71	A-M/T, C4- "Before 7/1/71"	302		C9AZ 6054-A	D2AZ 6068-C		
71/	A-MT, C4- "From 7/1/71"	302		D2AZ 6054-A	D2AZ 6068-C		
- B -							
68/69	B(exc. 76)	302	C6OZ 6A023-B	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
68/69	B(76)	302	C6OZ 6A023-B	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
70	B(exc. 57, 76) - "Before 6/15/70"	302	D0OZ 6A023-B	D0OZ 6096-A(R.H.) D0OZ 6096-B(L.H.)	D1ZZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
70/71	B(exc. 57, 76) - "From 6/15/70"	302	D0OZ 6A023-B	D0OZ 6096-C(R.H.) D0OZ 6096-D(L.H.)	D1ZZ 6068-B	Use 6096	Use 6096
70	B(57, 76) - "Before 6/15/70"	302	D0OZ 6A023-B	D0OZ 6096-A(R.H.) D0OZ 6096-B(L.H.)	D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
70/71	B(57, 76) - "From 6/15/70"	302	D0OZ 6A023-B	D0OZ 6096-C(R.H.) D0OZ 6096-D(L.H.)	D0OZ 6068-A	Use 6096	Use 6096
72	B	302			D3OZ 6068-A		

△ 6015 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6010 assembly.

* One required unless otherwise noted

6A023, 6054, 6068 & 6120

REAR MOTOR MOUNT CHART - continued

YEAR	MODEL	C.I.D.	*SUPPORT	*BRACKET- REAR SUPPORT	*INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- F -							
68/70	F	302	C7ZZ 6A023-D		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
69/70	F-Boss	302 Spec.	C7ZZ 6A023-D		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
71	F-M/T	302	D1ZZ 6A023-B		D1ZZ 6068-D		
71	F(exc.76)-C4	302	D1ZZ 6A023-B		C8ZZ 6068-A		
71	F(76)-C4	302	D1ZZ 6A023-B		D1ZZ 6068-D		
72	F(exc.76)-M/T	302	D1ZZ 6A023-B		C8ZZ 6068-A		
72	F(76)-M/T	302	D1ZZ 6A023-B		D1ZZ 6068-D		
72	F(exc.76)-A/T	302	D1ZZ 6A023-A		C8ZZ 6068-A		
72	F(76)-A/T	302	D1ZZ 6A023-A		D1ZZ 6068-D		

- P -							
71/	P-w/floor mounted shift-M/T	302	D4DZ 6A023-A		D1ZZ 6068-D		
71/	P-w/column shift-M/T	302	D4DZ 6A023-A		D1ZZ 6068-B		
71/	P-(A/T)	302	D4DZ 6A023-A		D1ZZ 6068-B		

- U -							
69/	U	302	C6TZ 6A023-B	C6TZ 6096-A	*C6TZ 6068-D		

- X -							
68	X	302	C6OZ 6A023-B	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-A		C6DZ 6120-F
68/69	X "From 12/1/67 to 2/13/69"	302	C6OZ 6A023-B	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-A	C6DZ 6120-E	C6DZ 6120-F
69	X "From 2/13/69"	302	C6OZ 6A023-B	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-B		
70	X	302	C6OZ 6A023-B		D0OZ 6068-B		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302	Spec	
6026			PLUG - ENGINE			
68/ 69/70	F-Boss	C8AZ 6026-C	10			Standard-1 1/2" O.D.-plug core holes in head or block
		C8AZ 6026-D	AR	6	AR	.060" O/S
68/71 68/71		353055-S(PP29)	4			Plug (oil gallery holes in block)-1/4"-18-pipe
			2			(Drain holes in block)
68/ 68/		376099-S(PP73A)	1			Plug (rear holes in block)-3/4" -cup
		376301-S(PP67A)	3			Plug (front main oil gallery) & (cylinder block oil passages)-1/2"-cup
69/71 69/71		376301-S(PP67A)		4		Plug (cup 1/2"-plug holes in head)
		370730-S(PP46D)		6		Plug (drain holes in block)-1 1/4"-11 1/2 pipe
72		87837-S(P15)	3			Plug (main gallery 6010)-1/4"-18 pipe
			2			Plug (drain holes 6015)-1/4"-18 pipe

6A027						
69/	U	C6TZ 6A027-A	2			SPACER - SUPPORT INSULATOR Rear

* One required unless otherwise noted
May, 1975

COPYRIGHT © 1975 —

† Two required
FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302	Spec	

6028,6029,6030,6031 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT BRACKET		* BRACKET		*INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.

- A -

68	A(2/B)	302	C5AZ 6028-B	C8AZ 6029-B			D3AZ 6038-E	D3AZ 6038-E
69/	A(2/B)	302	C9AZ 6028-D	C9AZ 6029-D			D3AZ 6038-E	D3AZ 6038-E

- B -

68/69	B(exc.76)	302	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-G	D0OZ 6038-G
68/69	B(76)	302	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-H	D0OZ 6038-H
70/71	B(exc.76)	302	D0OZ 6028-B	D0OZ 6029-B			D0OZ 6038-G	D0OZ 6038-G
70/71	B(76)	302	D0OZ 6028-B	D0OZ 6029-B			D0OZ 6038-H	D0OZ 6038-H
72	B	302					D2OZ 6038-C	D2OZ 6038-D

- F -

68/69	F(exc.76)	302	D0ZZ 6028-C	D0ZZ 6029-C	D0ZZ 6030-B	D0ZZ 6031-B	D0OZ 6038-G	D0OZ 6038-G
68/69	F(76)	302	C8ZZ 6028-B	D0ZZ 6029-D	C8ZZ 6030-A	C8ZZ 6031-A	D0ZZ 6038-B	D0ZZ 6038-B
69	F-Boss	302 Spec	D0ZZ 6028-C	D0ZZ 6029-C	D0ZZ 6030-B	D0ZZ 6031-B	D0OZ 6038-G	D0OZ 6038-G
70	F(exc.76)	302,302 Spec.	D0ZZ 6028-C	D0ZZ 6029-C	D0ZZ 6030-A	D0ZZ 6031-A	D0OZ 6038-G	D0OZ 6038-G
70	F(76)	302,302 Spec.			D0ZZ 6030-B	D0ZZ 6031-B	D0ZZ 6038-B	D0ZZ 6038-B
71/	F(exc.76)	302	D0OZ 6028-B	D0OZ 6029-B			D0OZ 6038-G	D0OZ 6038-G
71/	F(76)	302	D1ZZ 6028-A	D1ZZ 6029-A			D1ZZ 6038-B	D1ZZ 6038-B

- P -

71/	P	302	D0DZ 6028-B	D0DZ 6029-B			D0DZ 6038-B	D0DZ 6038-B
-----	---	-----	-------------	-------------	--	--	-------------	-------------

- U -

69/	U	302	Refer 5057	Refer 5058			C7TZ 6038-G	C7TZ 6038-G
-----	---	-----	------------	------------	--	--	-------------	-------------

- X -

68	X(exc.76)	302	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-G	D0OZ 6038-G
68	X(76)	302	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-H	D0OZ 6038-H
69	X(exc.76)	302	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-F	D0OZ 6038-F
69	X(76)	302	C6DZ 6028-A	C6DZ 6029-A				
70	X	302	C6DZ 6028-A	C6DZ 6029-A			D0OZ 6038-G	D0OZ 6038-G

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302	Spec	

6030-1

BRACKET - FRONT SUPPORT - Refer to
Front Motor Mount Chart - Group 6028

6038

INSULATOR - FRONT SUPPORT - Refer to
Front Motor Mount Chart - Group 6028

6C038

SHIELD - MOTOR MOUNT HEAT

68/69	A	C3DZ 6C038-A	2			8" long
70/	A	C9AZ 6C038-A	1			R.H.
		C9AZ 6C038-B	1			L.H.
71/	P	D4DZ 6C038-A	1			L.H.-not used on R.H. side
69/70	F-Boss	C9ZZ 6C038-A		1		L.H.-not used on R.H. side
71	F-Boss	D1ZZ 6C038-A		1		L.H.-not used on R.H. side
71	B, F		1			L.H.-not used on R.H. side

6A042

REINFORCEMENT - REAR SUPPORT

68/69	B, X-Note 1	C8OZ 6A042-C	1			R.H.
		C8OZ 6A042-D	1			L.H.
70/	B(exc.76)	D0OZ 6A042-A	1			R.H.
		D0OZ 6A042-C	1			L.H.
72	B	D2OZ 6047-A	2			BOLT - INSULATOR TO CROSSMEMBER - 3/8"-16 x 15"-hex.hd. piloted

* One required unless otherwise noted

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302	Spec		
6049							HEAD - CYLINDER
69/	U-Imco "From Ser. E10, 001"	▲DITZ 6049-A	2				
68	A(P/C, Taxi), A, B(2/B)-3 or 4 M/T-w/T/E	C8AZ 6049-F	2				
68	A(2/B)-A/T-Imco- "From 3/12/68"	C8OZ 6049-G	2				
68	X	C8OZ 6049-L	2				Includes (4) C6AZ 6052-A plugs-used when servicing Imco heads
68	F-M/T	C8OZ 6049-C	2				
68	F-A/T	C8ZZ 6049-A	2				
68/70	High Perf.B, F	D1OZ 6049-B	2				Valve seats must be ground to accommodate High Perf. valves
69	A, B, F, X-M/T	C9OZ 6049-C	2				
69	A, B, F, X-A/T	▲C9OZ 6049-G	2				Includes (8) D0AZ 6A529-A nuts-5/16"-24 (8) 384374-S2 washers-3/8" flat (1) 383791-S2 stud 5/16"-14 x 7 13/16" (1) 34988-S4 nut 7/16"-14 - (2) instruction sheets
68	A(P/C, Taxi), B(2/B)-A/T-Imco		2				
68	A(2/B)-A/T-Imco- "Before 3/12/68"						
68	A, B(2/B)-M/T-Imco		2				
69	U-Imco - "Before Ser. E10, 001"		2				
70	A, B, F-A/T	D2OZ 6049-B	2				
71/	A, B, F, P		2				Without valves
70	A, B, F-M/T	C9OZ 6049-E	2				
72		D2OZ 6049-C	2				Complete with valves
69		C9ZZ 6049-D		1			R.H. - Includes (4) D0ZZ 6505-A exhaust valves (4) D0ZZ 6507-A intake valves
69		D0ZZ 6049-B		1			L.H. - Includes (4) D0ZZ 6505-A exhaust valves, (4) D0ZZ 6507-A intake valves
70/71		D0ZZ 6049-A		2			Does not incl. valves
6051							GASKET - CYLINDER HEAD
68/	A, B, F, P, X	D0OZ 6051-A	2				
71/	U		2				
69/70	U "Before Ser. J10, 001"		2				
70	U "From Ser. J10, 001"	C9TZ 6051-A	2				Asbestos & steel
69/71		D1ZZ 6051-B		2			Steel & asbestos
72		D2AZ 6A051-A	1				HEATER ASSY. - ENGINE BLOCK - use w/6B018 wire assy.
68		C6AZ 6052-A	8				PLUG - CYLINDER HEAD EXHAUST AIR SUPPLY - to plug holes when T/E is not used
6054							RETAINER - REAR SUPPORT - Refer to Rear Motor Mount Chart - Group 6A023
6A061							INSULATOR ASSY. - REAR SUPPORT - REBOUND
69/	U	C6TZ 6A061-A	2				Lower
69/	U	C6TZ 6A061-D	1				6A023 c/member to transfer case
69/	U	383406-S100 (MM173MY)	1				Nut-3/8"-16 (att. 6A061 to 6A023)
6065							BOLT - CYLINDER HEAD
68/		C2OZ 6065-A	10				7/16"-14 x 2 9/32"
68/		C2OZ 6065-B	10				7/16"-14 x 3 29/32"
69/71		★C9ZZ 6065-A		20			7/16"-14 x 4 1/8"-repl.by B2AZ 6065-A (9-74)
6068							INSULATOR ASSY. - REAR SUPPORT - Refer to 6A023 Rear Motor Mount Chart
6070							PLATE - REAR SUPPORT
68/71	B(exc. 76), X	C8OZ 6070-A	1				R. H.
		C8OZ 6070-B	1				L. H.
68/71	B(76)	C6OZ 6070-A	2				R. H. & L. H.
69/	U	★C6TA 6070-C	2				Sheet steel-2 1/2" square-5/8" center hole-improvised

△ 6090 is a casting number and generally cannot be cross-referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6049 assy.

▲ Drill out A/C and P/S brackets when necessary to accommodate 7/16" bolts

Note 1 - not required on model 76 "From 12/1/67"

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302			
		6079					GASKET SET - VALVE GRIND
68/		D1AZ 6079-B	1				
	Consists of						
	2-D0OZ 6051-A Gasket						◆ 1-D1OZ 9A424-A Seal
	16-C7AZ 6571-B Seal						◆ 1-D1OZ 9A425-A Seal
	2-D0AZ 6584-B Gasket						◆ 2-C3AZ 9441-D Gasket
	1-C9AZ 8255-A Gasket						◆ Serviced in D1AZ 9433-B
69/71		C9ZZ 6079-B	1				
	Consists of						
	2-D1ZZ 6051-B Gasket (cylinder head)						◆ 1- D1OZ 9A424-A Seal (intake manifold)-front
	16-C9ZZ 6571-A Seal (valve stem)						◆ 1- D1OZ 9A425-A Seal (intake manifold)-rear
	2-D0OZ 6584-A Gasket (rocker arm cover)						◆ 1-C9ZZ 9441-A Gasket (intake manifold to head)
	1-C9AZ 8255-A Gasket (water connection)						◆ Serviced in D1ZZ 9433-A
68/71		C9AF 6B080-A	1				"O" RING - CYLINDER BLOCK HEATER use with C7DE 6D008-A heater kit
		6096					BRACKET - REAR SUPPORT - refer to groups 6A023, 6054, 6068 & 6120

6108-9 PISTON ASSEMBLY - CHART

In the Standard Column of the Chart below (R) designates Red Size - (B) designates Blue Size.
Red Size and Blue Size are optional for selective fit

YEAR	MODEL	C.I.D.	R I N G S	Q T Y.	PART NUMBER					
					STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
68/		302	3	▲	8 C9OZ 6108-N(R) 4.00" dia. C9OZ 6108-R(B)	D2OZ 6108-A	C9OZ 6108-T	C9OZ 6108-U	C9OZ 6108-V	
69/71		302 spec.	3	▲	8 D0ZZ 6108-A(R) 4.00" dia. D0ZZ 6108-B(B)	D0ZZ 6108-C				
68/70	All high perf. vehicles-R. H. - deflector dome & cast in valve relief-use w/351 cyl. head	302	3	▲	4 C9OZ 6108-AB 4.00" dia.					
68/70	All high perf. vehicles-L. H. - deflector dome & cast in valve relief-use w/351 cyl. head	302	3	▲	4 ★C9OZ 6109-C 4.00" dia.					
71	●Unique competition part	302 spec.	3	▲	8 ★D0ZX 6108-B					

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302			
		6135					PIN - PISTON
68/		B2AZ 6135-A	8				#Green-.9121" O.D.-.600" I.D.-3.023" long-std.
		B2AZ 6135-B	8				.001" O/S
69/71		C9ZZ 6135-E		8			
68/70	All high perf. vehicles	B2AZ 6135-A	8				Use w/pop-up piston & 351 high perf. cyl. head

6148 RING SET - PISTON PARTIAL - CHART - Consists of the necessary rings re-ring (2) pistons

YEAR	MODEL	C.I.D.	R I N G S	TYPE	PART NUMBER				
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S
68/		302, 302 spec.	3	Hi Lo	C3AZ 6148-F	C3AZ 6148-G	C3AZ 6148-H	C3AZ 6148-J	
68/70	All high perf. vehicles-use w/C9OZ 6108-AB & C9OZ 6109-C pistons	302	3		★C9OZ 6148-A				

▲ Includes piston pin

● Refer to appropriate muscle parts catalog

Identification marking

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302			
		6200		Spec			
68/		D3OZ 6200-A	8				ROD ASSY.- CONNECTING
69/71		C9ZZ 6200-B		8			
68/70	High perf. B, F	★C9OZ 6200-B	8				
70/71	High perf. vehicles	★D0ZX 6200-A		8			"Competition only"

6211 BEARING - CONNECTING ROD - CHART

In the Standard Column of the Chart below (R) designates Red Size - (B) designates Blue Size.
Red Size and Blue Size are optional for selective fit

YEAR	MODEL	C.I.D.	U P P E R	L O W E R	PART NUMBER							
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S	
68/		†302	8	8	C2OZ 6211-R	C2OZ 6211-S	C2OZ 6211-T	C2OZ 6211-U	C2OZ 6211-V	C2OZ 6211-Y	C2OZ 6211-Z	
69/71		302	8	8	C3OZ 6211-M	C3OZ 6211-N	C3OZ 6211-P	C3OZ 6211-R	C3OZ 6211-S	C3OZ 6211-T		
		spec.										
70/71	High perf. vehicles	302	8	8	★D0ZX 6211-A							
		spec.			D0ZX 6211-B(B)							

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302			
		6212					NUT - CONNECTING ROD
68/		C3DZ 6212-A	16				5/16"-24 hex.
69/71		C9AZ 6212-B		16			3/8"-24 hex.
70/71	●Unique competition part	★C9ZE 6212-A		16			
70/	All off highway vehicles	★D1ZX 6212-BA		16			7/16"-20 - 12 point head
		6214					BOLT - CONNECTING ROD
68/		C3AZ 6214-A	16				5/16"-24 x 2 5/64"
69/71		C9ZZ 6214-B		16			3/8"-24 x 2 7/64"
70/71	●Unique competition part	C7FE 6214-A		16			7/16"-20 x 2 7/16"
		6250					CAMSHAFT
68/71		C3AZ 6250-V	1				#UA-includes 378189-S dowel pin
72	A.F,P,U		1				
72	B-M/T		1				
72	B-A/T (exc. California)		1				
72	B (California)	D2OZ 6250-B	1				#2H
68	F(GT 350)	★C7FE 6250-A	1				Mechanical tappets
68/70	All high perf. vehicles		1				
68/70	All high perf. vehicles	★C9OZ 6250-C	1				Hydraulic tappets-use w/high riser alum.manifold or 35l cyl. heads
68	F(GT 350)		1				
69/71		D0ZZ 6250-A		1			#VE-D
68/		C2OZ 6A251-A	1	1			BEARING KIT - CAMSHAFT-Standard

Consists of

1-C2OZ 6261-A Front
1-C2OZ 6262-A Center

1-C2OZ 6263-A Rear
1-C2OZ 6267-A Front(intermediate)

1-C2OZ 6270-A Rear (intermediate)
1-C2OZ 6266-A Plug

68/72	"Before 5/2/72"	C5OZ 6256-B	1	1			SPROCKET - CAMSHAFT - #nylon-42 teeth
72	"From 5/2/72"	D3AZ 6256-B	1				
69/		378189-S(NN54J)	1				Dowel-5/16" x 1 3/8"
68/		43002-S(B257)	1				Bolt(plate to camshaft)-3/8"-16 x 1 1/2"

6261, 6262, 6263, 6267 & 6270 BEARING-CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
68/		302, 302 Spec	Standard	C2OZ 6261-A	C2OZ 6267-A	C2OZ 6262-A	C2OZ 6270-A	C2OZ 6263-A
			.015"U/S	C2OZ 6261-B	C2OZ 6267-B	C2OZ 6262-B	C2OZ 6270-B	C2OZ 6263-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302			
		6266					PLUG - CAMSHAFT REAR BEARING
68/		C2OZ 6266-A	1	1			Std.-2.156" O.D.-cup shaped
		C5AZ 6266-A	1	1			.060" O.S.

● Refer to appropriate muscle parts catalog # Identification marking † Bearing with oil hole optional with solid bearing
May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302	Spec		
68/		C3OZ 6268-A	1	1			CHAIN - TIMING - 58 links
		6269					PLATE - CAMSHAFT THRUST
68/		C9OZ 6269-A	1	1			Std.-.251" thick
		C9OZ 6269-B	1	1			.002" O/S
		C9OZ 6269-C	1	1			.004" O/S
68/		42911-S(B41A)	2	2			Bolt (plate to block)-1/4"-20 x 5/8"
		6270					BEARING - CAMSHAFT REAR INTERMEDIATE - Refer to Basic 6261
68/		C2OZ 6278-A	1	1			WASHER - CAMSHAFT SPROCKET -1.20" O.D. - .406" I.D. -.224" thick
		6287					ECCENTRIC - CAMSHAFT FUEL PUMP DRIVE
68/ 72	"Before 5/2/72"	C3AZ 6287-B	1	1			
72	"From 5/2/72"	D3AZ 6287-A	1				
68/		43002-S(B257)	1	1			Bolt (eccentric & sprocket to camshaft)-3/8"-16 x 1/2"
68/		C0DZ 6A302-A	1	1			PIN - CRANKSHAFT REAR OIL SEAL - .095" O.D. -.31" long-pointed
		6303					CRANKSHAFT ASSY.
68/		D2OZ 6303-B	1				#2MA -replaces crankshaft ident. 2M
69/71		D0ZZ 6303-A		1			Steel
		6306					SPROCKET - CRANKSHAFT
68/		C5OZ 6306-A	1	1			21 teeth
69/	All off highway vehicles	★D1ZX 6306-AA		1			21 teeth-1 3/8" I.D.-2 1/2" pitch diam.- 7 timing keyways
68/		372890-S(LL17)	1	1			Key (sprocket to crankshaft)-3/16" x 1 13/32"
69		C9ZZ 6307-A		8			PLUG - CRANKSHAFT - cuptype-1/2"high- 7/8" O.D.-used to plug clean out holes in crankshaft
69		C9ZZ 6307-B					RING - CRANKSHAFT RETAINING-15/16" O.D. - used to retain C9ZZ 6307-A plugs in crankshaft
		6310					SLINGER - CRANKSHAFT OIL
68/		C3OZ 6310-B	1	1			
		6312					PULLEY ASSY. - CRANKSHAFT - Also refer to Basic 6A312
68	A, B, F, X	★C5AZ 6312-D R/B C8OZ 6A312-B (10-74)	1				#C5AE-B-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
69	U	C5AZ 6312-B	1				#C5AE-A-single sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
		6A312					PULLEY ASSY. - CRANKSHAFT - OUTER
68	A, B, X(2/B, 4/B)-P/S	C8OZ 6A312-A	1				#C8OE 6312-A-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
68	B, F, X (2/B, 4/B)-P/S, A/C	C8OZ 6A312-B	1				#C8OE 6312-B-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
68	B, F, X (2/B, 4/B) M/T-less A/C	C8OZ 6A312-C	1				#C8OE 6312-C-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"-repl.pulley ident.
68	A-55 amp. alt. -M/T Imco		1				C7OE 6312-A or C7OE 6A312-C
69	F-Boss(4/B)			1			
68	A, B, F, X-T/E		1				
68	A, B, F, X-w/P/S, M/T, Imco		1				
69	A(P/C, Taxi)-w/A/C - 'Before 9/3/68"	C9AZ 6A312-A	1				#C9AE 6312-E-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
69	A(P/C, Taxi)-w/A/C - 'From 9/3/68"	C9AZ 6A312-C	1				#C9AE 6312-D-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
69	B, F, X-w/or w/o P/S	C9OZ 6A312-B	1				#C9OE 6312-E-double sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"-used to service pulley marked C9OE 6A312-D
69	A-w/55 or 65 amp.alt.w/o P/S		1				
69	A-w/or w/o P/S		1				
69	A-w/55 & 65 amp. (Ford) alt.-with P/S	D4UZ 6A312-A	1				#D3UE 6312-AA-triple sheave-repl. pulley ident. C9OE 6312-G
69	B, F, X-w/A/C	C9ZZ 6A312-B	1				#C9ZE 6312-B-triple sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
69	A-w/hang on A/C		1				
69/	U	C9TZ 6A312-B	1				#C9TE 6A312-B-single sheave-6 23/64" dia. - includes (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
69	U	C6TZ 6A312-B	1				#C6TE 6A312-D-double sheave-incl. (3) 42998-S2 or 8 bolt 3/8"-16 x 1"

Identification Marking

FORD CAR PARTS

SECTION 60.5
8 CYL. 302,302 SPEC.

9

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302		Spec	
6A312							PULLEY ASSY. - CRANKSHAFT - OUTER-cont'd.
70/71	A, B, F-with A/C	D00Z 6A312-B	1				#D00E 6312-C-triple sheave-use to serv. pulley
70	X-with A/C		1				ident, D0AE 6312-C
72	B, F-with A/C		1				
70	X(P/S)	D00Z 6A312-E	1				#D00E 6312-B-double sheave
71/	A, B, F-w/55 amp.alt. w/o P/S		1				
71/	P-w/55 amp. alt.		1				
70	A-with or without P/S	ØD00Z 6A312-B	1				#D00E 6312-C-triple sheave
	without A/C						
70/	B-with P/S without A/C		1				
70	F-with P/S without A/C		1				
71	F-w/rear window defroster		1				
	w/o P/S & A/C						
72	F-w/P/S w/o A/C		1				
71/	P-w/All A/C		1				
72	P-w/P/S w/o A/C		1				
72	U	D1TZ 6A312-A	1				#D1TE 6312-AB-double sheave
72	A, B, F, P-w/hang-on A/C	D2AZ 6A312-E	1				
70/71	F-Boss	D0ZZ 6A312-A		1			#D0ZE 6312-B-triple sheave-used to service
71	F-GT without A/C						pulleys marked D0ZE 6312 and D00E 6312-A
71/	P-w/Std. alt.		1				
70	F(2/B)-Std.		1				
70	X-w/o P/S or A/C		1				
70/	A, B, F-Std.-w/o P/S or A/C		1				

6316							DAMPER ASSY. - CRANKSHAFT
68		C8AZ 6316-A	1				6 1/2" O.D. -3 1/64" overall length
69		D2TZ 6316-B	1				Repl. pulley ident. #C9OE 6316-D
70/	U		1				
70/	A, B, F, P, X	D2OZ 6316-A	1				6 1/2" O.D.-4 1/8" long
69		C9ZZ 6316-B		1			6 1/2" O.D. -3 21/32" long w/timing marks
70/71		D0ZZ 6316-A		1			6 1/2" O.D. with timing marks
68/		377850-S(BB273A)	1	1			Bolt (damper & 6378 washer to crankshaft)-
							5/8"-18 x 2"-hex. head
68/		372890-S(LL17)	1				Key (damper to crankshaft)-3/16" x 1 13/32"
69/71		372854-S(LL-11)		1			Key (damper to crankshaft)-3/16" x 1 3/4"

6333 & 6337 BEARING - CRANKSHAFT MAIN - CHART

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
68/		Ø 302 Ø 302 Spec.	Std. - .0959" .001" .002" .010" .020" .030"	x		C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6337-P C3AZ 6337-R C3AZ 6337-S C3AZ 6337-T C3AZ 6337-U C3AZ 6337-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V	C3AZ 6333-P C3AZ 6333-R C3AZ 6333-S C3AZ 6333-T C3AZ 6333-U C3AZ 6333-V
68/		Ø 302 Ø 302 Spec.	Std. - .0959" .001" .002" .010" .020" .030"	x		C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6337-AA C3AZ 6337-AB C3AZ 6337-AC C3AZ 6337-AD C3AZ 6337-AE C3AZ 6337-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF	C3AZ 6333-AA C3AZ 6333-AB C3AZ 6333-AC C3AZ 6333-AD C3AZ 6333-AE C3AZ 6333-AF

Ø Plain

Ø Full oil grooves and (1) slot

Identification marking

May, 1975

COPYRIGHT © 1975 --

FORD MOTOR
COMPANY

-- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302	Speed	
6345						BOLT - CRANKSHAFT MAIN BEARING CAP
68/69/69/71	A,B,F,P,X U	C2OZ 6345-A	10 9	6		7/16"-14 x 3 3/16"
69/	U	C6TZ 6345-C	1			M. B. cap No. 1, 3, 5
69/70	"Before 10/1/69"	C9ZZ 6345-A		4		Stud (attach screen, cover to No. 3 R.H. cap) 3/8"-16 & 7/16"-14 x 4 3/32"
70/71	"From 10/1/69"	D0ZZ 6345-A		4		7/16"-14 x 3 9/64"-9/16" head height-M.B. cap No. 2 & 4 & attach baffle
69/71		43007-S2(B258A)		6		7/16"-14 x 3 9/64" - 3/4" head height-M.B. cap No. 2 & 4 & attach baffle
68/	A/T	C2OZ 6A366-A	1			Bolt-3/8"-16 x 2 1/8" (attach No. 2, 3, 4 M.B. cap) PLATE - FLYWHEEL REINFORCING -3 27/32" O. D. - 2 1/8" I. D. -.075" thick-(6) 29/64" holes
6375						FLYWHEEL ASSY.
68/71	A(2/B)-3 or 4 S/T	C5AZ 6375-S	1			#C7AE-A on eng. side-164 tooth ring gear (6)
68/	B, F, X(2/B, 4/B)-3 or 4 M/T		1			5/16"-18 pressure plate attaching holes on 11 3/8" bolt circle
68/72	A(P/C, Taxi), A(2/B)-C4, C/M B & F-C/M	C5AZ 6375-T	1			164 tooth ring gear-(4) converter attaching holes on 11 7/16" bolt circle
68/	B(2/B)-C4	C3AZ 6375-L	1			#C8OP-C or D-157 tooth ring gear-(4) 7/16"
68/71	B-C/M		1			converter attaching holes on 10 1/2" bolt circle
68/	F, P, X(2/B, 4/B)-C4		1			
69/	U(M/T)	C6TZ 6375-C	1			#C7TE-A-on engine side-164 tooth ring gear-
69/71	A(P/C, Taxi)-w/11" clutch -M/T		1			(6) 5/16"-18 pressure plate attaching holes on 12 3/8" bolt circle
69/71	F-Boss-M/T-10 1/2" clutch	C9ZZ 6375-B		1		164 tooth ring gear-(6) pressure plate attaching holes on 11 3/8" bolt circle
71/	P-M/T	C3AZ 6375-J	1			#C6ZE-B on eng. side-157 tooth ring gear-(6) 5/16"-18 pressure plate attaching holes on 11 3/8" bolt circle
68/		B8A 6378-A	1	1		WASHER - CRANKSHAFT PULLEY RETAINING- 1. 76" O. D. -.66" I. D. -.212" thick
6379						BOLT - FLYWHEEL TO CRANKSHAFT
68/		B8AZ 6379-A	6	6		7/16"-20 x 15/16"-used w/6A366 plate
72	A/T	D2AZ 6379-B	6			7/16"-20 x 3/4"-used w/o 6A366 plate
6384						GEAR - FLYWHEEL RING
68/	A,B,F,U,X-M/T	C5AZ 6384-D	1	1		164 teeth
70/	P-M/T	C2OZ 6384-B	1			157 teeth
6392						HOUSING ASSY. - FLYWHEEL
68	A(P/C, Taxi)-M/T	C5AZ 6392-D	1			#C5AA 6394-B-6 engine mounting holes-use lever
68/	B, F, X-M/T		1	1		#C8AA 7515-B - "Before 2/15/68"-use original lever
69/71	A(P/C, Taxi)-M/T	C9AZ 6392-A	1			Use lever #C8OA 7515-A
70/	P-M/T	D2OZ 6392-A	1			#C9AA 6394-A
69/	U	D1TZ 6392-D	1			Includes (1) C8OZ 7515-A lever assy.
68/71		20508-S8(B110)	2	2		Includes (1) B9AZ 7522-A bracket and
68/71		20546-S8(B114)	4	4		(2) 62329-S Rivet
72	B, F(M/T)	376275-S7-8	2			Bolt (flywheel housing to block)-7/16"-14 x 1 18/32"
72	P(M/T)	(BB181A)	4			Bolt (flywheel housing to block)-7/16"-14 x 2 1/2"
72	U	20546-S8(B114)	4			Bolt (flywheel housing to block)-7/16"-14 x 2 9/16"
68/		34808-S8(X67)	AR	AR		Bolt (flywheel housing to block)-7/16"-14 x 2 1/2" Lockwasher-7/16"
68/		EAD 6397-A	2	2		DOWEL - CYLINDER BLOCK-to flywheel housing- 1/2" x 1"
68/69/71	M/T	C4OZ 6424-A	1			SEAL - REAR COVER PLATE - 5 3/4" O. D. - 4 1/4" I. D.
6500						TAPPET ASSY. - VALVE
68/		D1AZ 6500-A	16			Hydraulic
68/69	High perf. B, F	*C9OZ 6500-A	16			Hydraulic
69/71	F-Boss	D1ZZ 6500-B		16		Mechanical
71	F-CJ	*D1AZ 6500-B		16		Hydraulic-replaced by D1AZ 6500-A (1-75)
70/	All off highway vehicles	*D1ZX 6500-CA		16		Mechanical-use w/D0ZX 6250-B kit only

Identification marking

6505-07 VALVE-INTAKE and EXHAUST-CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
68/69	302	A(exc. P/C & Taxi), B, F, X- "Before Chg./L4"	4.87"	1.45"	Std.	.3420"	C6AZ 6505-J	4.79"	1.78"	Std.	.3420"	C7AZ 6507-J
					.003"		C6AZ 6505-K			.003"		C7AZ 6507-K
					.015"		C6AZ 6505-L			.015"		C7AZ 6507-L
					.030"		C6AZ 6505-M			.030"		C7AZ 6507-M
69/	302	A(exc. P/C & Taxi), B, F, X- "Chg./L4/"	4.99"	1.45"	Std.	.3415"	D2TZ 6505-A	5.05"	1.78"	Std.	.3420"	D2TZ 6507-A
					.003"		★C9OZ 6505-F R/B D2TZ 6505-B (2-75)			.003"		D2TZ 6507-B
					.015"		★C9OZ 6505-G R/B D2TZ 6505-C (2-75)			.015"		★C9OZ 6507-G R/B D2TZ 6507-C (6-74)
					.030"		C9OZ 6505-H			.030"		C9OZ 6507-H
68/69	302	A(P/C, Taxi), U- "Before Chg./L4"	4.79"	1.45"	Std.	.3420"	C7AZ 6505-A	4.79"	1.78"	Std.	.3420"	C7AZ 6507-J
					.003"		C7AZ 6505-B			.003"		C7AZ 6507-K
					.015"		C7AZ 6505-C			.015"		C7AZ 6507-L
					.030"		C7AZ 6505-D			.030"		C7AZ 6507-M
69/ 69/71	302	A(P/C, Taxi) - "Chg./L4/" U-"Chg./L4/"	5.05"	1.46"	Std.	.3413"	D2TZ 6505-A	5.05"	1.78"	Std.	.3420"	D2TZ 6507-A
					.003"		D2TZ 6505-B			.003"		D2TZ 6507-B
					.015"		D2TZ 6505-C			.015"		D2TZ 6507-C
					.030"		C9AZ 6505-D			.030"		★C9AZ 6507-D R/B D2TZ 6507-D (10-74)
72	302	U	5.05"	1.46"	Std.	.3414"	D2TZ 6505-A	5.05"	1.78"	Std.	.3420"	D2TZ 6507-A
					.003"		D2TZ 6505-B			.003"		D2TZ 6507-B
					.015"		D2TZ 6505-C			.015"		D2TZ 6507-C
					.030"		D2TZ 6505-D			.030"		D2TZ 6507-D
68/70	302	High perf. B, F- use w/351 cyl.heads	5.07"	1.64	Std.	.3414	★C9OZ 6505-AA	5.07"	1.64"	Std.	.3414	C9OZ 6507-AA
68/70	302	High perf. B, F- use w/351 cyl.heads	5.07"	1.54	Std.	.3414	D2AZ 6505-A	5.07"	1.84"	Std.	.3420	D2AZ 6507-A
69	302 Spec.	F-Boss	5.05"	1.71"	Std.	.3414"	D0ZZ 6505-A	5.22"	2.23"	Std.	.3420"	C9ZZ 6507-A
					.003"		D0ZZ 6505-B			.003"		C9ZZ 6507-B
					.015"		D0ZZ 6505-C			.015"		C9ZZ 6507-C
					.030"		D0ZZ 6505-D			.030"		C9ZZ 6507-D
70/71	302 Spec.	F-Boss	5.05"	1.71"	Std.	.3414	D0ZZ 6505-A	5.23"	2.19"	Std.	.3420"	D0ZZ 6507-A
					.003"		D0ZZ 6505-B			.003"		D0ZZ 6507-B
					.015"		D0ZZ 6505-C			.015"		D0ZZ 6507-C
					.030"		D0ZZ 6505-D			.030"		D0ZZ 6507-D
70	302 Spec.	High perf.veh. competition eng. only					★D0ZX 6505-A					★ 6507

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302 Spec			
6510			BUSHING - VALVE GUIDE				
68/		D1AZ 6510-A	AR	AR			Intake & exhaust-2.29" long-.501" O.D-.313" I.D. - must be reamed to size of valve
70	●Unique competition part	★D0ZX 6A511-A		16			SPRING ASSY. - VALVE DAMPER
6513			SPRING VALVE				
68/ 69	"Before Chg./ L4"	C8AZ 6513-A	16				#Black or Gray
69/	"Chg./ L4/"	C9OZ 6513-B	16				
68/70	High perf. B, F	C9OZ 6513-A	16				Use w/std. 351 manifold & cyl. heads
68/69	High perf. B, F	C9OZ 6513-C	16				Use w/351 cvl.heads & high output hvd. camshaft
68/70	High perf. B, F	C9OZ 6513-E	16				Use with high riser manifold & 351 cvl. head
69/71		D0ZZ 6513-A		16			#4 dark Blue stripes

Identification Marking
May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

• Refer to appropriate muscle parts catalog
- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302	Spec		
		6514					RETAINER - VALVE SPRING
68/69	"Before Chg./L4"	C7AZ 6514-A	16				
69/	"Chg./L4/"	B9A 6514-A	16				
68/69	High perf. B, F- "Before 10/20/68"	★C9OZ 6514-D	16				One piece design-use w/351 cyl. heads
69/70	High perf. B, F- "From 10/20/68"	★C9OZ 6514-E	16				One piece design-use w/351 cyl. heads
69/71		C9ZZ 6514-A		16			
69/	"Chg./L4/"	B9A 6517-A	16				SLEEVE-VALVE SPRING RETAINER-intake & exhaust-conical-not used "Before Chg./L4"
		6518					KEY - VALVE SPRING RETAINER
68/		7HA 6518-A	32				
69/71		C9ZZ 6518-A		32			1/2" O. D. -3/8" high
68/70	High perf. B, F	C9ZZ 6518-A	32				Use w/351 cyl. heads
68/		C2OZ 6524-A	1	1			BAFFLE - VALVE PUSH ROD VALLEY
68/70	High perf. B, F		1				Use w/high riser intake manifold
68/		381709-S(UU52G)	2				Screw (baffle to intake manifold)-1/4"-20 x 3/8"
		6A527					STUD - VALVE ROCKER ARM SUPPORT
68/69	"Before Chg./L4"	C5AZ 6A527-A	16				Std. -3/8"-24 x 2 5/8"-.3717" diam. at non-threaded end
		C5AZ 6A527-B	AR				.006" O/S
		C5AZ 6A527-D	AR				.010" O/S-O. D. -.3821"
		C5AZ 6A527-C	AR				.015" O/S
69	"Chg./L4/"	C9OZ 6A527-E	16				Std. -3/8"-24 x 2 3/4"-.3717" diam. at non-threaded end
		C9OZ 6A527-F	AR				.006" O/S
		C9OZ 6A527-G	AR				.010" O/S
		C9OZ 6A527-H	AR				.015" O/S
70/		C9OZ 6A527-A	16				Std. -5/16"-24 x 2 3/4"-.3717" dia. at non-threaded end-use with D0AZ 6A529-A nut
		C9OZ 6A527-B	AR				.006" O/S
		C9OZ 6A527-C	AR				.010" O/S
		C9OZ 6A527-D	AR				.015" O/S
70	B, F	C1AE 6A527-C	1	1			Bolt-7/16"-14 x 3 1/4" (attach 7400 control to 7E046 plate)
69/71		C9ZZ 6A527-A		16			Std. -7/16"-20 & 7/16"-14
69	B, F, X	384374-S2 (XX140P)	16				Washer -3/8"flat-.107" thick-used with positive stop studs (6A527) when 1970 cyl. heads are used for past model service
		6A528					SEAT-VALVE ROCKER ARM FULCRUM
68/		C2OZ 6A528-C	16				
69/71		★C9ZZ 6A528-A		16			Replaced by D0OZ 6A528-B (11-74)
		6A529					NUT - VALVE ROCKER ARM STUD
68/69		C2DZ 6A529-A	16				3/8"-24 Hex. locking
70/		D0AZ 6A529-A	16				Nut-5/16"-24 (attach rocker arm to stud)
70	High perf. vehicles	C2DZ 6A529-A	16				Use w/351 cyl. heads
69/71		C8SZ 6A529-A		16			Nut-7/16"-20(attach rocker arm to stud)
69/71		C9ZZ 6A529-B		16			Nut-jam-7/16"-20 hex.
69/71		D0OZ 6A536-A		16			SEAT - VALVE SPRING
69/	Exc. taxi & P/C- "Chg./L4/"	C9OZ 6550-A	8				CAP - VALVE STEM EXHAUST-not used with D2TZ 6505-A, B, C or D valves
		6564					ARM - VALVE ROCKER
68/		C6OZ 6564-B	16				
69/71		C9ZZ 6564-A		16			
		6A564					GUIDE - VALVE PUSH ROD
69/71		C9ZZ 6A564-A		8			
68/70	High perf. B, F	★C9OZ 6A564-B	8				Use w/351 cyl. heads
		6565					ROD - VALVE PUSH
68/69	"Before Chg./L4"	C2OZ 6565-B	16				6.825" long-hydraulic tappets
69/	"Chg./L4/"	C9OZ 6565-B	16				6.905" long-hydraulic tappets
		D0OZ 6565-C	AR				.060" U/S
		D0OZ 6565-D	AR				.060" O/S
68/70		★C9OZ 6565-F	16				Mechanical tappets-6.950" long-hardened steel
69/70		C9ZZ 6565-A		16			7.595" long
71		D1ZZ 6565-A		16			7.66" long

FORD CAR PARTS

SECTION 60.5
8 CYL. 302,302 SPEC.

13

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302 Spec		
68/ 68/ 68/70 69/71	High perf. B, F	C7AZ 6571-B	16			SEAL - VALVE STEM-rubber-57/64" O. D. - 23/32" high
			16			Use w/high riser manifold and/or 351 cyl. heads
		C9ZZ 6571-A		16		5/8" O. D.-49/64" high -split ring around collar

6582 - 6A582 COVER ASSY.-VALVE ROCKER ARM CHART

YEAR	MODEL	C.I.D.	PAINTED		CHROME	
			R.H.	L.H.	R.H.	L.H.
68/70		302			C6ZZ 6582-H	C6ZZ 6582-J
68/		302	D2OZ 6582-D	D2OZ 6582-C		
69/71	F-Boss	302 Spec.			C9ZZ 6582-C Aluminum	C9ZZ 6582-C Aluminum
68	F(GT 350)	302			S2MS 6A582-A	S2MS 6A582-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302 Spec		
68/		353547-S2(GG173)	3			Clip wire (attach to cover)
68/		356748-S(BB124)	12			Bolt (cover to head)-1/4"-20 x 5/8"
68/		373071-S(BB554M)	12			Screw & washer (cover to head)-1/4"-20 x 5/8"
69/71		57623-S8(U3B)		16		Screw & washer (cover to head)-1/4"-20 x 7/8"

6584						
GASKET - VALVE ROCKER ARM COVER						
68/		D0AZ 6584-B	2			Cork & rubber-optional w/C6OZ 6584-B & C8OZ 6584-A
68/		C6OZ 6584-B	2			Cork & rubber-optional w/D0AZ 6584-B
69		*C8OZ 6584-A	2			Replaced by D0AZ 6584-B (9-74)
69/71		D0OZ 6584-A		2		

6600						
PUMP ASSY. - OIL						
68/		C2OZ 6600-A	1			Rotor type hex. drive-incl. (1) ea. C2OZ 6626-C & C2OZ 6659-C gaskets
69/71		C9ZZ 6600-B		1		Includes (1) C2OZ 6626-C & (1) C2OZ 6659-C gaskets
68/		376099-S(PP73A)	1			Cup plug (oil pump body)-3/4"
68/		20428-S8(B82)	2	2		Bolt (pump to block)-3/8"-16 x 1 1/4"
68/		34807-S9(X66)	2	2		Washer-3/8"
68/		B8A 6608-A	1	1		ROTOR AND SHAFT ASSY. - OIL PUMP DRIVE - rotor type pump
68/		B8A 6616-C	1	1		PLATE - OIL PUMP BODY
68/		42911-S(B41A)	4	4		Bolt (plate to body)-1/4"-20 x 5/8"
68/		C2OZ 6A616-A	1	1		PLUG - OIL PUMP RELIEF VALVE - cup type-. 642" & . 650" O. D. - . 361" height
68/		C2OZ 6A618-A	1	1		SHAFT ASSY. -OIL PUMP INTERMEDIATE- 7. 44" long includes retaining ring

6622						
SCREEN, TUBE AND COVER ASSY. -OIL PUMP						
68/	A,B,F,P,X	C3OZ 6622-A	1			
68/70	U	C6TZ 6622-D	1			
71/	U	D1TZ 6622-A	1			
69/71		C9ZZ 6622-A		1		#3 3/8" from centerline of oil hole inlet tube flange to bottom of screen & cover
69/	U	34807-S8(X66)	1			Lockwasher-3/8"
69/		357235-S(BB136)	2			Bolt (screen, tube & cover to pump-5/16"-18 x 7/8")

68/		B8TZ 6626-A	1	1		GASKET-OIL PUMP INLET TUBE
68/		B8A 6629-A	1	1		RING - OIL PUMP INTERMEDIATE SHAFT RETAINER - . 52" O. D. - 6 prongs

6B633-4						
BRACKET - OIL COOLER						
70		D1ZZ 6B633-A		1		Upper
		C9ZZ 6B634-A		1		Lower

70/71		D1ZZ 6A636-A		1		GASKET-OIL FILTER ADAPTOR to CYL. BLOCK
70		C9OZ 6A642-A		1		COOLER ASSY. - CRANKCASE OIL

Identification marking
May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302	Spec		
68/		C2OZ 6659-C	1	1			GASKET - OIL PUMP TO BLOCK - .010" thick
		6A664					HOSE - CRANKCASE VENTILATION - Also refer to Basic No. 6853
		C9PZ 6A664-A (KCV-1)	AR	AR			15/32" I.D. -25 ft. long-cut as required
		C9PZ 6A664-B (KCV-2)	AR	AR			5/8" I.D. -25 ft. long-cut as required
							Rocker Arm Cover Type
68/69	A(P/C, Taxi), A, B(2/B)	C6AZ 6A664-N	1				12" long-attach 6A666 to 9A589
68/69	F, U, X(2/B, 4/B)		1				
70	A, B, F, U	D0OZ 6A664-A	1				
71/	A, B, F, P	D1OZ 6A664-A	1				Approx. 20 1/2" long
71/	U	D1TZ 6A664-A	1				Approx. 27 1/2" long - attach to P.C.V. valve & carb. spacer
71/	U	D1TZ 6A664-B	1				Approx. 7 1/4" long-attach to oil filler cap & air cleaner
71	F-Boss(4/B)	D1OZ 6A664-B		1			Approx. 23 1/2" long - attach to P.C.V. valve & carb.
70		C7TZ 6666-B		1			PLUG - OIL FILTER BY-PASS VALVE
		6A666					VALVE - POSITIVE CRANKCASE VENTILATION (P.C.V.)
68/		D0AZ 6A666-A	1				
70	F-Boss "Before 2/5/70"	(EV-50)		1			
70/71	F-Boss "From 2/5/70"	D0OZ 6A666-A		1			
		(EV-51)					
69	F-Boss	C7OZ 6A666-A		1			
		(EV-42)					
		6670					SPRING - OIL PUMP RELIEF VALVE
68/		C2OZ 6670-A	1				2.13" free length-15 active coils
69/71		C9ZZ 6670-C		1			
68/		C2OZ 6674-A	1	1			PLUNGER - OIL PUMP RELIEF VALVE- (rotor type pump)-3 grooves on .5603" O.D. - 1.57" long
		6675					PAN ASSY. - OIL
68/	A, B, F, P, X	D0OZ 6675-C	1				
69/70	U	C6TZ 6675-D	1				
71/	U	D1TZ 6675-C	1				
69/71		D0ZZ 6675-A		1			Drain plug to side of sump
68/		356748-S(BB124)	18	18			Bolt (pan to block (16) & pan to cover (2)) - 1/4"-20 x 5/8"
68/		357235-S(BB136)	4	4			Bolt (pan to block (2) & pan to cover (2)) - 5/16"-18 x 7/8"
69/		373071-S (BB-554-M)	18				Bolt-1/4"-20 x 5/8" (pan to block (16) & pan to cover (2))
72		42847-S7-8(U14)	2				Screw & washer (pan to block)-5/16"-18 x 1" Screw & washer (pan to cover)-5/16"-18 x 1"
69/71		C9ZZ 6687-B		1			BAFFLE - OIL PAN UPPER
69/71		359330-S2 (BB589Y)		4			Screw & washer (baffle to M.B. caps)- 5/16" - 24 x 7/16"
68/		C3AZ 6700-A	1	1			SEAL - CYLINDER FRONT COVER OIL
		6701					PACKING - CRANKSHAFT REAR
68/		C9OZ 6701-A	2				Rope type-approx. 6 13/16" long-asbestos
39/71		C9ZZ 6701-A		2			Split lip type
65/	Note 1		2				

Note 1-When using C9ZZ 6701-A, remove pin from M.B. cap. # Identification marking ☆ U.S. only ♦ Canada only

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			302	302	Spec	
69/71		C7OZ 6A706-A		1		CONNECTOR - CRANKCASE VENTILATION HOSE - attach hose to valve (6A666)
		★ 6710-11				GASKET - OIL PAN - Supplied only in 6781 gasket set
		6A715				HOSE ASSY. - OIL COOLER
70/71		D1ZZ 6A715-A		1		Inlet
70/71		D1ZZ 6A715-B		1		Outlet
		6722-23				SEAL - OIL PAN - Supplied in 6781 only
68/		★D1AZ 6730-A R/B D1AZ 6730-B (11-74)	1	1		PLUG - OIL PAN DRAIN
		6731				ELEMENT ASSY.-OIL FILTER
68/		☆ C1AZ 6731-A (FL-1)	1	1		"Spin-on" one-piece filter-has 3/4"-16 female threads
68/		★CC1AZ 6731-A	1	1		"Spin-on" type
68/		C2OZ 6734-A	1	1		GASKET - OIL PAN DRAIN PLUG - #nylon-13/16" O. D. -1/2" I. D. -5/64" thick
70/71		EAA 6749-A		1		GASKET - OIL FILTER CENTER BOLT COVER - seal head of (6894) mtg. bolt
		6750				INDICATOR - OIL LEVEL
68		C5AZ 6750-G	1			#Black 17.62" top of shield to full 18.39" top of shield to add 19.40" top of shield to end
69	A, B, F, X	C9OZ 6750-A	1			20.37" shield to full 21.05" shield to add 22.80" shield to end
69	U	C6TZ 6750-D	1			14.55" top of shield to full 14.98" top of shield to add 16.48" top of shield to end
70/	A, B, F, P	D0AZ 6750-C	1			18.59" top of shield to safe 19.26" top of shield to add 20.86" top of shield to end
70	U	D0TZ 6750-A	1			14.06" shield to full mark 14.49" shield to add mark 16.48" shield to end
71/	U	D1TZ 6750-B	1			13.67" shield to full mark 14.33" shield to add mark 16.48" shield to end
69		C9ZZ 6750-A		1		#Chrome 17.62" top of shield to full 18.39" top of shield to add 19.40" top of shield to end
70/71		D0ZZ 6750-B		1		#Chrome-17.60" Top of shield to full 18" top of shield to add 1 20.86" top of shield to end
		6754				TUBE ASSY.-OIL LEVEL INDICATOR
68		C8AZ 6754-A	1			Approx. 10 1/4" long-incl. bracket
69	A, B, F, X	C9OZ 6754-B	1			Approx. 13 3/16" developed length
69	U	C6TZ 6754-E	1			Approx. 14 15/64" long
70/	U	D0TZ 6754-B	1			
70/	A, B, F, P	D2OZ 6754-A	1	1		Approx. 12 1/4" long
69		C9ZZ 6754-A		1		Approx. 10 1/4" long including bracket
68/69		44727-S8(X24)	1			Washer-3/8"

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			302	302	Spec		
		6766					CAP ASSY. - OIL FILLER & BREATHER Rocker Arm Cover Type -Closed, T/E, Imco
68/70	F-Boss(4/B)	C8AZ 6766-A (EC-1)	1	1			#Black
69/71		C8AZ 6766-B (EC-2)	1	1			#Chrome
71/		D1AZ 6766-A (EC-8-A)	1				#Black
72		D1ZZ 6766-A (EC-508)	1				#Chrome-optional w/specified black cap
68/		C8AZ 6767-A	1	1			ELBOW-CRANKCASE VENTILATION HOSE - 90 -5/8" x 5/8"-also refer basic 9600
68/		D0OZ 6781-A	1	1			GASKET SET - OIL PAN
Consists of 1-C9OE 6710-B Gasket - R. H. 1-C9OE 6711-B Gasket - L. H. 2-D3OE 6723-AA Seal (front & rear) 1-C2OZ 6734-A Gasket (oil drain plug)							
71/	A, B, F, P	D1AZ 6788-A	1				BRACKET - CRANKCASE VENT VALVE HOSE
71/	U "Chg./L10/"		1				
		6837					SPRING - OIL FILTER BY-PASS
70	"Before 1/5/70"	★C9ZZ 6837-A		1			Serviced in (6881) assy. only
70	"From 1/5/70"	C7TZ 6837-A		1			
		★6853	★	★			HOSE - CRANKCASE VENTILATION - Cut to fit from bulk hose 4090 Also refer to group 6A664
69	U	C5AZ 6A868-A	1				ADAPTER - OIL FILLER
		6881					ADAPTER ASSY. - OIL FILTER
70		D0ZZ 6881-A		1			W/engine oil cooler
71		D1ZZ 6881-B		1			W/engine oil cooler
		6890					INSERT-OIL FILTER MOUNTING BOLT
68/		D1AZ 6890-A	1	1			3/4"-16 & 1 1/16"-12 male threads- 1 13/64" long-shoulder type-attach filter to cylinder block-use with "Spin-on" type filter
70		B8A 6890-A		1			Adapter to block
70/71		C9AZ 6890-A		1			Oil filter to adapter
		6A892					RETAINER - CRANKCASE VENTILATION - grommet
69/71		C7AZ 6A892-A		1			Valve to cover
68/70	A(P/C & Taxi)A,B,F,X,U (2/B,4/B)	C8AZ 6A892-A	1				Elbow to oil filler cap-1 7/16" O.D. -37/64" I.D. - also refer to basic 9600
69/71	A,B,F,P,U(2/B)			1			Elbow to rocker arm cover
70/71	A,B,F,U(2/B)	D0OZ 6A892-A	1				Retainer-PCV valve to valve cover
68/69	A(P/C, Taxi), A, B(2/B)			1			
68/69	F,X,U(2/B,4/B)			1			
70	F-with evaporative emission	C8SZ 6A892-A	1				Used in crankcase vent flame arrestor
71/	A(P/C, Taxi), A,B,F,P,U(2/B)			1			P.C.V. valve to filler cap
71		D0AZ 6A892-A		1			Retainer- crankcase vent hose adapter
70/71		C4GY 6894-A		1			BOLT ASSY. - OIL FILTER ADAPTER MOUNTING - w/engine oil cooler -hollow shaft- 3/4"-16 x 4 9/32" long

Identification marking

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION		
			351 W	351 C	351 Spec	351 CJ			
		6007	★	★	★	★	ENGINE ASSEMBLY - service details		
		6008					GASKET SET - COMPLETE OVERHAUL		
69/		D1AZ 6008-C	1						
	Consists of								
	1-C2OZ 6020-A	Gasket	2-C9OZ 6701-A	Seal	2-C5AZ 8507-B	Gasket			
	2-C9OZ 6051-A	Gasket	1-C9OE 6710-C	Gasket	1-C5AZ 8513-A	Gasket (1969)			
16-	C7AZ 6571-B	Seal	1-C9OE 6711-C	Gasket	1-D0AZ 8513-A	Gasket (1970/)			
	2-D0AZ 6584-B	Gasket	1-D3OE 6723-AA	Seal	1-C3AZ 9417-C	Gasket			
	1-B8TZ 6626-A	Gasket	1-D3OE 6723-BA	Seal	1-D1OZ 9A424-B	Seal			
	1-C9OZ 6659-A	Gasket	1-C2OZ 6734-A	Gasket	1-D1OZ 9A425-B	Seal			
	1-C3AZ 6700-A	Seal	1-C9AZ 8255-A	Gasket	2-C9OZ 9441-A	Gasket			
70/	2/B	D0OZ 6008-A		1					
	Consists of								
	1-D0AZ 6020-A	Gasket (front cover)	1-D0AE 6711-B	Gasket (oil pan L.H.)					
	2-D0AZ 6051-C	Gasket (cyl. head)	2-D0AE 6723-B	Seal (oil pan front & rear)					
16-	D0AZ 6571-A	Seal (valve stem)	1-C2OZ 6734-A	Gasket (oil pan plug)					
	2-D0OZ 6584-A	Gasket (rocker arm cover)	1-C8SZ 8255-A	Gasket (water connection)					
	1-D0AZ 6659-A	Gasket (oil pump)	1-D0AZ 8513-A	Gasket (water pump)					
	1-D0AZ 6700-A	Seal (crankshaft front)	1-D0AZ 9417-A	Gasket (fuel pump)					
	2-C9OZ 6701-A	Seal (crankshaft rear)	2-D0AZ 9A424-A	Seal (intake manifold front & rear)					
	1-D0AE 6710-B	Gasket (oil pan R.H.)	1-D0AZ 9441-A	Gasket (intake manifold)					
70/	4/B	D0OZ 6008-B		1		1			
	Consists of								
	1-D0AZ 6020-A	Gasket (front cover)	1-D0AE 6711-B	Gasket (oil pan L.H.)					
	2-D0AZ 6051-C	Gasket (cyl. head)	2-D0AE 6723-B	Seal (oil pan-front & rear)					
16-	D0AZ 6571-A	Seal (valve stem)	1-C2OZ 6734-A	Gasket (oil drain plug)					
	2-D0OZ 6584-A	Gasket (rocker arm cover)	1-C8SZ 8255-A	Gasket (water connection)					
	1-D0AZ 6659-A	Gasket (oil pump)	1-D0AZ 8513-A	Gasket (water pump)					
	1-D0AZ 6700-A	Seal (crankshaft-front)	1-D0AZ 9417-A	Gasket (fuel pump)					
	2-C9OZ 6701-A	Seal (crankshaft-rear)	2-D0AE 9A424-C	Seal (intake manifold-front & rear)					
	1-D0AE 6710-B	Gasket (oil pan R.H.)	1-D0AE 9D440-A	Gasket (intake manifold)					
71/		★6008			1		D0OZ 6008-B may be used by substituting (2) each D2ZZ 6051-A, D0OZ 6701-A & (16) C9ZZ 6571-A		
69/		C2OZ 6A008-A	4	4	4	4	DOWEL-CYLINDER HEAD to CYLINDER BLOCK-.676" O.D.-.55" I.D.-.44" height-split		
72		6D008					HEATER KIT - CYL. BLOCK		
72		CD0DZ 6D008-A	1						
72		CD1AZ 6D008-A			1	1			
		6009					CYLINDER ASSY.-includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated		
69	4/B	C9OZ 6009-B	1						
69/	2/B	D1AZ 6009-E	1						
70/	2/B	D0AZ 6009-D			1		2 bolt M.B.		
70/71	4/B-exc. CJ or Spec.	D0AZ 6009-C			1		2 bolt M.B.		
71		D1ZZ 6009-D				1	4 bolt M.B. caps		
72		D2ZZ 6009-B				1			
71		D1ZZ 6009-A					1		
72		★D2ZZ 6009-C R/B D3ZZ 6009-A (1-75)					1		
		6010					Δ BLOCK ASSY. - CYLINDER		
69/		D1AZ 6010-B	1				Hydraulic tappets		
70/		D0AZ 6010-C			1		1	Hydraulic tappets-2 bolt main bearing cap-used to repl.block with 4 bolt main bearing cap	
71/		D1ZZ 6010-D				1	Mechanical tappets-4 bolt M.B. caps		
		6B018					WIRE ASSY. - CYL. BLOCK HEATER		
71	A	D1AB 6B018-AA	1	1					
71	B,F		1						
71	B,F	D2AZ 6B018-A		1		1			
72	A,B,F		1	1		1			

Δ 6015 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6010 assembly.

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6019					COVER ASSY. - CYLINDER FRONT - also refer to Basic 6B070
69/		D3OZ 6019-A	1				
70/		6019		★	★	★	Refer to Basic 6B070
69/71		357235-S(BB136)	2				Bolt (cover to block)-5/16"-18 x 7/8"
69/		56126-S(B319M)	4				Bolt (cover & timing pointer to block)-5/16"-18 x 2"
71/		376256-S(BB545A)	2				Bolt (cover to block)-5/16"-18 x 7/8"
69/		C2OZ 6020-A	1				GASKET-CYLINDER FRONT COVER -
70/		D0AZ 6020-A		1	1	1	
69		C8AZ 6023-B	1				POINTER - TIMING
70/		C9TZ 6023-A	1				
70/71	2/B,4/B-exc. CJ	D3AZ 6023-A		1	1		
72	Except California			1		1	
71		D1ZZ 6023-A				1	
72	California			1		1	
72		D2ZZ 6023-A			1		
72		56121-S(B319K)			1		Bolt-5/16"-18 x 3/4" (att. 6023 & 6020 to 6010)

6A023, 6054, 6068, 6096 & 6120**REAR MOTOR MOUNT CHART**

YEAR	MODEL	C.I.D.	* SUPPORT	*BRACKET- REAR SUPPORT	* INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- A -							
70/71	A(M/T)	351		C8AZ 6054-A	C9AZ 6068-E		
69/71	A(C/M) - "Before 7/1/71"	351		C9AZ 6054-A	C9AZ 6068-F		
71/	A(C/M) - "From 7/1/71"	351		D2AZ 6054-A	D2AZ 6068-A		
70/71	A(C4)- "Before 7/1/71"	351		C9AZ 6054-A	D2AZ 6068-C		
71/	A(C4)- "From 7/1/71"	351		D2AZ 6054-A	D2AZ 6068-C		
- B -							
69	B(76)	351	C9OZ 6A023-A	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
69	B(exc. 76)	351	C9OZ 6A023-A	C6OZ 6096-F(R.H.) C6OZ 6096-G(L.H.)	C8OZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
70	B(exc. 57, 76)- "Before 6/15/70"	351	D0OZ 6A023-B	D0OZ 6096-A(R.H.) D0OZ 6096-B(L.H.)	D1ZZ 6068-B	C6OZ 6120-G	C6OZ 6120-J
70/71	B(exc. 57, 76)- "From 6/15/70"	351	D0OZ 6A023-B	D0OZ 6096-C(R.H.) D0OZ 6096-D(L.H.)	D1ZZ 6068-B	Use 6096	Use 6096
70	B(57, 76)- "Before 6/15/70"	351	D0OZ 6A023-B	D0OZ 6096-A(R.H.) D0OZ 6096-B(L.H.)	D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
70/71	B(57, 76)- "From 6/15/70"	351	D0OZ 6A023-B	D0OZ 6096-C(R.H.) D0OZ 6096-D(L.H.)	D0OZ 6068-A	Use 6096	Use 6096
72	B(M/T)	351			D3OZ 6068-A		
72	B(C4)	351			D3OZ 6068-A		
72	B(C6)	351			D2OZ 6068-B		
- F -							
69	F(exc. 76)-M/T	351	C7ZZ 6A023-D		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
69	F(exc. 76)-A/T	351	C9ZZ 6A023-A		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
69	F(76)-M/T	351	C7ZZ 6A023-D		C9ZZ 6068-C		
69	F(76)-A/T	351	C9ZZ 6A023-A		C9ZZ 6068-C		
70	F(exc. 76)-C/M	351	C9ZZ 6A023-A		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
70	F(76)-C/M	351	C9ZZ 6A023-A		C9ZZ 6068-C		
70	F(exc. 76)-M/T	351	C7ZZ 6A023-D		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
70	F(76)-M/T	351	C7ZZ 6A023-D		C9ZZ 6068-C		
70	F(exc. 76)-C4	351	C7ZZ 6A023-D		★C8ZZ 6068-D R/B C8ZZ 6068-A (8-74)		
70	F(76)-C4	351	C7ZZ 6A023-D		C9ZZ 6068-C		

* One required unless otherwise noted

8 CYL. 351W, 351C, 351 SPEC.

6A023, 6054, 6068, 6096 & 6120 REAR MOTOR MOUNT CHART - continued

YEAR	MODEL	C.I.D.	* SUPPORT	*BRACKET- REAR SUPPORT	* INSULATOR ASSEMBLY	* EXTENSION	
						R.H.	L.H.
- F -							
71	F(2/B) (exc.76)-C6	351	D1ZZ 6A023-A		D1ZZ 6068-A		
71	F (2/B) (76)-C6	351	D1ZZ 6A023-A		D00Z 6068-A		
71	F(4/B)(exc.76)-C6	351	D1ZZ 6A023-A		D1ZZ 6068-A		
71	F(4/B)(76)-C6	351	D1ZZ 6A023-A		D00Z 6068-A		
71	F(exc.76) M/T	351	D1ZZ 6A023-B		C8ZZ 6068-A		
71	F(76) M/T	351	D1ZZ 6A023-B		C9ZZ 6068-C		
71	F(2/B)(exc.76)-C/M	351	D1ZZ 6A023-B		C8ZZ 6068-A		
71	F(2/B)(76)-C/M	351	D1ZZ 6A023-B		D1ZZ 6068-D		
71	F(4/B)(exc. 76)-C/M	351	D1ZZ 6A023-B		C8ZZ 6068-A		
71	F(4/B)(76)-C/M	351	D1ZZ 6A023-B		C9ZZ 6068-C		
71	F(exc.76)-C6	351CJ	D1ZZ 6A023-A		D1ZZ 6068-A		
71	F(76)-C6	351CJ	D1ZZ 6A023-A		D00Z 6068-A		
72	F(exc.76)M/T	351	D1ZZ 6A023-B		C8ZZ 6068-A		
72	F(76)M/T	351	D1ZZ 6A023-B		D1ZZ 6068-D		
72	F(exc.76)C/M	351	D1ZZ 6A023-A		C8ZZ 6068-A		
72	F(76)C/M	351	D1ZZ 6A023-A		D1ZZ 6068-D		
72	F(exc.76)C6	351CJ	D1ZZ 6A023-A		D1ZZ 6068-A		
72	F(76)C6	351CJ	D1ZZ 6A023-A		D00Z 6068-A		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
69/		C8AZ 6026-C	6	6	6	6	PLUG - ENGINE - standard-1 1/2" O.D. - plug holes in block or head
		C8AZ 6026-D	AR	AR	AR	AR	.060" O/S
71/		C8SZ 6026-A		2	2	2	Plug (oil gallery in block)-5/8"-18
69/		353055-S(PP29)	3				Plug (oil gallery holes in block)-1/4"-18-pipe
69/		376099-S(PP73A)	1				Plug (rear holes in block)-3/4"-cup
69/		376301-S(PP67A)	2				Plug (front main oil gallery) & (cylinder block oil passages)-1/2"-cup
72		87837-S(P15)	1				Plug (front oil gallery)-1/4"-18 x 27/64"
72			2	2	2	2	(Drain holes in block)
72		87710-S(P16)		3	3	3	Plug (oil gallery holes in block)-3/8"-18 x 15/32"
71/		371485-S(PP48A)	6	6	6	6	Plug (core clean out holes)-3/4"-14 x 17/32"

6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	* SUPPORT BRACKET		* BRACKET		* INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
- A -								
69/	A	351	C9AZ 6028-D	C9AZ 6029-D			D4AZ 6038-C	D4AZ 6038-C
- B -								
69	B(76)	351	C6DZ 6028-A	C6DZ 6029-A			D00Z 6038-H	D00Z 6038-H
69	B(exc. 76)	351	C6DZ 6028-A	C6DZ 6029-A			D00Z 6038-G	D00Z 6038-G
70/71	B(exc. 76)	351	D00Z 6028-B	D00Z 6029-B			D00Z 6038-G	D00Z 6038-G
70/71	B(76)	351	D00Z 6028-B	D00Z 6029-B			D00Z 6038-H	D00Z 6038-H
72	B	351					D2OZ 6038-C	D2OZ 6038-D
- F -								
69	F(exc.76)	351	D0ZZ 6028-C	D0ZZ 6029-C	D0ZZ 6030-B	D0ZZ 6031-B	D00Z 6038-G	D00Z 6038-G
69	F(76)	351	C8ZZ 6028-B	D0ZZ 6029-D	C8ZZ 6030-A	C8ZZ 6031-A	D0ZZ 6038-B	D0ZZ 6038-B
70	F(exc. 76)	351	D0ZZ 6028-C	D0ZZ 6029-C	D0ZZ 6030-A	D0ZZ 6031-A	D00Z 6038-G	D00Z 6038-G
70	F(76)	351			D0ZZ 6030-B	D0ZZ 6031-B	D0ZZ 6038-B	D0ZZ 6038-B
71/	F(exc. 76)	351	D00Z 6028-B	D00Z 6029-B			D00Z 6038-G	D00Z 6038-G
71/	F(76)	351	D1ZZ 6028-A	D1ZZ 6029-A			D1ZZ 6038-B	D1ZZ 6038-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6030-1					BRACKET - FRONT SUPPORT - Refer to front motor mount chart group 6028
		6038					INSULATOR - FRONT SUPPORT - Refer to front motor mount chart group 6028

* One required unless otherwise noted

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
69/	A	C9AZ 6C038-A	1	1			SHIELD-MOTOR MOUNT HEAT - R.H.
		C9AZ 6C038-B	1	1			L.H.
71	B	D1ZZ 6C038-A		1		1	L.H.-not used on R.H. side
71/	F			1	1	1	
72	B	D2OZ 6C038-D	1			1	R.H.
		D2OZ 6C038-A	1			1	L.H.
70/	B (exc. 76)	D0OZ 6A042-A		1		1	REINFORCEMENT- REAR SUPPORT - R.H.
		D0OZ 6A042-C		1		1	L.H.
69	B(exc. 76)	C8OZ 6A042-C	1				R.H.
		C8OZ 6A042-D	1				L.H.
72	B	D2OZ 6047-A		2		2	BOLT - INSULATOR TO CROSSMEMBER- 3/8"-16 x 5"-hex.hd. piloted
		6049					ΔHEAD - CYLINDER
69/		D1OZ 6049-B	2				Valve seats must be ground to accomodate High Performance valves-without valves
70/		D1OZ 6049-C	2				Complete with valves
70/	2/B	D3AZ 6049-H		2			Without valves
70/	2/B	D1AZ 6049-D		2			Complete with valves
70/71	4/B-exc. CJ or Spec.	D1AZ 6049-B		2			
71		D1ZZ 6049-B			2		
72		D2ZZ 6049-A			2		
71/		D1ZZ 6049-C				2	
		6051					GASKET - CYLINDER HEAD
69/		C9OZ 6051-A	2				Asbestos & steel-.050" thick
70/	2/B,4/B-exc. CJ or Spec.	★D3AZ 6051-A R/B D4AZ 6051-A (11-74)		2			Asbestos & steel
71/		D3ZZ 6051-A			2	2	
		6054					RETAINER - REAR SUPPORT - Refer to Group 6A023
69/		C9OZ 6065-A	10				BOLT-CYLINDER HEAD-1/2"-13 x 2 1/2"
69/		C9OZ 6065-B	10				1/2"-13 x 4"
70/		D0AZ 6065-A		20	20	20	1/2"-13 x 4 5/16"
		6068					INSULATOR ASSY. - REAR SUPPORT - refer to rear motor mount chart group 6A023
69/71	B-exc. 76	C8OZ 6070-A	1	2		2	PLATE - REAR SUPPORT - R.H.
		C8OZ 6070-B	1	2		2	L.H.
69/71	B (76)	C6OZ 6070-A	2	2		2	R.H. & L.H.
71	B (76)			1		1	
70/		D0AZ 6B070-A		1	1	1	PLATE - CYLINDER FRONT COVER
		6079					GASKET SET - VALVE GRIND
69/		D1AZ 6079-C	1				

Consists of

2-C9OZ 6051-A Gasket
16-C7AZ 6571-B Seal
2-D0AZ 6584-B Gasket
1-C9AZ 8255-A Gasket

▲1-D1OZ 9A424-B Seal
▲1-D1OZ 9A425-B Seal
▲2-C9OE 9441-B Gasket
▲ Serviced in D1AZ 9433-C

70/	2/B	D0OZ 6079-A		1			
-----	-----	-------------	--	---	--	--	--

Consists of

2-D4AZ 6051-A Gasket (cylinder head)
16-D0AZ 6571-A Seal (valve stem)
2-D0OZ 6584-A Gasket (rocker arm cover)

1-C8SZ 8255-A Gasket (water connection)
▲2-D0AZ 9A424-A Seal (intake manifold)-front & rear
▲1-D0AE 9D440-B Gasket & cover assy.(intake manifold)
▲ Serviced in D0AZ 9433-B

70/	4/B-exc. CJ or Spec.	D0OZ 6079-B		1			
-----	----------------------	-------------	--	---	--	--	--

Consists of

2-D3AZ 6051-A Gasket (cylinder head)
16-D0AZ 6571-A Seal (valve stem)
2-D0OZ 6584-A Gasket (rocker arm cover)

1-C8SZ 8255-A Gasket (water connection)
▲2-D0AZ 9A424-A Seal (intake manifold)-front & rear
▲1-D0AE 9D440-A Gasket & cover assy.(intake manifold)
▲ Serviced in D0AZ 9433-A

Δ 6090 is a casting number and generally cannot be cross-referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6049 assembly.

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6079					GASKET SET - VALVE GRIND - continued
71/	4/B (CJ, Spec.)	D4OZ 6079-A			1	1	
Consists of 2-D3ZZ 6051-A Gasket (cyl. head) 1-C8SZ 8255-A Gasket (water connection) 16-D0OZ 6571-A Seal (valve stem) ▲2-D0AZ 9A424-A Seal (intake manifold) 2-D0OZ 6584-A Gasket (rocker arm cover) ▲1-D0AE 9D440-A Gasket (intake manifold) ▲ Serviced in D0AZ 9433-A							
71/		★ 6079			★		D0OZ 6079-B may be used by substituting (2) D3ZZ 6051-A and (16) C9ZZ 6571-A
71/		★6079				★	D0OZ 6079-B may be used by substituting (2) D1ZZ 6051-A and (16) D0OZ 6571-A
		6096					BRACKET - REAR SUPPORT - refer to rear motor mount chart group 6A023

6108 PISTON ASSEMBLY - CHART

In the Standard Column of the Chart below (R) designates Red Size - (B) designates Blue Size.

Red Size and Blue Size are optional for selective fit

YEAR	MODEL	C.I.D.	RINGS	INCL.	QTY.	PART NUMBER					
						STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
69	4/B	351W	3	▲	8	★C9OZ 6108-A R/B C9OZ 6108-B (9-74) C9OZ 6108-B(B) 3.999" dia.	C9OZ 6108-C	C9OZ 6108-D	C9OZ 6108-E	C9OZ 6108-F	
69/71	2/B	351W	3	▲	8	D2AZ 6108-N(R) 3.998" dia. ★C9OZ 6108-H R/B D2AZ 6108-P (10-74)	C9OZ 6108-J	D2AZ 6108-S	D2AZ 6108-T	D2AZ 6108-U	
72		351W	3	▲	8	D2AZ 6108-N(R) D2AZ 6108-P(B)	D2AZ 6108-R	D2AZ 6108-S	D2AZ 6108-T	D2AZ 6108-U	
70/		351C 351CJ	3	▲	8	D0AZ 6108-A(R) 3.998" dia. D0AZ 6108-B(B)	D0AZ 6108-C	D0AZ 6108-D	D0AZ 6108-E	D0AZ 6108-F	
71		351C Spec.	3	▲	8	D1ZZ 6108-A(R) D1ZZ 6108-B(B)	D1ZZ 6108-C				
72		351C Spec.	3	▲	8	D2ZZ 6108-A(R)	D2ZZ 6108-C				

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6120					EXTENSION - REAR SUPPORT - Refer to rear motor mount chart (group 6A023)
69/		B2AZ 6135-A	8	8		8	PIN - PISTON - #Green-.9121" O.D.-.600" I.D. - 3.023" long-std.
		B2AZ 6135-B	8	8		8	.001" O/S
71/		C9ZZ 6135-E				8	

6148 RING SET - PISTON PARTIAL - CHART

Consists of the necessary rings re-ring (2) Pistons

YEAR	MODEL	C.I.D.	RINGS	TYPE	PART NUMBER					
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S	
69/		351	3	HiLo	C3AZ 6148-F	C3AZ 6148-G	C3AZ 6148-H	C3AZ 6148-J		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
69/		C9OZ 6200-A	8				ROD ASSY. - CONNECTING
70/		D0AZ 6200-A		8		8	
71/		D1ZZ 6200-A			8		

▲ Includes piston pin
May, 1975

Identification marking
COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER						
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S
69/		351W	8	8	C9OZ 6211-A	C9OZ 6211-B	C9OZ 6211-C	C9OZ 6211-D	C9OZ 6211-E	C9OZ 6211-F	
70/	2/B, 4/B exc. CJ or Spec.	351C	8	8	D0AZ 6211-A	D0AZ 6211-B	D0AZ 6211-C	D0AZ 6211-D	D0AZ 6211-E	D0AZ 6211-F	
71/		351C 351C Spec.	8	8	D1ZZ 6211-A	D1ZZ 6211-B	D1ZZ 6211-C	D1ZZ 6211-D	D1ZZ 6211-E	D1ZZ 6211-F	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
69/		C9AZ 6212-B	16	16		16	NUT-CONNECTING ROD-3/8"-24 hex.
71/		D1ZZ 6212-A				16	3/8"-24
69/		C8SZ 6214-A	16				BOLT - CONNECTING ROD
70/		D0AZ 6214-A		16		16	3/8"-24 x 2 5/16"
71/		D1ZZ 6214-A			16		3/8"-24 x 2 5/16"
69/		C9OZ 6250-A	1				CAMSHAFT-less gear - hyd. tappets - #BF
70/	2/B	D0AZ 6250-B		1			#BN or NB
70/71	4/B-exc. CJ or Spec.	D0AZ 6250-C		1			#BR
71		D1ZZ 6250-B			1		#BY at rear of camshaft
72		D2ZZ 6250-A			1		#CF at rear of camshaft
71/		D2ZZ 6250-B				1	#DV at rear of camshaft
71/	All off highway vehicles Consists of 1-D1ZX 6250-CA *Camshaft 16-D1ZX 6500-CA Tappet * Camshaft not serviced separately	*D1ZX 6250-FA			1		CAMSHAFT and TAPPETS - KIT

					1-C2AZ 19579-A	Oil conditioner-pint can
					1	Instruction sheet
					1-I.S. #3771	Warranty notice
69/		C2OZ 6A251-A	1			BEARING KIT - CAMSHAFT - standard
	Consists of 1-C2OZ 6261-A Front 1-C2OZ 6262-A Center				1-C2OZ 6263-A Rear 1-C2OZ 6267-A Front(intermediate)	1-C2OZ 6270-A Rear (intermediate) 1-C2OZ 6266-A Plug
70/		D0AZ 6A251-A		1		1
	Consists of 1-D0AZ 6261-E Front 1-C2OZ 6262-A Center				1-C2OZ 6263-A Rear 1-C2OZ 6267-A Front(intermediate)	1-C2OZ 6270-A Rear (intermediate) 1-C5AZ 6266-B Plug
69/72	"Before 5/2/72"	C5OZ 6256-B	1			
72	"From 5/2/72"	D3AZ 6256-B	1			
70/		D0AZ 6256-A		1	1	1
69/		378189-S(NN54J)	1			
70/		73328-S(N87B)		1	1	1

6261, 6262, 6263, 6267 & 6270 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
69/		351W	Standard .015" U/S	C2OZ 6261-A	C2OZ 6267-A	C2OZ 6262-A	C2OZ 6270-A	C2OZ 6263-A
70/		351C, 351Spec.	Standard .015"	C2OZ 6261-B	C2OZ 6267-B	C2OZ 6262-B	C2OZ 6270-B	C2OZ 6263-B
				D0AZ 6261-E	C2OZ 6267-A	C2OZ 6262-A	C2OZ 6270-A	C2OZ 6263-A
				D0AZ 6261-F	C2OZ 6267-B	C2OZ 6262-B	C2OZ 6270-B	C2OZ 6263-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
69/		C2OZ 6266-A	1				PLUG-CAMSHAFT REAR BEARING-standard-2.156" O.D.-cup shaped
		C5AZ 6266-A	1				.060" O/S
70/		C5AZ 6266-B		1	1	1	
69/		C3OZ 6268-A	1				CHAIN-TIMING-58 links
70/		D0AZ 6268-A		1	1	1	48 links
69/		C9OZ 6269-A	1				PLATE-CAMSHAFT THRUST-std.-.251" thick
		C9OZ 6269-B	1				.002" O/S
		C9OZ 6269-C	1				.004" O/S
70/		C8SZ 6269-A		1	1	1	Standard
68/		42911-S(B41A)	2				Bolt (plate to block)-1/4"-20 x 5/8"

Identification marking

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6270					BEARING-CAMSHAFT REAR INTERMEDIATE- Refer to Basic 6261
69/		C2OZ 6278-A	1	1	1	1	WASHER-CAMSHAFT SPROCKET-1.20" O.D.- .406" I.D.-.224" thick
		6287					ECCENTRIC-CAMSHAFT FUEL PUMP DRIVE
69/72	"Before 5/2/72"	C3AZ 6287-B	1				
72	"From 5/2/72"	D3AZ 6287-A	1				
70/		D0AZ 6287-A		1	1	1	2 1/2" O.D. -outer
		D0AZ 6287-B		1	1	1	2 25/64" O.D. -inner
69/		43002-S(B257)	1				Bolt(eccentric & sprocket to camshaft)-3/8"-16 x 1/2"
70/		20522-S8(B89)		1	1	1	Bolt(eccentric & sprocket to camshaft)-3/8"-16 x 2"
69/		C0DZ 6A302-A	1	1		1	PIN-CRANKSHAFT REAR OIL SEAL-.095" O.D.-
69/		★C9OZ 6303-A R/B D2AZ 6303-C (4-74)	1				CRANKSHAFT ASSY. - #3M-iron
70/		★D0AZ 6303-A R/B D2AZ 6303-A (10-74)		1		1	#4M-iron
71/		D1ZZ 6303-A			1		
69/		C5OZ 6306-A	1				SPROCKET-CRANKSHAFT -21 teeth
69/	All off highway vehicles	★D1ZX 6306-AA	1				21 teeth-1 3/8" I.D.-2 1/2" pitch diam.- 7 timing keyways
70/		C8SZ 6306-A		1	1	1	18 teeth-1 3/8" I.D.
69/	All off highway vehicles	★D1ZX 6306-BA			1		18 teeth-1 3/8" I.D.-2 7/8" pitch diam.- 7 timing keyways
69/		372854-S(LL11)	1	1	1	1	Key (sprocket to crankshaft)-3/16"-1 3/4"
69/		C3OZ 6310-B	1				SLINGER-CRANKSHAFT OIL
70/		D0AZ 6310-A		1	1	1	
		6A312					PULLEY ASSY. - CRANKSHAFT - OUTER
69	A-w/ A/C	C9AZ 6A312-C	1				#C9AE 6312-D-triple sheave- includes (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
69	With 55 & 65 amp. alt. with P/S-without A/C	D4UZ 6A312-A	1				#D3UE 6312-AA-triple sheave-replaces pulley identi. C9OE 6312-G
69	Without P/S or A/C	C9OZ 6A312-B	1				#C9OE 6312-E-double sheave-incl.(3) 42998-S2 or 8 bolt 3/8"-16 x 1"-used to service pulley marked C9OE 6A312-D
69	42 amp. alt.-with P/S- without A/C		1				
69	With A/C-with or without P/S	C9ZZ 6A312-B	1				#C9ZE 6312-B-triple sheave - includes (3) 42998-S2 or 8 bolt 3/8"-16 x 1"
70/71	2/B,4/B exc. CJ with A/C- with or without P/S	D0OZ 6A312-B	1	1			#D0OE 6312-C-triple sheave-used to serv.pulley identi. D0AE 6312-C
72	2/B-with A/C-with or w/o P/S		1	1			
70	With idler or P/S-without A/C		1	1			
71	F-w/rear window defroster			1			
72	With hang-on A/C	D2AZ 6A312-E	1	1		1	
71	2/B,4/B-exc.CJ-with idler or P/S-without A/C	D0OZ 6A312-E	1	1			#D0OE 6312-B-double sheave
72	2/B-with idler or P/S- without A/C		1	1			
70/	Without A/C or P/S	D0ZZ 6A312-A	1	1		1	#D0ZE 6312-B-triple sheave-replaces pulleys identi. D0ZE 6312-A, D0OE 6312-A or D1ZE 6312-AA & BA
71/	F-Boss				1		
71	With P/S-without A/C					1	
71/	With A/C-with or without P/S	D2OZ 6A312-A			1	1	#D2OE 6312-AA-triple sheave-replaces pulleys 1 identi. D1ZE 6312-CA or D2OE 6312-BA
72	4/B-with P/S-without A/C			1			
		6316					DAMPER ASSY. - CRANKSHAFT
69		C9OZ 6316-A	1				#C9OE 6316-E-6 3/8" dia.-3 1/32" long
70/		D2AZ 6316-A	1				6 3/8" O.D.-4 1/8" long
70/	2/B,4/B-exc. CJ or Spec.	D2AZ 6316-B		1			6 1/2" O.D.-3 1/2" long
71/		D2ZZ 6316-A			1		6 1/2" O.D.-3 1/2" long
71/		D1ZZ 6316-A				1	6 1/2" O.D.-3 1/2" long
69/		377850-S(BB273A)	1	1	1	1	Bolt (damper & 6378 washer to crankshaft)- 5/8"-18 x 2"-hex. head
69/		372854-S(LL-11)	1	1	1	1	Key (damper to crankshaft)-3/16" x 1 3/4"

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

6333 & 6337

BEARING - CRANKSHAFT MAIN - CHART

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR	
69/		351W	Std. .001" .002" .010" .020" .030"	x	x	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	D1AZ 6337-A C9OZ 6337-B D1AZ 6337-C D1AZ 6337-D C9OZ 6337-E C9OZ 6337-F	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	
69/70	High perf.	351W	Std. .001" .002" .010" .020" .030"	x	x	C9OZ 6333-P	C9OZ 6333-P	*C9OZ 6337-P	C9OZ 6333-P	C9OZ 6333-P	
70		351C	Std. .0960" .001" .002" .010" .020" .030"	x		D0AZ 6333-A D0AZ 6333-B D0AZ 6333-C D1ZZ 6333-D D1ZZ 6333-E	D0AZ 6333-A D0AZ 6333-B D0AZ 6333-C D1ZZ 6333-D D1ZZ 6333-E	D0AZ 6337-A D0AZ 6337-B D0AZ 6337-C D0AZ 6337-D D1ZZ 6337-E D0AZ 6337-F	D0AZ 6333-A D0AZ 6333-B D0AZ 6333-C D1ZZ 6333-D D1ZZ 6333-E	D0AZ 6333-A D0AZ 6333-B D0AZ 6333-C D1ZZ 6333-D D1ZZ 6333-E	
70		351C	Std. .0960" .001" .002" .010" .020" .030"		x	D1ZZ 6333-A D0AZ 6333-J D0AZ 6333-K D1ZZ 6333-D D1ZZ 6333-E D0AZ 6333-N	D1ZZ 6333-A D0AZ 6333-J D0AZ 6333-K D1ZZ 6333-D D1ZZ 6333-E D0AZ 6333-N	D0AZ 6337-H D0AZ 6337-J D0AZ 6337-K D1ZZ 6337-D D0AZ 6337-M D0AZ 6337-N	D1ZZ 6333-A D0AZ 6333-J D0AZ 6333-K D1ZZ 6333-D D1ZZ 6333-E D0AZ 6333-N	D1ZZ 6333-A D0AZ 6333-J D0AZ 6333-K D1ZZ 6333-D D1ZZ 6333-E D0AZ 6333-N	
71/		351C, 351 spec.	Std. .001" .002" .010" .020" .030"	x	x	D1ZZ 6333-A D1ZZ 6333-B D1ZZ 6333-C D1ZZ 6333-D D1ZZ 6333-E D1ZZ 6333-F	D1ZZ 6333-A D1ZZ 6333-B D1ZZ 6333-C D1ZZ 6333-D D1ZZ 6333-E D1ZZ 6333-F	D1ZZ 6337-A D1ZZ 6337-B D1ZZ 6337-C D1ZZ 6337-D D1ZZ 6337-E D1ZZ 6337-F	D1ZZ 6333-A D1ZZ 6333-B D1ZZ 6333-C D1ZZ 6333-D D1ZZ 6333-E D1ZZ 6333-F	D1ZZ 6333-A D1ZZ 6333-B D1ZZ 6333-C D1ZZ 6333-D D1ZZ 6333-E D1ZZ 6333-F	
69/						C1AE 6345-B	10			BOLT-CRANKSHAFT MAIN BEARING CAP- 1/2"-13 x 3 1/2"	
70/ 71/ 71						D0AZ 6345-B	10	6	10	1/2"-13 x 3 1/4" plain head	
71/ 71						C9AZ 6345-A		10	4	Use in M.B. cap # 2 and 4	
71/						353992-S(XX127)		10	10	3/8"-16 x 1 3/4"	
71										Washer-flat-3/8"	
69/	A/T					C2OZ 6A366-A	1	1		1	PLATE-FLYWHEEL REINFORCING-3 27/32" O.D. 2 1/8" I.D.-.075" thick-(6) 29/64" holes
						6375					FLYWHEEL ASSY.
69/70	A,B,F(2/B,4/B)-A/T					C5AZ 6375-T	1	1		1	164 tooth ring gear-(4) converter attaching holes on 11 7/16" bolt circle
71/ 72 71	A(2/B)-A/T B & F(2/B)-C4 & CM-A/T B & F(2/B)-A/T						1 1 1	1 1 1			
69/	M/T					C6TZ 6375-C	1	1		1	#C7TE-A-on eninge side-164 tooth ring gear- (6) 5/16"-18 pressure plate attaching holes on 12 3/8" bolt circle
71 72	B & F(4/B exc. CJ)-A/T B & F(2/B)-C6-A/T					D1ZZ 6375-A		1 1			#D1ZP-AB-164 tooth ring gear
71/ 72	F(4/B CJ)-A/T B(4/B CJ)-A/T					D1ZZ 6375-C				1 1	
71	M/T					D1ZZ 6375-B			1		
69/						B8A 6378-A	1	1	1	1	WASHER-CRANKSHAFT PULLEY RETAINING - 1.76" O.D.-.66" I.D.-.212" thick
69/	M/T					B8AZ 6379-A	6	6	6	6	BOLT-FLYWHEEL TO CRANKSHAFT- 7/16"-20 x 15/16"
69/	A/T					*C3AZ 6379-B R/B D2AZ 6379-B (6-74)	6	6		6	7/16"-20 x 13/16"-used with 6A366 plate
72	A/T					D2AZ 6379-B	6	6		6	7/16"-20 x 3/4"-used without 6A366 plate
69/	M/T					C5AZ 6384-D	1	1		1	GEAR-FLYWHEEL RING-164 teeth

Identification marking

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6392					HOUSING ASSY. - FLYWHEEL
70/71	M/T	C9AZ 6392-A	1				#C9AA 6394-A
69	M/T	C5TZ 6392-B	1				#C5TA 6394-A
70	M/T			1			
71/	M/T	D1TZ 6392-C		1	1	1	
69/		20508-S8(B110)	2				Bolt (flywheel hsg.to block)-7/16"-14 x 1 18/32"
69/		20546-S8(B114)	4				Bolt (flywheel hsg.to block)-7/16"-14 x 2 1/2"
		34808-S8(X67)	AR				Lockwasher-7/16"
71/	M/T	34848-S(X75)	6				Lockwasher-7/16"
71/	M/T	376275-S8(BB181A)		2	2	2	Bolt (flywheel hsg. to block)-7/16"-14 x 2 3/8"
71	M/T		3				
69/		EAD 6397-A	2	2	2	2	DOWEL-CYLINDER BLOCK-to flywheel housing - 1/2" x 1"
69/	M/T	C4OZ 6424-A	1	1	1	1	SEAL - REAR COVER PLATE - 5 3/4" O.D.-4 1/4" I.D.
		6500					TAPPET ASSY. -VALVE
69/	2/B,4/B-exc. CJor Spec.	D1AZ 6500-A	16	16			Hydraulic
71/		D1ZZ 6500-B			16		Mechanical
71/	All off highway vehicles	★D1ZX 6500-CA			16		Mechanical-use w/D1ZX 6250-FA kit only
71/		★D1AZ 6500-B R/B D1AZ 6500-A (1-75)				16	Hydraulic

6505-07 VALVE- INTAKE and EXHAUST - CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
69/71	351W		5.07"	1.54"	Std. .003"	.3414"	D2AZ 6505-A D2AZ 6505-B	5.07"	1.84"	Std. .003"	.3419"	D2AZ 6507-A ★C9OZ 6507-K R/B D2AZ 6507-B (6-74)
					.015" .030"		D2AZ 6505-C C9OZ 6505-D			.015" .030"		D2AZ 6507-C D2AZ 6507-M
72	351W		5.07"	1.54"	Std. .003" .015" .030"	.3414"	D2AZ 6505-A D2AZ 6505-B D2AZ 6505-C D2AZ 6505-D	5.07"	1.84"	Std. .003" .015" .030"	.3419"	D2AZ 6507-A D2AZ 6507-B D2AZ 6507-C D2AZ 6507-D
70/	351C	2/B	5.05"	1.61"	Std. .003" .015" .030"	.3415"	D1AZ 6505-A ★D1AZ 6505-B R/B D5AZ 6505-B (11-74) ★D1AZ 6505-C R/B D5AZ 6505-C (3-75) D1AZ 6505-D	5.23"	2.04"	Std. .003" .015" .030"	.3420"	D0AZ 6507-E D0AZ 6507-F D0AZ 6507-G D0AZ 6507-H
70/	351C 351CJ	4/B	5.05"	1.71"	Std. .003" .015" .030"	.3414"	D0AZ 6505-E D0AZ 6505-F D0AZ 6505-G D0AZ 6505-H	5.23"	2.19"	Std. .003" .015" .030"	.3420"	D0AZ 6507-A D0AZ 6507-B D0AZ 6507-C D0AZ 6507-D
71/	351Spec		5.05"	1.71"	Std. .003" .015" .030"	.3414"	D0ZZ 6505-A D0ZZ 6505-B D0ZZ 6505-C D0ZZ 6505-D	5.23"	2.19"	Std. .003" .015" .030"	.3420"	D0ZZ 6507-A D0ZZ 6507-B D0ZZ 6507-C D0ZZ 6507-D

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6510					BUSHING - VALVE GUIDE
69/		D1AZ 6510-A	AR				Intake & exhaust-2.29" long-.501" O.D.-.313" I.D.
70/		NOTE 1		AR	AR	AR	Exhaust
70/		D1AZ 6510-B		AR	AR	AR	Intake-2.4" long-.501" O.D.-.313" I.D.
		NOTE 1					

Identification marking
May, 1975

NOTE 1 - Bushing must be reamed to size of valve
COPYRIGHT © 1975 — FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6513					SPRING-VALVE
69/70	"Before 4/23/70"	C9OZ 6513-A	16				2 5/64" free length-double spring
70/	"From 4/23/70"	D0OZ 6513-B	16				Single spring
70/	2/B	D1AZ 6513-A		16			
70/	4/B	C9OZ 6513-E		16		16	#4 silver or yellow stripes
71/		D0ZZ 6513-A			16		#4 dark blue stripes
		6514					RETAINER-VALVE SPRING
69/71		B9A 6514-A	16				
72		D2AZ 6514-A	16				
70/		D0AZ 6514-A		16		16	1 27/64" O.D.-7/16" high
71/		C9ZZ 6514-A			16		
		6517					SLEEVE-VALVE SPRING RETAINER
69	B, F	B9A 6517-A	16				Intake & exhaust-conical-not used "Before
69	A		16				Chg. /L4"
70/			16				
		6518					KEY-VALVE SPRING RETAINER
69/		7HA 6518-A	32				
70/		D0AZ 6518-A		32		32	1 2" O.D. -3/8" high
71/		C9ZZ 6518-A			32		1 2" O.D.-3/8" high
		6524					BAFFLE-VALVE PUSH ROD VALLEY
69/		C9OZ 6524-A	1				
70		C2OZ 6524-A		1			
		6524					BAFFLE-VALVE ROCKER ARM OIL
71/	2/B,4/B-exc. CJ	D1AZ 6524-A		16			
71/		D1ZZ 6524-A				16	
		6A527					STUD-VALVE ROCKER ARM SUPPORT
69/		C9OZ 6A527-A	16				Std. -5/16"-24 x 2 3/4"- .3717" diam. at non-
		C9OZ 6A527-B	AR				threaded end-use w/D0AZ 6A529-A nut
		C9OZ 6A527-C	AR				.006" O/S
		C9OZ 6A527-D	AR				.010" O/S
71/		C9ZZ 6A527-A			16		.015" O/S
		6A527					7/16"-20 & 7/16"-14
70/		D0OZ 6A527-A		16		16	BOLT - VALVE ROCKER ARM SUPPORT
70		C1AE 6A527-C	1	1			Std. -5/16" -18 x 1 3/8" -Bolt-hex. hd.
							Bolt-7/16"-14 x 3 1/4" (attach 7400 control to
							7E046 plate)
		6A528					SEAT-VALVE ROCKER ARM FULCRUM
69/		C2OZ 6A528-C	16				
70/		D1OZ 6A528-A		16		16	
71		★C9ZZ 6A528-A			16		Repl. by D0OZ 6A528-B (11-74)
72		D0OZ 6A528-B			16		
		6A529					NUT-VALVE ROCKER ARM STUD
69/		D0AZ 6A529-A	16				Nut-5/16"-24 (attach rocker arm to stud)
71/		C8SZ 6A529-A			16		Nut-7/16"-20 (attach rocker arm to stud)
71/		C9ZZ 6A529-B			16		Nut-jam-7/16"-20 hex.
71/		D0OZ 6A536-A			16		SEAT-VALVE SPRING
		6564					ARM-VALVE ROCKER
69/		C6OZ 6564-B	16				
70/		C9ZZ 6564-A		16	16	16	
71/		C9ZZ 6A564-A			8		GUIDE-VALVE PUSH ROD
		6565					ROD-VALVE PUSH
69/		C9OZ 6565-A	16				8.17" long-hydraulic tappets
		C9OZ 6565-C	AR				.060" O/S
		C9OZ 6565-D	AR				.060" U/S
69	● Unique competition part	C9OZ 6565-G	16				Mechanical tappets-use w/high rise manifold-
							8.182" long-hardened steel
70/		D0AZ 6565-A		16		16	8 7/16" long-hydraulic tappets
		D0AZ 6565-B		AR		AR	.062" U/S
		D0AZ 6565-C		AR		AR	.062" O/S
71		D0OZ 6565-F			16		8.52" long
72		D2ZZ 6565-A			16		8.41" long

FORD CAR PARTS

SECTION 60.5A

11

8 CYL. 351W, 351C, 351 SPEC.

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec.	351 CJ	
		6571					SEAL-VALVE STEM
69/		C7AZ 6571-B	16				Rubber-57/64" O.D.-23/32" high-use with .015" & .030" valves
69/		D2AZ 6571-A	16				Use w/std. & .003" O/S valves
70/	2/B,4/B-exc. CJ or Spec.	D0AZ 6571-A		16			Rubber
71		C9ZZ 6571-A			16		5/8" O.D.-49/64" high-split ring around collar
71/		D0OZ 6571-A			16	16	#D0OE-A-white-7/8" O.D.-11/16" high-
72					16		use w/std. & .003" O/S valves
		D0OZ 6571-B			AR	AR	.015" O/S-use with .015" O/S valves -
							#D0OE-B-Green
		D0OZ 6571-C			AR	AR	.030" O/S-use with .030" O/S valves -
							#D0OE-C-Brown

6582 - 6A582 COVER ASSY. - VALVE ROCKER ARM - CHART

YEAR	MODEL	C.I.D.	PAINTED		CHROME	
			R.H.	L.H.	R.H.	L.H.
69/70	A "Before 10/1/69"	351W	D2OZ 6582-D	D2OZ 6582-C	C6ZZ 6582-H	C6ZZ 6582-J
69/70	C, F					
70	A "From 10/1/69"	351W	D2OZ 6582-C	D2OZ 6582-C		
71	A	351W	D2OZ 6582-D	D2OZ 6582-C		
72	B	351W				
72	A	351W	D2OZ 6582-D	★D2AZ 6582-B R/B D2OZ 6582-C (11-74)		
70		351C	D2SZ 6582-B	D2SZ 6582-B		
71/		351C,351CJ	D2SZ 6582-A	D2SZ 6582-B		
69/70	F(GT 350)	351			S2MS 6A582-A	S2MS 6A582-B
71/		351Spec.			C9ZZ 6582-C	C9ZZ 6582-C
					Aluminum	Aluminum

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec.	351 CJ	
		6582-6A582					COVER ASSY.-VALVE ROCKER ARM - continued
69/		353547-S2(GG173)	3				Clip wire (attach to cover)
69/		356748-S(BB124)	12				Bolt (cover to head)-1/4"-20 x 9/16"
70/		373071-S(BB554M)		16		16	Screw & washer (cover to head)-1/4"-20 x 5/8"
72		57623-S7-8(U3B)			16		Screw & washer (cover to head)-1/4"-20 x 3/4"
		6584					GASKET-VALVE ROCKER ARM COVER
69		★C8OZ 6584-A R/B D0AZ 6584-B (9-74)	2				Cork & rubber
70/		D0AZ 6584-B	2				Cork & rubber
70/		D0OZ 6584-A		2	2	2	
		6600					PUMP ASSY.-OIL
69/		C9OZ 6600-A	1				Includes (1) C9OZ 6659-A & (1) B8TZ 6626-A gaskets
70/		D0AZ 6600-B		1	1	1	Less screen & cover-includes (1) D0AZ 6659-A gasket
69/		376099-S(PP73A)	1				Cup plug (oil pump body)-3/4"
69/		20428-S8(B82)	2				Bolt (pump to block)-3/8"-16 x 1 1/4"
		34807-S8(X66)	2				Washer-3/8"
70/		359266-S8(BB157)		2	2	2	Bolt - 3/8"-16 x 1 1/4"
69/		C8SZ 6608-A	1	1	1	1	ROTOR and SHAFT ASSY.-OIL PUMP DRIVE
69/		B8A 6616-C	1	1	1	1	PLATE - OIL PUMP BODY
69/		42911-S(B41A)	4	4	4	4	Bolt (plate to body)-1/4"-20 x 5/8"

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
69/ 70/		6A618 C9OZ 6A618-A D0AZ 6A618-A	1		1	1	PLUG-OIL PUMP RELIEF VALVE
69/ 70/		6A618 C9OZ 6A618-A D0AZ 6A618-A	1		1	1	SHAFT ASSY.-OIL PUMP INTERMEDIATE 5/16" hex.-8 3/16" long-includes retaining ring 8 7/16" long-including retainer
69/ 70/		6622 C9OZ 6622-A D1AZ 6622-A	1		1	1	SCREEN, TUBE and COVER ASSY.-OIL PUMP
69/		357235-S(BB136)	2				Bolt (screen, tube & cover to pump)-5/16"-18 x 7/8"
69/ 70		B8TZ 6626-A	1	1			GASKET - OIL PUMP INLET TUBE
69/		C4TZ 6629-A	1	1	1	1	RING-OIL PUMP INTERMEDIATE SHAFT RETAINER
69/ 70/		6659 C9OZ 6659-A D0AZ 6659-A	1		1	1	GASKET-OIL PUMP TO BLOCK
		6A664 C9PZ 6A664-A (KCV-1) C9PZ 6A664-B (KCV-2)	AR	AR		AR	HOSE - CRANKCASE VENTILATION Also refer to group 6853 15/32" I.D.-25 ft. long-cut as required 5/8" I.D.-25 ft. long-cut as required
71/ 71/		D1OZ 6A664-A D1OZ 6A664-B	1		1	1	Rocker Arm Cover Type Approx. 20 1/2" long Approx. 23 1/2" long-attach to P.C.V. valve & carb.
69 70 70 70	A F A	"Before 10/1/69" C9OZ 6A664-A "From 10/1/69" D0AZ 6A664-B	1 1 1 1				1/2" I.D. (valve to carb.)
70		D0AZ 6A664-C		1			"L" shaped-1/2" I. D. approx. 13 1/4" long- (valve to carb.)
70		D0ZZ 6A664-A		1			"L" shaped-1/2" O. D. -approx. 15 1/4" long- (valve to carb. spacer)
72	A			1			Approx. 9" long-5/8" I.D. -(oil filler cap to air cleaner)
69		BPA 18572-A	2				CLAMP - HOSE (hose to valve & carb. spacer)
69/		6A666 D0AZ 6A666-A	1	1	1	1	VALVE - POSITIVE CRANKCASE VENTILATION (P.C.V.)
69/ 70/ 71/		6670 C9OZ 6670-A C5AZ 6670-A ★D2ZX 6670-AA (EV-50)	1		1	1	SPRING-OIL PUMP RELIEF VALVE 3.22" free length Free length 3.03" - 22 coils
69/		C5AZ 6674-A	1	1	1	1	PLUNGER - OIL PUMP RELIEF VALVE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec	351 CJ	
		6675					PAN ASSY.-OIL
69/		★C9OZ 6675-A R/B D5OZ 6675-A (10-74)	1				
70/	2/B	D0AZ 6675-A		1			
70/	4/B	D1ZZ 6675-C		1	1	1	
69/		357235-S(BB136)	4				Bolt (pan to block (2) & pan to cover (2))- 5/16"-18 x 7/8"
70/		371065-S		4	4	4	Bolt (pan to block(2) & pan to cover(2))- 5/16" - 18 x 5/8"
70/ 69/70		373071-S		16	16	16	Bolt (pan to block)-1/4" - 20 x 5/8" (pan to block (16) & pan to cover (2))
71/		356748-S(BB124)	18				Bolt (pan to block (16) & pan to cover (2))- 1/4"-20 x 5/8"
		6700					SEAL-CYLINDER FRONT COVER OIL
69/		C3AZ 6700-A	1				
70/		D0AZ 6700-A		1	1	1	
		6701					PACKING-CRANKSHAFT REAR
69/		C9OZ 6701-A	2	2		2	Rope type
69/		D0OZ 6701-A	2	2	2	2	Split lip type
		★ 6710-11					GASKET - OIL PAN - refer to group 6781
		★ 6722-23					SEAL - OIL PAN - refer to group 6781
69/		★D1AZ 6730-A R/B D1AZ 6730-B (11-74)	1	1	1	1	PLUG-OIL PAN DRAIN-1/2"-20
		6731					ELEMENT ASSY.-OIL FILTER
69/		★C1AZ 6731-A (FL-1)	1	1	1	1	With gasket-"Spin-on" one-piece filter has 3/4"- 16 female threads
69/		★CC1AZ 6731-A (FL-1)	1	1	1	1	"Spin-on" type
69/		C2OZ 6734-A	1	1	1	1	GASKET-OIL PAN DRAIN PLUG
		6750					INDICATOR - OIL LEVEL
69		C9OZ 6750-A	1				20.37" shield to full 21.05" shield to add 22.80" shield to end
70/		D0AZ 6750-C	1				18.59" top of shield to safe 19.26" top of shield to add 20.86" top of shield to end
70/		D0AZ 6750-A		1		1	20.00" top of shield to safe 20.85" top of shield to add 1 21.68" top of shield to end
71/		D1ZZ 6750-B			1		19.30" top of shield to safe 20.00" top of shield to add 1 21.52" top of shield to add 2 22.20" top of shield to end
		6754					TUBE ASSY.-OIL LEVEL INDICATOR
69		C9OZ 6754-A	1				Approx. 13 11/16" long
70		D0OZ 6754-B	1				11 41/64" long
71/		D1OZ 6754-B	1				Approx. 11 5/8" long-including bracket
70/		D0AZ 6754-B		1	1	1	Approx. 18 1/4" long-including bracket
71/		87031-S91 (T-1-DA)		1	1	1	"O" ring-3/8" I.D.-used at base of 6754 tube

☆ U.S. only

♣ Canada only

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			351 W	351 C	351 Spec.	351 CJ	
		6766					CAP ASSY. - OIL FILLER & BREATHER Rocker Arm Cover Type - Closed, T/E, Imco
69/70		C8AZ 6766-A (EC-1)	1				#Black
		C8AZ 6766-B (EC-2)	1				#Chrome
70/ 71/ 72		D1AZ 6766-A (EC-8-A)	1	1	2	1	#Black
		D1ZZ 6766-A (EG-508)	1	1	1	1	#Chrome - optional w/specified black cap
69/70	F(GT350)(4/B)	C4TZ 6766-B (EC-31)	1				#Black
69/		C8AZ 6767-A	1	1	1	1	ELBOW - CRANKCASE VENTILATION HOSE - 90° - 5/8" x 5/8" - Also refer to basic 9600
69/		6781 D0AZ 6781-C	1				GASKET SET - OIL PAN
	Consists of 1-C9OE 6710-C Gasket - R.H. 1-C9OE 6711-C Gasket - L.H. 1-D3OE 6722-AA Seal (front) 1-D3OE 6723-BA Seal (rear) 1-C2OZ 6734-A Gasket (oil drain plug)						
70/		D0AZ 6781-D		1	1	1	
	Consists of 1-D0AE 6710-B Gasket - R.H. 1-D0AE 6711-B Gasket - L.H. 1-C2OZ 6734-A Gasket 2-D0AE 6723-A Seal or 2-D0AE 6723-B						
71/		D1AZ 6788-A	1	1	1	1	BRACKET-CRANKCASE VENT VALVE HOSE CLIP
		★6853	★	★	★	★	HOSE - CRANKCASE VENTILATION - Cut to fit from bulk hose 4090 Also refer to group 6A664
69/		D1AZ 6890-A	1	1	1	1	INSERT-OIL FILTER MOUNTING BOLT- 3/4"-16 & 1 1/16"-12 male threads-1 13/64" long- shoulder type-attach filter to cyl.block-use with "Spin-on" type filter
		6A892					RETAINER - CRANKCASE VENTILATION - grommet-also refer to group 9600
69/70 71/ 71/		C8AZ 6A892-A	1 1	1 1		1	Elbow to oil filler cap-1 7/16" O.D.-37/64" I.D. Elbow to valve cover Elbow to oil filler cap
70 71/	F-w/evaporative emission	C8SZ 6A892-A	1 1	1 1	1 1	1	Used in crankcase vent flame arrester P.C.V.valve to filler cap
69/70		D0OZ 6A892-A	1				PCV valve to valve cover
70 70 70	"Before 10/28/69"	D0AZ 6A892-A	1	1			PCV valve to valve cover
	"From 10/28/69"	D0AZ 6A892-B		1			PCV valve to valve cover

Identification marking

FORD CAR PARTS

SECTION 60.6
8 CYL. - 352, 390

1

YEAR	RESTRICTIONS		PART NUMBER		QUANTITY			PART NAME AND DESCRIPTION	
					352		390		
			6007					ENGINE ASSY.-service details only	
65			C2AZ 6008-E		1		1	GASKET SET - COMPLETE OVERHAUL	
	Consists of								
	1-C0AE	6020-C Gasket	2-D0AZ	6584-C Gasket				1-C8PZ	8255-U Gasket
	2-C6AZ	6051-A Gasket	1-B8TZ	6626-A Gasket				2-B8A	8507-A Gasket
	2-C1AE	6336-B Seal	1-C0AZ	6A636-B Gasket				1-B8A	8513-A Gasket (1961)
	1-C3AZ	6411-B Seal (1963/)	1-B8AZ	6659-A Gasket				1-C2AZ	8513-A Gasket (1962/)
	1-C3AZ	6411-C Seal (1963/)	1-C3AZ	6700-A Seal				1-C3AZ	9417-C Gasket
	1-C2AZ	6436-A Seal (1961/62)	2-C9OZ	6701-A Seal				1-C8AZ	9A424-A Seal
	16-C4TZ	6571-J Seal	1-D0AZ	6710-A Gasket				1-C8AZ	9A425-A Seal
			1-C2OZ	6734-A Gasket				2-C8AZ	9441-A Gasket
66/68	"Before 1/26/68"		C6AZ 6008-E		1		1		
	Consists of								
	1-C0AE	6020-C Gasket	1-C0AZ	6A636-B Gasket				2-B8A	8507-A Gasket
	2-C6AZ	6051-A Gasket	1-B8AZ	6659-A Gasket				1-C2AZ	8513-A Gasket
	2-C1AE	6336-B Seal	1-C3AZ	6700-A Seal				1-C3AZ	9417-C Gasket
	1-C3AZ	6411-C Seal	2-C9OZ	6701-A Packing				1-C8AZ	9A424-A Seal
	1-C3AZ	6411-B Seal	1-D0AZ	6710-A Gasket				1-C8AZ	9A425-A Seal
	16-C4TZ	6571-J Seal	1-C2OZ	6734-A Gasket				2-C8AZ	9441-A Gasket
	2-D0AZ	6584-C Gasket	1-C8PZ	8255-U Gasket					
	1-B8TZ	6626-A Gasket							
68	"From 1/26/68"		★C8AZ 6008-D				1	Repl. by C6AZ 6008-E (8/74)	
	Consists of								
	1-C0AE	6020-C Gasket	1-B8TZ	6626-A Gasket				1-C8PZ	8255-U Gasket
	2-ΔC6AZ	6051-A Gasket	1-C0AZ	6A636-B Gasket				2-B8A	8507-A Gasket
	2-C1AE	6336-B Seal	1-B8AZ	6659-A Gasket				1-C2AZ	8513-A Gasket
	1-C3AZ	6411-C Seal	1-C3AZ	6700-A Seal				1-C3AZ	9417-C Gasket
	1-C3AZ	6411-B Seal	2-C9OZ	6701-A Packing				1-C8AZ	9A424-A Seal
	16-C4TZ	6571-J Seal	1-D0AZ	6710-A Gasket				1-C8AZ	9A425-A Seal
	2-D0AZ	6584-C Gasket	1-C2OZ	6734-A Gasket				2-C8AZ	9441-A Gasket
69/71			C9AZ 6008-A				1		
	Consists of								
	1-C0AE	6020-C Gasket	1-B8TZ	6626-A Gasket				1-C8PZ	8255-U Gasket
	2-C8AZ	6051-A Gasket (steel)	1-C0AZ	6A636-B Gasket				2-B8A	8507-A Gasket
	2-C1AE	6336-B Seal	1-B8AZ	6659-A Gasket				1-C2AZ	8513-A Gasket
	1-C3AZ	6411-C Seal	1-C3AZ	6700-A Seal				1-C3AZ	9417-C Gasket
	1-C3AZ	6411-B Seal	2-C9OZ	6701-A Seal				1-C8AZ	9A424-A Seal
	16-C4TZ	6571-J Gasket	1-D0AZ	6710-A Gasket				1-C8AZ	9A425-A Seal
	2-D0AZ	6584-C Gasket	1-C2OZ	6734-A Gasket				2-C8AZ	9441-A Gasket
65/71			B9AE 6A008-A		4		4	DOWEL - CYLINDER HEAD TO CYLINDER BLOCK - .7355" O.D. -.61" I.D. -.44" height-split	

Δ Asbestos & steel
May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
		6009				CYLINDER ASSY. - Includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated
65/66		*C8TZ 6009-G	1			4.05" bore includes C3AZ 7007-F plate
65/66		*C3AZ 6009-AE	1			
65	P/C	C3AZ 6009-AC		1		4.05" bore
66/70	A, B(2/B)	C6AZ 6009-T		1		4.05" bore-includes (1) C3AZ 7007-F plate
66	B-GT(4/B)	C6OZ 6009-A		1		4.05" bore
67	B-GT, F(4/B)	C7OZ 6009-E		1		4.05" bore-includes (1) C3AZ 7007-F plate
68	B, F(4/B)					
65/68	A(exc.P/C), S(4/B)	C6AZ 6009-U		1		4.05" bore-includes (1) C3AZ 7007-F plate
66/67	B (4/B)			1		
68	F(2/B P.F.)			1		
69	B-GT, F-GT(4/B)			1		
71	A(2/B)	DIAZ 6009-C		1		
		6010				BLOCK ASSY. - CYLINDER
65/66		C8AZ 6010-F	1			Hydraulic tappets-includes (1) C8TE 6010-T block (8) C8AE 6110-AA pistons, (1) C3AZ 7007-F plate, (8) C4TE 6135-J piston pins & (2) 380041-S screw & washer-This assembly must be used w/C8TZ 6148-A piston rings
65	P/C	*ΔC3AZ 6010-Y		1		Mechanical tappets -4.05" bore-not replaced
65/71	Exc. P/C	C8AZ 6010-C		1		Hydraulic tappets-4.05" bore-consists of (1) C8AZ 6010-A, (1) stud for (4 x 4) truck oil tube, (2) 380041-S S & W 7/16"-14 x 5/8" to retain cam plate, (1) C3AZ 7007-F plate
65/71	A, S	73249-S(N88)	2	2		Dowel (cyl. block to clutch hsg.)-3/8" x 9/16"
65/71	A, S	357648-S8(NN55)	1	1		Dowel (intake manifold to cyl. block)-5/16" x 11/16"
		6B018				WIRE ASSY. - CYL. BLOCK HEATER
65/66		CC1TF 6B018-E	1	1		
67		C7TE 6B018-A		1		2 conductor-use w/3 terminal heater-(dummy ground)
67		C7TE 6B018-C		1		3 conductor-use w/3 terminal heater-(1 green ground connector)
71		D1AB 6B018-AA		1		
65/71		C2AZ 6019-D	1	1		REPAIR KIT - CYLINDER FRONT COVER
Consists of						
	1-C0AE 6020-C	Gasket (front cover)		1-C1SZ 9417-A	Gasket (fuel pump mtg.)	
	1-C0AE 6023-C	Pointer (timing)-61/62 (exc. spec.)		4-374408-S	Bolt (5/16"-18 x 3/4")	
	1-C0AE 6023-D	Pointer (timing)-58/60 & 61/62 spec.		4-374409-S	Bolt (3/8"-16 x 7/8")	
	1-C8AE 6059-B	Cover (front)		2-373913-S	Screw (No. 10-24 x 5/16")	
	1-C3AZ 6700-A	Seal (crankshaft)-front				
65/71		374408-S(BB413C)	4	4		Bolt (cover to block)-5/16"-18 x 3/4"-hex. locking
65/71		374409-S(BB416B)	4	4		Bolt (cover to block)-3/8"-16 x 7/8"-hex. locking
		6020				GASKET - CYLINDER FRONT COVER
65/71		C0AE 6020-C	1	1		(4) .411" & (4) .348" holes-.030" thick-used with aluminum cover
		6023-A				POINTER - TIMING
65/71		C9AZ 6023-A	1	1		
66/69	High Perf. B, F w/A/C	C8AZ 6023-A		1		
66/69	High Perf. B, F w/o A/C	C6AZ 6023-A		1		1 3/4" long-2" wide
65/67	A, S	373913-S(UU40)	2	2		Screw(pointer to cover)-No. 10-24 x 3 3/64" hex. head tapping

Δ Includes (2) 376893-S bolts, (2) 376894-S flat washer and (2) 376895-S flat washers. If used with camshaft thrust button and spring use to plug holes in front of block. If used with thrust plate use to retain plate to block.

* Does not include tappets

☆ U.S. only

◆ Canada only

FORD CAR PARTS

SECTION 60.6
8 CYL. - 352, 390

3

6A023, 6054, 6068 & 6120

REAR MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT	*RETAINER- REAR SUPPORT	*SUPPORT ASSEMBLY	*BRACKET	
						R.H.	L.H.
- A -							
65	A-C4	352		C5AZ 6054-A	C8AZ 6068-B		
65/66	A(M/T and C/M)	352		C5AZ 6054-B	C9AZ 6068-E		
65	A, P/C	390		C5AZ 6054-B	C9AZ 6068-E		
66/67	A(2/B)-3/S/T, C/M	390		C5AZ 6054-B	C9AZ 6068-E		
66/67	A(4/B)-3/4/S/T, S/T & O/D, C/M	390					
66/67	A(2/B, 4/B)-C6	390		C5AZ 6054-A	C8AZ 6068-B		
68	A(2/B, 4/B)-S/T, C/M	390		C8AZ 6054-A	C9AZ 6068-E		
68	A(2/B, 4/B)-C6	390		C8AZ 6054-A	C8AZ 6068-B		
69/70	A(2/B)-S/T	390		C8AZ 6054-A	C9AZ 6068-E		
69/71	A(2/B)-C6, C/M - " Before 7/1/71"	390		C9AZ 6054-A	C9AZ 6068-H		
71	A(2/B)-C6 - " From 7/1/71"	390		D2AZ 6054-A	D2AZ 6068-B		
- B -							
66	B, B-GT (2/B, 4/B)	390	C6OZ 6A023-C		D0OZ 6068-A	C6OZ 6120-C	C6OZ 6120-D
67	B(exc. 66), B-GT	390	C6OZ 6A023-C		D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-H
67	B (66)	390	C6OZ 6A023-C		C8OZ 6068-A	C6OZ 6120-G	C6OZ 6120-H
68/69	B	390	C6OZ 6A023-C		D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
- F -							
67	F(C6)	390	C7ZZ 6A023-B		D0OZ 6068-A		
67	F(M/T)	390	C9ZZ 6A023-B		D0OZ 6068-A		
68	F(3 or 4 S/T)(76)	390	C9ZZ 6A023-B		D0OZ 6068-A		
68	F(C6)-exc. 76	390	C7ZZ 6A023-B		D0OZ 6068-A		
69	F(3 or 4 S/T)-76	390	C9ZZ 6A023-B		D0OZ 6068-A		
69	F(A/T)-76	390	C7ZZ 6A023-B		C9ZZ 6068-D		
69	F(63, 65)-S/T - w/improved handling	390	C9ZZ 6A023-B		C9ZZ 6068-D		
69	F(63, 65)-A/T-w/o improved handling	390	C7ZZ 6A023-B		C9ZZ 6068-D		
- S -							
65	S	390		C3AZ 6054-A	C3AZ 6068-C		
66	S (exc. C6)	390	*C6SZ 6A023-A	C3AZ 6054-A	C3AZ 6068-C	*C6SZ 6120-A	*C6SZ 6120-B
66	S (C6)	390	*C6SZ 6A023-A	C5AZ 6054-A	C6SZ 6068-D	*C6SZ 6120-A	*C6SZ 6120-B
67	S	390		C5AZ 6054-A	C6SZ 6068-D		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY		PART NAME AND DESCRIPTION
			352	390	
65/68	A	20432-S7-8(B121)		2	Bolt (retainer to trans. ext.)-1/2"-13 x 1 1/8"
65/68	A	44735-S8(X32)		2	Washer-flat-1/2"
65/71	A, S	20392-S8(B120A)	2	2	Bolt (ret. to trans. ext.)-1/2"-13 x 7/8" hex. head
65/67	S	20452-S8(B122)		2	Bolt (support to bracket)-1/2"-13 x 1 3/8"
		20348-S8(B77)		6	Bolt (mtg. bracket to underbody)-3/8"-16 x 3/4"
		34807-S8(X66)		6	Lockwasher-3/8"
65/71	A, S	20411-S7(B184)	2	2	Bolt (rear suppt. to frame)-7/16"-20 x 1 1/8" hex. hd.
65/71	A, S	34671-S8(M67)	2	2	Nut-7/16"-20
65/71	A, S	356590-S(XX171)	2	2	Washer-flat-.47" I.D. -.78" O.D. -.10" thick-steel
65/71	A, S	357625-S7-8(XX304)	2	2	Lockwasher-7/16"

* (1) Required unless otherwise noted

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

—DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
		6026				PLUG - ENGINE
68	A(2/B, 4/B)	C8AZ 6026-A			1	1 3/4" O. D. -plug clean-out hole in head
65/68	A,S(2/B,4/B)		6		6	Plug holes in block
65/68	A,S(2/B,4/B)		4		4	Plug holes in end of heads
69/71	A, B-GT, F-GT(2/B, 4/B)	C8AZ 6026-B	AR		6	plug clean-out hole in block
				AR		.060" O/S
65/66	A, S	383024-S(PP66A)	1			Valve assy.- tappet air bleed lubrication -
65/69	A, B, B-GT, F, S(2/B, 4/B)				1	use to plug rear main oil gallery
65/71	A, S	376635-S8(PP66A)	12		12	Plug-cup type (oil galleries-tappet valley)-
						29/64" dia.
65/71		353001-S(PP85)	1		1	Plug (cylinder block camshaft rear bearing hole)-
						2 3/8"-cup type
65/66	A, S	376635-S8(PP66A)	3			Plug-cup type (cyl. tappet oil crossover holes)-
65/71	A, S				3	29/64" dia.
65/71	A, S	376635-S8(PP66A)	2		2	Plug-cup type (oil gallery-front) - 29/64" dia.
65/66	A, S	376635-S8(PP66A)	2			Plug-cup type (oil line front face)- 29/64" dia.
65/71	A, S				2	
65/66	A, S	376635-S8(PP66A)	4			Plug-cup type (oil gallery rear face)- 29/64" dia.
65/71	A, S				4	
65/66	A, S	354942-S(PP81)	AR			Plug (cyl.block side)-cup type-O/S-1.790" &
						1.775" O. D.
65/71		371058-S(PP73)	1		1	Plug (cyl. block rear)-cup type-3/4"
65/66	A	376635-S8(PP66A)	2			Plug-cup type (cyl. block tappet oil lines front)-
						29/64" dia.
65/66	A, S	358048-S(PP43)	6			Plug (cyl. head top)-3/4" pipe-socket head
65/68	A, S				6	

6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT BRACKET		*BRACKET		*INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
- A -								
65/67	A, P/C(2/B, 4/B)	352,390	C5AZ 6028-C	C5AZ 6029-C			C5AZ 6038-C	C5AZ 6038-D
68	A (2/B, 4/B)	390	C5AZ 6028-C	C8AZ 6029-A			C5AZ 6038-C	C5AZ 6038-D
69/71	A(2/B)	390	C9AZ 6028-C	C9AZ 6029-C			C9AZ 6038-D	C9AZ 6038-E
- B -								
66	B, B-GT(2/B, 4/B)	390	C6OZ 6028-A	C6OZ 6029-A	C6OZ 6030-A	C6OZ 6030-A	C6OZ 6038-G	C6OZ 6038-H
67/69	B, B-GT(2/B, 4/B)-	390	C6OZ 6028-A	C6OZ 6029-A	C6OZ 6030-A	C6OZ 6030-A	C6OZ 6038-G	C6OZ 6038-H
- F -								
67	F(4/B)-exc. 76	390	D0ZZ 6028-D	C7ZZ 6029-B	D0ZZ 6030-E	D0ZZ 6031-B	D1ZZ 6038-A	D1ZZ 6038-A
67	F(4/B)-76	390	D0ZZ 6028-D	C7ZZ 6029-B	D0ZZ 6030-B	D0ZZ 6031-B	D0ZZ 6038-D	D0ZZ 6038-D
68	F(4/B)-76	390	C8ZZ 6028-B	D0ZZ 6029-D	D0ZZ 6030-B	D0ZZ 6031-B	D0ZZ 6038-D	D0ZZ 6038-D
68	F(4/B)-exc. 76	390	C8ZZ 6028-B	D0ZZ 6029-D	D0ZZ 6030-B	D0ZZ 6031-B	D1ZZ 6038-A	D1ZZ 6038-A
68/69	F(2/B)-76	390	C8ZZ 6028-B	D0ZZ 6029-D	C8ZZ 6030-A	C8ZZ 6031-A	D0ZZ 6038-D	D0ZZ 6038-D
68/69	F(2/B) 63, 65	390	C8ZZ 6028-B	D0ZZ 6029-D	C8ZZ 6030-A	C8ZZ 6031-A	D1ZZ 6038-A	D1ZZ 6038-A
- S -								
65	S (63, 76)	390	C5SZ 6028-A				C4SZ 6038-C	C4SZ 6038-D
66	S (C/M)	390	C6SZ 6028-A	C6SZ 6029-A			C4SZ 6038-C	C4SZ 6038-D
66	S (C6)	390	C6SZ 6028-A	C6SZ 6029-A			C6SZ 6038-A	C6SZ 6038-A
67	S	390	C5AZ 6028-C	C5AZ 6029-C			C5AZ 6038-C	C5AZ 6038-D

* (1) Required unless otherwise noted

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY		PART NAME AND DESCRIPTION
			352	390	
6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART - continued					
65/68	A	33845-S8(M57)	2	2	Nut (6038 to No. 2 crossmember)-1/2"-13 hex.
65/71	A	357625-S7(XX304)	2	2	Lockwasher-7/16"
65	A	351428-S7(XX166)	2	2	Washer-flat-7/16"
65/67	S	357450-S(BB172)		4	Bolt (insulator to cyl. block)-7/16"-14 x 7/8"
65/67	S	20390-S8(B102)		4	Bolt (insulator to cyl. block)-7/16"-14 x 1"
		34808-S8(X87)		4	Lockwasher-7/16"
		354530-S(MM155)		2	Nut-1/2"-20
		44735-S8(X32)		2	Washer-flat-1/2"
68/69	B	373403-S8(MM173J)	2	2	Nut (insulator to bracket)-3/8"-16 hex. lock
66/69	B	20348-S2(B77)		2	Bolt (insulator to bracket)-3/8-16 x 3/4" hex. hd.
65/71	A	20390-S8(B102)	4	4	Bolt (engine front support insulator to cyl. block)-7/16"-14 x 1"-hex. head
65/71	A	34671-S8(M67)	4	4	Nut-7/16"-14
65/71	A	357625-S7-8(XX304)	4	4	Lockwasher-7/16"
68	F	351989-S8(BB188)		2	Bolt (insulator to bracket)-7/16"-14 x 4 5/8"
		6030-1			BRACKET - FRONT SUPPORT - Refer to front motor mount chart (Basic No. 6028)
		6035			SHIELD - FRONT SUPPORT INSULATOR
65/67	S	★C4SA 6035-A		1	Dealer improvise-.015" thick-steel-4" long-1 25/32" wide (1) 17/32" hole & (1) 1/2" hole
66	S(C6)	★C6SA 6035-A		1	4" long-1 25/32" wide-1/64" thick-(1) each 1/2" & 17/32" bolt holes-dealer improvise
		6038			INSULATOR - FRONT SUPPORT - Refer to front motor mount chart (Basic No. 6028)
		6A042			REINFORCEMENT - REAR SUPPORT
68/69	B(exc. 76-5)	C8OZ 6A042-C		1	R. H.
		C8OZ 6A042-D		1	L. H.
65	S	★C5SA 6046-A		2	BRACKET - FRONT SUPPORT INSULATOR - serviced in 6028-29 assemblies - Also refer to front motor mount chart (Basic No. 6028)
66	S	★C6SA 6046-A		2	Serviced in 6028-9 assemblies
67/69	F(2/B P. F., 4/B)	C7ZZ 6046-A		1	R. H.
		C7ZZ 6046-B		1	L. H.
		6049			HEAD - CYLINDER
65/66	A(exc. T/E)	C8AZ 6049-M	2		Without valves
65/67	A, S, P/C(exc. T/E)			2	
68	A(2/B, 4/B)-C/M, C6			2	
69/71	A(2/B)-S/T, A/T			2	
65/70	A(exc. P/C)-exc. T/E	C8AZ 6049-R	2	2	Complete with valves
66/67	A, S(2/B, 4/B)-T/E	C8AZ 6049-A	2	2	
68	A(2/B, 4/B), 3 or 4 S/T-T/E			2	
66/68	B, B-GT, F(2/B, 4/B)-exc. T/E	C8OZ 6049-B		2	
66	B(2/B, 4/B)-T/E-	★ 6049		2	
	"Before 6/1/66"				
66/67	B, B-GT, F(2/B, 4/B)-T/E-	C8OZ 6049-A		2	
	"From 6/1/66"				
68	B(2/B), 3 or 4 S/T			2	
68	B-GT, F(4/B)-3 or 4 S/T, C6			2	
69	B-GT, F(4/B)-Imco	C8OZ 6049-J		2	
65/71	All High Performance Vehicles	C8OZ 6049-K		2	With T/E
		6051			GASKET - CYLINDER HEAD
65/70	All High Performance Vehicles	C3AZ 6051-B		2	Steel-.015" thick
65/71		C6AZ 6051-A	2	2	#C6AE 6051-C-asbestos & steel-opt. with C8AZ 6051-A steel gasket
69/71		C8AZ 6051-A		2	Steel-opt. with C6AZ 6051-A asbestos & steel gskt.
66/69	High perf. B, F	C8AZ 6051-A		2	Steel

* (1) Required unless otherwise noted # Identification marking ◇ Not used on Model 76 from 12/1/67

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
66/68		C6AZ 6052-A	8		8	PLUG - CYLINDER HEAD-EXHAUST AIR SUPPLY (to plug holes when T/E not used)-1/2"-20 x 1 11/32" hex, head
		6054				RETAINER - REAR SUPPORT - Refer to rear motor mount chart (Basic No. 6A023)
65/67	S(76)	B8AZ 6065-A			2	BOLT - CYLINDER HEAD-1/2"-13 x 4.22"- Also component of C2SZ 7611032-3-A damper assy.
65/71		C1AE 6065-A	10		10	1/2"-13 x 4 29/64"
65/71		C1AE 6065-C	10		10	1/2"-13 x 2 7/8"
		6068				INSULATOR ASSY. - REAR SUPPORT - Refer to rear motor mount chart (Basic No. 6A023)
66	B(2/B & 4/B)	C6OZ 6B068-A			1	INDUCTION KIT - HIGH PERFORMANCE - to convert to (3) 2/B carburetors
65/68	A	B8A 6070-A	1		1	PLATE - REAR SUPPORT
66/67	B	C6OZ 6070-A			2	Approx. 4 3/4" long-3 5/16" wide
68/69	B(76)				2	
68/69	B(exc. 76)	C8OZ 6070-A			1	R. H.
		C8OZ 6070-B			1	L. H.
		6079				GASKET SET - VALVE GRIND
65/67		C6AZ 6079-E	1		1	
Consists of 2-C6AZ 6051-A Gasket 16-C4TZ 6571-J Seal 2-B9AZ 6584-A Gasket 1-C8PZ 8255-U Gasket						
▲ 1-C8AZ 9A424-A Seal ▲ 1-C8AZ 9A425-A Seal ■ 2-C8AZ 9441-A Gasket						
▲ Serviced in C3AZ 9433-G ■ Serviced in C6AZ 9433-E						
68		★C8AZ 6079-D			1	Repl. by C6AZ 6079-E (8/74)
Consists of 2-C6AZ 6051-A Gasket (asbestos & steel) 16-C4TZ 6571-J Seal 2-D0AZ 6584-C Gasket 1-C8PZ 8255-U Gasket						
1-C8AZ 9A424-A Seal 1-C8AZ 9A425-A Seal 2-C8AZ 9441-A Gasket						
69/71		C9AZ 6079-A			1	
Consists of 2-C8AZ 6051-A Gasket (steel) 16-C4TZ 6571-J Gasket 2-D0AZ 6584-C Gasket 1-C8PZ 8255-U Gasket						
▲ 1-C8AZ 9A424-A Seal ▲ 1-C8AZ 9A425-A Seal ▲ 2-C8AZ 9441-A Gasket ▲ Serviced in C3AZ 9433-G						
68/71		CC2AF 6B080-A			1	"O" RING - CYL. BLOCK HEATER
66	B, B-GT(2/B, 4/B)	C6OZ 6096-A			1	BRACKET - REAR SUPPORT -rear-R.H.
		C6OZ 6096-D			1	Rear-L. H.
67	B, B-GT(2/B, 4/B)- "Before 4/3/67"	C6OZ 6096-C			1	R. H.
		C6OZ 6096-G			1	L. H.
67	B, B-GT(2/B, 4/B)- "From 4/3/67"	C6OZ 6096-F			1	R.H.
		C6OZ 6096-G			1	L.H.
68/69	B, B-GT	C6OZ 6096-F			1	R. H.
		C6OZ 6096-G			1	L. H.
		6C098-9				STOP - FRONT SUPPORT INSULATOR -
66/68	B, B-GT(2/B, 4/B) -exc. P/S	C6OZ 6C098-A			1	R.H.
		C6OZ 6C099-A			1	L. H.
66/68	B-B-GT(2/B, 4/B) -P/S	C6OZ 6C098-A			1	R.H.
		C6OZ 6C099-B			1	L. H.
69	B-GT(4/B) -P/S	C6OZ 6C098-A			1	R. H.
		★			★	L. H. -Refer to Basic 3C510

Identification marking

6108-9 PISTON ASSEMBLY - CHART

In the Standard column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	RINGS	QTY.	PART NUMBER					
					STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65/66	A(4/B)	352	3	8	C0AZ 6108-A 4.00" bore	C0AZ 6108-AC	C0AZ 6108-D	C0AZ 6108-E	C0AZ 6108-F	C0AZ 6108-G
65	A, S, P/C	390	3	8	C1AZ 6108-A(R) C1AZ 6108-B(B) 4.05" bore	C1AZ 6108-C	C1AZ 6108-D	C1AZ 6108-E	C1AZ 6108-F	
66/68 69/70	A, B (2/B) A(2/B) replaces-5/64" "ring groove piston"	390 or 390	3	8	C6AZ 6108-AG(R) C6AZ 6108-AH(B)	C6AZ 6108-AJ	C6AZ 6108-AK	C6AZ 6108-AL	C6AZ 6108-AM	
66/68 69	A, B, B-GT, F, S (4/B, 2/B P. F.) B, F(4/B)	390	3	8	C6AZ 6108-BG(R) C6AZ 6108-BH(B)	C6AZ 6108-BJ	C6AZ 6108-BK	C6AZ 6108-BL	C6AZ 6108-BM	
66/69	All High Perf. Vehicles-R. H. - use W/C8OZ 6049-K cyl. head	390	3	4	C9OZ 6108-AD 4.048" dia.					
66/69	All high Perf. Vehicles- L. H. - use W/C8OZ 6049-K cyl. head	390	3	4	C9OZ 6108-D 4.046" dia.					
71	A(2/E)	390	3	8	C8TZ 6108-R(R) D1AZ 6108-G(B)	C8TZ 6108-S	C8TZ 6108-T	C8TZ 6108-U	C8TZ 6108-V	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY		PART NAME AND DESCRIPTION
			352	390	
		612C			BRACKET - REAR SUPPORT - refer to Rear Motor Mount Chart (Group 6A023)
65/66 65 65	A, S A, S P/C	B8A 6135-AA B8A 6135-AB B8A 6135-AC	8	8 8	PIN - PISTON-standard-#Green-.9752" O. D. - 3.163" long .001" O/S-#Blue .002" O/S-#Yellow
66/71	A, B, B-GT, F, S(2/B, 4/B)	C6AZ 6135-A C6AZ 6135-B C6AZ 6135-C		8	Standard-#Green-.975" O. D. .001" O/S-#Blue .002" O/S-#Yellow
66/69	High Perf. B, F	C6AZ 6135-A		8	Std. -#Green-.975" O. D.
65/71	A, B, B-GT, F, S, P/C(2/B, 4/B)	C3AZ 6140-B	16	16	RETAINER - PISTON PIN-.94" I. D. - 1.113" O. D. - .052" thick

◇ Center line of piston pin hole to top of piston 1.833"

△ Eye brow type piston, 2nd ring groove 5/64" wide

△ Includes piston pin and retainer

● 2nd ring groove 3/32" wide - use C1AZ 6148-A, B, C, D, or E piston rings

FORD CAR PARTS**6148 RING SET - PISTON PARTIAL - CHART**-Consists of the
necessary rings to re-ring (2) pistons

YEAR	MODEL	C.I.D.	RINGS	TYPE *	PART NUMBER				
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S
65/66	A	352	3	Hi Lo	★B8AZ 6148-A opt. with C7TZ 6148-C	★B8AZ 6148-B opt. with C7TZ 6148-D	★B8AZ 6148-C opt. with C7TZ 6148-E	★B8AZ 6148-D opt. with C7TZ 6148-F	★B8AZ 6148-E opt. with C7TZ 6148-G
65/66	A top ring chromed	352	3	Hi Lo	★C7TZ 6148-C opt. with B8AZ 6148-A	★C7TZ 6148-D opt. with B8AZ 6148-B	★C7TZ 6148-E opt. with B8AZ 6148-C	★C7TZ 6148-F opt. with B8AZ 6148-D	★C7TZ 6148-G opt. with B8AZ 6148-E
65/66	A	352	3	Hi Lo	★CC1AE 6148-E	★CC1AE 6148-F	★CC1AE 6148-G	★CC1AE 6148-H	★CC1AE 6148-J
66/67	A, B, B-GT, F, S top ring chromed	▲390	3	Hi Lo	C6AZ 6148-E	C6AZ 6148-F	C6AZ 6148-G	C6AZ 6148-H	
65 68/70	A, S, P/C A, B-GT, F, (2/B, 4/B)	390 ◇390	3	Hi Lo	★C1AZ 6148-A	★C1AZ 6148-B	★C1AZ 6148-C	★C1AZ 6148-D	★C1AZ 6148-E
71	A(2/D)								
65 68/71	A, S A, B, F	390 390	3	Hi Lo	★CC1AE 6148-A	★CC1AE 6148-B	★CC1AE 6148-C	★CC1AE 6148-D	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
65/66		C1AZ 6200-C	8			ROD ASSY. - CONNECTING
65	A(exc. P/C), S	C3AZ 6200-B			8	#C3AE 6205-A-use with C3AZ 6303-D crankshaft
65	P/C	C3AZ 6200-F			8	
66/71		C6AZ 6200-D			8	
65/69	All High Performance Vehicles	C9ZZ 6200-A			8	Lemans type-crankshaft rebalancing required
65/70	All High Performance Vehicles	C6AZ 6200-C			8	Street type-crankshaft rebalancing required
65/71		B8A 6207-A	8		8	BUSHING - CONNECTING ROD-split type-1.0435" O. D. -.040" wall thickness-1.24" long

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER					
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S
65/71		352 390	8 8	8 8	C6AZ 6211-A .0758"	C6AZ 6211-B	C6AZ 6211-C	C6AZ 6211-D	C6AZ 6211-E	C6AZ 6211-F
65/69	All High Performance Vehicles	390	8	8	C5AZ 6211-G .0748"					C6AZ 6211-G

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
65/71	Exc. P/C	C9AZ 6212-B	16		16	NUT - CONNECTING ROD - 3/8"-24-.557" hex, chamfered
65	P/C	C3AZ 6212-A			16	13/32"-24-use with C3AZ 6200-F
66/69	High Perf. B. F	C0ME 6212-A			16	13/32"-24 hex,
65/67	Exc. P/C	C1AZ 6214-A	16		16	BOLT - CONNECTING ROD-3/8"-24 x 2 7/32"
65	P/C	C2AZ 6214-B			16	13/32"-24 x 2 5/32"
68/71		C8AZ 6214-B			16	3/8"-24 x 2 1/4"
66/69	High Perf. B. F	C2AZ 6214-B			16	

◇ For use on pistons having 3/32" wide 2nd groove - when used on 1968 model engines use with C6AZ 6108-AG, AH, AJ, AK, AL, AM
 # Identification marking * Hi Lo mileage ▲ For use on pistons having 5/64" wide 2nd groove

★ U.S. only ♦ Canada only

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
		6250				CAMSHAFT - less gear
65	P/C	C3AZ 6250-T			1	Mechanical tappets #VAA
65/66	A, S	C3AZ 6250-U	1		1	Hydraulic tappets-#YA
66	A, B, S(2/B, 4/B)	C6AZ 6250-A			1	Hydraulic tappets-#VU or VU with white paint-
67	A, B, S(4/B)				1	induction hardened-15 tooth dist. gear
68	A(4/B), F(2/B P.F.)				1	
69	B-GT, F(4/B)				1	
67/71	A, B (2/B)	C7AZ 6250-A			1	#VX or VU with green paint-induction hardened-
						15 tooth dist. gear
66/68	B-GT, F(4/B)	C6OZ 6250-B			1	Hydraulic tappets
66/69	All High Perf. B. F	C6OZ 6250-B			1	
65/69	All High Performance Vehicles	C3AZ 6250-AA			1	#VBX-Use with thrust plate kit
65/69	All High Performance Vehicles	★C4AE 6250-B			1	.500 Lift-used on engines properly set up for high
						R. P. M. operation-camshaft thrust plate kit
						required-this cam requires .176 adjustable
						rocker arms
65/69	All High Performance Vehicles	★C8AX 6250-C			1	.515 Lift-steel-use on hydraulic lifter engines
65/69	All High Performance Vehicles	★C8AX 6250-D			1	.600 Lift-steel-full race type-use on high R. P. M.
						engines-for use on strip or track only-camshaft
						thrust plate kit, spl. valve springs, seats and
						retainers are required
		6A251				BEARING KIT - CAMSHAFT - standard
65/71	Consists of	C3AZ 6A251-A	1		1	
	1-C3AZ 6261-A Front	1-B8A 6263-AA Rear				1-B8A 6270-AA Rear Intermediate
	1-B8A 6262-AA Center	1-B8A 6267-AA Front Intermediate				1-353001-S Plug
		6256				SPROCKET - CAMSHAFT
65/71		C8AZ 6256-A	1		1	36 teeth-spacer C3AZ 6265-A is not required
						with this sprocket
65/71		73357-S(N87C)	1		1	Dowel (sprocket to camshaft)-5/16" x 1 1/2"
65/68		354150-S8(BB177)	1		1	Bolt (sprocket to camshaft)-7/16"-14 x 1 7/8"
69		304815-S(B110A)			1	Bolt (sprocket to camshaft)-7/16"-14 x 1 7/8"
69		34808-S8(X67)			1	Lockwasher-7/16"
65/66		370301-S8(BB546)	1			Bolt (sprocket to camshaft)-7/16"-14 x 1 1/4"
65/66		44730-S8(X26)	1			Washer-flat-7/16"

6261, 6262, 6263, 6267 & 6270 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65/71		352,390	Standard .015" U/S	C3AZ 6261-A D3TZ 6261-C	B3A 6267-AA B8A 6267-AB	B8A 6262-AA B8A 6262-AB	B8A 6270-AA B8A 6270-AB	B8A 6263-AA B8A 6263-AB

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
65/69		C3AZ 6265-A	1		1	SPACER - CAMSHAFT GEAR OR SPROCKET -
						1.56" O.D. - 3/4" I.D. -not used with C8AZ 6256-A
		6267				Refer to Camshaft Bearing Chart (Basic No. 6261)
65/71		D0AZ 6268-A	1		1	CHAIN - TIMING - 48 links
65/71		★C3AZ 6269-A r/b D3TZ 6269-A (9/74)	1		1	PLATE - CAMSHAFT THRUST-1.80" I. D.
65/71		380041-S (BB639B)	2		2	Screw & washer (plate to cyl. block)-7/16"-
						14 x 5/8"

Identification marking
May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
		6270				Refer to Camshaft Bearing Chart (Basic No. 6261)
65/71		C3AZ 6287-A	1		1	ECCENTRIC - CAMSHAFT FUEL PUMP DRIVE
		6303				CRANKSHAFT ASSY.
65/69	All High Performance Vehicles	C8AZ 6303-B			1	Iron
65/69	All High Performance Vehicles	C5AZ 6303-C			1	Steel
65/66		C4AZ 6303-L	1			#2T on No. 3 counterweight
65		C4AZ 6303-G			1	Consists of (1) C4AZ 6303-C, (1) C4AZ 6306-A gear attached with 378704-S key
66/71	A,B,B-GT,F,S(2/B, 4/B)	C6AZ 6303-A			1	#2U-27 9/16" o/all length
		6306				SPROCKET - CRANKSHAFT
65/71		C4AZ 6306-A	1		1	18 teeth
69/	All of highway vehicles	*D1ZX 6306-CA			1	18 teeth - 1 3/8" I.D. 2 7/8 pitch dia. - 7 timing keyways
65/71		378704-S(LL12A)	1		1	Key (sprocket to crankshaft)-3/16"
65/71		B8A 6310-A	1		1	SLINGER - CRANKSHAFT OIL-3.31" O.D. - 1.39" I.D.
		6312				PULLEY ASSY. - CRANKSHAFT - Also refer to Basic No. 6A312
65/67	A,B,B-GT,F,S(2/B, 4/B)	C3AZ 6312-E	1		1	#C4AE 6316-A, B-single sheave-6 19/32" dia. - 1 19/32" long-uses 3/8" belt-includes (1) C3AZ 6023-A pointer
66/69	High Perf. B, F	C6AZ 6312-A			1	#C6AE 6316-A-single sheave
65/66	A, S	355721-S(BB270)	1			Bolt (damper to crankshaft)-5/8"-18 x 1 1/2"-hex. head
65/66	A, S	358963-S(LL2)	1			Key (crankshaft damper)-1/4" x 3/4"
65/	A, S				1	
		6A312				PULLEY ASSY. - CRANKSHAFT-OUTER Single sheave
65/68	A(P/S)-with or without extra cooling "From 2/1/64"	C1AZ 6A312-D	1		1	
65/66	S(not used with A/C or T/E)				1	
66/68	B, B-GT(2/B,4/B)-38 amp. alt., P/S-not used in Calif.				1	
67	F(P/S)				1	
67	A(2/B, 4/B), C6, C/M, Imco, 42 amp. alt., P/S(exc. A/C)				1	
67	A(2/B, 4/B)-C/M, C6, Imco, 53, 55, 65 amp. alt. (except P/S & exc. A/C)	C5TZ 6A312-A			1	#C5TE 6312-A-single sheave
65/68	S	C1AZ 6A312-C			1	Double sheave
65/68	A(40 amp. gen. 40, 52, 53 & 60 amp. alt. -except with A/C)		1		1	
65	P/C				1	
65	A(60 amp. alt., P/S & extra cooling)				1	
66	S(T/E)-exc. A/C				1	
66/68	B,B-GT,F(2/B,4/B)-53,55 amp. alt. (T/E)-exc. A/C				1	
67	F(T/E, P/S)				1	
67	F(C6, T/E, X/C, P/S, A/C)				1	
67	F(3 or 4/S/T, T/E, X/C, A/C, P/S)				1	
67	A(2/B, 4/B), C6, C/M, Imco, P/S, 53, 55, 65 amp. alt. (except A/C)				1	

FORD CAR PARTS

SECTION 60.6
8 CYL. - 352, 390

11

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			352		390		
		6A312					PULLEY ASSY. - CRANKSHAFT OUTER-continued
65/68	A, B, F, P/C(A/C with or w/o P/S)	C4AZ 6A312-B			1		Triple sheave-includes (1) C5AZ 6023-A pointer
67	S(P/S, T/E)				1		
65/68	A, B, B-GT, S(A/C, T/E, with or without P/S	C4SZ 6A312-B	1		1		Triple sheave-#C5AE-D
67/68	S(P/S)-exc. T/E				1		
68	A, B-GT, F(4/B)-A/C	C8AZ 6A312-A			1		#C8AE 6312-A-triple sheave
68	A(2/B)						
68	A, B, F(2/B P. F.)-A/C	C8AZ 6A312-B			1		#C8AE 6312-B-triple sheave
71	A-w/Std. alt.w/o P/S				1		
68	A, B, B-GT, F(2/B, 4/B)-C/M, P/S	C8AZ 6A312-C			1		#C8AE 6312-C-double sheave
69	A, B-GT, F-GT-w/P/S, std. alt.				1		
70/71	A-w/std. Alt., w/P/S				1		
68	B, F(2/B, 4/B)-S/T-with or without P/S	C8AZ 6A312-D			1		#C8AE 6312-D-triple sheave-used as replacement for pulley identified C8AE 6312-E
69	A, B-GT, F-GT-with or w/o P/S-(exc. std. alt or A/C)				1		
70	A-w/ or w/o P/S w/o A/C				1		
71	A(P/C)-w/55 or 65 amp.alt.						
68	A, B, B-GT, F(2/B, 4/B)	C8AZ 6A312-E			1		#C8AE 6A312-B-single sheave
69	A, B, B-GT, F, F-GT, w/o - P/S and A/C				1		
70	A-std. alt. w/o P/S or A/C				1		
65/67	S(P/S)	C1SZ 6A312-A			1		Outer-single sheave
69	A-w/A/C	C9AZ 6A312-B			1		#C9AE 6312-B-triple sheave
69	A, P/C-w/A/C	C9OZ 6A312-E			1		#C9OE 6312-C-triple sheave
69	B-GT, F-GT-w/A/C w/or w/o P/S				1		
70	P/C - with A/C	C9OZ 6A312-F			1		#C9OE 6312-D-triple sheave
70/71	A-with A/C	D0AZ 6A312-D			1		#D0AE 6312-D-triple sheave
71	A(P/C)-w/A/C				1		
65/	A, S(P/S, A/C also 50 & 100 amp. H/D alt.)	20388-S8(B80)	3		3		Bolt (pulley to damper)-3/8"-16 x 1"-used with cast iron design pulley
65/68	S(P/S)	373293-S8(BB563)			3		Screw & washer assy. (pulley to damper)-3/8"-16 x 1"-hex. head
65/66	A	20388-S8(B80)	3				Bolt (pulley to damper)-3/8"-16 x 1"-used with cast iron design pulley
65/71	A, S	373293-S8(BB563)	3		3		Screw & washer assy. (pulley to damper)-3/8"-16 x 1"
		6316					DAMPER ASSY. - CRANKSHAFT
68/71		D2TZ 6316-A			1		
68/71		377850-S(BB273A)			1		Bolt (damper to crankshaft)-5/8"-18 x 2"
68/71		358963-S(LL2)			1		Key-1/4" x 3/4"
65/71		C1AZ 6A312-C	1		1		SEAL KIT - CRANKSHAFT REAR MAIN BEARING-consists of the following - (2) C1AE 6336-B Seal, (2) C2OZ 6701-A Packing

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS**6333 & 6337 BEARING - CRANKSHAFT MAIN - CHART**

In the size column of the chart below (R) designates Red size - (B) designates Blue size.
Red size and Blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	SIZE	UP PER	LOW ER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65		352, 390	Std. - .0959" .001" .002" .010" .020" .030" .040"	1	1	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6337-H C4TZ 6337-J C4TZ 6337-K C4TZ 6337-L C4TZ 6337-M C4TZ 6337-N C4TZ 6337-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P
66/71		352, 390	Std. - .0959" .001" ▲.002" ▲.010" ▲.020" ▲.030" ▲.040"	1	1	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C6TZ 6337-A C6TZ 6337-B C6TZ 6337-C C6TZ 6337-D C6TZ 6337-E C6TZ 6337-F C6TZ 6337-G	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			352		390		
65/71		C1AE 6336-B	2		2		SEAL - CRANKSHAFT REAR MAIN BEARING CAP- #Yellow-asbestos & rubber-2 23/32" long-wedge shaped-std. .025" O/S
		B8KY 6336-A	2		2		
		6337					Refer to Main Bearing Chart (Basic No. 6333)
65/71		C1AE 6345-B	10		10		BOLT - CRANKSHAFT MAIN BEARING CAP - 1/2"-13 x 3 1/2"
65/71		B8AZ 6359-A	1		1		SPACER - CRANKSHAFT DAMPER-steel or cast iron design
		6366					COVER ASSY. - FLYWHEEL HOUSING
65/70	M/T	C3AZ 6366-A	1		1		
65/70	M/T	20308-S7(B40)	4		4		Bolt (bottom cover to flywheel hsg.)-1/4"-20 x 1/2"
65/70	M/T	20308-S7(B40)	1or2		1or2		Bolt (cover to cyl. block)-1/4"-20 x 1/2"
		34805-S8(X62)	1or2		1or2		Lockwasher-1/4"
65/70	M/T	42718-S8(U9)	4		4		Screw & washer assy. (cover to flywheel hsg.)- 5/16"-18 x 1/2"-hex. head
65/71	A/T	B9AZ 6A366-B	1or3		1or3		PLATE - FLYWHEEL REINFORCING - 5.12" O.D. - 3.34" I.D. - .060" thick
		6375					FLYWHEEL ASSY.
65/71	A/T	C5AZ 6375-D	1		1		184 tooth ring gear-14 1/2" dia. (16) 17/64" bolt holes on 11-13/32" bolt circle
65/70	M/T-exc.B & F-GT	C5AZ 6375-K	1		1		#C5AE 6380-J (6) 5/16"-18 pressure plate attach- ing holes on 12 3/8" bolt circle-includes 184 tooth ring gear
68/69	B-GT, F-GT-M/T				1		
66/67	B-GT, F-M/T	C5AZ 6375-L			1		#C5AE 6380-K-cast iron-(6)5/16"-18 pressure plate attaching holes on 12 7/8" bolt circle - includes 184 tooth ring gear

▲ Bearing measurement based on .0954" Red & .0958" Blue standard sizes

Identification marking

◆ Bearings listed are used in place of double lock type production bearings

FORD CAR PARTS

SECTION 60.6
8 CYL. - 352, 390

13

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
65/71		B8A 6378-A	1		1	WASHER - CRANKSHAFT PULLEY RETAINING-1.76" O.D.-.66" I.D.-.212" thick
65/70	M/T	B8AZ 6379-A	6		6	BOLT - FLYWHEEL TO CRANKSHAFT - 7/16"-20 x 15/16"
65/71	A/T	B8A 6379-B	6		6	7/16"-20 x 11/16"-hex. head self-locking
65/70	M/T	6384 C5AZ 6384-A	1		1	GEAR - FLYWHEEL RING 184 teeth
66/69	B, F-M/T	6392 C6OZ 6392-C			1	HOUSING ASSY. - FLYWHEEL Use lever #C8OA 7515-B
65/68	A-M/T	C5AZ 6392-C	1		1	Use lever #C8AA 7515-B
69/70	A-M/T	C9AZ 6392-B			1	=C9AA 6394-C
65/70	M/T	20546-S8(B114) 34808-S8(X67)	4or6 4or6		4or6 4or6	Bolt (flywheel hsg. to cyl. block)-7/16"-14 x 2 1/2" Lockwasher-7/16"
65/71		EAD 6397-A	2		2	DOWEL - CYLINDER BLOCK-to flywheel housing-1/2" x 1"
66	B-GT	*C6GY 6404-A			2	PLATE - NAME-"390 Cyclone GT"-aluminum 10 1/2" long -1 1/4" wide-includes (3) sleeve nuts to attach to valve cover. Secure from Mercury Dealer
65/71		C3AZ 6411-B	1		1	SEAL - REAR COVER PLATE-14.44" long .40" width
65/71		C3AZ 6411-C	1		1	SEAL - FLYWHEEL HOUSING COVER PLATE
65/70		C3AZ 6435-B	1		1	GASKET - FLYWHEEL HOUSING-.040" thick-cork and rubber
65/71	Exc. P/C	6500 C8AZ 6500-A	16		16	TAPPET ASSY. - VALVE Hydraulic-1.82" long-use with C8AZ 6565-A push rod
65	P/C	C4AZ 6500-B			16	Mechanical-.8742" O.D. -1.85" long
65/69	High Perf. B, F				16	

6505-07 VALVE - INTAKE and EXHAUST - CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
65/69	390	All High Perf. Veh.-light weight-not w/tunnel port hds.					*C8AX 6505-A					*C8AX 6507-A
65/69	390	All High Perf. Veh.-std. weight-solid						5.36"	2.09"	Std.	.3715"	C9OZ 6507-U
65/71	352,390	Exc. P/C	5.36"	1.57"	Std.	.3705	C0AZ 6505-N	5.44"	2.04"	Std.	.3715"	*C8TZ 6507-A r/b D4TZ 6507-A(9/74)
					.003"		C7TZ 6505-C			.003"	.3745"	C8TZ 6507-B
					.015"		*C7TZ 6505-D			.015"	.3865"	C8TZ 6507-C
					.030"		r/b D4TZ 6505-C(10/74) C2AZ 6505-D			.030"	.4015"	C8TZ 6507-D
65	390	P/C	5.36"	1.57"	Std.	.3705"	C7TZ 6505-B	5.44"	2.04"	Std.	.3715"	*C8TZ 6507-A r/b D4TZ 6507-A(9/74)
			1		.003"	.3735"	C7TZ 6505-C			.003"	.3745"	C8TZ 6507-B
					.015"	.3855"	*C7TZ 6505-D			.015"	.3865"	C8TZ 6507-C
					.030"	.4005"	r/b D4TZ 6505-C(10/74) C2AZ 6505-D			.030"	.4015"	C8TZ 6507-D

Identification marking

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
65/71		6510 D1AZ 6510-A			AR	BUSHING - VALVE GUIDE - NOTE 1 Intake-2.29" long-.501" O.D.-.313" I.D.
65/71		D1AZ 6510-B			AR	Exhaust-2.4" long-.501" O.D.-.313" I.D.
65/66		B8A 6513-C	16			SPRING - VALVE-one piece design-2.26" long- 6 1/2 coils-alternate with B8A 6513-B
65/66		B8A 6513-B	16			Two piece design-consists of the following - (1) Valve spring, (1) Damper spring-alternate with B8A 6513-C
65	P/C	C3AZ 6513-E		16		
66/68	B, B-GT, F			16		
65	A, S	C1AZ 6513-B		16		Two piece design-damper type-#White
66/68	A, B (2/B), F(2/B P.F.)	C6AZ 6513-D		16		Two piece design
66/68	A, S (4/B)			16		
69/	A, B-GT, F-GT(2/B, 4/B)			16		
66/69	High perf. B. F	C9OZ 6513-E		16		#4 Silver or Yellow stripes
		6514				RETAINER - VALVE SPRING
65/68	A, B, S(2/B & 4/B carb.)	C6AZ 6514-A	16	16		1-13/32" O.D. -27/64" I.D. -1/2" height
68	F(2/B P.F.)			16		
69/71	A, B-GT, F-GT(2/B, 4/B)			16		
65	P/C	*C3AZ 6514-A		16		1 31/64" O.D. -9/32" height
66/68	B-GT, F-GT	r/b D0AZ 6514-A (6/74)		16		
66/69	High Perf. B. F			16		
65/66	A	B8A 6515-A	AR			SPACER - VALVE SPRING-1.44" O.D. -1.057" I.D. -.030" thick
65/71		B8A 6517-B	16	16		SLEEVE - VALVE SPRING RETAINER-.769" flange O.D. -.599" conical O.D. -.36" height
65/71		B8A 6518-A	32	32		KEY - VALVE SPRING RETAINER - .373" to .533" conical O.D. -.375" height-# Red
65/71		C7AZ 6524-B	2	2		BAFFLE - VALVE SPRING OIL
65/71		C1DZ 6A527-C	6	6		BOLT - VALVE ROCKER ARM SHAFT SUPPORT- 3/8" - 16 x 2 31/32"-Also refer to Basic No. 6531
65/71		C1AZ 6A527-A	2	2		3/8"-16 x 3 19/64"
65/71		C2AZ 6531-B	8	8		SUPPORT - VALVE ROCKER ARM SHAFT - aluminum
65/71		372702-S(XX144)	8	8		Washer-flat-3/8" I.D. -1" O.D.
		34807-S7-8(X66)	8	8		Lockwasher-3/8"
65	P/C	B6A 6549-C		16		SCREW - VALVE ROCKER ARM ADJUSTING - Std. -7/16"-20 x 1.40" long
		C2AZ 6549-A		AR		.0023" O/S
66/69	High Perf. B. F	B6A 6549-C		16		
65	P/C	B8AZ 6563-A		2		SHAFT - VALVE ROCKER ARM-18" long-(2) thru holes-(8) 5/32" holes lower half-includes (2) EAA 6572-A plugs
65/71	Exc. P/C	B8AZ 6563-D	2	2		Includes (2) EAA 6572-A plugs
65/71	Exc. P/C	B8AZ 6564-C	16	16		ARM - VALVE ROCKER

Identification marking

NOTE 1 - Bushing must be reamed to size of valve

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
65	P/C	B8A 6564-B		16		ARM - VALVE ROCKER - includes screw
66/69	High Perf. B, F	B8A 6564-B		16		
		6565				ROD - VALVE PUSH
65	P/C	B8AZ 6565-C		16		9.350" o/all length-(1) oval & (1) cup type end
66/69	High Perf. B, F	B8AZ 6565-C		16		Mechanical tappets
65/68	Exc. P/C - "Before Chg./L10"	C4TZ 6565-B	16	16		Std. -9.62" o/all length
		C8AZ 6565-A	AR	AR		.030" U/S
		C4TZ 6565-C	AR	AR		.060" O/S
		C4TZ 6565-D	AR	AR		.060" U/S
68/71	"Chg./L10/"	C8AZ 6565-A		16		Std. -9.59" o/all length-use w/C8AZ 6500-A tappet
		C4TZ 6565-B		AR		.030" O/S
		6570				GROMMET
65/70	A, S(P/S)	B9A 6570-A	1	1		Used on power steering oil reservoir cover stud - rubber -.32" I.D. -1" O.D. -1/2" thick
65/71	Exc. P/C	C4TZ 6571-J	16	16		SEAL - VALVE STEM - Intake & exhaust
65	P/C	*B8AZ 6571-B r/b C4TZ 6571-H (10/74)		16		Intake & exhaust
65/71		EAA 6572-A	4	4		PLUG - VALVE ROCKER ARM SHAFT-cup shaped -.536" diameter-for transmission usage refer 7D418

6582 COVER ASSY.- VALVE ROCKER ARM- CHART

YEAR	MODEL	C.I.D	PAINTED		CHROME	
			R.H.	L.H.	R.H.	L.H.
65/67	A, B, S(2/B, 4/B)- "Before CHG L8"	352, 390	\$C7AZ 6582-A #Blue	\$C7AZ 6582-A #Blue	\$C6OZ 6582-A	\$C6OZ 6582-B
66	B-GT	390				
65	P/C	390	\$C7AZ 6582-A #Blue	\$C7AZ 6582-A #Blue	None	None
67	B-GT, F "Before CHG/L8"	390	\$C7AZ 6582-A #Blue	\$C7AZ 6582-A #Blue	\$C7OZ 6582-B	\$C6OZ 6582-B
67/68	A, B, B-GT, F, S(2/B, 4 B)- "CHG/L8"/	390	\$C7AZ 6582-A #Blue	\$C7AZ 6582-A #Blue	\$C7OZ 6582-B	\$C7OZ 6582-B
69/71	A(2/B), B, B-GT, F-GT(4/B)	390	\$C7AZ 6582-A #Blue	\$C7AZ 6582-A #Blue	\$C7OZ 6582-B	\$C7OZ 6582-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
65/71		371065-S(BB549)	10	10		Bolt (cover to cyl. head)-5/16"-18 x 5/8" hex. washer head locking
65	A, P/C(non em/re)	377393-S(KK24C)	1	1		Grommet(holds 6758 in 6582)-1 7/8" O.D. -31/32" I.D.
65/67	A, S, P/C(em/re) - "Before CHG/L8"	377394-S(KK23F)	1	1		Grommet (holds 6A666 in 6582)-1 7/16" O. D. - 23, 32" I.D. -Refer to Basic 6A892
		6584				GASKET - VALVE ROCKER ARM COVER
65/71		D0AZ 6584-C	2	2		Cork and rubber
66/70	B-GT, F	377346-S6(PP1A)		6		Plug button-1/4" chrome to plug holes in top of valve cover
65/71		B8A 6587-B	6	6		SPRING - VALVE ROCKER ARM TO SHAFT LOCATING-approx. 3.73" free length-8 coils - .859" I. D.

Identification marking ◇ Has em/re hole ✕ Has oil fill hole Δ Includes (3) 75480-S102 sleeve nuts
\$ Includes (1) C7AZ 6A892-A retainer

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
65/71		B8A 6590-A	4or8	4or8		WASHER - VALVE ROCKER ARM SHAFT-flat type-1.32" O.D.-.86" I.D.-.060" thick
		72053-S(N52)	AR	AR		Cotter pin-1/8" x 1 1/4"
65/71		B8A 6598-A	4	4		WASHER - VALVE ROCKER ARM SHAFT - spring type - 1.18" O.D.-.86" I.D.-.008" thick
		6600				PUMP ASSY. - OIL
65/71	Exc. P/C	C8AZ 6600-A	1	1		Includes attaching gaskets
65	P/C	C9ZZ 6600-A		1		
65/68		20408-S7(B81)	2	2		Bolt (pump to cyl. block)-3/8"-16 x 1 1/8"
		34807-S8(X66)	2	2		Lockwasher-3/8"
69/ 71		354135-S7(BB155A)		2		Bolt (pump to cyl. block)-3/8"-16 x 1 1/8"
		34807-S8(X66)		2		Lockwasher-3/8"
65/67	All(exc. Calif.)	D0AZ 6A603-G (EK6A)	1	1		EMISSION CONTROL KIT - EXHAUST
Consist of 1-D0AE 12A091-C Valve assembly distributor 1-D0AE 12226-J Hose distributor vacuum 3" long 1-D2AE 9C485-AA Tag eng. exh. emission I.D.						
			1-ESB-M4G92-A Sealers, silicone rubber 1-Instruction sheet			
65/71		B8A 6608-A	1	1		ROTOR and SHAFT ASSY. - OIL PUMP DRIVE - rotor type pump
65/71		B8A 6616-C	1	1		PLATE - OIL PUMP BODY
65/68		20324-S8(B41)	4	4		Bolt (cover plate to body)-1/4"-20 x 5/8"
		34805-S8(X62)	4	4		Lockwasher-1/4"
69/71		42911-S(B41A)		4		Screw & washer (cover to body)-1/4"-20 x 5/8"
65/71		B8AZ 6A618-A	1	1		SHAFT ASSY. - OIL PUMP INTERMEDIATE
65	P/C	★C0AE 6622-A		1		SCREEN, TUBE and COVER ASSY. - OIL PUMP
65	S	C1SE 6622-B		1		
65/66	A (exc. P/C)	C2AZ 6622-B	1	1		
65/69	All High Performance Vehicles	★C5AE 6622-B		1		Deep sump type-used w/deep sump oil pan
66/69	B,B-GT,F,S(2/B & 4/B carb.)	C6OZ 6622-A		1		
67/	A(2/B, 4/B)			1		
65/71		20346-S8(B50)	2	2		Bolt (screen to oil pump)-5/16"-18 x 3/4"
		34806-S7(X64)		2		Lockwasher-5/16"
65/71		B8TZ 6626-A	1	1		GASKET - OIL PUMP INLET TUBE
65/71		B8A 6629-A	1	1		RING - OIL PUMP INTERMEDIATE SHAFT RETAINER-.52" O.D.-6 prongs
65/66		6A630-A				DUCT - CRANKCASE VENTILATION
65/66		B9AZ 6A630-B	1			Lower-refer to Product Service Letter P-415
65/66		381709-S(UU52G)	3			Screw(lower vent duct to manifold)-1/4"-20 x 3/8" hex. washer head

FORD CAR PARTS

SECTION 60.6
8 CYL. - 352, 390

17

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352		390	
		6A630-A				BAFFLE - INTAKE MANIFOLD OIL
66/67	2/B "Before 10/24/66"	C6AZ 6A630-D			1	
66/69	4/B				1	
67/71	2/B "From 10/24/66"	C5AZ 6A630-A			1	13 29/32" long-7 13/32" wide
70	4/B				1	
66/69	High Perf. B. F	C6AZ 6A630-B			1	Use W/ Aluminum manifold
66/69	High Perf. B. F	C8AZ 6A630-B			1	
65/71		B9AZ 6A630-C	1		1	BAFFLE - PUSH ROD CRANKCASE VENTILATION-upper-approx. 19.87" x 10.44"
65/71		C0AZ 6A636-B	1		1	GASKET - OIL FILTER ADAPTER TO CYLINDER BLOCK - rubber
65/71		B8AZ 6659-A	1		1	GASKET - OIL PUMP TO BLOCK -#rubber - .010" thick
		6A664				HOSE - CRANKCASE VENTILATION - Also refer to Basic No. 6853 Intake Manifold Type
		C9PZ 6A664-A (KCV-1)	AR		AR	15/32" I.D.-25 ft.long-cut as required
		C9PZ 6A664-B (KCV-2)	AR		AR	5/8" I.D.-25 ft.long-cut as required
65/68	A Special(4/B carb.)	★C1AE 6A664-S			1	5" long-attach brkt. & cover to carb. spacer
68	A, B, B-GT, F(4/B)	C6AZ 6A664-D			1	
						Rocker Arm Cover Type
65/66	A	★C4AE 6A664-B	1			8 1/2" long-attach cap to air cleaner- NOTE 1
65/67	A, B, S- "Before CHG/L9"	C5AZ 6A664-C	1		1	20 5/32" long-attach valve to int.manifold
66	A				1	
66/68	A(T/E)	★C6AZ 6A664-L	1			6A666 valve to tee
66/68	B, S (2/B, 4/B carb.)-T/E	C6AZ 6A664-A	1		1	Oil filler cap to air cleaner
66	A				1	
66/67	A, B, S(2/B, 4/B carb.) - "Before CHG/L8"	C6AZ 6A664-B			1	5/8" I.D. & 1/2" I.D.-11" long-6A666 valve to 6758 tube
66/68	A, B, B-GT, F, S(2/B & 4/B)	★C6AE 6A664-A			1	1 1/2" long-attach valve to intake manifold
67	S (2/B, 4/B)-"CHG/L8"	C7AZ 6A664-A			1	5/8" I.D. valve end-1/2" I.D. tube end
66/68	A, B (2/B, 4/B carb.)	C6AZ 6A664-E			1	Front-6758 tube to tee
		C6AZ 6A664-F			1	Rear-tee to 6A666 valve
66/67	S	C6SZ 6A664-B			1	Front-6758 tube to tee
		C6SZ 6A664-A			1	Rear-tee to 6A666 valve
67	S(T/E)	C6SZ 6A664-B			1	3-5/64" long tee to 6758 tube (front)
66	A, B(T/E)	C6SZ 6A664-A			1	Rear
66	B-GT, F(4/B, T/E)	★C6GY 6A664-A			1	Air cleaner to oil filler cap
67	B-GT, F(4/B) - "Before 10/3/66"	★C7ZZ 6A664-A			1	
67/68	B-GT, F (4/B)- "CHG/L 8"	C7ZZ 6A664-B			1	5/8" I.D. valve end-1/2" I.D. tube end
67	B-GT, F (4/B) T/E	C6AZ 6A664-A			1	Air cleaner to oil filler cap
67	B(2/B)-T/E	C7OZ 6A664-A			1	1/2" I.D. -11" long
68	A(4/B)	C8AZ 6A664-A			1	1/2" I.D. -molded-attaches valve
68/71	A, B(2/B)	C8AZ 6A664-D			1	20" long-5/8" I.D. one end-1/2" I.D. other end- attaches valve
68	B-GT, F(2/B)	C8OZ 6A664-A			1	11" long-1/2" I.D.- attaches valve
67	A (C/M, C6, Imco)	★C6AZ 6A664-L			1	Attach oil filler to air cleaner
69	B-GT, F-GT-"Before 2/21/69"	C9ZZ 6A664-A			1	5/8" I.D. one end 1/2" I.D. other end-15" long
69	B-GT, F-GT-"From 2/21/69"	C7TZ 6A664-A			1	Valve to engine
69/71	A(2/B)	BPA 18572-A			AR	Clamp(hose)
69/70	B-GT, F-GT(4/B)				AR	

NOTE 1 - Cut from C3AZ 6A664-B

Identification marking

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
65	A	C2AZ 6A665-A	1			ADAPTER ASSY. - CRANKCASE VENTILATION
68/71	A, B (2/B)	C8AZ 6A665-A		1		Cap assy. - c/case ventilation valve retainer-use
68	A(4/B)	(EC-17)		1		with C8AZ 6A892-B grommet
65/69	"Before 11/25/68"	C0AZ 6666-A	1	1		PLUG - OIL PUMP RELIEF VALVE-in oil pump
						body-cup type-.559" & .567" O.D.-.361" height-
						.114" orifice
69/71	"From 11/25/68"	C6AZ 6666-A		1		Plug-in oil pump-cup type
		6A666				VALVE POSITIVE CRANKCASE VENTILATION -
						(P.C.V.)
65/68	A, B, S (2/B, 4/B)-	D0AZ 6A666-A	1	1		#C6AE 6A666-B
66/67	B-GT (4/B) "Before CHG/L8"	(EV-50)		1		
69	A			1		
70/71	A (2/B)			1		
69	B-GT, F-GT-"From 2/21/69"			1		
67	B-GT, F(2/B P. F., 4/B)-	C7OZ 6A666-A		1		1/4"-18 one end-Also refer to Basic 6A706
	"CHG/L8/"	(EV-42)				
69	B-GT, F-GT-"Before 2/21/69"			1		
68	B-GT, F(2/B P. F., 4/B)	C8OZ 6A666-B		1		1/4"-18 one end-Also refer to Basic 6A706
		(EV-45)				
65/71		C6AZ 6670-A	1	1		SPRING - OIL PUMP RELIEF VALVE-
						1-63/64" free length
65/66	"Before 5/2/66"	B9AE 6674-A	1	1		PLUNGER - OIL PUMP RELIEF VALVE -
	NOTE: plunger for 8 cyl. 390					use with COME 6600-B pump
	P/C serviced in C0AE 6600-C					
	pump assy. only					
66/71	"From 5/2/66"	C6AZ 6674-A	1	1		1-9/16" long
65/66	A, P/C	C7AZ 6675-A	1	1		PAN ASSY.-OIL -Also refer to Accessories Section
65/69	All High Performance Vehicles	★C8AX 6675-A		1		Deep sump-7 qt. -requires special pick up
65/69	B, B-GT, F, S (2/B, 4/B)	C6OZ 6675-A		1		
67/71	A			1		
65/68	A, S	373994-S(XX348E)	2	2		Washer (rear brg. seal bolts)-sealer type spring
65/71		20326-S7(B49)	20	20		Bolt (oil pan to cyl. block)-5/16"-18 x 5/8" hex. hd.
		34806-S7(X64)	20	20		Lockwasher-5/16
65/71		C3AZ 6700-A	1	1		SEAL - CYLINDER FRONT COVER OIL
65/71		C9OZ 6701-A	2	2		PACKING - CRANKSHAFT REAR-cut to length-
						rope type
65/70		B8AZ 6701-A	2	2		Rubber-formed seal-3.40" dia. -split lip type
		6A706				CONNECTOR - CRANKCASE VENTILATION
						HOSE - emission reduction control
67	A, B (2/B, 4/B)	★C7AZ 6A706-A		1		3 way tee-3/8"-18 male & female-2 3/16" hose tubes
67/69	B-GT, F (4/B) -	ΔC7OZ 6A706-A		1		1/4"-18 female-5/8" hose end-att. 6A666 valve,
	"CHG/L8 to 2/21/69"					6758 tube & anti-backfire valve - Not used from
						2/21/69"

Identification marking

Δ Not used before Chg. /L8

FORD CAR PARTS

SECTION 60.6
8 CYL. - 352, 390

19

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
65/71		D0AZ 6710-A	1		1	GASKET - OIL PAN - rubber & cork
65/71		★ DIAZ 6730-A r/b DIAZ 6730-B (11/74)	1		1	PLUG - OIL PAN DRAIN - 1/2"-20 - includes (1) C2OZ 6734-A gasket
65/71		☆ CIAZ 6731-A (FL-1)	1		1	ELEMENT ASSY. - OIL FILTER - "Spin-on" - one piece filter-has 3/4"-16 female threads
65/71		● CCIAZ 6731-A (FL-1)	1		1	"Spin on" type
65/71		C2OZ 6734-A	1		1	GASKET - OIL PAN DRAIN PLUG - #Nylon-13/16" O. D. -1/2" I. D. -5/64" thick
65	A, P/C	C5AZ 6750-D	1		1	INDICATOR - OIL LEVEL - 17.55" shield to full 18.59" shield to add 19.59" shield to end
66	A	C6AZ 6750-A	1		1	17.80" shield to full 18.58" shield to add 19.81" shield to end
65	S	C5SZ 6750-A			1	20.06" shield to full 22.22" shield to add 23.22" shield to end
66	B-exc. GT	C6OZ 6750-A			1	#Plain-20.80" shield to full 21.94" shield to add 22.94" shield to end-opt. w/C6GY 6750-A
66	B-GT	C6GY 6750-A			1	#Chrome-Black plug in handle 20.80" shield to full 21.94" shield to add 22.94" shield to end-opt. w/C6OZ 6750-A
66	S	C6SZ 6750-B			1	21.56" shield to full 22.70" shield to add 23.70" shield to end
67/71		C7AZ 6750-A			1	#Black handle 17.42" shield to full 18.50" shield to add 19.25" shield to end-opt. with C7OZ 6750-A
67/71		C7OZ 6750-A			1	#Chrome handle 17.42" shield to full 18.50" shield to add 19.25" shield to end-opt. with C7AZ 6750-A
65/71	A, S, R/C	C5AZ 6754-D	1		1	TUBE ASSY.-OIL LEVEL INDICATOR - Refer to Basic No. 6750
65/66	S	C5SZ 6754-A			1	Approx. 13 1/2" long
66	B, B-GT	C6OZ 6754-A			1	
67/69	B, B-GT, F	C7OZ 6754-A			1	Approx. 10-5/64" long
		6758				TUBE - CRANKCASE VENTILATION - Non-emission reduction - Also refer to Basic No's 6A664, 6A665 & 6853
65	A(non em/re)	C5AZ 6758-F	1		1	Attaches to rocker arm cover Emission reduction - Also refer to Basic No's 6A664, 6A665 & 6853
66/68	F, S(2/B & 4/B carb.)	C6AZ 6758-A			1	Attach to front & rear of intake manifold
68	B, F(4/B)-T/E	★ C8OZ 6758-A Not replaced			1	

Identification marking
May, 1975

★ U.S. only

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

● Canada only
- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			352	390		
		6766				CAP ASSY.-OIL FILLER & BREATHER
		★ 6766		★		Oil separator - Retain 6A666 valve-see basic 6A665
						ROCKER ARM COVER TYPE - OPEN
65/68	A, B, E-GT, F, S, P/C(2/B, 4/B)	C3AZ 6766-D (EC-64)	1	1		#Black
		C3AZ 6766-E	1	1		#Chrome
						ROCKER ARM COVER TYPE - CLOSED and/or THERMACTOR
65/67		C4TZ 6766-B (EC-31)	1	1		#Black-has straight spout-opt. with C5ZZ 6766-D
65/67		C5ZZ 6766-D (EC-10)	1	1		#Chrome-has straight spout-opt. w/C4TZ 6766-B
66/69	B-GT, F(4/B)	C8AZ 6766-A (EC-1)		AR		#Black
68/69	A, B, F(2/B, 4/B)	C8AZ 6766-B (EC-2)		AR		#Chrome
70/71	A(2/B)	D1AZ 6766-A (EC-8-A)		1		#Black
68/71		C8AZ 6767-A		1		ELBOW - CRANKCASE VENTILATION HOSE - 90° -5/8" x 5/8" - Also refer to Basic 9600
		★6853	★	★		HOSE - CRANKCASE VENTILATION Cut from B4C 4090-A-3/8" I. D. Cut from C3AZ 6A664-A-1/2" I. D. Cut from C3AZ 6A664-B-5/8" I. D. Also refer to Basic 6A664
65	A, S, P/C(closed em/re)	C5AZ 6A666-A	1	1		ADAPTER - OIL FILLER - Also refer to
66	A(closed em/re, T/E)		1			Group 6763
66/67	B-GT(closed em/re, T/E)			1		
67	F(T/E)			1		
68	A (C/M, C6)			1		
66/69	High Perf. B. F	C6AZ 6869-A		1		COVER - CRANKCASE VENT
65/71		C0AZ 6881-A	1	1		ADAPTER ASSY. - OIL FILLER - spin on type filter
65/71		352464-S8(BB139)	4	4		Bolt (adapter to block)-5/16"-18 x 1 1/8"
65/70		B8A 6890-A	1	1		INSERT - OIL FILTER MOUNTING BOLT - 3/4"-16 external threads-1/2" I.D.-1.30" long-use with "Spin-On" type filter-attach filter to adaptor
		6A892				RETAINER - CRANKCASE VENTILATION - GROMMET
67	"Chg/L8/"	C7AZ 6A892-A		1		P.C.V. Valve (grommet) - Also refer to Group 6582
69/70	B-GT, F-GT			1		Also refer to Group 6582
68/71	Exc. B & F-GT	C8AZ 6A892-B		1		P. C. V. VALVE to 6A665 cap
68/71		C8AZ 6A892-A		1		Elbow to oil filler cap - (grommet)-1 7/16" O.D. - 37/64" I.D. -Also refer to Basic 9600

FORD CAR PARTS

SECTION 60.7

8 CYL. - 400

1

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				IDENT. TAG CODE	PART NAME AND DESCRIPTION
			400					
		6007	★					ENGINE ASSEMBLY -service details
71/		D1AZ 6008-A	1					GASKET SET - COMPLETE OVERHAUL
	Consists of							
	1-D0AZ 6020-A	gasket (front cover)	1-D0AE 6710-B	gasket (oil pan-R.H.)	1-D0AZ 8513-A	gasket (water pump)		
	2-D0AZ 6051-C	gasket (cyl.head)	1-D0AE 6711-B	gasket (oil pan-L.H.)	1-D0AZ 9417-A	gasket (fuel pump)		
	16-D0AZ 6571-A	seal (valve stem)	2-D0AE 6723-B	seal (oil pan-	2-D1AE 9A425-AA	seal (intake manifold-		
	2-D0OZ 6584-A	gasket (rocker cover)		front & rear)		front & rear)		
	1-D0AZ 6659-A	gasket (oil pump)	1-C2OZ 6734-A	gasket (oil drain plug)	1-D1AE 9D440-AA	gasket & cover assy.-		
	1-D0AZ 6700-A	seal (crankshaft-front)	1-C8SZ 8255-A	gasket (water conn.)		(intake manifold open.)		
	2-C9OZ 6701-A	seal (crankshaft-rear)						
71/		C2OZ 6A008-A	4					DOWEL - CYL. HEAD TO CYLINDER BLOCK
72		CD1AZ 6D008-A	1					HEATER KIT - CYL. BLOCK
		6009						CYLINDER ASSY.-Includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated
71/		D1AZ 6009-B	1					
71/		D1AZ 6010-A	1					BLOCK ASSEMBLY - CYLINDER
71/		D2AZ 6B018-A	1					WIRE ASSY. - CYL. BLOCK HEATER
		★6019						COVER ASSY.-CYLINDER FRONT - refer to group 6B070
71/		D0AZ 6020-A	1					GASKET - CYL. FRONT COVER
71	"Before 5/3/71"	D3AZ 6023-A	1					POINTER - TIMING
71/	"From 5/3/71"	D1ZZ 6023-A	1					
		6026						PLUG - ENGINE
71/		C8AZ 6026-C	6					Plug-1 1/2" O.D.
		C8AZ 6026-D	AR					.060" O/S
71/		C8SZ 6026-A	2					Plug(oil gallery in front of block)-5/8"-18
71/		87837-S(P15)	2					Plug(water drain holes in block)-1/4"-18 x 27/64"
71/		87710-S(P16)	3					Plug(oil passage holes in block)-3/8"-18x15/32"
71/		371485-S(PP8A)	6					Plug(core hole in head)-3/4"-14 x 17/32"

6028, 6029, 6030 and 6038 FRONT MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	* SUPPORT BRACKET		* BRACKET		* INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
71/	A	400	D1AZ 6028-A	D1AZ 6029-A			★D4AZ 6038-B r/s D5AZ 6038-C(11/74)	D4AZ 6038-A
72	B	400			D2SZ 6030-A	D2SZ 6030-A	D2SZ 6038-A	D2SZ 6038-B
72	S	400			D2SZ 6030-A	D2SZ 6030-A	D2SZ 6038-C	D2SZ 6038-D

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
72	B,S	34988-S4(M89D)	4				Nut-7/16"-14 Hex. lock (attach 6030 to 6038)
		6038					INSULATOR - FRONT SUPPORT - refer to Front Motor Mount Chart (group 6028)

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
72	B	D00Z 6A042-A	1				REINFORCEMENT - REAR SUPPORT - R.H.
		D00Z 6A042-C	1				L.H.
72	B,S	D20Z 6047-A	2				BOLT - INSULATOR TO CROSS MEMBER - 3/8" - 16 x 5" Hex. Hd. Piloted
		6049					HEAD - CYLINDER
71/		D3AZ 6049-H	2				Without valves
71/		D3AZ 6049-G	2				Complete with valves
71/		★D3AZ 6051-A r/b D4AZ 6051-A (11/74)	2				GASKET - CYLINDER HEAD - Steel

6054 and 6068 REAR MOTOR MOUNT CHART

YEAR	MODEL	C.I.D.	*SUPPORT- CROSS MEMBER	* RETAINER REAR SUPPORT	*INSULATOR ASSEMBLY	* BRACKET	
						R.H.	L.H.
71	A(C6)"Before 7/1/71"	400		C9AZ 6054-A	C9AZ 6068-H		
71/	A(C6)"From 7/1/71"	400		D2AZ 6054-A	D2AZ 6068-B		
72	B(C6)	400			D20Z 6068-B		
72	S	400			D2SZ 6068-B		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		D0AZ 6065-A	20				BOLT - CYLINDER HEAD-1/2"-13 x 4 5/16"
		6068					INSULATOR ASSY. - REAR SUPPORT - refer to Rear Motor Mount Chart (group 6054)
71/		D0AZ 6B070-A	1				PLATE - CYLINDER FRONT COVER
71/		372995-S13	4				Screw & washer(plate to block)-5/16"x 3/4"
71/		D1AZ 6079-A	1				GASKET SET - VALVE GRIND

Consists of

- 2-D0AZ 6051-C gasket (cyl.head) 1-C8SZ 8255-A gasket (water conn.) ♦ 1-D1AE 9D440-AA gasket & cover assy.-
 16-D0AZ 6571-A seal (valve stem) ♦ 2-D1AE 9A425-AA seal (intake manifold (intake manifold open.)
 2-D00Z 6584-A gasket (rocker arm cover) to block)-front & rear ♦ Serviced in D1AZ 9433-A

6108 PISTON ASSEMBLY - CHART

In the Standard column of the chart below (R) designates red size - (B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	RINGS	QTY.	PART NUMBER					
					STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
71/72		400	3	▲ 8	D2AZ 6108-G(R) D2AZ 6108-H(B)	D2AZ 6108-J	D2AZ 6108-K	D2AZ 6108-L	D2AZ 6108-M	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		C6AZ 6135-A	8				PIN - PISTON

6148 RING SET - PISTON PARTIAL - CHART - Consists of the necessary rings to re-ring (2) pistons

YEAR	MODEL	C.I.D.	RINGS	TYPE	PART NUMBER				
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S
71/		400	3	Hi Lo	C3AZ 6148-F	C3AZ 6148-G	C3AZ 6148-H	C3AZ 6148-J	

* (1) required unless otherwise noted

▲ Includes piston pin

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		D1AZ 6200-A	8				ROD ASSEMBLY - CONNECTING

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER					
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S
71/		400	8	8	D0AZ 6211-A	D0AZ 6211-B	D0AZ 6211-C	D0AZ 6211-D	D0AZ 6211-E	D0AZ 6211-F

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		C9AZ 6212-B	16				NUT - CONNECTING ROD - 3/8"-24 x 1 1/2" hex.
71/		D1AZ 6214-A	16				BOLT - CONNECTING ROD - 3/8"-24 x 2 1/2"
71/		D1AZ 6250-A	1				CAMSHAFT - #8U
71/		D0AZ 6A251-A	1				BEARING KIT - CAMSHAFT - standard

Consists of

1-D0AZ 6261-E front
1-C2OZ 6262-A center

1-C2OZ 6263-A rear
1-C2OZ 6267-A front (intermediate)

1-C2OZ 6270-A rear (intermediate)
1-C5AZ 6266-B plug

71/		D0AZ 6256-A	1				SPROCKET - CAMSHAFT
71/		73328-S(N87B)	1				Dowel - 5/16" x 1 1/8"

6261, 6262, 6263, 6267 & 6270 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
71/		400	Standard	D0AZ 6261-E	C2OZ 6267-A	C2OZ 6262-A	C2OZ 6270-A	C2OZ 6263-A

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		C5AZ 6266-B	1				PLUG - CAMSHAFT REAR BEARING CUP - plug bearing hole in block-2 1/4"
		6267					Refer to Camshaft Bearing Kit (group 6A251)
71/		D0AZ 6268-A	1				CHAIN - TIMING
71/		C8SZ 6269-A	1				PLATE - CAMSHAFT THRUST
		6270					Refer to Camshaft Bearing Chart (group 6261)
71/		C2OZ 6278-A	1				WASHER - CAMSHAFT SPROCKET
		6287					ECCENTRIC - CAMSHAFT FUEL PUMP DRIVE
71/		D0AZ 6287-A	1				Outer
71/		D0AZ 6287-B	1				Inner
71/		20522-S8(B89)	1				Bolt (eccentric to camshaft)-3/8"-16 x 2"
71/		C0DZ 6A302-A	1				PIN - CRANKSHAFT REAR OIL SEAL
71/		D2AZ 6303-B	1				CRANKSHAFT ASSY.
71/		C8SZ 6306-A	1				SPROCKET - CRANKSHAFT
71/	All off highway vehicles	★D1ZX 6306-BA	1				18 teeth-1 3/8" I.D.-2 7/8" pitch dia.-7 timing keyways
71/		D0AZ 6310-A	1				SLINGER - CRANKSHAFT OIL

Identification Marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER.	QUANTITY				PART NAME AND DESCRIPTION
			400				
		6A312					PULLEY ASSEMBLY - CRANKSHAFT - OUTER
71	A-w/A/c-w/or w/o P/S	D00Z 6A312-B	1				#D00E 6312-C - triple sheave-6 23/32" O.D.-
72	A, B-w/A/C		1				8" O.D. & 8 13/32" O.D.-used to service pulley identified D0AE-6312-C
71	A-w/o A/C-w/or w/o P/S	D00Z 6A312-E	1				#D00E 6312-B - double sheave-8" outer pulley-6 11/16" inner pulley dia.-uses 1/2" & 3/8" belts
72	A, B-w/hang on A/C	D2AZ 6A312-E	1				
72	S	D2SZ 6A312-A	1				#D2SE 6312-AA - Triple sheave-8" outer pulley dia.-7 15/32" center pulley dia. & 6 11/16" inner pulley dia.-uses (2)1/2" belts & (1)3/8" belt
72	A, B-Std.	D0ZZ 6A312-A	1				#D0ZE 6312-B-triple sheave-5 15/16" O.D. & 6 11/16 O.D.-used to service pulley marked D00E 6312-A
71/		D2AZ 6316-C	1				DAMPER ASSY. - CRANKSHAFT - 6 1/2" O.D.-3 1/2" long
71/		377850-S(BB273A)	1				Bolt(damper to crank)-5/8"-18 x 1 3/4"
71/		372854-S(LL11)	1				Key(damper to crank)-3/16"-1 3/4"

6333 and 6337 BEARING - CRANKSHAFT MAIN - CHART

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
71/		400	Std. .001" .002" .010" .020" .030"	x	x	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	D1AZ 6337-A D1AZ 6337-B D1AZ 6337-C D1AZ 6337-D D1AZ 6337-E D1AZ 6337-F	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F	D1AZ 6333-A D1AZ 6333-B D1AZ 6333-C D1AZ 6333-D D1AZ 6333-E D1AZ 6333-F

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		D0AZ 6345-B	10				BOLT - CRANKSHAFT MAIN BEARING CAP - also used to attach windage baffle to M. B. caps
71/		C2OZ 6A366-A	1				PLATE - FLYWHEEL REINFORCING
71/		D1AZ 6375-A	1				FLYWHEEL ASSY. - 164 teeth
71/		B8A 6378-A	1				WASHER - CRANKSHAFT PULLEY RETAINING
71/		★C3AZ 6379-B r/b D2AZ 6379-B (6-74)	6				BOLT - FLYWHEEL TO CRANKSHAFT - 7/16"-20 x 13/16" -used with 6A366 plate
72		D2AZ 6379-B	6				7/16"-20 x 3/4"-used without 6A366 plate
71/		EAD 6397-A	2				DOWEL - CYL. BLOCK-to flywheel housing
71/		D1AZ 6411-A	1				SEAL - REAR COVER PLATE
71/		D1AZ 6500-A	16				TAPPET ASSY. - VALVE - hydraulic

6505-07 VALVE - INTAKE and EXHAUST - CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
71/	400		5.05"	1.61"	Std. .003" .015" .030"	.3415	D1AZ 6505-A ★D1AZ 6505-B r/b D5AZ 6505-B (11/74) ★D1AZ 6505-C r/b D5AZ 6505-C (3/75) D1AZ 6505-D	5.23	2.04	Std. .003" .015" .030"	.3420	D0AZ 6507-E D0AZ 6507-F D0AZ 6507-G D0AZ 6507-H

Identification marking

FORD CAR PARTS

SECTION 60.7

8 CYL. - 400

5

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
		6510					BUSHING - VALVE GUIDE - NOTE 1
71/		D1AZ 6510-B	AR				Intake-2.4" long-.501" O.D.-.313" I.D.
71/		D1AZ 6510-A	AR				Exhaust-2.29" long-.501" O.D.-.313" I.D.
71/		D1AZ 6513-A	16				SPRING - VALVE
71/		D0AZ 6514-A	16				RETAINER - VALVE SPRING
71/		D0AZ 6518-A	32				KEY - VALVE SPRING RETAINER
71/		D1AZ 6524-A	16				BAFFLE - VALVE ROCKER ARM OIL
71/		D0OZ 6A527-A	16				BOLT - VALVE ROCKER ARM SUPPORT - 5/16"-18 x 1 3/8" hex.head
71/		D1OZ 6A528-A	16				SEAT - VALVE ROCKER ARM FULCRUM
71/		C9ZZ 6564-A	16				ARM - VALVE ROCKER
71/		D1AZ 6565-A	16				ROD - VALVE PUSH - 9.51" long
		D1AZ 6565-B	AR				.060" O/S
		D1AZ 6565-C	AR				.060" U/S
71/		D0AZ 6571-A	16				SEAL - VALVE STEM
		6582					COVER ASSY. - VALVE ROCKER ARM
71/		D2SZ 6582-A	1				R. H.
		D2SZ 6582-B	1				L. H.
71/		373071-S(BB554M)	16				Screw & washer (cover to head)-1/4"-20 x 5/8"
71/		D0OZ 6584-A	2				GASKET - VALVE ROCKER ARM COVER
71/		D0AZ 6600-B	1				PUMP ASSY. - OIL -less screen & cover-includes (1) D0AZ 6659-A gasket
71/		C8SZ 6608-A	1				ROTOR and SHAFT ASSY. - OIL PUMP DRIVE
71/		B8A 6616-C	1				PLATE - OIL PUMP BODY
71/		42911-S(B41A)	4				Bolt (plate to body)-1/4"-20 x 5/8"
71/		D0AZ 6A616-A	1				PLUG - OIL PUMP RELIEF VALVE
71/		D0AZ 6A618-A	1				SHAFT ASSY. - OIL PUMP INTERMEDIATE - includes retaining ring
71/		D1AZ 6622-A	1				SCREEN, TUBE & COVER ASSY. - OIL PUMP
71/		C4TZ 6629-A	1				RING - OIL PUMP INTERMEDIATE SHAFT RETAINER
71/		D0AZ 6659-A	1				GASKET - OIL PUMP TO BLOCK
		6A664					HOSE - CRANKCASE VENTILATION - Also refer to basic 6853
		C9PZ 6A664-B (KCV-2)	AR				Bulk hose-5/8" I.D.-25 ft. long-cut to fit
71/		D1OZ 6A664-B	1				Approx. 23 1/2" long-attach to P.C.V. valve & carb.
71/		D0AZ 6A666-A (EV-50)	1 1				VALVE - POSITIVE CRANKCASE VENTILATION (P.C.V.)

NOTE 1 - Bushing must be reamed to size of valve

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			400				
71/		C5AZ 6670-A	1				SPRING - OIL PUMP RELIEF VALVE
71/		C5AZ 6674-A	1				PLUNGER - OIL PUMP RELIEF VALVE
71/		D0AZ 6675-A	1				PAN ASSY. - OIL
71/		373071-S(BB554M)	16				Screw & washer (pan to block)-1/4"-20 x 5/8"
71/		D0AZ 6700-A	1				SEAL - CYLINDER FRONT COVER OIL
71/		C9OZ 6701-A	2				PACKING - CRANKSHAFT REAR - rope type
71/		D0OZ 6701-A	2				Split-lip type
		6710-11					GASKET - OIL PAN - refer to group 6781
		6722-23					SEAL - OIL PAN - refer to group 6781
71/		★D1AZ 6730-A r/b D1AZ 6730-B (11/74)	1				PLUG - OIL PAN DRAIN
71/		★C1AZ 6731-A (FL-1)	1				ELEMENT ASSY. - OIL FILTER - "spin-on"- one piece filter-has 3/4"-16 female threads
71/		★CC1AZ 6731-A (FL-1)	1				"Spin-on" type
71/		C2OZ 6734-A	1				GASKET - OIL PAN DRAIN PLUG
71/		D0AZ 6750-A	1				INDICATOR - OIL LEVEL
71/		D1AZ 6754-A	1				TUBE ASSY. - OIL LEVEL INDICATOR
71/		87031-S91 (T1DA)	1				"O" ring -3/8" L.D. -used at base of 6754 tube
		6766					CAP ASSY. - OIL FILLER and BREATHER
71/		D1AZ 6766-A (EC-8-A)	1				#Black
72		D1ZZ 6766-A (EC-508)	1				#Chrome-optional w/specified black cap
71/		C8AZ 6767-A	1				ELBOW - CRANKCASE VENTILATION HOSE
71/		D0AZ 6781-D	1				GASKET SET - OIL PAN

Consists of

1-D0AE 6710-B gasket (R.H.)

1-D0AE 6711-B gasket (L.H.)

2-D0AE 6723-A seal (front & rear) 1-C2OZ 6734-A gasket

or

D0AE 6723-B

71/		D1AZ 6788-A	1				BRACKET - CRANKCASE VENT VALVE HOSE CLIP
		★ 6853					HOSE - CRANKCASE VENTILATION - Cut to fit from bulk hose 4090 - also refer to group 6A664
71/		D1AZ 6890-A	1				INSERT - OIL FILTER MOUNTING BOLT - 3/4"- 16 & 1 1/16"-12 male thread-1 13/64" long
71/		C8AZ 6A892-A	1				RETAINER - CRANKCASE VENTILATION - grommet (elbow to cover)
71/		C8SZ 6A892-A	1				P.C.V. to oil filler cap

#Identification Marking

★ U.S. only

● Canada only

FORD CAR PARTS

SECTION 60.8
8 CYL. - 427

1

YEAR	RESTRICTIONS			PART NUMBER		QUANTITY			PART NAME AND DESCRIPTION
						427			
65				6008					GASKET SET - COMPLETE OVERHAUL
				C3AZ 6008-E		1			
	Consists of								
	1-C0AE 6020-C	Gasket	1-B8TZ 6626-A	Gasket	1-C8PZ 8255-U	Gasket			
	2-C3AZ 6051-B	Gasket	1-C0AZ 6A636-B	Gasket	2-B8A 8507-A	Gasket			
	2-C1AE 6336-B	Seal	1-B8AZ 6659-A	Gasket	1-C2AZ 8513-A	Gasket			
	1-C3AZ 6411-B	Seal	1-C3AZ 6700-A	Seal	1-C3AZ 9417-C	Gasket			
	1-C3AZ 6411-C	Seal	2-C9OZ 6701-A	Packing	1-C8AZ 9A424-A	Seal			
	16-B8AZ 6571-B	Seal	1-D0AZ 6710-A	Gasket	1-C8AZ 9A425-A	Seal			
	2-D0AZ 6584-C	Gasket	1-C2OZ 6734-A	Gasket	2-C8AZ 9441-A	Gasket			
66/67				C6AZ 6008-G		1			
	Consists of								
	1-C0AE 6020-C	Gasket	1-B8TZ 6626-A	Gasket	1-C8PZ 8255-U	Gasket			
	2-C3AZ 6051-B	Gasket	1-C0AZ 6A636-B	Gasket	2-B8A 8507-A	Gasket			
	2-C1AE 6336-B	Seal	1-B8AZ 6659-A	Gasket	1-C2AZ 8513-A	Gasket			
	1-C3AZ 6411-B	Seal	1-C3AZ 6700-A	Seal	1-C3AZ 9417-C	Gasket			
	1-C3AZ 6411-C	Seal	2-C9OZ 6701-A	Packing	1-C8AZ 9A424-A	Seal			
	16-C5AZ 6571-C	Seal	1-D0AZ 6710-A	Gasket	1-C8AZ 9A425-A	Seal			
	2-D0AZ 6584-C	Gasket	1-C2OZ 6734-A	Gasket	2-C8AZ 9441-A	Gasket			
68				C8AZ 6008-C		1			
	Consists of								
	1-C0AE 6020-C	Gasket	1-B8TZ 6626-A	Gasket	1-C8PZ 8255-U	Gasket			
	2-C3AZ 6051-B	Gasket	1-C0AZ 6A636-B	Gasket	2-B8A 8507-A	Gasket			
	2-C1AE 6336-B	Seal	1-B8AZ 6659-A	Gasket	1-C2AZ 8513-A	Gasket			
	1-C3AZ 6411-B	Seal	1-C3AZ 6700-A	Seal	1-C3AZ 9417-C	Gasket			
	1-C3AZ 6411-C	Seal	2-C9OZ 6701-A	Packing	1-C8AZ 9A424-A	Seal			
	16-C4TZ 6571-J	Seal	1-D0AZ 6710-A	Gasket	1-C8AZ 9A425-A	Seal			
	2-D0AZ 6584-C	Gasket	1-C2OZ 6734-A	Gasket	2-C8AZ 9441-A	Gasket			
65/68				B9AE 6A008-A		4			DOWEL - CYLINDER HEAD TO CYLINDER BLOCK -.7355" O.D. -.61" I.D. -.44" height-split
				6009					CYLINDER ASSY. - includes cylinder block with all internal parts of the engine does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated
65/67				C6AZ 6009-AG		1			4.23" bore-steel crankshaft-includes C3AZ 7007-A plate
68				C8AZ 6009-B		1			4.23" bore
65/67				6010					BLOCK ASSY. - CYLINDER
				C8AZ 6010-B		1			Hydraulic tappets-4.23" bore-used with mechanical tappet engines for prior to 1968 427 C.I.D. - When used for racing purposes with mechanical tappets,(2) C4TZ 6026-A plug type valves must be used to plug two rear valley oil tappet gallery holes
68				C8AZ 6010-G		1			
65/68				73249-S(N88)		2			Dowel (cyl. block to clutch housing)-3/8" x 9/16"
65/68				43011-S(B263)		6			"Cross-bolt" (used to reinforce block)-3/8"-16 x 2 5/8"-slotted hex. head
				6B018					WIRE ASSY. - CYL. BLOCK HEATER
65/66				CC1TF 6B018-E		1			
67				C7TE 6B018-A		1			2 conductor-use w/3 terminal heater (dummy ground)
67				C7TE 6B018-C		1			3 conductor-use w/3 terminal heater (green ground connector)
65/68				C2AZ 6019-D		1			REPAIR KIT - CYLINDER FRONT COVER
	Consists of								
	1-C0AE 6020-C	Gasket (front cover)	1-C1SZ 9417-A	Gasket (fuel pump mounting)					
	1-C0AE 6023-C	Pointer (timing)-61/62(exc. Spec.)	4-374408-S	Bolt-5/16"-18 x 3/4"					
	1-C0AE 6023-D	Pointer (timing)-58/60 & 61/62 Spec.	4-374409-S	Bolt-3/8"-16 x 7/8"					
	1-C8AE 6059-B	Cover (front)	2-373913-S	Screw-No. 10-24 x 5/16"					
	1-C3AZ 6700-A	Seal (crankshaft-front)							

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			427				
65/68		C0AE 6020-C	1				GASKET - CYLINDER FRONT COVER - (4) .411" & (4) .348" holes-.030" thick-used with aluminum cover
		6023					POINTER - TIMING
65/67		C2AZ 6023-B	1				3 7/8" overall length (2) 7/32" holes
68		C9AZ 6023-A	1				
67/68	B Special (4/B, 8/B carb.)	C6OZ 6A023-C	1				SUPPORT ASSY. - REAR
68	F Special(4/B)	C7ZZ 6A023-B	1				
		6026					PLUG - ENGINE
66/68		C8SZ 6026-A	AR				5/8"-plug core hole in block
65/68	A & B Specials(4/B, 8/B)	C8AZ 6026-A	6				1 3/4" O.D.(plug core hole in block)
68		383024-S(PP66A)	1				Valve assy.-tappet air bleed lubricator-use to plug rear main oil gallery
68	B, F	C8AZ 6026-E	1				
65/68	A & B Specials(4/B, 6/B, 8/B)	353001-S(PP85)	1				Plug (cylinder block camshaft rear bearing hole)- 2 3/8"-cup type
65/68	A & B Specials(4/B & 6/B)	371058-S(PP73)	1				Plug (cylinder block rear)-cup type-3/4"
65/67	A & B Specials (4/B, 6/B, 8/B)	357217-S(PP82)	4				Plug (cylinder head end)-1 3/4" diam.-cup type
		6028-29					BRACKET - FRONT SUPPORT
65/67	A Spec. (4/B, 6/B, 8/B)	C5AZ 6028-C	1				R. H.
		C5AZ 6029-C	1				L. H.
68	A Special (4/B)	C5AZ 6028-C	1				R. H.
		C8AZ 6029-A	1				L. H.
67/68	B Special (4/B, 8/B carb.)	C6OZ 6028-A	1				R. H.
		C6OZ 6029-A	1				L. H.
68	F Special(4/B)	C7ZZ 6046-A	1				R. H. (upper)
		C8ZZ 6028-B	1				R. H. (lower)
		C8ZZ 6029-C	1				L. H. (upper)
		D0ZZ 6029-D	1				L. H. (lower)
65/67	A	20390-S8(B102)	4				Bolt (engine front support insulator to cyl. block)- 7/16"-14 x 1"-hex. head
		34671-S8(M67)	4				Nut-7/16"-14
		357625-S7-8(XX304)	4				Lockwasher-7/16"
		6030					BRACKET - FRONT MOUNTING
67/68	B Special (4/B, 8/B carb.)	C6OZ 6030-A	1				R. H.
		C6OZ 6030-A	1				L. H.
68	F Special(4/B)	C8ZZ 6030-A	1				R. H.
		C8ZZ 6031-A	1				L. H.
		6038					INSULATOR - FRONT SUPPORT
65	A Spec. (4/B, 6/B, 8/B)	C5AZ 6038-C	1				R. H.
		C5AZ 6038-D	1				L. H.
66/67	A Special (4/B, 8/B carb.)	C5AZ 6038-C	1				R. H.
		C5AZ 6038-E	1				L. H.
67/68	B Special (4/B, 8/B carb.)- "Before 11/1/67"	C6OZ 6038-G	1				R. H.
		C7OZ 6038-A	1				L. H.
68	B Special(4/B)-"From 11/1/67"	C6OZ 6038-G	1				R. H.
		C6OZ 6038-H	1				L. H.
68	F Special(4/B)-76	D0ZZ 6038-D	2				R. H. & L. H.
68	F Special(4/B)-exc. 76	C7ZZ 6038-J	2				R. H. & L. H.
65/67	A Special	33845-S8(M57)	2				Nut (6038 to No. 2 crossmember)-1/2"-13 hex.
		357625-S7(XX304)	2				Lockwasher-7/16"
		351428-S7(XX166)	2				Washer-flat-7/16"
65/67	A Special	20390-S8(B102)	4				Bolt (engine front support insulator to cyl. block)- 7/16"-14 x 1"-hex. head
		34671-S8(M67)	4				Nut-7/16"-14
		357625-S7-8(XX304)	4				Lockwasher-7/16"
65/67	A Special (4/B & 8/B carb.)	★C3AZ 6C038-A	1				SHIELD - MOTOR MOUNT HEAT - R. H.-triangular
		★C3AZ 6C038-B	1				L. H. -triangular
		34808-S8(X67)	4				Lockwasher (R. H. & L. H. 6038 to engine)
		6A042					REINFORCEMENT - REAR SUPPORT
68	B Special(4/B)(except 76-)	C8OZ 6A042-C	1				R. H.
		C8OZ 6A042-D	1				L. H.

◇ Not used on model 76 "From 12/1/67"

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			427				
68	F Special (4/B)	6046	★				BRACKET - FRONT SUPPORT - Refer to basic 6028-29
		6049					HEAD - CYLINDER
65/68	All High Performance Veh.	C8OZ 6049-K	2				Replaces cyl. hd. ident. C3AE 6090-J
65			2				
68	B Special(4/B)		2				
65/69	All High Performance Vehicles	C4AE 6049-F	2				High riser type-matching 4/B & 8/B high riser intake manifolds & lightweight valves are required
66/67		C5AZ 6049-C	2				Mechanical tappets
68	F Special (4/B)	C8WY 6049-A	2				
		6051					GASKET - CYLINDER HEAD
65/68		C3AZ 6051-B	2				Steel-.015" thick-#C3AE 6051-B
65/68	All High Perf.vehicles	★C3AE 6051-BS	1				R. H. -stainless steel-.020" thick-use with medium & high riser or tunnel port manifolds
65/68	All High Perf.vehicles	★C4AE 6051-BS	1				L. H. -stainless steel-.020" thick-use with medium & high riser or tunnel port manifolds
66/68		C6AZ 6052-A	AR				PLUG - CYLINDER HEAD EXHAUST AIR SUPPLY - to plug T/E holes in head
		6054					RETAINER - REAR SUPPORT
65/67	A Spec. (4/B, 6/B, 8/B carb.)-S/T	C5AZ 6054-B	1				
68	A Special (4/B)-C6	C5AZ 6054-A	1				7-13/32" long
65/67	A	20392-S8(B120A)	2				Bolt(ret. to trans. ext.)-1/2"-13 x 7/8" hex. head
		20411-S7(B184)	2				Bolt(rear suppt. to frame)-7/16"-20 x 1 1/8" hex. hd.
		34671-S8(M67)	2				Nut-7/16"-20
		356590-S(XX171)	2				Washer-flat-.47" I.D. -.78" O.D. -.10" thick-steel
		357625-S7-8 (XX304)	2				Lockwasher-7/16"
65/68		C1AE 6065-A	10				BOLT - CYLINDER HEAD - 1/2"-13 x 4-29/64"
65/68		C1AE 6065-C	10				1/2"-13 x 2-7/8"
65/67	A Spec. (4/B, 6/B & 8/B)	351453-S8(XX186)	20				Washer-flat-1/2"
65/67	A	20392-S8(B120A)	2				Bolt(ret. to trans. ext.)-1/2"-13 x 7/8" hex. head
		20411-S7(B184)	2				Bolt(rear suppt. to frame)-7/16"-20 x 1 1/8"hex.hd
		34671-S8(M67)	2				Nut-7/16"-20
		356590-S(XX171)	2				Washer-flat-.47" I.D. -.78" O.D. -.10" thick-steel
		357625-S7-8 (XX304)	2				Lockwasher-7/16"
		6068					INSULATOR ASSY. - REAR SUPPORT
65/67	A Spec. (4/B, 6/B, 8/B)-S/T	C9AZ 6068-E	1				
67/68	B Special (4/B & 8/B carb.)	C9ZZ 6068-D	1				
68	F Special (4/B)-exc. 76		1				
68	F Special (4/B)-76	D0OZ 6068-A	1				
68	A Special (4/B)	C8AZ 6068-B	1				
67	B Special(4/B & 8/B carb.)	C6OZ 6070-A	2				PLATE - REAR SUPPORT - approx. 4 3/4" long-3 5/16" wide
68	B Special(76)		2				
68	B Special (4/B)-exc. 76	C8OZ 6070-A	1				R. H.
		C8OZ 6070-B	1				L. H.
65	Consists of	C3AZ 6079-D	1				GASKET SET - VALVE GRIND
	2-C3AZ 6051-B Gasket (cylinder head)					▲1-C8AZ 9A424-A Seal (intake manifold-rear)	
	16-B8AZ 6571-B Seal (valve stem)					▲1-C8AZ 9A425-A Seal (intake manifold-front)	
	2-D0AZ 6584-C Gasket (valve cover)-rubber					▲2-C8AZ 9441-A Gasket (intake manifold)	
	1-C8PZ 8255-U Gasket (water connection)					▲ Serviced in C3AZ 9433-G	
66/67	Consists of	C6AZ 6079-G	1				
	2-C3AZ 6051-B Gasket (cylinder head)					▲1-C8AZ 9A424-A Seal (intake manifold-rear)	
	16-C5AZ 6571-C Seal (valve stem)					▲1-C8AZ 9A425-A Seal (intake manifold-front)	
	2-D0AZ 6584-C Gasket (rocker arm cover)					▲2-C8AZ 9441-A Gasket (intake manifold)	
	1-C8PZ 8255-U Gasket (water connection)					▲ Serviced in C3AZ 9433-G	

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
68		C8AZ 6079-C	1			GASKET SET - VALVE GRIND - cont'd.
	Consists of					
	2-C3AZ 6051-B	Gasket (cylinder head)	‡1-C8AZ 9A424-A	Seal (intake manifold front)		
	16-C4TZ 6571-J	Seal (valve stem)	‡1-C8AZ 9A425-A	Seal (intake manifold)		
	1-D0AZ 6584-A	Gasket (rocker arm cover)	‡2-C8AZ 9441-A	Gasket (intake manifold)		
	1-C8PZ 8255-U	Gasket (water connection)	‡	Service in C3AZ 9433-G		
		6096				BRACKET - REAR SUPPORT
67	B Special (4/B & 8/B carb.)- "Before 4/3/67"	★C7OZ 6096-A	1			R. H.
		C6OZ 6096-G	1			L. H.
67	B Special (4/B, 8/B)- "From 4/3/67"	C6OZ 6096-F	1			R. H.
		C6OZ 6096-G	1			L. H.
68	B Special (4/B)	C6OZ 6096-F	1			R. H.
		C6OZ 6096-G	1			L. H.
		6C098-9				STOP - FRONT SUPPORT INSULATOR
67, 68	B Special (4/B & 8/B carb.)	C6OZ 6C098-A	1			R. H.
		C6OZ 6C099-A	1			L. H.
		▲ 6108				PISTON ASSY. - 3 rings-includes piston pin & retainer
65		C3AZ 6108-M	8			Standard-eyebrow type
		C3AZ 6108-W	8			.003" O/S-eyebrow type
66/67		C5AZ 6108-A	8			Standard-eyebrow type
		C5AZ 6108-B	8			.003" O/S -eyebrow type
68		C8AZ 6108-A	8			Standard-4.23" bore
		C8AZ 6108-B	8			.003" O/S
65/68	All High Performance Veh.	★D0AX 6108-A	8			Not replaced
70	●Unique competition part		8			
67/68	●Unique competition part	C8AX 6110-A	8			Requires dyke top ring
		6120				EXTENSION - REAR SUPPORT
67	B Special (4/B & 8/B carb.)	C6OZ 6120-G	1			R. H.
		C6OZ 6120-H	1			L. H.
68	B Special (4/B)	C6OZ 6120-G	1			R. H.
		C6OZ 6120-J	1			L. H.
		6135				PIN - PISTON
65		★C3AZ 6135-A	8			.975"/.9753" x 3.207" long
66/68		C5AZ 6135-A	8			
		★C5AZ 6135-B	8			.001" O/S
		★C5AZ 6135-C	8			.002" O/S
65/68		C3AZ 6140-B	16			RETAINER - PISTON PIN-.94" I.D.-1.113" O.D. - .052" thick
		6148				RING SET - PISTON PARTIAL - consists of the necessary rings to re-ring (2) pistons-3 rings-Hi Lo Type
65		C3AZ 6148-A	4			Standard
66/68		C5AZ 6148-A	4			Standard
		6150				RING - PISTON
65/68	All High Performance Veh.	C8AX 6150-A	8			Dyke type-used w/C8AX 6110-A piston
		C3AZ 6200-F	8			ROD ASSY. - CONNECTING
66/67		C9ZZ 6200-A	8			
65/68	All High Performance Veh.		8			Lemans type-crankshaft rebalancing required
68		C6AZ 6200-C	8			
65/68	All High Performance Veh.	C6AZ 6200-C	8			Street type-crankshaft rebalancing required
65/68	All High Performance Veh.	★C7OE 6200-A	8			7000 plus R. P. M.-use with medium & high riser or tunnel port manifolds-requires Special High Performance bearings
65/68	All High Performance Veh.	C7OZ 6200-B	1			Incl. (8) C7OE 6200-A
65/68		B8A 6207-A	8			BUSHING - CONNECTING ROD -split type 1.0435" O.D. -.038" wall thickness-1.24" long

▲ 6110 is a casting number and cannot be cross-referenced to a service number ● Refer to appropriate muscle parts catalog

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	UPPER	LOWER	PART NUMBER						
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S
65/67		427	8	8	C5AZ 6211-G .0748"		C1AE 6211-K	C1AE 6211-L	C1AE 6211-M	C1AE 6211-N	
68		427	8	8	C6AZ 6211-A .0758"	C6AZ 6211-B	C6AZ 6211-C	C6AZ 6211-D	C6AZ 6211-E	C6AZ 6211-F	C6AZ 6211-G
65/68	All High Performance	427	8	8	C5AZ 6211-G .0748"						
65/68	All High Perf Veh.-use w/ C7OE 6200-A rod and C9AZ 6303-D crankshaft	427	8	8	★C9AX 6211-E .0753" ★C9AX 6211-F						

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
68		C0ME 6212-A	16			NUT - CONNECTING ROD -13/32"-24
65		C3AZ 6212-A	16			13/32"-24
65		C2AZ 6214-B	16			BOLT - CONNECTING ROD-13/32"-24 x 2 5/32"
66/67		C5AZ 6214-B	16			7/16"-20 x 1 3/4"-12 point head
65/68	All High Performance Veh.	★C7OE 6214-A	16			Use with C7OE 6200-A High Performance rods - includes instruction sheet
65/67		C9ZZ 6217-A	16			DOWEL - CONNECTING ROD TO CAP - 1/2" dia. x 1/4"
65/67		6250				CAMSHAFT - less gear
65/68	All High Performance Veh.	C3AZ 6250-AA	1			Mechanical tappets-"VBA", "VBX"-15 teeth on distributor gear
68		C8AZ 6250-A	1			★VBAB-hydraulic tappets-15 tooth distributor gear
65/68	All High Performance Vehicles	★C4AE 6250-B	1			.500 lift-use on engines that are properly set up for high R. P. M. operation-this cam requires .176 adjustable rocker arms
65/68	All High Performance Veh.	★C8AX 6250-C	1			.515 lift-steel-use on hydraulic lifter engines
65/68	All High Performance Vehicles	★C8AX 6250-D	1			.600 lift-steel-full race type-use on high R. P. M. engines-for strip & track use only-spl. valve springs, seats and retainers are required
65		6A251				BEARING KIT - CAMSHAFT - standard
65		C3AZ 6A251-A	1			

Consists of

1-C3AZ 6261-A	Front	1-B8A 6263-AA	Rear	1-B8A 6270-AA	Rear Intermediate
1-B8A 6262-AA	Center	1-B8A 6267-AA	Front Intermediate	1-35001-S	Plug

66/68		C5AZ 6A251-A	1			
-------	--	--------------	---	--	--	--

Consists of

1-C3AZ 6261-A	Front	1-C5AZ 6267-A	Front intermediate
1-C5AZ 6262-C	Center	1-C5AZ 6270-A	Rear intermediate
1-C5AZ 6263-A	Rear	1-353001-S	Plug

65		6256				SPROCKET - CAMSHAFT
68		C8AZ 6256-A	1			36 teeth-spacer C3AZ 6265-A is not required with this sprocket
66/67		C3AZ 6256-B	1			36 teeth
65/67		73357-S(N87C)	1			Pin-dowel (sprocket to camshaft)-5/16" x 1-1/2"

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6261, 6262, 6263, 6267 & 6270 BEARING - CAMSHAFT - CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65		427	Standard .015" U/S	C3AZ 6261-A D3TZ 6261-C	B8A 6267-AA B8A 6267-AB	B8A 6262-AA B8A 6262-AB	B8A 6270-AA B8A 6270-AB	B8A 6263-AA B8A 6263-AB
66/68		427	Standard .015" U/S	C3AZ 6261-A D3TZ 6261-C	C5AZ 6267-A ★C5AZ 6267-B	C5AZ 6262-C C5AZ 6262-D	C5AZ 6270-A ★C5AZ 6270-B	C5AZ 6263-A ★C5AZ 6263-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
65/68		C3AZ 6265-A	1			SPACER - CAMSHAFT GEAR or SPROCKET - 1.56" O.D.-3/4" I.D.-not used with C8AZ 6256-A
65/68		C8SZ 6265-A	6			Flat washer-3/8"-1" O.D.-.13/64" thick-case hardened
		6267				Refer to Camshaft Bearing Chart group 6261
65/68		D0AZ 6268-A	1			CHAIN - TIMING
65/68		★C3AZ 6269-A r/b D3TZ 6269-A (9-74)	1			PLATE - CAMSHAFT THRUST-1.80" I.D.
65/68		380041-S(BB639B)	2			Screw & washer (plate to cyl.block)-7/16"-14 x 5/8"
		6270				Refer to Camshaft Bearing Chart(Basic No. 6261)
65/68		C3AZ 6287-A	1			ECCENTRIC - CAMSHAFT FUEL PUMP DRIVE
		6303				CRANKSHAFT ASSY.
65/68	All High Performance Veh.	C5AZ 6303-C	1			Steel
65		C4AZ 6303-H	1			Includes (1) C4AZ 6306-A gear attached with 378704-S key - iron
66/67		C5AZ 6303-C	1			Includes (8) ★376636-S cup plugs & (8) ★97421-S rings - steel
68		C8AZ 6303-B	1			Iron
		6306				SPROCKET - CRANKSHAFT
65/68		C4AZ 6306-A	1			18 teeth
69	All off highway vehicles	★D1ZX 6306-CA	1			18 teeth-1 3/8" I.D.-2 7/8" pitch dia.-7 timing keyways
65/68		358963-S(LL2)	1			Key (sprocket to crankshaft)-1/4" x 3/4"
65/69	A Special	C9ZZ 6307-B	8			RING - CRANKSHAFT RETAINING - 15/16" - used in crankshaft
65/68		B8A 6310-A	1			SLINGER - CRANKSHAFT OIL-3.31" O.D.-1.39" I.D.
		6312				PULLEY ASSY. - CRANKSHAFT
65/67		+C3AZ 6312-F	1			★C4AE 6316-E-single sheave 6 5/8" diam.-uses 3/8" belt
65/68	A	34810-S7-8(X69)	1			Lockwasher-9/16"
65/67		377850-S(BB273A)	1			Bolt (pulley to crankshaft)-5/8"-18 x 2"
		6A312				PULLEY ASSY. - CRANKSHAFT - OUTER
68	A & F Specials(4/B)- with or w/out P/S	C8AZ 6A312-D	1			★C8AE 6312-D-triple sheave-inner pulley dia. 6 21/32"-outer pulley dia. 6 5/32"-2 7/32" long-inner pulleys use 3/8" belts-outer pulley uses 1/2" belt
68		D2TZ 6316-A	1			DAMPER ASSY. - CRANKSHAFT
65/68		C1AZ 6A321-C	1			SEAL KIT - CRANKSHAFT REAR MAIN BEARING consists of the following-2-C1AE 6336-B Seal 2-C2OZ 6701-A Packing

† Includes damper

Identification marking

6333 & 6337 BEARING - CRANKSHAFT MAIN - CHART

IN THE SIZE COLUMN OF THE CHART BELOW (R) DESIGNATES RED SIZE - (B) DESIGNATES BLUE SIZE.
RED SIZE AND BLUE SIZE ARE OPTIONAL FOR SELECTIVE FIT.

YEAR	MODEL	C.I.D.	SIZE	UPPER	LOWER	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
65		427	Std. (R) - .0957" Std. (B) - .0961" .002" .010" .020" .030"	x	x	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F	C4AZ 6337-A C4AZ 6337-B ★C4AZ 6337-C C4AZ 6337-D C4AZ 6337-E ★C4AZ 6337-F	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F
66		427	Std. (R) - .0957" Std. (B) - .0961" .002" .010" .020" .030"	x		C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F	C4AZ 6337-A C4AZ 6337-B ★C4AZ 6337-C C4AZ 6337-D C4AZ 6337-E ★C4AZ 6337-F	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F	C1AE 6333-A C1AE 6333-B C1AE 6333-C C1AE 6333-D C1AE 6333-E C1AE 6333-F
66		427	Std. (R) - .0955" Std. (B) - .0959" .002" .010" .020" .030"		x	C5AZ 6333-A C5AZ 6333-B ★C5AZ 6333-C C5AZ 6333-D C5AZ 6333-E C5AZ 6333-F	C5AZ 6333-A C5AZ 6333-B ★C5AZ 6333-C C5AZ 6333-D C5AZ 6333-E C5AZ 6333-F	C5AZ 6337-A C5AZ 6337-B ★C5AZ 6337-C C5AZ 6337-D ★C5AZ 6337-E ★C5AZ 6337-F	C5AZ 6333-A C5AZ 6333-B ★C5AZ 6333-C C5AZ 6333-D C5AZ 6333-E C5AZ 6333-F	C5AZ 6333-A C5AZ 6333-B ★C5AZ 6333-C C5AZ 6333-D C5AZ 6333-E C5AZ 6333-F
66/67		427	Std. - .0950"	x		C5AZ 6333-AB	C5AZ 6333-AB	C5AZ 6337-AB	C5AZ 6333-AB	C5AZ 6333-AB
66/67		427	Std. - .0950"		x	C5AZ 6333-AA	C5AZ 6333-AA	C5AZ 6337-AA	C5AZ 6333-AA	C5AZ 6333-AA
68		427	Std. - .0959" .001" .002" .010" .020" .030" .040"	x	x	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C6TZ 6337-A C6TZ 6337-B C6TZ 6337-C C6TZ 6337-D C6TZ 6337-E C6TZ 6337-F C6TZ 6337-G	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P	C4TZ 6333-H C4TZ 6333-J C4TZ 6333-K C4TZ 6333-L C4TZ 6333-M C4TZ 6333-N C4TZ 6333-P

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
65/68		C1AE 6336-B	2			SEAL - CRANKSHAFT REAR MAIN BEARING CAP #Yellow-asbestos & rubber-2 23/32" long-wedge shaped .025" O/S
		B8KY 6336-A	2			
		6337				Refer to Main Bearing Chart (Basic No. 6333)
65/68		C1AE 6345-B	10			BOLT - CRANKSHAFT MAIN BEARING CAP - 1/2"-13 x 3 1/2"
65/68		★6A354				SPACER - CRANKSHAFT MAIN BEARING CAP - 3/4" O.D. - 13/32" I.D.
		★C3AZ 6A354-A	6			△Red size-thickness .3767"
		★C3AZ 6A354-B	6			△Blue size-thickness .3750"
		★C3AZ 6A354-C	6			△Yellow size-thickness .3733"

△ Thin wall type bearing - for competition use - optional with C5AZ 6333-A, B & C5AZ 6337-A, AB

Identification marking

△ Red, Blue and Yellow size optional for selective fit

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
				427		
65/68		B8AZ 6359-A	1	1		SPACER - CRANKSHAFT DAMPER - steel or cast iron design
		6366				COVER ASSY. - FLYWHEEL HOUSING
65/67		C3AZ 6366-A		1		
65/67		20308-S7(B40)		4		Bolt (bottom cover to flywheel hsg.)-1/4"-20 x 1/2"
		20308-S7(B40)		1 or 2		Bolt (cover to cylinder block)-1/4"-20 x 1/2"
		34805-S8(X62)				Lockwasher-1/4"
68	A/T	B9AZ 6A366-B		3		PLATE - FLYWHEEL REINFORCING
		6375				FLYWHEEL ASSY.
65/67	M/T	C5AZ 6375-E		1		#C5AE 6375-E or C6AE 6380-E-184 tooth ring-(6) 5/16"-18 pressure plate attaching holes on 12-7/8" bolt circle
68	A/T	C5AZ 6375-D		1		184 tooth ring gear-14-1/2" dia.-(16) 17/64" bolt holes on 11-13/32" bolt circle
65/68		B8A 6378-A		1		WASHER - CRANKSHAFT PULLEY RETAINING-1.76" O.D.-.86" I.D.-.212" thick
65/67		B8AZ 6379-A		6		BOLT - FLYWHEEL TO CRANKSHAFT - 7/16"-20 x 15/16"
68		B8A 6379-B		6		7/16"-20 x 23/32"
65/67		C5AZ 6384-A		1		GEAR - FLYWHEEL RING - 184 teeth
65/67	A Spec.(8/B carb.)-4/M/T	C5AZ 6392-C		1		HOUSING ASSY. - FLYWHEEL
67	B Special (4/B, 8/B)-4/M/T	C6OZ 6392-B		1		#C6OA 6394-B
65/67		20546-S8(B114)		4 or 6		Bolt (flywheel hsg. to cyl. block)-7/16"-14 x 2 1/2"
		34808-S8(X67)				Lockwasher-7/16"
65/68		EAD 6397-A		2		DOWEL - CYLINDER BLOCK-to flywheel housing-1/2" x 1"
65/68		C3AZ 6411-B		1		SEAL - REAR COVER PLATE-14.44" long-.40" width
65/68		C3AZ 6411-C		1		SEAL - FLYWHEEL HOUSING COVER PLATE
65/67		C3AZ 6435-B		1		GASKET - FLYWHEEL HOUSING -.040" thick-cork and rubber
65/67		C4AZ 6500-B		16		TAPPET ASSY. - VALVE - mechanical-.8742" O.D. -1.85" long
68		C8AZ 6500-A		16		Hydraulic tappets-1.83" long

6505-07 VALVE - INTAKE and EXHAUST - CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
65/68	427	All High Perf.Veh.-std.weight solid						5.36"	2.09"	Std.	.3715"	C9OZ 6507-U
65/68	427	All High Perf.Veh.-use w/tunnel port medium & high riser heads-light-weight type	5.45"	1.72"	Std.	.3705"	C5AZ 6505-N					
65/68	427	All High Perf.Veh.-lightweight-not for tunnel port heads					★C8AX 6505-A					★C8AX 6507-A
65/68	427	All High Perf.Veh.-w/tunnel heads										C8AX 6507-B
65	427	Use with C3AZ 6049-K	5.36"	1.66"	Std. .003" .015" .030"	.3705"	C9OZ 6505-N C3AZ 6505-F C9OZ 6505-S C9OZ 6505-T	5.36"	2.09"	Std. .003" .015" .030"	.3715"	★C9OZ 6507-U ★C9OZ 6507-V ★C9OZ 6507-Y ★C9OZ 6507-Z

Identification marking

● Bumper head type

FORD CAR PARTS

SECTION 60.8
8 CYL. - 427

9

6505-07 VALVE - INTAKE and EXHAUST - CHART - cont'd.

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
66	427	Exh.valves sodium cooled-both valves chromed	5.45"	1.72"	Std. .003" .015" .030"	.3705"	C5AZ 6505-N C5AZ 6505-P C5AZ 6505-R C5AZ 6505-S	5.45"	2.19"	Std. .003" .015" .030"	.3715"	C5AZ 6507-N C5AZ 6507-P C5AZ 6507-R C5AZ 6507-M
67	427	Exh.valves sodium cooled-both valves chromed	5.43"	1.72"	Std. .003" .015" .030"	.3705"	C5AZ 6505-N C5AZ 6505-P C5AZ 6505-R C5AZ 6505-S	5.45"	2.19"	Std. .003" .015" .030"	.3715"	C5AZ 6507-N C5AZ 6507-P C5AZ 6507-R C5AZ 6507-S
68	427	Silicone-chrome	5.36"	1.66"	Std. .003" .015" .030"	.3705"	C9OZ 6505-N C9OZ 6505-R C9OZ 6505-S C9OZ 6505-T	5.36"	2.09"	Std. .003" .015" .030"	.3715"	♣C9OZ 6507-U ♣C9OZ 6507-V ♣C9OZ 6507-Y ♣C9OZ 6507-Z

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
65/68		C3AZ 6513-B	16			SPRING - VALVE -2 piece design
65/68		C3AZ 6514-A	16			RETAINER - VALVE SPRING -1 31/64" O.D. - 9/32" height
65/68		B8A 6518-A	32			KEY - VALVE SPRING RETAINER - .373" to .533" conical O.D.-.380" height-#Red
65/68		C7AZ 6524-B	2			BAFFLE - VALVE SPRING OIL -approx. 18 1/2" long - Also Refer to Basic No. 6A630
65/66		C1AZ 6A527-A	2			BOLT - VALVE ROCKER ARM SHAFT SUPPORT - 3/8"-16 x 3.29"
65/66 67/68		C1DZ 6A527-C	6 8			3/8"-16 x 2 31/32"
65/68	All High Performance Veh.	★C3AE 6A527-A	16			3/8" -16 x 2 1/2" hex. -use with high riser manifold
65 66/67 68		C3AZ 6531-A C5AZ 6531-A C2AZ 6531-B	8 8 8			SUPPORT - VALVE ROCKER ARM SHAFT
65/68	All High Performance Veh.	★C3AE 6531-A	16			Use with high riser manifold
65/67		C3AZ 6A536-A	16			SEAT - VALVE SPRING
65/67		B6A 6549-C C2AZ 6549-A	16 AR			SCREW - VALVE ROCKER ARM ADJUSTING-standard-7/16"-20 x 1.40" long .0023" O/S
65 66/67 68		C3AZ 6563-A C5AZ 6563-A B8AZ 6563-D	2 2 2			SHAFT - VALVE ROCKER ARM -10 holes in shaft-use w/mech. tappets-includes (2) EAA 6572-A plugs Includes (2)EAA 6572-A plugs Includes (2)EAA 6572-A plugs
65/67		B8A 6564-B	16			ARM - VALVE ROCKER - Mechanical - includes screw
68		B8AZ 6564-C	16			Hydraulic
65/67		B8AZ 6565-C	16			ROD - VALVE PUSH -9.350" overall length-(1) oval & (1) cup type end
68	"Before CHG./L10"	C4TZ 6565-B C8AZ 6565-A C4TZ 6565-C C4TZ 6565-D	16 AR AR AR			Std.-9.62" overall length-use w/C3DZ 6500-B tappet .030" U/S .060" Oversize-# Yellow .060" Undersize-# Green
68	"From CHG./L10/"	C8AZ 6565-A C4TZ 6565-B	16 AR			Std.-9.59" overall length-use/C8AZ 6500-A tappet .030" O/S

♣ Bumper head type
May, 1975

Identification marking

COPYRIGHT © 1975 — FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
65		★B8AZ 6571-B r/b C4TZ 6571-H (10/74)	16			SEAL - VALVE STEM - intake & exhaust
66/67	A & B Specials (4/B, 8/B)	C5AZ 6571-C	16			1/2" high-with spring support
68		C4TZ 6571-J	16			Intake exhaust
65/68		EAA 6572-A	4			PLUG - VALVE ROCKER ARM SHAFT-cup shaped -.536" diameter
65/68		C7AZ 6582-C	2			COVER ASSY. - VALVE ROCKER ARM - chrome- incl. (1) 6766 cap
65/68		D0AZ 6584-C	2			GASKET - VALVE ROCKER ARM COVER
65/68		B8A 6587-B	6			SPRING - VALVE ROCKER ARM TO SHAFT LOCATING -approx. 3.73" free length-8 coils- .859" I.D.
65/68		B8A 6590-A	4			WASHER - VALVE ROCKER ARM SHAFT - flat type-1.32" O.D.-.86" I.D.-.060" thick
		72053-S(N52)	4			Cotter pin-1/8" x 1 1/4"
65/68		B8A 6598-A	4			WASHER - VALVE ROCKER ARM SHAFT - spring type-1.18" O.D.-.86" I.D.-.008" thick
65/68		C3AZ 6600-B	1			PUMP ASSY. - OIL - Includes (1) each B8TZ 6626-A & B8AZ 6659-A gaskets
65/68		20408-S7(B81)	2			Bolt (pump to cylinder block)-3/8"-16 x 1 1/8"
		34807-S8(X66)	2			Lockwasher-3/8"
		34806-S7(X64)	1			Lockwasher-5/16"
65/67	All (exc. Calif.)	D0AZ 6A603-G (EK6A)	1			EMISSION CONTROL KIT - EXHAUST
Consist of 1-D0AE 12A091-C Valve assembly distributor 1-D0AE 12226-J Hose distributor vacuum 3" long 1-D2AZ 9C485-AA Tag eng. exh. emission I. D.						
			1-ESB- M4G92-A Sealer, silicone rubber 1-Instruction sheet			
65/68		B8A 6608-A	1			ROTOR AND SHAFT ASSY. - OIL PUMP DRIVE - rotor type pump
65/68		B8A 6616-C	1			PLATE - OIL PUMP BODY
65/68		B8AZ 6A618-A	1			SHAFT ASSY. - OIL PUMP INTERMEDIATE
65/67	All High Performance Veh.	C0AZ 6622-E	1			SCREEN, TUBE AND COVER ASSY. - OIL PUMP
68		C6OZ 6622-A	1			
65/68		★C5AE 6622-B	1			Deep sump type-used w/deep sump oil pan
65/68		20346-S8(B50)	2			Bolt (screen to oil pump)-5/16"-18 x 3/4"
65/68		34806-S7(X64)	2			Lockwasher-5/16"
		B8TZ 6626-A	1			GASKET - OIL PUMP INLET TUBE
65/68		B8A 6629-A	1			RING - OIL PUMP INTERMEDIATE SHAFT RETAINER -.52" O.D. -6 prongs
65/68		B9AZ 6A630-C	1			BAFFLE - PUSH ROD CRANKCASE VENTILATION-upper
65/67		6A630				BAFFLE - INTAKE MANIFOLD OIL
		C3AZ 6A630-B	1			
68		C6AZ 6A630-B	1			
65/67		C0AE 6A631-A (FA-60)	1			ELEMENT - CRANKCASE VENTILATION OIL SEPARATOR
65/68		C1AE 6A632-A	1			GASKET - CRANKCASE VENTILATION OIL SEPARATOR
65/67		C0AE 6A633-A	1			RETAINER - CRANKCASE VENTILATION OIL SEPARATOR ELEMENT
65/68		C0AZ 6A636-B	1			GASKET - OIL FILTER ADAPTER TO CYLINDER BLOCK - Rubber
65/68		B8AZ 6659-A	1			GASKET - OIL PUMP TO BLOCK -.010" thick

FORD CAR PARTS

SECTION 60.8
8 CYL. - 427

11

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY			PART NAME AND DESCRIPTION
			427			
		6A664				HOSE - CRANKCASE VENTILATION- Also refer to Group 6853
65/68	A, B & F Specials(4/B, 6/B, 8/B)	C9PZ 6A664-A	AR			1/2" I.D. -25 ft. long-cut to required length
66/68	A Special (8/B)-T/E	C6AZ 6A664-B	1			6A666 valve to 6758 tube
68	A, B & F Specials(4/B)- "Before 2/1/68"	C7AZ 6A664-B	1			5/8" I.D. valve end-1/2" I.D. tube end
68	B, F Specials(4/B)- "From 2/1/68"	C7ZZ 6A664-B	1			5/8" I.D. valve end-1/2" I.D. tube end
65/67		C1AE 6A665-H	1			ADAPTER ASSY. - CRANKCASE VENTILATION
65/67		20309-S8(B150)	2			Bolt (adaptor to manifold)-1/4"-28 x 1/2"-self-tapping
65/67		B7A 8287-A	2			Hose clamp (hose to adaptor)-7/8"
65		C0AZ 6666-A	1			PLUG - OIL PUMP RELIEF VALVE-in oil pump body-cup type
66/68		C6AZ 6666-A	1			In oil pump body-cup type
65		D0AZ 6A666-A (EV-50)	1			VALVE - POSITIVE CRANKCASE VENTILATION- (P.C.V.)
66/67		C1TZ 6A666-A (EV-1)	1			#C4TE 6A666-B or C-2 7/8" long-1/4"-18 male threads one end
68		C7OZ 6A666-A (EV-42)	1			1/4"-18 one end
65/67		376711-S (II159N)	1			Elbow-65°-(valve to intake manifold)
65/68		C0ME 6670-A	1			SPRING - CYLINDER BLOCK MAIN OIL GALLEY RELIEF VALVE PLUNGER -rear-18 active coils-2.34" long-.468" O.D.
65/68		C1AE 6670-A	1			SPRING - OIL PUMP RELIEF VALVE - 16 3/4 coils-2.01" long-.47" O.D.
65/68		B9AE 6674-B	1			PLUNGER - CYLINDER BLOCK MAIN OIL GALLERY RELIEF VALVE -rear-1.81" long-.4933" O.D. for .77"-.18" O.D. for 1"
65/68		C1AE 6674-A	1			PLUNGER - OIL PUMP RELIEF VALVE-approx. -2.59" long
		6675				PAN ASSY. - OIL
65		C1AZ 6675-F	1			
66		★C1AZ 6675-G	1			
67		C7AZ 6675-A	1			
68		C6OZ 6675-A	1			
65/68	All High Performance Veh.	★C8AX 6675-A	1			Deep sump-7 qt. -requires special pick up
65/67		AE 6677-A	1			COVER - STARTER PINION -2.62" ridge O.D. - 1.30" overall length
65/68		C3AZ 6700-A	1			SEAL - CYLINDER FRONT COVER OIL
65/68		C9OZ 6701-A	2			PACKING - CRANKSHAFT REAR - rope type-cut to length
65/68		B8AZ 6701-A	2			Rubber-formed seal-3.40" dia. -split lip type
		6A706				CONNECTOR - CRANKCASE VENTILATION HOSE
65/67		C2AZ 6A706-B	1			Includes bracket
68		C7OZ 6A706-A	1			Elbow-60°-1/2" hose-1/4"-18 female thread-attach 6A666 valve to 6758 tube & back fire valve
65/67		20310-S8(B48)	2			Bolt (bracket & connector to intake manifold)-5/16"-18 x 1/2"
		34806-S7(X64)	2			Lockwasher-5/16"
65/68		D0AZ 6710-A	1			GASKET - OIL PAN - cork and rubber
65/68		★D1AZ 6730-A r/b D1AZ 6730-B (11/74)	1			PLUG - OIL PAN DRAIN-1/2"-20- includes (1) C2OZ 6734-A gasket
65/68		★C1AZ 6731-A (FL-1)	1			ELEMENT ASSY. - OIL FILTER - "spin-on" one piece filter-has 3/4"-16 female threads
65/68		★CC1AZ 6731-A (FL-1)	1			
65/68		C2OZ 6734-A	1			GASKET - OIL PAN DRAIN PLUG-#Nylon-13/16" O.D.-1/2" I.D.-5/64" thick

Identification marking

May, 1975

☆ U.S. only
COPYRIGHT © 1975 -

♣ Canada only
FORD MOTOR COMPANY
- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			427				
65/67		C3AZ 6750-E	1				INDICATOR - OIL LEVEL-#red plug in handle 17.64" shield to full 18.16" shield to add 19.28" shield to end
65/67		C4MY 6750-A	1				#Chrome 17.64" shield to full 18.16" shield to add 19.28" shield to end
68		C7OZ 6750-A	1				#Chrome handle 17.42" shield to full 18.50" shield to add 19.25" shield to end
65/67		C3AZ 6754-C	1				TUBE ASSY. - OIL LEVEL INDICATOR - Refer Group 6750
68	F Special(4/B)	C7OZ 6754-A	1				Approximately 10-5/64" long
68	B Specials(4/B)	C5AZ 6754-D	1				
		6758					TUBE - CRANKCASE VENTILATION -non-emission reduction control
65		C5AZ 6758-E	1				#Painted-attaches to rear on intake manifold-optional with C5MY 6758-C
65		C5MY 6758-C	1				#Chrome-attaches to rear of intake manifold-optional with C5AZ 6758-E
68		C6AZ 6758-B	1				Emission reduction control-approximately 19 9/16" long
65/67	A & B Specials(4/B, 6/B, 8/B)	C3AZ 6763-A	1				PIPE - OIL FILLER
65/67	A Spec. (8/B carb.)-closed type em/re or T/E	C4AZ 6763-A	1				#Has outlet spout
6766 CAP ASSY. - OIL FILLER and BREATHER - non-emission							
65	A Spec. (4/B, 6/B, 8/B)	C2SZ 6766-B	1				#Chrome
65/67	A Spec. (4/B, 6/B, 8/B)	B6AZ 6766-A	1				#Black
67	A Special(4/B, 6/B, 8/B)	C7AZ 6766-C	2				#Chrome (used as plug)
		(EC-566)					
6766 CAP ASSY. - OIL FILLER and BREATHER - emission							
65/67	A Spec. (4/B, 6/B, 8/B, open em/re)	B6AZ 6766-A	1				#Black
		C2SZ 6766-B	1				#Chrome
65/67	A Spec. (4/B, 6/B, 8/B, closed em/re)	C4TZ 6766-B	1				#Black
		(EC-31)					
		C2SZ 6766-B	1				#Chrome
68		C8AZ 6766-A	1				#Black
		(EC-1)					
68		C8AZ 6766-B	1				#Chrome
		(EC-2)					
68		C8AZ 6767-A	1				ELBOW - CRANKCASE VENTILATION HOSE - in top of oil filler cap
65/67	A Spec. (8/B carb.)-closed em/re	C4AZ 6A827-A	1				ARRESTOR - CRANKCASE VENTILATION FLAME
		★ 6853	★				HOSE - CRANKCASE VENTILATION Cut from B4C 4090-A-3/8" I.D. Cut from C3AZ 6A664-A-1/2" I.D. Cut from C3AZ 6A664-B-5/8" I.D. Also refer Basic 6A664
68		C6AZ 6869-A	1				COVER - CRANKCASE VENT
65/67		C0AZ 6881-A	1				ADAPTER ASSY. - OIL FILTER-Except with engine warning system
68			1				Used with "spin on" type filter
65/67		C3AZ 6881-A	1				With engine warning system
65/68		B8A 6890-A	1				INSERT - OIL FILTER MOUNTING BOLT - 3/4"-16 external threads-1/2" I.D. -1.30" long-use with "spin-on" type filter-att. filter to adaptor or cylinder block
		6A892					RETAINER - CRANKCASE VENTILATION-Grommet
68		C7AZ 6A892-A	1				
68		C8AZ 6A892-A	1				Retainers-elbow to oil filler cap-1 7/16" O.D. - 37/64" I.D.

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

1

YEAR	RESTRICTIONS			QUANTITY				IDENT. TAG CODE	PART NAME AND DESCRIPTION
				428	429	429 Spec.	460		
			6007	★	★	★	★		ENGINE ASSEMBLY-service details
			6008						GASKET SET - COMPLETE OVERHAUL-Also refer to group 6E078 & 6079
66/67			C6AZ 6008-E	1					
	Consists of								
	1-C0AE	6020-C	Gasket	1-B8TZ	6626-A	Gasket	1-C8PZ	8255-U	Gasket
	2-C6AZ	6051-A	Gasket	1-C0AZ	6A636-B	Gasket	2-B8A	8507-A	Gasket
	2-C1AE	6336-B	Seal	1-B8AZ	6659-A	Gasket	1-C2AZ	8513-A	Gasket
	1-C3AZ	6411-B	Seal	1-C3AZ	6700-A	Seal	1-C3AZ	9417-C	Gasket
	1-C3AZ	6411-C	Seal	2-C9OZ	6701-A	Packing	1-C8AZ	9A424-A	Seal
	16-C4TZ	6571-J	Seal	1-D0AZ	6710-A	Gasket	1-C8AZ	9A425-A	Seal
	2-D0AZ	6584-C	Gasket	1-C2OZ	6734-A	Gasket	2-C8AZ	9441-A	Gasket
							2-C6AZ	9441-A	Gasket (1966)
68			★C8AZ 6008-D	1					Repl. by C6AZ 6008-E (8/74)
	Consists of								
	1-C0AE	6020-C	Gasket	1-B8TZ	6626-A	Gasket	1-C8PZ	8255-U	Gasket
	Δ2-C6AZ	6051-A	Gasket	1-C0AZ	6A636-B	Gasket	2-B8A	8507-A	Gasket
	2-C1AE	6336-B	Seal	1-B8AZ	6659-A	Gasket	1-C2AZ	8513-A	Gasket
	1-C3AZ	6411-C	Seal	1-C3AZ	6700-A	Seal	1-C3AZ	9417-C	Gasket
	1-C3AZ	6411-B	Seal	2-C9OZ	6701-A	Gasket	1-C8AZ	9A424-A	Seal
	16-C4TZ	6571-J	Gasket	1-D0AZ	6710-A	Gasket	1-C8AZ	9A425-A	Seal
	2-D0AZ	6584-C	Gasket	1-C2OZ	6734-A	Gasket	2-C8AZ	9441-A	Gasket
69/70	A, P/C		C9AZ 6008-A	1					
	Consists of								
	1-C0AE	6020-C	Gasket	1-B8TZ	6626-A	Gasket	1-C8PZ	8255-U	Gasket
	2-C8AZ	6051-A	Gasket (steel)	1-C0AZ	6A636-B	Gasket	2-B8A	8507-A	Gasket
	2-C1AE	6336-B	Seal	1-B8AZ	6659-A	Gasket	1-C2AZ	8513-A	Gasket
	1-C3AZ	6411-C	Seal	1-C3AZ	6700-A	Seal	1-C3AZ	9417-C	Gasket
	1-C3AZ	6411-B	Seal	2-C9OZ	6701-A	Seal	1-C8AZ	9A424-A	Seal
	16-C4TZ	6571-J	Gasket	1-D0AZ	6710-A	Gasket	1-C8AZ	9A425-A	Seal
	2-D0AZ	6584-C	Gasket	1-C2OZ	6734-A	Gasket	2-C8AZ	9441-A	Gasket
69/70	B & F(CJ & Super CJ)		C9OZ 6008-C	1					
	Consists of								
	1-C0AE	6020-C	Gasket	1-B8TZ	6626-A	Gasket	1-C8PZ	8255-U	Gasket
	2-C8AZ	6051-A	Gasket (steel)	1-C0AZ	6A636-B	Gasket	2-B8A	8507-A	Gasket
	2-C1AE	6336-B	Seal	1-B8AZ	6659-A	Gasket	1-C2AZ	8513-A	Gasket
	1-C3AZ	6411-C	Seal	1-C3AZ	6700-A	Seal	1-C3AZ	9417-C	Gasket
	1-C3AZ	6411-B	Seal	2-C9OZ	6701-A	Gasket	1-C8AZ	9A424-A	Seal
	16-C4TZ	6571-J	Gasket	2-D0ZZ	6710-A	Gasket	1-C8AZ	9A425-A	Seal
	2-D0AZ	6584-C	Gasket	1-C2OZ	6734-A	Gasket	2-C8AZ	9441-A	Gasket
68/69	"Before 4/1/69"		C8SZ 6008-A	1					
	Consists of								
	1-C8SZ	6020-A	Gasket	1-C3AZ	6700-A	Seal	1-C8SZ	8255-A	Gasket
	1-C8SZ	6051-A	Gasket	2-C9OZ	6701-A	Packing	1-C8VZ	8507-A	Gasket
	1-D1AZ	6411-A	Seal	1-C9VE	6710-B	Gasket	1-C8SZ	8513-A	Gasket
	16-C8SZ	6571-A	Seal	1-C9VE	6711-A	Gasket	1-C3AZ	9417-C	Gasket
	2-D0SZ	6584-A	Gasket	2-D2VE	6722-AA	Seal	2-C9SZ	9A425-A	Seal
	1-C8SZ	6659-A	Gasket	1-C2OZ	6734-A	Gasket	2-C8SZ	9441-A	Gasket
69/	Exc. P/C, CJ or S/CJ- "From 4/1/69"		C9SZ 6008-A	1					
	Consists of								
	1-C8SZ	6020-A	Gasket	1-C3AZ	6700-A	Seal	1-C8SZ	8255-A	Gasket
	2-D4TZ	6051-A	Gasket	2-C9OZ	6701-A	Seal	2-C8VZ	8507-A	Gasket
	1-D1AZ	6411-A	Seal	1-C9VE	6710-B	Gasket	1-C8VZ	8513-A	Gasket
	16-C8SZ	6571-A	Seal	1-C9VE	6711-A	Gasket	1-C3AZ	9417-C	Gasket
	2-D0SZ	6584-A	Gasket	2-D2VE	6722-AA	Seal	2-C9SZ	9A425-A	Seal
	1-C8SZ	6659-A	Gasket	1-C2OZ	6734-A	Gasket	2-C8SZ	9441-A	Gasket

Δ Asbestos & steel

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
		6008					GASKET SET - COMPLETE OVERHAUL - cont. - Also refer to group 6E078 & 6079
70/	P/C, C/J or S/CJ	D00Z 6008-C		1			
	Consists of						
	1-C8SZ 6020-A	Gasket	1-C3AZ 6700-A	Seal	1-C8SZ 8255-A	Gasket	
	2-D4TZ 6051-A	Gasket	2-C9OZ 6701-A	Seal	2-C8VZ 8507-A	Gasket	
	1-D1AZ 6411-A	Seal	1-C9VE 6710-B	Gasket	1-C8SZ 8513-A	Gasket	
	16-D00Z 6571-A	Seal	1-C9VE 6711-A	Gasket	1-C3AZ 9417-C	Gasket	
	2-D0SZ 6584-A	Gasket	2-D2VE 6722-AA	Seal	2-C9SZ 9A425-A	Seal	
	1-C8SZ 6659-A	Gasket	1-C2OZ 6734-A	Gasket	2-D0OZ 9441-A	Gasket	
69/70		C9ZZ 6008-A		1			
	Consists of						
	1-C8SZ 6020-A	Gasket	1-B8TZ 6626-A	Gasket	1-C2OZ 6734-A	Gasket	
	8-C9AE 6051-A	Gasket	1-C8SZ 6659-A	Gasket	1-C8VZ 8507-A	Gasket	
	34-C9AE 6051-C	Gasket	1-C3AZ 6700-A	Seal	1-C8SZ 8513-A	Gasket	
	8-C9ZZ 6051-D	Gasket	2-C9AZ 6701-A	Seal	1-C8SZ 8255-A	Gasket	
	1-D1AZ 6411-A	Seal	1-C9VE 6710-B	Gasket	1-C3AZ 9417-C	Gasket	
	16-C9AZ 6571-A	Seal	1-C9VE 6711-A	Gasket	2-C9SZ 9A425-A	Seal	
	2-C9AZ 6584-A	Gasket	2-D2VE 6722-AA	Seal	2-C9AZ 9441-B	Gasket	
66/		B9AE 6A008-A	4	4	4	4	DOWEL - CYLINDER HEAD TO CYLINDER BLOCK
		6D008					HEATER KIT - CYLINDER BLOCK
68/71		C7DE 6D008-A		1			
72		CD0DZ 6D008-A		1		1	
		6009					CYLINDER ASSY. - includes cylinder block with all internal parts of the engine but does not include cylinder heads, tappets, oil pan or cylinder front cover unless indicated
66/67	Exc. P/C	C6AZ 6009-S	1				Includes C3AZ 7007-F
68	Exc. P/C, C/J or S/CJ - "From 10/18/67"		1				
68	Exc. P/C, C/J or S/CJ - "Before 10/18/67"	C6AZ 6009-J	1				4.13" bore
66/70	P/C	C7AZ 6009-E	1				4.13" bore-includes (1) C3AZ 7007-F
68/70	B & F(CJ)	C9ZZ 6009-E	1				
69/70	B & F (Super CJ)	C9ZZ 6009-F	1				
68/71	A(exc. P/C), S- "Before CHG./L8"	D0SZ 6009-A		1			
70	B(4/B exc. CJ or S/CJ)			1			
71	A(exc. P/C), S "CHG./L8/"	D1SZ 6009-A		1			
70/71	B & F(CJ)	D0OZ 6009-E		1			
70/71	B & F(Super CJ)	D1ZZ 6009-B		1			
71	A(P/C)	D1AZ 6009-A		1			
72	A(P/C)	D2OZ 6009-B		1			
72	A(exc. P/C), B, S	D2SZ 6009-A		1			
69/70	F Boss	C9AZ 6009-C			1		Mechanical tappets-includes (16) D0AZ 6500-B tappets
72	S-exc. Calif.	D2VY 6009-A				1	
72	S-Calif.	D2VY 6009-C				1	

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

3

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70		6010					BLOCK ASSY. - CYLINDER
		C6AZ 6010-F	1				Hydraulic tappets-4.13" bore-includes (1) C3AZ 7007-F
68/7072	A(exc. P/C),S B(4/B & CJ) B	D1VZ 6010-A		1		1	
70/717171/	B & F (Super CJ) B & F(CJ) A(P/C)	D1OZ 6010-A		1			Hydraulic tappets-4bolt M.B.cap
				1			
				1			
69/7066/69	F Boss	C9AZ 6010-B 73249-S(N88)	2			1	Dowel (cyl. block to clutch hsg.)-3/8" x 9/16"
		6B018					WIRE ASSY. - CYLINDER BLOCK HEATER
66		CC1TF 6B018-E	1				
67		C7TE 6B018-A	1				2 conductor-use w/3 terminal htr. (dummy ground)
67		C7TE 6B018-C	1				3 conductor-use w/3 terminal htr.-(Green ground connector)
71		DIAB 6B018-A		1			
72		D2AZ 6B018-A		1		1	
66/70		C2AZ 6019-D	1				REPAIR KIT - CYLINDER FRONT COVER

Consists of the following

1-C0AE 6023-C	Pointer (timing) 61/62 exc. Special	1-C1SZ 9417-A	Gasket (fuel pump mtg.)
1-C0AE 6023-D	Pointer (timing) 58/68 & 61/62 Special	4-374408-S	Bolt (5/16"-18 x 3/4")
1-C8AE 6059-B	Cover (front)	4-374409-S	Bolt (3/8"-16 x 7/8")
1-C3AZ 6700-A	Seal (crankshaft-front)	2-373913-S	Screw (No. 10-24 x 5/16")

68/66/70		D2VZ 6019-A		1	1	1	COVER ASSY. - CYLINDER FRONT
		374408-S(BB413C)	4				Bolt (front cover to block)-5/16"-18 x 3/4"
		374409-S(BB416B)	3 or 4				Bolt (front cov. to block)-3/8"-16 x 7/8"
69/70		373139-S(BB163)	1				Bolt (front cover to block)-3/8"-16 x 2 3/4"
68/		376256-S(BB545A)		1		1	Bolt (front cover to block)-5/16"-18 x 1"
68/		382129-S(BE545BA)		1		1	Bolt (front cover to block)-5/16"-18 x 2 3/8"
68/		56126-S(B319M)		2		2	Bolt (front cover to block)-5/16"-18 x 2 1/64"
66/70		C0AE 6020-C	1				GASKET - CYLINDER FRONT COVER - (4) .411" & (4) .348" holes-.030" thick-used with aluminum cover
68/		C8SZ 6020-A		1	1	1	
66/6768/7066/6769/7068/71727269/70	A, S, P/C A, P/C, B & F(CJ) P/C(exc. A/C) B & F (Super CJ) Exc. California California	6023 C9AZ 6023-A C6AZ 6023-A C9OZ 6023-A D0OZ 6023-A D2VZ 6023-A C9AZ 6023-B	1 1 1 1 1 1 1				POINTER - TIMING 1 3/4" long-2" wide 2 27/32" long Steel Steel
68/717272	Exc. California California	373913-S(UU40) ★383112-S2	1 1 1			1	

6015 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6010 assembly.

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6A023,6054,6068 & 6120 REAR MOTOR MOUNT CHART							
YEAR	MODEL	C.I.D.	*SUPPORT	*BRACKET- REAR SUPPORT	*INSULATOR ASSEMBLY	*BRACKET	
						R.H.	L.H.
- A -							
66/67	A, P/C-M/T	428		C5AZ 6054-B	C9AZ 6068-E		
68	A, P/C -M/T	428		C8AZ 6054-A	C9AZ 6068-E		
66/68	A, P/C -A/T	428		C5AZ 6054-A	C8AZ 6068-B		
69/70	A, P/C -A/T	428		C9AZ 6054-A	C9AZ 6068-H		
69	A(4/S/T)	429		C8AZ 6054-A	C9AZ 6068-E		
69/71	A (exc. P/C)-A/T- "Before 7/1/71"	429		C9AZ 6054-A	C9AZ 6068-H		
71/	A (exc. P/C)-A/T - "From 7/1/71"	429		D2AZ 6054-A	D2AZ 6068-B		
71	P/C - "Before 9/21/70"	429		C9AZ 6054-A	C9AZ 6068-H		
71	P/C - "From 9/21/70"	429		D1AZ 6054-A (Upper) C9AZ 6054-A (Lower)	C9AZ 6068-F		
72	P/C - "Before 12/8/71"	429		D1AZ 6054-A (Upper) D2AZ 6054-A (Lower)	D2AZ 6068-A		
72	P/C - "From 12/8/71"	429		D1AZ 6054-A (upper) D2AZ 6054-A (lower)	D2AZ 6068-B		
- B -							
68/69	B(CJ)	428	C6OZ 6A023-C		D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
70	B(CJ) - "Before 5/4/70"	429	D0OZ 6A023-B	D0OZ 6096-A(RH) D0OZ 6096-B(LH)	D0OZ 6068-A	C6OZ 6120-G	C6OZ 6120-J
70/71	B (CJ)- "From 5/4/70"	429	D0OZ 6A023-B	D0OZ 6096-C(RH) D0OZ 6096-D(LH)	D0OZ 6068-A	Use 6096	Use 6096
72	B(C6)	429			D2OZ 6068-B		
- F -							
68/70	F(CJ)- M/T	428	C9ZZ 6A023-B		D0OZ 6068-A		
68/70	F(CJ)-A/T	428	C7ZZ 6A023-B		D0OZ 6068-A		
69/70	F Boss	429 Spec.	C9ZZ 6A023-D		D0OZ 6068-A		
71	F-A/T	429CJ	D1ZZ 6A023-A		D1ZZ 6068-B		
71	F-M/T	429CJ	D1ZZ 6A023-B		D1ZZ 6068-B		
- S -							
66	S(exc. C6)	428	★C6SZ 6A023-A	C3AZ 6054-A	#C6SZ 6068-D	★C6SZ 6120-A	★C6SZ 6120-B
66	S(C6)	428	★C6SZ 6A023-A	C5AZ 6054-A	#C6SZ 6068-D	★C6SZ 6120-A	★C6SZ 6120-B
67	S	428		C5AZ 6054-A	C6SZ 6068-D		
68	S	429		C8SZ 6054-B	C9LY 6068-A		
69	S(4/B) "BEFORE 10/1/68"	429		C8SZ 6054-B	C9LY 6068-A		
69	S(4/B) "FROM 10/1/68"	429		C9SZ 6054-A	C9LY 6068-A		
70/71	S	429		C9SZ 6054-B	C9LY 6068-A		
72	S "Before 1/24/72"	429,460			★D2SZ 6068-A NOTE 1		
72	S "From 1/24/72"	429,460			\$D2SZ 6068-C		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70	A, S	20411-S7(B184)	2				Bolt(rear suppt. to frame)-7/16"-20 x 1 1/8" hex. hd.
		34671-S8(M67)	2				Nut-7/16"-20
		356590-S(XX171)	2				Washer-flat-, 47" I.D. -, 78" O.D. -, 10" thick-steel
		357625-S7-8(XX304)	2				Lockwasher-7/16"
70	S	373403-S8(MM173J)		2			Nut-3/8"-16 hex. washer lock
72	S	382802-S2		1		1	Nut-3/8"-16-att. 6068, 6A027, 6A061 to frame crossmember 5005

* 1 Required unless otherwise noted \$ Use w/6A027 & 6A061

2 required

NOTE 1 - R/B D2SZ 6A027-A, D2SZ 6A061-A and D2SZ 6068-C (4-73)

5

6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART

* 1 Required unless otherwise noted

— DEARBORN, MICHIGAN

FINAL ISSUE

6028, 6029, 6030, 6031 & 6038 FRONT MOTOR MOUNT CHART - continued

YEAR	MODEL	C.I.D.	*SUPPORT BRACKET		*MOUNTING BRACKET		*INSULATOR	
			R.H.	L.H.	R.H.	L.H.	R.H.	L.H.
- S -								
66	S	428	C6SZ 6028-A	C6SZ 6029-A			C6SZ 6038-A	C6SZ 6038-A
67	S	428	C5AZ 6028-C	C5AZ 6029-C			C5AZ 6038-C	C5AZ 6038-D
68/71	S	429	C8SZ 6028-A	C8SZ 6029-A			C9LY 6038-A	C9LY 6038-B
72	S	429			D2OZ 6030-B	D2OZ 6031-B	D2LZ 6038-A	★D2LZ 6038-B r/b D4SZ 6038-B(9/74)
72	S	460			D2OZ 6030-B	D2OZ 6031-B	D2LZ 6038-A	★D2LZ 6038-B r/b D4SZ 6038-B(9/74)

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec	460	
66/70	A	20390-S8(B102)	4				Bolt (engine front support insulator to cyl. block)- 7/16"-14 x 1"-hex. head
		34671-S8(M67)	4				Nut-7/16"-14
		357625-S7-8(XX304)	4				Lockwasher-7/16"
70	S	373403-S8(MM176J)		8			Nut (support to cross member) 3/8"
68/71	B	20348-S2(B77)	2	2			Bolt (insulator to bracket)-3/8"-16 x 3/4" Hex.hd.
70/71	S "From 11/1/69"	D0SZ 6B031-A		1			BRACKET - FRAME MOUNTING BOLT - INNER - not used "Before 11/1/69"
66	S(C6)	*C6SA 6035-A	1				SHIELD - FRONT SUPPORT INSULATOR - 4" long-1 25/32" wide-1/64" thick-(1) each 1/2" & 17/32" bolt holes-dealer improvise
		6038					INSULATOR - FRONT SUPPORT - refer to Front Motor Mount Chart group 6028
		6C038					SHIELD - MOTOR MOUNT HEAT
68	S	C8SZ 6C038-A		1			R. H. -5 13/16" long
		C8SZ 6C038-B		1			L. H. -5 13/16" long
69/71	A, S	C8SZ 6C038-C		1			R. H. -6 17/32" long
72	A			1			
69/70	F Boss	C8SZ 6C038-D		1	1		L. H. -6 17/32" long
72	B, S	D2OZ 6C038-B		1		1	R. H.
		D2OZ 6C038-C		1		1	L. H.
		6D039					PLUG-CYLINDER BLOCK WATER METERING
69	F Boss (4/B)	*C9AZ 6D039-A			12		Repl. by C9ZZ 6026-D(3/74)
69	F Boss (4/B)	C9AZ 6D039-C			2		1/8" I.D. -1/8" -27 pipe
		6A042					REINFORCEMENT - REAR SUPPORT
68/70	B(exc. 76) CJ & Super CJ	C8OZ 6A042-C	1				R. H.
		C8OZ 6A042-D	1				L. H.
70/71	B(exc. 76)-CJ, Super CJ	D0OZ 6A042-A		1			R. H.
72	B(exc. 76)			1			
		D0OZ 6A042-C		1			L. H.
		6046					BRACKET - FRONT SUPPORT INSULATOR
66	S	*C6SA 6046-A		2			Serviced in 6028-9 assemblies
68/70	F(CJ)	C7ZZ 6046-A		1			R. H.
		C7ZZ 6046-B		1			L. H.
70/71	S	D0SZ 6A046-A		1			SPACER - FRAME MOUNTING BOLT - 7 1/8" long - cut to required length
72	B, S	D2OZ 6047-A		2			BOLT-INSULATOR TO CROSSMEMBER-3/8"-16 x 5" hex.hd. pointed
70/71	S "From 11/1/69"	D0SZ 6A047-A		1			BRACKET - FRAME MOUNTING BOLT - OUTER - not used "Before 11/1/69"
70/71	S	56340-S2(B323)		2			Bolt (3/8"-16 x 1 5/32")-bracket to frame
70/71	S	375474-S8(MM120B)		2			Nut-round hd. rivet type (3/8"-16)-bracket to frame

* 1 required unless otherwise noted

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

7

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
		6049					
66/69	All High Perf. Vehicles	C4AE 6049-F	2				HEAD - CYLINDER High Riser Type- USE ON CHAMFERED BLOCKS THAT PROVIDE SUFFICIENT VALVE CLEARANCE- MATCHING 4/B & 8/B HIGH RISER INTAKE MANIFOLDS & LIGHTWEIGHT VALVES ARE REQUIRED
66/69	All High Perf. Vehicles	C5AZ 6049-C	2				Block must be chamfered to assure proper valve clearance-special light weight valves must be used
67	P/C (exc. T/E)	C7AZ 6049-A	2				
67	A,S (exc. T/E)	C8AZ 6049-M	2				
66	A,S,P/C (exc. T/E)		2				
66/67	A,S,P/C(T/E)		2				
68	A		2				
68/70	P/C(C6)	C8AZ 6049-N	2				
67	P/C (T/E)		2				
68/70	B & F(CJ & Super CJ)	C8OZ 6049-K	2				
68/71	Exc. P/C, CJ or S/CJ	D0VZ 6049-D		2			Includes (2) D0ZZ 6026-A cup plugs-plugs used w/o T/E
70/71	P/C, CJ or S/CJ	D0OZ 6049-H		2			Includes (2) D0ZZ 6026-A plug
72	P/C	D2OZ 6049-A		2			
72	Exc. P/C	D2VZ 6049-B		2		2	
69/70		D0AZ 6049-C			2		
70/71	S "From 11/1/69"	D0SZ 6A049-A		4			BUSHING - FRAME MOUNTING BOLT RUBBER - not used "Before 11/1/69"
66/70		C6AZ 6051-A	2				GASKET - CYLINDER HEAD-#C6AE 6051-C- asbestos & steel-opt. w/C8AZ 6051-A steel gskt.
69/70		C8AZ 6051-A	2				Steel-optional with C6AZ 6051-A asbestos & steel gasket except P/C
66/70	All High Perf. Vehicles	C3AZ 6051-B	2				Steel-.015" thick
68/69	"Before 4/1/69"	C8SZ 6051-A		2			Asbestos & steel
69/	"From 4/1/69"	★C9VZ 6051-A r/b D4TZ 6051-A (2/75)		2		2	Asbestos & steel
69/70		C9ZZ 6051-D			1		1/4" I.D. -1/2" O.D. -part of C9ZZ 6051-B gasket set-use only when necessary
		6051					GASKET SET - CYLINDER HEAD
69/70		C9ZZ 6051-B			2		
Consists of							
4-C9AE 6051-A		Gasket-steel	17-C9AE 6051-C		Gasket-rubber & steel-1/2" I.D.		
			\$4-C9ZZ 6051-D		Gasket-rubber & steel-1/4" I.D.		
\$ Some cylinder heads may require (1) additional C9ZZ 6051-D gasket							
66/68	A, S, P/C	C6AZ 6052-A	8				PLUG - CYLINDER HEAD EXHAUST AIR SUPPLY- (to plug holes when T/E not used)- 1/2"-20 x 1 11/32"
		6054					RETAINER - REAR SUPPORT-Refer to Rear Motor Mount Chart (Basic No. 6A023)
69/70	F Boss (4/B)	C9AZ 6057-A			8		INSERT - VALVE SEAT- intake-std.-2.5" O.D.
		C9AZ 6057-C			AR		.020" O/S
69/70	F Boss (4/B)	C9AZ 6057-B			8		Exhaust - 2" O.D.
		C9AZ 6057-D			AR		.020" O/S
		6A061					INSULATOR ASSY. - REAR SUPPORT REBOUND
72	S-use w/D2SZ 6068-C insul. & D2SZ 6A027-A spacer	D2SZ 6A061-A		1		1	Round-1 5/8" O.D.-1/2" I.D.-1" thick

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

SECTION 60.9
8 CYL.-428,429,460
FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70		C1AE 6065-A	10				BOLT - CYLINDER HEAD-1/2"-13 x 4 29/64"
66/70		C1AE 6065-C	10				1/2"-13 x 2 7/8"
68/		C8SZ 6065-A		10		10	9/16"-12 x 5 1/8"
68/		C8SZ 6065-B		10		10	9/16"-12 x 4 3/8"
69/70					20		
69		C9AZ 6067-A			20		WASHER - CYLINDER HEAD BOLT
		6068					INSULATOR ASSY. - REAR SUPPORT - Refer to Rear Motor Mount Chart (Basic No. 6A023)
69	B(76)	C8OZ 6070-A	2				PLATE - REAR SUPPORT - approx.
70/71	B(76)			2			4 3/4" long-3 5/16" wide
69/71	B(exc. 76)	C8OZ 6070-A	1	1	1		R. H.
		C8OZ 6070-B	1	1	1		L. H.
		6E078					GASKET SET - ENGINE LOWER
72		D5PZ 6E078-D				1	
Consists of							
	1-C8SZ 6020-A	Gasket					2-D2VE 6722-AA Seal
	1-D1AZ 6411-A	Seal					1-C2OZ 6734-A Gasket
	1-C3AZ 6700-A	Seal					2-C8VZ 8507-A Gasket
	2-C9OZ 6701-A	Seal					1-C8SZ 8513-A Gasket
	1-C9VE 6710-B	Gasket					1-C3AZ 9417-C Gasket
	1-C9VE 6711-A	Gasket					
		6079					GASKET SET - VALVE GRIND
66/67		C6AZ 6079-E	1				Optional with C9AZ 6079-A
Consists of							
	2-C6AZ 6051-A	Gasket (cyl. head)					▲ 1-C8AZ 9A424-A Seal (int. manifold-rear)
	16-C4TZ 6571-J	Seal (valve stem)					▲ 1-C8AZ 9A425-A Seal (int. manifold-front)
	2-B9AZ 6584-A	Gasket (valve cov.)-rubber					▲ 2-C8AZ 9441-A Gasket (int. manifold)
	1-B8PZ 8255-U	Gasket (water connection)					Gasket (int. manifold)
							▲ Serviced in C3AZ 9433-G
68		★C8AZ 6079-D	1				Repl. by C6AZ 6079-E (8/74)
Consists of							
	2-C6AZ 6051-A	Gasket-asbestos & steel					1-C8AZ 9A424-A Seal
	16-C4TZ 6571-J	Seal					1-C8AZ 9A425-A Seal
	2-D0AZ 6584-C	Gasket					2-C8AZ 9441-A Gasket
	1-C8PZ 8255-U	Gasket					
69/70		C9AZ 6079-A	1				Optional with C6AZ 6079-E
Consists of							
	2-C8AZ 6051-A	Gasket-steel					▲1-C8AZ 9A424-A Seal
	16-C4TZ 6571-J	Gasket					▲1-C8AZ 9A425-A Seal
	2-D0AZ 6584-C	Gasket					▲2-C8AZ 9441-A Gasket
	1-C8PZ 8255-U	Gasket					▲ Serviced in C9AZ 9433-G
68/69	"Before 4/1/69"	C8SZ 6079-A		1			
Consists of							
	2-C8SZ 6051-A	Gasket (cyl. head)					1-C8SZ 8255-A Gasket (water connection)
	16-C8SZ 6571-A	Seal (valve stem)					⊕2-C9SZ 9A425-A Seal (int. manifold to block)
	2-D0SZ 6584-A	Gasket (rocker cover)					⊕2-C8SZ 9441-A Gasket (int. manifold)
							⊕ Serviced in C9AZ 9433-A
69/	Exc. P/C, CJ or S/CJ	C9SZ 6079-A		1		1	
	"From 4/1/69"						
Consists of							
	2-D4TZ 6051-A	Gasket (cyl. head)					1-C8SZ 8255-A Gasket (water connection)
	16-C8SZ 6571-A	Seal (valve stem)					⊕2-C9SZ 9A425-A Seal (int. manifold)
	2-D0SZ 6584-A	Gasket (rocker cover)					⊕2-C8SZ 9441-A Gasket (int. manifold)
							⊕ Serviced in C9AZ 9433-A
70/	P/C, CJ or S/CJ	D0OZ 6079-C		1			
Consists of							
	2-D4TZ 6051-A	Gasket					1-C8SZ 8255-A Gasket
	16-D0OZ 6571-A	Seal					▲ 2-C9SZ 9A425-A Seal
	2-D0SZ 6571-A	Seal					▲ 2-D0OZ 9441-A Gasket
							▲ Serviced in D0OZ 9433-A

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

9

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec	460	
69/70		6079					GASKET SET - VALVE GRIND - continued
		C9ZZ 6079-A			1		
	Consists of 8-C9AE 6051-A Gasket 34-C9AE 6051-C Gasket \$8-C9ZZ 6051-D Gasket 16-C9AZ 6571-A Seal 2-C9AZ 6584-A Gasket 1-C8SZ 8255-A Gasket ▲2-C9SZ 9A425-A Seal ▲2-C9AZ 9441-B Seal ▲ Serviced in C9AZ 9433-A						
68/71		C9AF 6B080-A		1			"O" RING - CYLINDER BLOCK HEATER
72	A(P/C),B(P/C)	C5TZ 6095-A		1			COVER - FUEL PUMP OPENING
		6096					BRACKET - REAR SUPPORT - Refer to Rear Motor Mount Chart (Basic 6A023)
		6C098-9					STOP - ENGINE FRONT SUPPORT INSULATOR
68	B(CJ)	C6OZ 6C098-A	1				R. H.
		C6OZ 6C099-A	1				L. H.
69	B(CJ)-exc. P/S	C6OZ 6C098-A	1				R. H.
		C6OZ 6C098-A	1				L. H.
69	B(CJ)-P/S	C6OZ 6C098-A	1				R. H.
		★	★				L. H. -refer to Basic 3C510

A. 6108-9 PISTON ASSEMBLY-CHART

In the standard column of the chart below (R) designates red size-(B) designates blue size.
Red size and blue size are optional for selective fit.

YEAR	MODEL	C.I.D.	RINGS	INCL.	QTY.	PART NUMBER					
						STANDARD	.003" O/S	.020" O/S	.030" O/S	.040" O/S	.060" O/S
66/70	A, S, P/C	428	3	✓	8	C6AZ 6108-A(NR) C6AZ 6108-AR(B)	C6AZ 6108-AS	C6AZ 6108-AT	C6AZ 6108-AU	C6AZ 6108-AV	
68/69	B & F(CJ) "Before 11/13/68" # single notch on dome	428	3	Δ	8	C8OZ 6108-G(R) C8OZ 6108-H(B)	C8OZ 6108-J	C8OZ 6108-K	C8OZ 6108-L	C8OZ 6108-M	
69/70	B & F (CJ)- "From 11/13/68" #double notch on dome	428	3	Δ	8	C9ZZ 6108-Y(R) C9ZZ 6108-Z(B)	C9ZZ 6108-AA	C9ZZ 6108-AB	C9ZZ 6108-AC		
69/70	B & F (Super CJ)	428	3	Δ	8	C9ZZ 6108-N(R) C9ZZ 6108-R(B)	C9ZZ 6108-S	\$C9ZZ 6108-AB	\$C9ZZ 6108-AC		
71/	All off highway vehicles	428	3	Δ	8	D1ZX6108-NA					
68/	Exc. P/C), CJ or S/CJ	429	3	◇	8	D2AZ 6108-A(R) D2AZ 6108-B(B)	D2AZ 6108-C	D2AZ 6108-D	D2AZ 6108-E	D2AZ 6108-F	
70	B & F(CJ & Super CJ)	429	3	◇	8	D1OZ 6108-B(R) D1OZ 6108-C(B)	D1OZ 6108-D	D1OZ 6108-E	D1OZ 6108-F		
71/	P/C, CJ or S/CJ	429	3	◇	8	D1OZ 6108-B(R) D1OZ 6108-C(B)	D1OZ 6108-D	D1OZ 6108-E	D1OZ 6108-F		
69	F Boss(eng. code 820-S)	429	3	Δ	8	C9AZ 6108-A(R) C9AZ 6108-B(B)	C9AZ 6108-C				
69	F Boss(engine code 820-T)	429	3	◇	8	C9AZ 6108-G(R) C9AZ 6108-H(B)	C9AZ 6108-J				
70	F Boss	429	3	Spec.							
72	S	460	3	Δ	8	D2VY 6108-A(R) D2VY 6108-B(B)	D2VY 6108-C	D2VY 6108-D	D2VY 6108-E	D2VY 6108-F	

\$ When used for S/CJ engine replace piston pin with C9ZZ 6135-B

Δ Includes piston, pin & retainer

◇ 6110 is a casting number and generally cannot be cross referenced to a service number. It will be used as a means of identification only when casting number is unique to only one 6108 assembly.

◇ Includes piston & pin

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
65/69	All High Perf. Vehicles	★C8AZ 6110-A	4				PISTON-LESS PIN - Pop-Up Type- R. H. -requires .120 piston to valve clearance
66/69	All High Perf. Vehicles	★C8AZ 6110-B	4				Pop-Up Type-L. H. -requires .120 piston to valve clearance
		6120					BRACKET - REAR SUPPORT - refer to Rear Motor Mount Chart group 6A023
66/70	A, S, P/C, B & F (CJ)	C6AZ 6135-A C6AZ 6135-B C6AZ 6135-C	8 8 8				PIN - PISTON-std. -#Green-.975" O. D. .001" O/S-#Blue .002" O/S-#Yellow
69/70	B & F (Super CJ)	C9ZZ 6135-B C9ZZ 6135-C C9ZZ 6135-D	8 AR AR				Standard-#Green .001" O/S .002" O/S
68/ 69/70	F Boss(eng.tag code 820-T)	C8SZ 6135-A C8SZ 6135-B		8 AR		8	Standard .001" O/S
69	F Boss(eng.tag code 820-S)	★C9AZ 6135-A		8			Serviced in (6108) assy. only
66/70		C3AZ 6140-B	16				RETAINER - PISTON PIN-.94" I. D. -.1113" O. D. -.052" thick
69	F Boss(eng.tag code 820-S)	C9AZ 6140-A		16			3/32" I. D. 1 5/32" O. D. -3/64" thick

6148 RING SET - PISTON PARTIAL - CHART -

Consists of the necessary rings to re-ring (2) pistons

YEAR	MODEL	C.I.D.	RINGS	TYPE	PART NUMBER				
					STANDARD	.020" O/S	.030" O/S	.040" O/S	.060" O/S
66/70		428	3	Hi Lo	C6AZ 6148-A	C6AZ 6148-B	C6AZ 6148-C	C6AZ 6148-D	
68/		429,460, 429 Spec.	3	Hi Lo	C8SZ 6148-A	C8SZ 6148-B	C8SZ 6148-C	C8SZ 6148-D	

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
		6200					ROD ASSY. - CONNECTING
66/68	A, S	C6AZ 6200-D	8				
66/70	P/C, B & F (CJ)	C6AZ 6200-C	8				
69/70	B & F (Super CJ)	C9ZZ 6200-A	8				
66/70	All High Perf. Vehicles	C6AZ 6200-C	8				Street type-crankshaft rebalancing required
66/70	All High Perf. Vehicles	C9ZZ 6200-A	8				Lemans type-crankshaft rebalancing required
68/ 70/	Exc. P/C, CJ or S/CJ P/C, CJ or Super CJ	C8SZ 6200-A D00Z 6200-A		8 8		8	
69	F Boss(eng.tag code 820-S)	C9AZ 6200-A			8		
69	F Boss(eng.tag code 820-T)	C9AZ 6200-B			8		
70	F Boss				8		
66/70		B8A 6207-A	8				BUSHING - CONNECTING ROD-split type-1.0435" O. D. -.040" wall thickness-1.24" long
69	F Boss(eng.tag code 820-S)	C9AZ 6207-A			8		

Identification marking

6211 BEARING - CONNECTING ROD - CHART

YEAR	MODEL	C.I.D.	U P P E R	L O W E R	PART NUMBER						
					STANDARD	.001" U/S	.002" U/S	.010" U/S	.020" U/S	.030" U/S	.040" U/S
66/67		428	8	8	C6AZ 6211-A	C6AZ 6211-B	C6AZ 6211-C	C6AZ 6211-D	C6AZ 6211-E	C6AZ 6211-F	C6AZ 6211-G
68/70		428	8	8	C6JZ 6211-A	C6JZ 6211-B	C6JZ 6211-C	C6JZ 6211-D	C6JZ 6211-E	C6JZ 6211-F	C6JZ 6211-G
68/		429	8	8	C8SZ 6211-A	C8SZ 6211-B	C8SZ 6211-C	C8SZ 6211-D	C8SZ 6211-E	C8SZ 6211-F	C8SZ 6211-G
		460									
69	F Boss(eng. tag code 820-T)	429	8	8							
70	F Boss	429	8	8							
		Spec.									
69	F Boss(eng. tag code 820-S)	429	8	8	C9AZ 6211-A	C9AZ 6211-B		C9AZ 6211-C			
		Spec.									

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
68/		C9AZ 6212-B		16	16	16	NUT - CONNECTING ROD-3/8"-24 - .557" hex.
66/70	P/C, B & F (CJ)	C0ME 6212-A	16				13/32"-24 hex.
66/67	A(exc. P/C),S	C1AZ 6214-A	16				BOLT - CONNECTING ROD-3/8"-24 x 2 7/32"
66/70	P/C, B & F(CJ)	C2AZ 6214-B	16				13/32"-24 x 2 5/32"
68	A(exc. P/C)	C8AZ 6214-B	16				
69/70	B & F (Super CJ)	C9ZZ 6214-A	16				7/16"-20 x 1 3/4"-Dodecagon head
68/	Exc. P/C, CJ or SCJ	C8SZ 6214-A		16		16	3/8"-24 x 2 3/16"
69/70		C9AZ 6214-B			16		3/8"-24 x 2 3/16"
70/	P/C, CJ or Super CJ			16			
69/70	B & F(Super CJ)	C9ZZ 6217-A	16				DOWEL - CONNECTING ROD TO CAP - 1/2" dia. x 1/4"
		6250					CAMSHAFT
66/68	A(exc. P/C),S	C6AZ 6250-A	1				Hydraulic tappets-#VU-induction hardened-15 tooth dist. gear
66	P/C	C3AZ 6250-D	1				Mechanical tappets-#VB" or "VB" between last lobe & last journal
67/70	P/C, B & F (CJ & Super CJ)	C6OZ 6250-B	1				Hydraulic tappets-15 tooth dist. gear
66/69	All High Perf. Vehicles	★C4AE 6250-B	1				.500 lift-USE ON ENGINES PROPERLY SET UP FOR HIGH R.P.M. OPERATION - THIS CAM REQUIRES .176 ADJUSTABLE ROCKER ARMS
66/69	All High Perf. Vehicles	★C8AX 6250-C	1				.515 lift-steel-use on hydraulic lifter engines
66/69	All High Perf. Vehicles	★C8AX 6250-D	1				.600 lift-steel-full race type-USE ON HIGH R.P.M. ENGINES - FOR STRIP or TRACK ONLY - SPECIAL VALVE SPRINGS, SEATS & RETAINERS ARE REQUIRED
66/69	All High Perf. Vehicles	C3AZ 6250-AA	1				#VBX-mechanical tappets
68/	Exc. P/C, CJ or S/CJ	C8SZ 6250-A		1			Hydraulic tappets-#QB-15 tooth dist. gear
72	California					1	
72	Exc. California	D2VY 6250-B				1	
69		C9AZ 6250-A			1		Hydraulic tappets
70/71	P/C, CJ or S/CJ			1			
70/71	B & F(S/CJ)	D0AZ 6250-D		1			Mechanical tappets
70					1		
72	P/C	D2OZ 6250-A		1			#VZ
71/	All off highway vehicles	★D1ZX 6250-EA			1		.368 lift-135° overlap-includes IS-3771
66/70		353001-S(PP85)	1				Plug(camshaft rear bearing hole)-2 3/8" dia. cup type
66/70		C3AZ 6A251-A	1				BEARING KIT - CAMSHAFT
	Consists of						
	1-C3AZ 6261-A Front			1-B8A 6263-AA Rear			1-B8A 6270-AA Rear int.
	1-B8A 6262-AA Center			1-B8A 6267-AA Front int.			1-353001-S Plug
66/70		C8AZ 6256-A	1				SPROCKET - CAMSHAFT - 36 teeth-spacer C3AZ 6255-A is not required with this sprocket
68/		D0AZ 6256-A		1	1	1	
68/70		304815-S(B110A)	1				Bolt (sprocket to camshaft)-7/16"-14 x 1 7/8"
		34808-S(X67)	1				Lockwasher-7/16"
66/70		73357-S(N87C)	1				Dowel (sprocket to camshaft)-5/16" x 1 1/2"
68/		73328-S(N87-B)		1	1	1	Dowel pin (align sprocket to cam)-5/16" x 1 1/8"

Identification marking
May, 1975

6261,6262,6263,6267 & 6270 BEARING-CAMSHAFT CHART

YEAR	MODEL	C.I.D.	SIZE	FRONT	FRONT INTERMEDIATE	CENTER	REAR INTERMEDIATE	REAR
66/70		428	Standard .015" U/S	C3AZ 6261-A D3TZ 6261-C	B8A 6267-AA B8A 6267-AB	D8A 6262-AA B8A6262-AB	B8A 6270-AA B8A6270-AB	B8A 6263-AA B8A 6263-AB
68/71	"Before 8/3/70"	429, 429 Spec.	Standard .015" U/S	D1VZ 6261-B C8VZ 6261-B	D1VZ 6261-B C8VZ 6261-B	D1VZ 6261-B C8VZ 6261-B	D1VZ 6261-B C8VZ 6261-B	D1VZ 6261-B C8VZ 6261-B
71/	"From 8/3/70"	429, 460	Standard .015" U/S	D1VZ 6261-B D1VZ 6261-C	D1VZ 6261-B D1VZ 6261-C	D1VZ 6261-B D1VZ 6261-C	D1VZ 6261-B D1VZ 6261-C	D1VZ 6261-B D1VZ 6261-C

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/69		C3AZ 6265-A	1				SPACER - CAMSHAFT GEAR or SPROCKET - 1.56" O.D.-3/4" I.D.-not used w/C8AZ 6256-A
68/71	A,P/C,B(exc. CJ & S/CJ), S- "Before 11/2/70"	C8SZ 6265-A		1			1" O.D.-13/32" I.D.-13/64" thick - "From 11/2/70" refer to basic 6278
69					1		
70/71	B & F(CJ & Super CJ)			1			
72	A(P/C)			1			
66/69		34808-S8(X67)	1				Lockwasher-7/16"-sprocket & eccentric to camshaft
68/		C8SZ 6266-A C8SZ 6266-B		1 1	1 1	1 1	PLUG - CAMSHAFT REAR BEARING - std. .060" O/S
		6267					Refer to Camshaft Bearing Chart (Basic No. 6261)
66/70		D0AZ 6268-A	1				CHAIN - TIMING
68/		C8SZ 6268-A		1	1	1	52 links
66/70		★C3AZ 6269-A r/b D3TZ 6269-A (9/74)	1				PLATE - CAMSHAFT THRUST-1.80" I.D.
68/		C8SZ 6269-A		1	1	1	1.76" I.D. -2.60" O.D.
69/70		380041-S(BB639B)	2				Screw & washer (plate to front cover)-7/16"-14 x 5/8"
		6270					Refer to Camshaft Bearing Chart (Basic No. 6261)
71	A,P/C,S "From 11/2/70"	C2OZ 6278-A		1			WASHER - CAMSHAFT SPROCKET
72	A(exc. P/C),B,S			1		1	
66/70		C3AZ 6287-A	1				ECCENTRIC - CAMSHAFT FUEL PUMP DRIVE
68/71	A,B,S(exc. P/C,CJ & S/CJ)- "Before CHG./L9"	C8SZ 6287-A		1			One-piece design
69/70	F Boss				1		
70/	A(P/C),B & F(CJ & Super CJ)			1			
71	A(exc. P/C),S - "CHG./L9/"	D0AZ 6287-A		1			Two-piece design-outer only
72	A(exc. P/C),B,S			1		1	
71	A(exc. P/C),S- "CHG./L9/"	D1AZ 6287-A		1			Two-piece design-inner only
72	A(exc. P/C),B,S			1		1	
68/		43002-S(B257)		1		1	Bolt(eccentric & sprocket to camshaft)- 3/8"-16 x 1 1/2"
68/		C0DZ 6A302-A		1		1	PIN - CRANKSHAFT REAR OIL SEAL - .095" O.D. -.31" long-pointed
		6303					CRANKSHAFT ASSY.
66/68		C9ZZ 6303-B	1				#1UB
69/70	A, P/C		1				
69	B & F(CJ) "Before 12/26/68"		1				
69/70	B & F(CJ) "From 12/26/68"	C9ZZ 6303-E	1				#A
69	B & F (Super CJ)- "Before 12/26/68"	C9ZZ 6303-A	1				#1UA
69/70	B & F(Super CJ)- "From 12/26/68"	C9ZZ 6303-D	1				#B
66/69	All High Perf. Vehicles	C8AZ 6303-B	1				Iron-special pistons required

Identification marking

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

13

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429 Spec.	460		
		6303					CRANKSHAFT ASSY. - continued
68/71		D0OZ 6303-A		1			#H on No. 1 counterweight
72		D2OZ 6303-A		1			#H on No. 1 counterweight - used to service #4UA
69	F Boss (eng. tag code 820-T)	C9AZ 6303-C			1		Includes (8) 380249-S (8) 377436-S
70	F-Boss				1		
72		★D2VY 6303-B			1		Repl. by D5VY 6303-A (3/75)
66/70		C4AZ 6306-A	1				SPROCKET - CRANKSHAFT - 18 teeth
68/71	Exc. P/C	C8SZ 6306-A		1	1		18 teeth-1 3/8" I.D.
70/	P/C, C/J or S/C/J			1			
72	Exc. P/C	D2VY 6306-B		1	1		
69/	All off highway vehicles	★D1ZX 6306-CA	1				18 teeth-1 3/8" I.D.-2 7/8" pitch dia.- 7 timing keyways
69/	All off highway vehicles	★D1ZX 6306-BA			1	1	18 teeth-1 3/8" I.D.-2 7/8" pitch dia.- 7 timing keyways
66/70		378704-S(LL-12A)	1				Key (sprocket to crankshaft)-3/16" dia. -1 13/32" long-3/16" thick
68/		358985-S(LL12)		1	1		Key(sprocket to crankshaft)-1 3/4" x 3/16"-woodruff
69	F Boss	C9AZ 6307-A			8		PLUG - CRANKSHAFT 7/8"-14-1/2" high- 7/8" O.D.-square hole socket-used with 371058-S to plug clean out holes in crankshaft
70	F Boss	C9ZZ 6307-A			8		1/2" high-7/8" O.D.-used to plug clean out holes in crankshaft
69	F Boss	371058-S(PP73)			8		Plug - expansion - 3/4" cup plug-used with C9AZ 6307-A
70	F Boss	C9ZZ 6307-B			8		RING - CRANKSHAFT RETAINING - 15/16" O.D.- used to retain C9ZZ 6307-A plugs in crankshaft
66/70		B8A 6310-A	1				SLINGER - CRANKSHAFT OIL-3.31" O.D. -1.39" I.D.
68/		C8SZ 6310-A		1	1	1	3 1/2" O.D. -1 3/8" I.D.
66/67	A(exc. P/C), S	C3AZ 6312-E	1				PULLEY ASSY. - CRANKSHAFT-#C4AE 6316-A- single sheave-uses 3/8" belt-includes (1) C3AZ 6023-A pointer
66/67	P/C	C6AZ 6312-A	1				*C6AE 6316-A single sheave
68/69	A, S	C8SZ 6312-B		1			*C9VE 6316-A-double sheave-7" dia. -1 7/16" long- uses 3/8" belts - use for service of pulley #C8VE 6316-A
69/70	F Boss	C9AZ 6312-A			1		Single sheave-7" dia. -4 1/8" long-uses 3/8" belts
66/68	A, S, P/C	377850-S(BB273A)	1				Bolt (pulley to crankshaft)-5/8"-18 x 2"
66/68	A, S, P/C	358963-S(LL-2)	1				Key (pulley to crankshaft)-1/4" x 3/4"
69	A, S	74151-S(L13)		1	1		Key (pulley to crankshaft)-1/4" x 7/8"
66	S(not used with A/C or T/E)	C1AZ 6A312-D	1				PULLEY ASSY. - CRANKSHAFT-OUTER - single
67	S(T/E)		1				sheave-6.60" O.D.
66/68	S	C1AZ 6A312-C	1				Double sheave
66/68	A(40, 52, 53 & 60 amp. alt. - except with A/C		1				
66/68	S(T/E) except A/C		1				
67	S(P/S, T/E)	C4AZ 6A312-B	1				Triple sheave
66	P/C(A/C w/ or w/o P/S)						
66/68	A, S(A/C, T/E with or without P/S)	C4SZ 6A312-B	1				Triple sheave
67	S(P/S)-except T/E		1				
68	A, P/C-(A/C)	C8AZ 6A312-A	1				*C8AE 6312-A-triple sheave

Identification marking

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
		6A312					PULLEY ASSY.-CRANKSHAFT-OUTER-continued
68	A (A/C)	C8AZ 6A312-B	1				#C8AE 6312-B-triple sheave
68	A, P/C (C6) P/S	C8AZ 6A312-C	1				#C8AE 6312-C-double sheave
68	A, P/C(S/T)w/or w/o P/S	C8AZ 6A312-D	1				#C8AE 6312-D-triple sheave-used as replacement
68	B & F(CJ)		1				for pulley identified C8AE 6312-E
69/70	A, P/C, B & F(CJ)-w/ or w/o P/S(exc. A/C)		1				
68	A, P/C	C8AZ 6A312-E	1				#C8AE 6A312-B-Single sheave-pulley dia. 6 25/32" -uses 3/8" belt
69/70	A, P/C, B & F(CJ)(T/E)-w/A/C	C9OZ 6A312-F	1				#C9OE 6312-D-triple sheave-6 5/32" & 7 5/32" dia.
68/70	S	C9SZ 6A312-A		1			#C9SE 6312-B-single sheave-6" diam. -uses 1/2"
69	A-w/P/S			1			belt - replaced pulley #C8SE 6B319-A
69	A, P/C-w/55 & 65 amp. alt.			1			
70/	A(exc. P/C)-w/o A/C	D0AZ 6A312-A		1			#D0AE 6312-A-double sheave-6 45/64" O.D. &
70/71	S-w/P/S			1			8" O.D.
70	B(exc. CJ)-w/o A/C			1			
72	B-w/o A/C			1			
72	S-w/o A/C			1			
70	P/C, B(CJ)-w/55 amp. alt.	D0OZ 6A312-C		1			#D0OE 6312-D-triple sheave-7 3/64", 6 3/4" &
70	B(CJ)-w/A/C & P/S-						6 31/32" O.D. -use to service pulley identified
70	"Before 5/11/70"			1			D0OE 6312-E
70	B(CJ & Super CJ)-w/std. alt.-						
71/	"Before 5/11/70"						
72	P/C			1			
72	B(P/C)			1			
70	B(CJ)-w/A/C & P/S -	D0OZ 6A312-H		1			#D0OE 6312-H or J-triple sheave 6 1/4",
71	"From 5/11/70"						7 1/16", & 7 5/32"
71	B & F(CJ) w/ A/C			1			
69/70	F Boss-with P/S	C9AZ 6A312-D			1		#C9AE 6B319-A-single sheave-6" dia. -2 3/32" long
70	B(CJ & Super CJ)-w/std. alt.-	D0OZ 6A312-G		1			#D0OE 6312-F-double sheave-6 1/4" & 7" O.D.
71	"From 5/11/70"						
71	B & F(CJ & S/CJ)w/idler pulley or P/S w/o A/C			1			
70/	A-w/A/C & P/S	D0SZ 6A312-B		1			#D0SE 6312-B-triple sheave-replaces pulley
70	B(exc. CJ)-w/A/C & P/S			1			pulley ident. D0OE 6312-K or L
70	S-w/A/C & P/S			1			
72	B(exc. P/C)-w/integral A/C			1			
72	A, B-w/hang on A/C	D2AZ 6A312-C		1			
72	S-w/A/C	D1VY 6A312-A		1			#D1VE 6312-AA-triple sheave-7 7/8" O.D. &
72	S-w/A/C & P/S				1		7 19/32" O.D.
68/70	A, P/G, B & F (CJ)	D2TZ 6316-A	1				DAMPER ASSY. -CRANKSHAFT
69/70	B, F (Super CJ)	C8AZ 6316-C	1				#C8AE 6316-C-7 1/2" O.D.
70/		D2VZ 6316-A		1	1	1	6 21/32" O.D.
68/70		377850-S(BB273A)	1				Bolt (damper to crank)-5/8"-18 x 2"
68/70		358963-S(LL2)	1				Key (damper to crank)-1/4" x 3/4"
72		46223-S2(B283)		1		1	Bolt (damper to crank)-5/8" x 2"
72		74151-S(L13)		1		1	Key (damper to crank)-1/4" x 7/8"
66/70		C1AZ 6A321-C	1				SEAL KIT - CRANKSHAFT REAR MAIN BEARING
							Consists of (2) C1AE 6336-B Seal &
							(2) C2OZ 6701-A Packing
69/70	F Boss	C9AZ 6A331-A			1		SPACER-CRANKSHAFT SPROCKET-
							2 5/32" O.D. -1 3/8" I.D. -9/32" high

Identification marking

6333 & 6337 BEARING - CRANKSHAFT MAIN-CHART

[illegible]

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70		C1AE 6336-B	2				SEAL - CRANKSHAFT REAR MAIN BEARING CAP - #Yellow-asbestos & rubber-2 23/32" long-wedge shaped-Std. .025" O/S
		B8KY 6336-A	AR				
		6337					Refer to Main Bearing Chart (Basic No.6333)
66/70		C1AE 6345-B	10				BOLT - CRANKSHAFT MAIN BEARING CAP - 1/2"-13 x 3 1/2"
68/		D5AZ 6345-A		10	10	10	1/2"-13 x 3 61/64" M. B. cap No. 1, 2, 3, 4, 5 inboard
69/70	F Boss	C9AZ 6345-A			2		3/8"-16 x 1 3/4"-M. B. cap No. 1 outboard
69/70	F Boss	C9AZ 6345-B			6		7/16"-14 x 2"-M. B. cap No. 2, 3, 4 outboard
70/	A(P/C), B & F (CJ & Super CJ)			6			
66/70	A, S, P/C, B & F (CJ)	B8AZ 6359-A	1				SPACER - CRANKSHAFT DAMPER-steel or cast iron design
68/69		C8SZ 6359-B		1			Iron
69/70	B & F (Super CJ)	C9ZZ 6359-A	1				Iron-w/counterweight
70/		D0OZ 6359-A		1		1	Iron-2 3/4" long
66/68	A (with S/T & O/D)	C3AZ 6366-A	1				COVER ASSY. - FLYWHEEL HOUSING
68/70	B, F(CJ)-S/T		1				
66/68	A, S(S/T & O/D)	20308-S7(B40)	4				Bolt (bottom cover to flywheel hsg.)-1/4"-20 x 1/2"
66/68	A, S(S/T & O/D)	20308-S7(B40)	1or2				Bolt (cover to cyl. block)-1/4"-20 x 1/2"
		34805-S8(X62)	1or2				Lockwasher-1/4"
66/68	A, S (S/T & O/D)	20310-S8(B48)	4				Bolt (bottom cover to flywheel hsg.)-5/16"-18 x 1/2"
		34806-S7(X64)	4				Lockwasher-5/16"
66/	A/T	B9AZ 6A366-B	1	1		1	PLATE - FLYWHEEL REINFORCING
66/68	A, P/C (M/T)	C6AZ 6375-A	1				FLYWHEEL ASSY. - #C6AE 6380-B-includes 184 tooth ring gear-14 23/64" diam.-(6) 5/16"-18 pressure plate attaching holes on 12 7/8" bolt circle
66/70	A, S, P/C, B & F(CJ)-A/T	C6AZ 6375-B	1				#C6VP 6380-B or C7AP 6375-A-two piece design opt. with one piece design-184 tooth ring gear-15 17/32" diam. (4) 7/16" ring gear attaching holes on 12" bolt circle
68/70	B & F(CJ)-M/T	C8OZ 6375-A	1				#C8OE-A-184 tooth ring gear-14 15/64" diam. -(6) 5/16"-18 pressure plate attaching holes on 12 7/8" diam. bolt circle
69/70	B & F (Super CJ)-M/T	C9ZZ 6375-A	1				184 tooth ring gear-14 15/64" diam. (6) 5/16"-18 pressure plate attaching holes on 12 7/8" diam. bolt circle
69/70	B & F(Super CJ)-A/T	C9OZ 6375-B	1				15 1/2" dia.
69/70	A, B(exc. CJ, S/CJ)-M/T	C9AZ 6375-A		1			#C9AE-A-176 tooth ring gear-15 3/8" diam. -(6) 5/16"-18 pressure plate attaching holes on 12 7/8" diam. bolt circle
69/70	F Boss	C9AZ 6375-C			1		176 tooth ring gear-(6) pressure plate attaching holes on 12 7/8" diam. bolt circle
70/71	B & F(CJ & S/CJ)-M/T			1			
68/	A/T	D1SZ 6375-A		1		1	14 1/4" dia.
66/		B8A 6378-A	1	1	1	1	WASHER - CRANKSHAFT PULLEY RETAINING - 1 3/4" O.D. -11/16" I.D. -7/32" thick
68/	A/T	★C3AZ 6379-B r/b D2AZ 6379-B (6/74)		6		6	BOLT - PLATE TO CRANKSHAFT - 7/16"-20 x 13/16"-used with 6A366 plate
69/71	M/T	B8AZ 6379-A	6	6			Bolt-7/16"-20 x 15/16"
69	F Boss				6		
72	A/T	D2AZ 6379-B		6		6	7/16"-20 x 3/4"-used without 6A366 plate
66/70	M/T	C5AZ 6384-A	1				GEAR - FLYWHEEL RING-184 teeth
69/70	M/T	C9AZ 6384-A		1	1		176 teeth

Identification marking

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/68	A, P/C(M/T)	C5AZ 6392-C	1				HOUSING ASSY. - FLYWHEEL - use lever #C8AA 7515-A
68/70	B & F(CJ & Super CJ) -M/T	C6OZ 6392-C	1				Includes (1) C8OZ 7515-B lever
69/71	M/T	D0AZ 6392-A		1	1		Repl. hsg. ident. #C9AA 6394-D
66/70		20546-S8(B114) 34808-S8(X67)	4or6 4or6				Bolt(flywheel hsg. to cyl.block)-7/16"-14 x 2 1/2" Lockwasher-7/16"
66/		EAD 6397-A	2	2	2	2	DOWEL - CYLINDER BLOCK-to flywheel hsg. - 1/2" x 1"
66/70		C3AZ 6411-C	1				SEAL - FLYWHEEL HOUSING COVER PLATE
66/70		C3AZ 6411-B	1				SEAL - REAR COVER PLATE - 14.44" long - .40" width
68/		D1AZ 6411-A		1	1	1	Sponge rubber
66/70	M/T	C3AZ 6435-B	1				GASKET - FLYWHEEL HOUSING - .040" thick - cork and rubber
66	A, S (exc. P/C)	6500 C8AZ 6500-A	16 16				TAPPET ASSY.- VALVE Hydraulic
67/70					16		
66	P/C	C4AZ 6500-B	16				Mechanical
70		D0AZ 6500-B			16		Mechanical
70/	P/C, CJ	*D1AZ 6500-B r/b D1AZ 6500-A (1/75)		16			Hydraulic
70/71	CJ or S/CJ	D1ZZ 6500-B		16			Mechanical
68/	Exc. P/C, CJ or S/CJ	D1AZ 6500-A		16	16		Hydraulic

6505-07 VALVE - INTAKE and EXHAUST CHART

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
66/68	428	A, S (exc. P/C)	5.36"	1.57"	Std.	.3705"	C0AZ 6505-N C7TZ 6505-C *C7TZ 6505-D r/b D4TZ 6505-C(10/74)	5.44"	2.04"	Std.	.3715"	*C8TZ 6507-A r/b D4TZ 6507-A(9/74) C8TZ 6507-B C8TZ 6507-C
					.003"					.003"		
					.015"					.015"		
					.030"		C2AZ 6505-D			.030"		C8TZ 6507-D
66	428	P/C	5.36"	1.57"	Std.	.3705"	C7TZ 6505-B	5.44"	2.04"	Std.	.3715"	*C8TZ 6507-A r/b D4TZ 6507-A(9/74) C8TZ 6507-B C8TZ 6507-C
					.003"		C7TZ 6505-C			.003"		
					.015"		*C7TZ 6505-D r/b D4TZ 6505-C(10/74)			.015"		
					.030"		C2AZ 6505-D			.030"		C8TZ 6507-D
67/70	428	P/C-intake valve chrome	5.44"	1.57"	Std.	.3705"	C7TZ 6505-B C7TZ 6505-C *C7TZ 6505-D r/b D4TZ 6505-C(10/74)	5.44"	2.03"	Std.	.3715"	D0AZ 6507-J D0AZ 6507-K D0AZ 6507-L
					.003"					.003"		
					.015"					.015"		
					.030"		C2AZ 6505-D			.030"		D0AZ 6507-M
68/70	428	B & F(CJ & Super CJ)-silicone-chrome	5.42"	1.65"	Std.	.3705"	C9OZ 6505-N C9OZ 6505-R C9OZ 6505-S C9OZ 6505-T	5.44"	2.09"	Std.	.3715"	C9OZ 6507-U C9OZ 6507-V C9OZ 6507-Y C9OZ 6507-Z
					.003"					.003"		
					.015"					.015"		
					.030"					.030"		
66/69	428	All High Perf. Veh. -use w/tunnel port, med. & high riser hds. -lightwt. type	5.45"	1.72"	Std.	.3705"	C5AZ 6505-N					
66/69	428	All High Perf. Veh. -lightwt. -not for tunnel port heads					*C8AX 6505-A					*C8AX 6507-A
65/68	428	All High Perf. Veh. -w/tunnel port heads										C8AX 6507-B

Identification marking
May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

6505-07 VALVE - INTAKE and EXHAUST CHART - continued

YEAR	C.I.D.	MODEL	EXHAUST VALVE					INTAKE VALVE				
			LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER	LENGTH	HEAD DIA.	STEM SIZE	STEM DIA.	PART NUMBER
66/69	428	All High Perf.Veh. -lightwt.-for use w/medium or high riser heads-not for tunnel port heads						5.45"	2.19"	Std.	.3715"	C5AZ 6507-N
68/	429, 460	Exc. P/C, CJ or S/CJ	5.08"	1.65"	Std. .003" .015" .030"	.3419"	C8SZ 6505-A C8SZ 6505-B C8SZ 6505-C C8SZ 6505-D	5.29"	2.08"	Std. .003" .015" .030"	.3419"	C8SZ 6507-A C8SZ 6507-B C8SZ 6507-C C8SZ 6507-D
70/71	429	P/C, CJ or S/CJ	5.06"	1.72"	Std. .003" .015" .030"	.3420"	D0OZ 6505-A D0OZ 6505-B D0OZ 6505-C D0OZ 6505-D	5.27"	2.24"	Std. .003" .015" .030"	.3420"	D0OZ 6507-A D0OZ 6507-B D0OZ 6507-C D0OZ 6507-D
72	429	P/C- intake valve silicone-chrome	4.98"	1.72"	Std. .003" .015" .030"	.3420"	D2OZ 6505-A D2OZ 6505-B D2OZ 6505-C D2OZ 6505-D	5.19"	2.25"	Std. .003" .015" .030"	.3420"	D2OZ 6507-A D2OZ 6507-B D2OZ 6507-C D2OZ 6507-D
69/70	429 Spec	F Boss- silicone-chrome	5.63"	1.90"	Std. .003" .015" .030"	.3704"	C9AZ 6505-J C9AZ 6505-K C9AZ 6505-L C9AZ 6505-M	5.60"	2.28"	Std. .003" .015" .030"	.3714"	C9AZ 6507-J C9AZ 6507-K C9AZ 6507-L C9AZ 6507-M

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/69		6510 D1AZ 6510-B	AR				BUSHING - VALVE GUIDE - NOTE 1 Exhaust
68/		D1AZ 6510-A	AR				Intake
66/	A, S (exc. P/C)	C6AZ 6513-D	16				SPRING - VALVE-#Yellow-2 1/8" free length- two piece design
66/70	P/C	C3AZ 6513-B	16				
68	B & F (CJ)		16				
69/70	B & F (CJ & Super CJ)	C9OZ 6513-E	16				#4 Silver or Yellow stripes
68/	Exc. P/C, CJ or S/CJ	C8SZ 6513-B		16		16	
70/	P/C, CJ or S/CJ	D0ZZ 6513-A		16			#4 Dark blue stripes
69/70				16			
66/68	A, S (exc. P/C)	C6AZ 6514-A	16				RETAINER - VALVE SPRING-1 13/32" O. D. - 27/64" I. D. -1/2" height
66/69	P/C, B & F (CJ & Super CJ)- "Before 6/1/69"	C3AZ 6514-A	16				
69	A, P/C, B & F (CJ & Super CJ)- "From 6/1/69"	D0AZ 6514-A	16				1 27/64" O. D. 7/16" high
69/70				16			
70	F (CJ & Super CJ)	D0AZ 6514-B	16				
68/	(Exc. P/C, CJ or S/CJ	*C8SZ 6514-A		16		16	1.32" O. D. -.45" high
70	P/C	r/b D0OZ 6514-A (10/74)	16				
70/	P/C, CJ or Super CJ	D0OZ 6514-A		16			1 7/16" O.D.-7/16" high
66/68	A, S	B8A 6517-B	16				SLEEVE - VALVE SPRING RETAINER-.769" flange O. D. -.599" conical O. D. -.36" height
66/70		B8A 6518-A	32				KEY - VALVE SPRING-RETAINER-.373" to .533" conical O. D. -.375" height-#Red
68/		7HA 6518-A		32		32	
69/70		C9AZ 6518-A			32		1 7/32" O. D. -25/64" high

NOTE 1 - Must be reamed to size of valve

FORD CAR PARTS

SECTION 60.9 19
8 CYL.-428,429,460

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70		C7AZ 6524-B	2				BAFFLE-VALVE SPRING OIL-approx. 18 1/2" long
72		D1AZ 6524-A		16		16	BAFFLE - VALVE ROCKER ARM OIL
71	A	D1AZ 6A525-A		AR			SHIM - ROCKER ARM STUD or BOLT- 3/4" x 7/16" x .030" (used under 6A527)-also used with 3E717 steering column lock gear
66/70	A, S, P/C	C1AZ 6A527-A	2				BOLT - VALVE ROCKER ARM SHAFT SUPPORT- 3/8"-16 x 3.29"
68/70	B & F (CJ & Super CJ)		2				
66/70	A, S, P/C	C1DZ 6A527-C	6				3/8"-16 x 2 31/32"
70	B, F	C1AE 6A527 C	1	1	1		Bolt - 7/16"-14 x 3 1/4" (Attach 7400 control assy. to 7E046 plate)
72	A, B, S (exc. P/C)	D0OZ 6A527-A	16			16	Bolt (rocker arm to head)-5/16"-18 x 1 3/8" hex.hd.
		6A527					STUD - VALVE ROCKER ARM SUPPORT
68/71	A, S	C9SZ 6A527-A	16				Stud & nut kit-3/8"-24 x 7/16"-14 x 2 43/64" long- includes (4) studs & (4) C9SZ 6A529-A nuts
70	B(exc. CJ & S/CJ)		16				
70/71	B(Super CJ)	C9ZZ 6A527-A	16				Stud-Rocker arm to head-
70	B(CJ)- "Before 10/28/69"		16				7/16"-20, 7/16"-14 x 2 21/32" long
70/71	B(CJ)- "From 10/28/69"	D0OZ 6A527-B	16				Stud-3/8"-24, 7/16"-14 x 2 11/16" long
71/	A(P/C)		16				
71	F(CJ)		16				
69/70		C9ZZ 6A527-B			24		Stud-5/16"-18-24 x 2 3/8"
69/70		382620-S100(WW14)			8		Stud-5/16"-18-5/16"-18 x 3 1/2"
68/71	Exc. P/C, CJ or S/CJ	C8SZ 6A528-A	16				SEAT - VALVE ROCKER ARM FULCRUM- .88" O.D. -.44" I.D.
71/	P/C, CJ or S/CJ	D0OZ 6A528-B	16				
72	Exc. P/C	D1OZ 6A528-A	16			16	
70	CJ or S/CJ		16				Hydraulic tappets
70	CJ or S/CJ	★C9ZZ 6A528-A r/b D0OZ 6A528-B (11/74)	16				Mechanical tappets
68/69	A, S - "Before 11/1/68"	C8SZ 6A529-A	16				NUT - VALVE ROCKER ARM STUD -
70	B(CJ & S/CJ) - "Before 10/28/69"		16				7/16"-20-hex. lock
70/71	B & F(S/CJ)- "From 10/28/69"		16				
69/71	A, S - "From 11/1/68"	C9SZ 6A529-A	16				3/8" -24 hex.
70	A, B, B(CJ)- "From 10/28/69"		16				
72	A(P/C)		16				
70/71	B & F (S/CJ)	C9ZZ 6A529-B	16				Nut-jam-7/16"-20 x 1/4"
69/70		C9ZZ 6A529-A			24		Nut-5/16" -24
69/70		33770-S4(M89K)			8		Nut-5/16"-18
66/70		C2AZ 6531-B	8				SUPPORT - VALVE ROCKER ARM SHAFT
69/70		C9AZ 6531-A			16		Aluminum
69/70		C9AZ 6A536-A			16		SEAT - VALVE SPRING
70/	P/C, CJ or S/CJ	D0OZ 6A536-A	16				Lower-I.D.11/2"-O.D.1 23/32"-center hole 45/64"
66	P/C	B6A 6549-C	16				SCREW - VALVE ROCKER ARM ADJUSTING - standard-7/16"-20 x 1.40" long
		C2AZ 6549-A	AR				.0023" O/S
69/70		C9AZ 6549-A			16		7/16" -20 x 1 11/32" long
69/70		EAA 6552-A			16		NUT - VALVE ROCKER ARM ADJUSTING SCREW

Identification marking
May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

-DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/67	A, S	B8AZ 6563-D	2				SHAFT - VALVE ROCKER ARM-includes (2)
67	P/C		2				EAA 6572-A plugs
68/70	A, P/C, B & F (CJ & Super CJ)		2				
66	P/C	B8AZ 6563-A	2				18" long-(8) 5/32" holes lower half-includes (2)
							EAA 6572-A plugs
69/70		C9AZ 6563-A			16		Steel-approx. 2 1/2" long
66/68	A, S	B8AZ 6564-C	16				ARM - VALVE ROCKER - hydraulic tappets
67/70	P/C, B & F (CJ & Super CJ)		16				
66	P/C	B8A 6564-B	16				Mechanical tappets
68/71	Exc. P/C, CJ or S/CJ	C8SZ 6564-A		16			3 3/64" long
70/71	P/C, CJ or S/CJ	C9ZZ 6564-A		16			
72				16		16	
69/70		C9AZ 6564-C			8		Intake short type-includes adjusting screw & nut
69/70		C9AZ 6564-D			8		Exhaust-long type-includes adjusting screw & nut
66/70		372702-S (XX144)	8				Flat washer (rocker arm & rocker arm shaft to head)-3/8"
		6A564					GUIDE - VALVE PUSH ROD
70/	P/C, CJ or S/CJ	D00Z 6A564-B		8			
66/68	A, S	C4TZ 6565-B	16				ROD - VALVE PUSH-std. -.9.62" o/all length
67/68	P/C		16				
	" Before chg./L5"	C8AZ 6565-A	AR				.030" U/S
	" Before chg./L5"	C4TZ 6565-C	AR				.060" O/S-#Yellow
		C4TZ 6565-D	AR				.060" U/S-#Green
66	P/C	B8AZ 6565-C	16				9.345"/9.355" o/a length-(1) oval & 61) cup type end
68/70	A, P/C	C8AZ 6565-A	16				Std. -.9.59" length
68/70	B & F (CJ & Super CJ)		16				
		C4TZ 6565-B	AR				.030" O/S
68/69	"Before 4/1/69"	C8VZ 6565-A		16			8.70" long
71	Exc. P/C "CHG./L8/"			16			
69/71	Exc. P/C, CJ or S/CJ	C9VZ 6565-A		16			8.67" long
	"From 4/1/69 to	C9VZ 6565-B		16			.060" O/S
	Before CHG./L8"	C9VZ 6565-C		AR			.060" U/S
70/	P/C, CJ or Super CJ	D00Z 6565-B		16			8.55" long
		D00Z 6565-E		AR			.060" O/S
		D00Z 6565-F		AR			.060" U/S
69/70		C9AZ 6565-A			8		Intake-8.76" long
69/70		C9AZ 6565-B			8		Exhaust-10.88" long
72	Exc. P/C	D2OZ 6565-A		16		16	8.60" long
		C9VZ 6565-A		AR		AR	.060 O/S
		D5VZ 6565-A		AR		AR	.060 U/S
66	A, S (P/S)	B9A 6570-A	1				GROMMET - used on power steering oil reservoir cover stud - rubber-.32" I.D.-1" O.D.-1/2" thick
66/67	A, S	C4TZ 6571-J	16				SEAL - VALVE STEM - intake & exhaust -
67	P/C		16				.90" O.D.-.342" I.D.-.80" height
68/70	A, P/C, B & F (CJ & Super CJ)		16				
66	P/C	C6AZ 6571-A	16				Intake and exhaust
68/	Exc. P/C, CJ or S/CJ	C8SZ 6571-A		16		16	.32" I.D.-.72" high-intake & exhaust
70/	P/C, CJ or S/CJ	D00Z 6571-A		16			.21/64" I.D.-use with std. & .003" O/S valves
		D00Z 6571-B		AR			.015" O/S-use w/.015" O/S valves
		D00Z 6571-C		AR			.030" O/S-use w/.030" O/S valves
69/70		C9AZ 6571-A			16		.665" O.D.-.515" high-intake & exhaust-Std. & .003" O/S-use w/Std. & .003" O/S valves
		C9AZ 6571-B			AR		.015" O/S
		C9AZ 6571-C			AR		.030" O/S
66/70	A, S, P/C	EAA 6572-A	4				PLUG - VALVE ROCKER ARM SHAFT-cup shaped -.536" diameter-for transmission usage refer basic 7D418
							1 7/16" O.D.-.23/32" I.D.
69		C9AZ 6A580-B			2		PLUG-VALVE OIL METERING-3/8"-16-1/16" I.D.

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

21

6582-6A582 COVER ASSY. - VALVE ROCKER ARM - CHART

YEAR	MODEL	C. I. D.	PAINTED		CHROME	
			R. H.	L. H.	R. H.	L. H.
66	P/C	428	C7AZ 6582-A #Blue includes (1) C7AZ 6A892-A retainer	C7AZ 6582-A #Blue retainer not required	None	None
66/67 67	A, S P/C	"Before CHG/L3" 428 "Before CHG/L3" 428	C5AZ 6582-H #Primed	C7AZ 6582-A	C6OZ 6582-A	C6OZ 6582-B
67/68	A, S, P/C	CHG/L3/ 428	C7AZ 6582-A #Blue includes (1) C7AZ 6A892-A retainer	C7AZ 6582-A #Blue retainer not required	C7OZ 6582-B includes (1) C7AZ 6A892-A retainer	C7OZ 6582-B includes (1) C7AZ 6A892-A retainer
68/69 69/70	B & F (CJ) A, P/C	"Before 2/14/69" 428 428			C7OZ 6582-B includes (1) C7AZ 6A892-A retainer	C7OZ 6582-B includes (1) C7AZ 6A892-A retainer
69/70 69/70	B & F (CJ) B & F (Super CJ)	"From 2/14/69" 428 428			C9ZZ 6582-B #Aluminum includes ret. for R. H. only	C9ZZ 6582-B #Aluminum includes ret. for R. H. only
65/68	F (GT500)	428			S7MS 6A582-A	S7MS 6A582-A
68/71 72	Exc. P/C, CJ or S/CJ Exc. P/C	429 429,460	D1VZ 6582-A D1VZ 6582-A	C8SZ 6582-B D2VZ 6582-B		
70	CJ or S/CJ	429			D0OZ 6582-A #Aluminum	D0OZ 6582-A #Aluminum
71/	P/C, CJ or S/CJ	429			D1OZ 6582-D	D0OZ 6582-A
69/70	F Boss	429 Spec.			D0AZ 6582-B	D0AZ 6582-B

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66	A, S, P/C	371065-S(BB549)	10				Bolt (valve cover to head)-5/16"-18 x 5/8"
66/70	A, S, P/C	377394-S(KK23F)	1				Grommet(retains 6A666 valve to 6582 cov.)-
67/70	A, P/C, S, B & F - (CJ & Super CJ)	372995-S13 (BB545AA)	10				Screw & washer (valve cover to head)- 5/16"-18 x 3/4"
70/	P/C, CJ or S/CJ	383680-S8(BB863KD)		14			Screw & washer (cover to head)-1/4"-20 x 3/4"
68/71	Exc. P/C, CJ or S/CJ	373071-S7 (BB554M)		14			Screw & washer (cover to head)-1/4"-20 x 5/8"
72	Exc. P/C	356748-S(BB-124)		14		14	Screw & washer (cover to head)-1/4"-20 x 5/8"
69/70		383688-S(WW97EX)			2		Stud (cover to head) 5/16"-18-18 x 2 13/16"
69/70		56126-S(B319M)			16		Bolt (cover to head)-5/16"-18 x 2" hex.hd.
69/70		45582-S8(B70)			2		Bolt (cover to head)-5/16"-18 x 4 1/2"
66/70		D0AZ 6584-C	2				GASKET - VALVE ROCKER ARM COVER - rubber (5) 23/64" diam.holes-(5) tabs
68/		D0SZ 6584-A		2		2	Cork & rubber
69/70	F Boss	C9AZ 6584-A			2		Asbestos & rubber
66/70		B8A 6587-B	6				SPRING - VALVE ROCKER ARM TO SHAFT LOCATING-approx. 3.73" free length-8 coils- .859" I.D.
66/70		B8A 6590-A	4				WASHER - VALVE ROCKER ARM SHAFT - flat type - 1.32" O.D.-.86" I.D.-.060" thick

Identification marking

◇ Has em/re hole

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70		B8A 6598-A	4				WASHER - VALVE ROCKER ARM SHAFT - spring type - 1.18" O.D.-.86" I.D.-.008" thick
66/68	A, S	C8AZ 6600-A	1				PUMP ASSY. - OIL - includes (1) each B8TZ 6626-A, B8AZ 6659-A & C6VE 6659-A gaskets
69/70	B & F (Super CJ)	C9ZZ 6600-A	1				Includes (1) B8TZ 6626-A, (1) B8AZ 6659-A gaskets
66/70	A, P/C, B & F (CJ)		1				
68/69	A, S	C8SZ 6600-B		1			Includes (1) C8SZ 6659-A gasket-also includes screen and cover
70/71	S			1			
69/70		C9AZ 6600-A			1		Includes (1) B8TZ 6626-A & (1) C8SZ 6659-A gaskets
70/	P/C, CJ or S/CJ			1			
70/	Exc. P/C, CJ or S/CJ	D0AZ 6600-A		1		1	With screen & cover-includes (1) C8SZ 6659-A gasket
66/70		354135-S7-8(BB155A)	2				Bolt (pump to block)-3/8"-16 x 1 1/8"
		34807-S7(X66)	2				Lockwasher-3/8"
71/		359266-S8(BB157)		2			Screw & washer (pump to block)-3/8"-16 x 1 1/4"
66/67	All(exc. Calif.)	D0AZ 6A603-G (EK-6-A)	1				EMISSION CONTROL KIT - EXHAUST
Consists of 1-D0AE 12A091-C Valve assy.dist. 1-D0AE 12226-J Hose dist.vac.3" long 1-Instruction sheet							
				1-D2AE 9C485-AA Tag eng.exh.emission I.D.			
				1-ESB M4G92-A Sealer, silicone rubber			
66/70		B8A 6608-A	1				ROTOR and SHAFT ASSY. - OIL PUMP DRIVE-rotor type pump
68/		C8SZ 6608-A		1	1	1	2 31/64" long
66/70		B8A 6616-C	1				PLATE - OIL PUMP BODY
68/	Exc. P/C, CJ or S/CJ			1		1	
69		C9AZ 6616-A			1		
70/	P/C, CJ or S/CJ			1			
66/70		42911-S(B41A)	4				Bolt (plate to pump)-1/4"-20 x 5/8"
68/	Exc. P/C, CJ or S/CJ			4		4	
70/	P/C, CJ or S/CJ	370519-S(BB125)		4			Screw & washer (plate to pump)-1/4"-20 x 7/8"
69/70					4		
66/70		B8AZ 6A618-A	1				SHAFT ASSY. - OIL PUMP INTERMEDIATE
68/		C8SZ 6A618-A		1	1	1	9 11/32" long-11/32" O.D.
66	A, P/C	C2AZ 6622-B	1				SCREEN, TUBE and COVER ASSY. - OIL PUMP
66/67	S	C6OZ 6622-A	1				
67/69	A, P/C "Before 12/23/68"		1				
68/70	B & F(CJ & Super CJ)		1				
69/70	P/C "From 12/23/68"	C8SZ 6622-B	1				
66/69	All High Performance Vehicle	★C5AE 6622-B	1				Deep sump type-use w/deep sump oil pan
68/	Exc. P/C, CJ or S/CJ	★ 6622		★			Refer to group 6600
70/	P/C, CJ or Super CJ	D0OZ 6622-A		1			
69/70		C9AZ 6622-A			1		
66/71		20346-S8(B50)	2	2			Bolt (screw & cover to pump)-5/16"-18 x 3/4"
72		34806-S7(X64)	2	2			Lockwasher-5/16
66	"Before 3/1/66"	B8AZ 6626-B	1				GASKET - OIL PUMP INLET TUBE
66/70	"From 3/1/66"	B8TZ 6626-A	1				
70/	P/C, CJ or S/CJ			1			
69					1		
66/70		B8A 6629-A	1				RING - OIL PUMP INTERMEDIATE SHAFT RETAINER-.52" O.D. -6 prongs
68/		C4TZ 6629-A		1	1	1	.56" O.D.(6) internal prongs

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

23

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/70		B9AZ 6A630-C	1				BAFFLE - PUSH ROD CRANKCASE VENTILATION - upper
		6A630					BAFFLE - INTAKE MANIFOLD OIL
66/69	P/C "Before 12/23/68"	C6AZ 6A630-B	1				
68/70	B & F(CJ & Super CJ)	C8AZ 6A630-B	1				
69/70	P/C "From 12/23/68"		1				
66/67	A,S- "Before 10/24/66"	C6AZ 6A630-D	1				Intake manifold baffle
68	A		1				
67	A, S "From 10/24/66"	C5AZ 6A630-A	1				
68/	Exc. P/C, CJ or S/CJ	C8SZ 6A630-A		1		1	
70/	P/C, CJ or S/CJ	D0OZ 6A630-A		1			Intake manifold baffle
67/70	A,P/C,B & F(CJ & Super CJ)	381709-S(UU52G)	2				Screw (baffle to manifold)-1/4"-20 x .38"
69/				3	3	3	
66/68	P/C, B & F(CJ)	C1AE 6A632-A	1				GASKET - CRANKCASE VENT - oil separator
69	P/C "Before 12/23/68"		1				Not used from 12/23/68
		6B633					BRACKET - OIL COOLER UPPER
69/70	B & F (S/CJ)	D1ZZ 6B633-A	1	1	1		
70	B	55736-S2(M96F)		1			Nut-5/16"-18-(6B633 to 16138)
70	B	359662-S7-8-(BB575A)					Screw & washer-5/16"-18 x 3/4"-(6B633 to 16138)
		6B634					BRACKET - OIL COOLER LOWER
69/70	F (Super CJ)	C9ZZ 6B634-A	1				
69					1		
69/70	B (Super CJ) -	D0OZ 6B634-B	1	1			
70					1		
70	B	57140-S2(B340H)		2			Screw & washer-5/16"-18 x 7/8"-(6B634 to 16138)
66/67	A, S	C0AZ 6A636-B	1				GASKET - OIL FILTER ADAPTER TO CYLINDER
67	P/C		1				BLOCK-2 29/32" x 2 1/2" x .022" thick
68/70	A,P/C,B & F(CJ & Super CJ)		1				
66	P/C	C6AZ 6A636-A	1				
69		C9AZ 6A636-A			1		
70/71	B & F (S/CJ)	D1ZZ 6A636-A		1			3" O.D.-1" I.D.
70					1		
69/70	B & F (S/CJ)	C9OZ 6A642-A	1				COOLER ASSY. - CRANKCASE OIL
69/70					1		
70	B(Super CJ)			1			
67/68	F(GT500)-w/A/C	★S7MS 6653-A	1				HEAT EXCHANGER - OIL COOLER ASSY.
67/68	F(GT500)-w/A/C	★S8MS 6A653-A	4				CONNECTOR - OIL COOLER - same as Shelby No. 57003-S
66/70		B8AZ 6659-A	1				GASKET - OIL PUMP TO BLOCK-(1) elongated & (2) 13/32" holes-1.56" hole centers-.030" thick
68/		C8SZ 6659-A		1	1	1	Fibre
66/68	A,S(T/E)	C6AZ 6A664-A	1				HOSE - CRANKCASE VENTILATION - thermactor type-attaching oil filler cap to air cleaner
68	S			1			
		C9PZ 6A664-A	AR	AR			1/2" bulk hose
		C9PZ 6A664-A (KCV-1)	AR	AR	AR		15/32"-25 ft. long - cut as required
		C9PZ 6A664-B (KCV-2)	AR	AR	AR		5/8" I. D. - 25 ft. long - cut as required

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR COMPANY

—DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
66/67	A,S,P/C (R/A cover em/re)- "Before CHG/L3"	6A664 C6AZ 6A664-B	1				HOSE - CRANKCASE VENTILATION - continued 1/2" I.D. & 5/8" I.D. -11" long-6A666 valve to hot idle compensator tee to 6758 tube
66/67	S(T/E)	C6SZ 6A664-B	1				6758 tube to tee
		C6SZ 6A664-A	1				Tee to 6A666 valve
66/68	A(T/E)	C6AZ 6A664-E	1				Front 6758 tube to tee
		C6AZ 6A664-F	1				Rear tee to 6A666 valve
66/68	P/C(T/E)	★C6AZ 6A664-H	1				Air cleaner to oil filler cap
66/68	P/C(T/E)	★C6AZ 6A664-J	1				6A666 valve to tee-"S" shape
		★C6AZ 6A664-K	1				6758 tube to tee
66/70	A, S, P/C, B & F(CJ)	★C6AE 6A664-A	1				1 1/2" long-attach elbow to 6758 tube-cut from C3AZ 6A664-A bulk hose
66/67	A,S,P/C (except T/E)- "Before CHG/L3"	★C6AZ 6A664-M	1				"L" shape-1/2" dia. one end-61/64" dia. other end- attach 6A666 valve to 6758 tube
67	A, S "CHG/L3/"	C7AZ 6A664-A	1				5/8" I.D. -valve end-1/2" I.D. tube-att, 6A666 valve to 6758 tube-front
67/69	P/C "CHG/L3/ to 12/23/68"	C7AZ 6A664-B	1				5/8" I.D. -valve end-1/2" I.D. tube end
68/69	B, F (CJ & Super CJ)	C7ZZ 6A664-B	1				5/8" I.D. valve end-1/2" I.D. tube end
69/70	P/C "From 12/23/68"		1				
68	F(GT 500)-T/E		AR				Cut to proper length
67	S(T/E)	C6SZ 6A664-B	1				3 5/64" long-tee to 6758 tube (front)
67	S (T/E)	C6SZ 6A664-A	1				
67	A (7 litre, closed em/re)	★C6GY 6A664-A	1				Air cleaner to oil filler cap
68	A, P/C	C8AZ 6A664-A	1				1/2" I.D. -molded
69	"Before 3/5/69"	C9AZ 6A664-A			1		1/2" one end, 5/8" other end-approx. 14 1/4" long
71	B & F(CJ & S/CJ)			1			
69	"From 3/5/69"	★6A664			★		Cut from C9PZ 6A664-B bulk hose
70/71	B, F(CJ & S/CJ)	★C6DE 6A664-B		1			P.C.V. valve to carb.-cut from B4C 4090-A hose
71	A(P/C)			1			
68/	A, B, S	C8SZ 6A664-B		1			1/2" I.D. -molded
70	B(CJ & S/CJ)			1			
72	S					1	
70	F(CJ & S/CJ)	C9PZ 6A664-A	1				P. C. V. valve to carb.-cut to required length
71/	A(P/C)	D1OZ 6A664-B		1			Approx. 23 1/2" long-P.C.V. valve to carb.
71	B, F(CJ & S/CJ)		AR				cut to proper length
68	A	C8AZ 6A665-A (EC-17)	1				ADAPTOR ASSY. - CRANKCASE VENTILATION
66/68	"Before 11/25/68"	C0AZ 6666-A	1				PLUG - OIL PUMP RELIEF VALVE - in oil pump body-cup type-.559" & .567" O.D.-.361" height - .114" orifice
68/ 70	"From 11/25/68"	C6AZ 6666-A	1				Plug (in oil pump)-cup type
68/		C8SZ 6666-A		1	1	1	Attaches valve to spacer-7/8" O.D. -5/8" high
68/		72070-S(N46)		1	1	1	Cotter pin (retain oil pump relief valve)- 3/32" x 1 1/2"
69	B & F (Super CJ)	C7TZ 6666-B	1				PLUG - OIL FILTER BY-PASS VALVE
69					1		
66/69	A,S,P/C "Before 12/23/68"	D0AZ 6A666-A (EV-50)	1				VALVE - POSITIVE CRANKCASE VENTILATION - (P.C.V.)
69				1			
70/	Exc. CJ & S/CJ			1		1	
71	B & F(CJ)-Imco			1			
68/69	B, F(CJ & Super CJ)	C8OZ 6A666-B	1				
69	P/C "From 12/23/68"	(EV-45)	1				
69/70		C1TZ 6A666-A (EV-1)			1		

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
		6A666					VALVE - POSITIVE CRANKCASE VENTILATION - (P.C.V.) - continued
70	B (CJ & S/CJ)	C9TZ 6A666-A		1			
71	F(S/CJ)-w/mech.tappets	(EV-48)		1			
70	F(CJ & Super CJ)	D0OZ 6A666-A	1				
70	A, P/C	(EV-51)	1				
66/70	A, S, P/C	377394-S(KK23F)	1				Grommet (retains valve to 6582 cov.)-1 7/16" O. D. - 23/32" I. D.
66	A, S "Before 5/2/66"	C0ME 6670-A	1				SPRING - OIL PUMP RELIEF VALVE - 18 active coils-2.34" long-.468" O. D.
66/68	A, S "From 5/2/66"	C6AZ 6670-A	1				2 1/64" long
66/69	P/C, B & F (CJ) - "Before 11/25/68"	C4TZ 6670-A	1				2" long-approx.
69/70	B, F (Super CJ)	C9ZZ 6670-A	1				2 5/32" long-approx.
69/70	P/C, B & F (CJ)- "From 11/25/68"		1				
68/		C5AZ 6670-A		1	1	1	
66	A, S "Before 5/2/66"	B9AE 6674-A	1				PLUNGER - OIL PUMP RELIEF VALVE
66/68	A, S "From 5/2/66"	C6AZ 6674-A	1				
68/70	P/C	C4TZ 6674-A	1				
68/70	B & F (CJ & Super CJ)	C1AE 6674-A	1				
68/		C5AZ 6674-A		1	1	1	
66	A, P/C	C7AZ 6675-A	1				PAN ASSY. - OIL
66/67	S	C6OZ 6675-A	1				Steel
67/69	A, P/C "Before 12/23/68"		1				
68	B & F (CJ)		1				
69/70	P/C "From 12/23/68"	C8SZ 6675-B	1				
69/70	B & F(CJ & Super CJ)	C9ZZ 6675-D	1				
66/69	All High Performance Vehicles	*C8AX 6675-A	1				Deep sump-7 qt. -requires special pick up
68/69	A, S	C8SZ 6675-A		1			
70/71	S			1			
70/	A, P/C, B, F	D0OZ 6675-D		1			
72	S			1		1	
69/71		C9AZ 6675-A			1		6 qts.
66/70		20326-S7-8(B49)	20				Bolt (oil pan to block)-5/16"-18 x 5/8"
		34806-S7(X64)	20				Lockwasher-5/16"
68/70		371065-S(BB549)		4	4		Screw & washer (oil pan to cover to block)- 5/16" -18 x 5/8"
68/71		373071-S7(BB554M)		19	19		Screw & washer (oil pan to block)-1/4"-20 x 5/8" (18 to block & 1 to cover)
71/		372995-S13(BB545AA)		4	4	4	Screw & washer (oil pan to cover to block)- 5/16"-18 x 3/4"
72		356748-S(BB-124)		19		19	Screw & washer (oil pan to block)-1/4"-20x 5/8"- 18 block to cover
69/70	B & F(CJ & Super CJ)	C9ZZ 6687-A	1				BAFFLE - OIL PAN UPPER
66/		C3AZ 6700-A	1	1	1	1	SEAL - CYLINDER FRONT COVER OIL
66/70		6701					PACKING - CRANKSHAFT REAR
68/		B8AZ 6701-A	2				Rubber-formed seal-3.40" dia. -split lip type
66/		C9AZ 6701-A		2	2		Split lip type
		C9OZ 6701-A	2	2		2	Rope type
68/70	B, F(CJ & Super CJ)	C7OZ 6A706-A	1				CONNECTOR - CRANKCASE VENTILATION HOSE
69/70	P/C		1				-6° -attaches hose to 6A666 valve
66/70	A, S, P/C	D0AZ 6710-A	1				GASKET - OIL PAN - Also refer to Basic 6781
68	B & F (CJ)		1				
69/70	B & F (CJ & Super CJ)	D0ZZ 6710-A	2				

Identification marking
May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

-DEARBORN, MICHIGAN

FINAL ISSUE

FORD CAR PARTS

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429	460	
					Spec.		
69	B (Super CJ)	C9OZ 6A715-A	1				HOSE ASSY. - OIL COOLER INLET
69	B (Super CJ)	C9OZ 6A715-B	1				Outlet
69/70	F (Super CJ)	C9ZZ 6A715-A	1				Inlet
69/70	F (Super CJ)	C9ZZ 6A715-B	1				Outlet
69/70	F Boss	C9AZ 6A715-A			1		Inlet
69/70	F Boss	C9ZZ 6A715-B			1		Outlet
70	B(Super CJ)	D0OZ 6A715-A		1			Inlet
70	B(Super CJ)	D0OZ 6A715-B		1			Outlet
		6722-23					SEAL - OIL PAN - Refer to Basic 6781
66/		★D1AZ 6730-A r/b D1AZ 6730-B (11/74)	1	1	1	1	PLUG - OIL PAN DRAIN - 1/2"-20
66/		*C1AZ 6731-A (FL-1)	1	1	1	1	ELEMENT ASSY. - OIL FILTER - "Spin-on" one piece filter-has 3/4"-16 female threads
66/		*CC1AZ 6731-A (FL-1)	1	1	1		"Spin-on" type
66/		C2OZ 6734-A	1	1	1	1	GASKET - OIL PAN DRAIN PLUG - #Nylon-13/16" O.D. -1/2" I.D. -5/64" thick
67/68	F(GT500)-w/A/C	★S1CR 6734-A r/b FL-5	1				FILTER - OIL
69	B & F (Super CJ)	86H 6734	1				GASKET - OIL FILTER BY-PASS VALVE NUT
69	F Boss				2		
67/68	F(GT500)-w/A/C	S8MS 6A734-A	1				GASKET - OIL DISTRIBUTOR TO OIL FILLER
70	B(CJ & S/CJ)	EAA 6749-A		1			GASKET - OIL FILTER CENTER BOLT COVER -
71	F(S/CJ)			1			seal head of (6894) mtg. bolt
66	A, P/C	C6AZ 6750-A	1				INDICATOR - OIL LEVEL 17.80" shield to full 18.58" shield to add 19.81" shield to end
66	S	C6SZ 6750-B	1				21.56" shield to full 22.70" shield to add 23.70" shield to end
67	A, S, P/C	C7AZ 6750-A	1				#Black-black plug in handle 17.42" shield to full 18.50" shield to add 19.25" shield to end-optional with C7OZ 6750-A
68/69	A, P/C "Before 12/23/68"		1				17.44" shield to upper safe mark 18.50" shield to add 20.00" shield to end
69/70	P/C "From 12/23/68"	C9AZ 6750-A	1				#Chrome handle-Black plug in handle 17.42" shield to full 18.50" shield to add 19.25" shield to end-optional with C7AZ 6750-A
67	A, P/C	C7OZ 6750-A	1				16.90" shield to add 1 mark 17.60" shield to add 2 mark 20.00" shield to end-use on engines w/increased oil capacity-from 5 ats. to 7 ats.
68/69	B & F(CJ)		1				
70	F(CJ)		1				
70	F(CJ & S/CJ)	D0OZ 6750-C	1				
68/71	S	★C8SZ 6750-A r/b D4VZ 6750-A (10/74)		1			16.81" shield to full 17.81" shield to add 18.52" shield to end
69	A	C9MZ 6750-A		1			16.62" shield to full 17.64" shield to add 18.52" shield to end

Identification marking

* U.S. only

• Canada only

FORD CAR PARTS

SECTION 60.9
8 CYL.-428,429,460

27

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
		6750					INDICATOR - OIL LEVEL - continued
70/	A(exc. P/C)	D0AZ 6750-B		1			15.81" top of shield to safe
70	B(exc. CJ & S/CJ - "Before 3/16/70"			1			16.62" top of shield to add 1
72	S			1		1	17.24" top of shield to add 2
							18.12" top of shield to end
70/	B(exc. CJ & S/CJ "From 3/16/70"	★D0OZ 6750-D r/b D4AZ 6750-B (10/74)		1			15.36" top of shield to safe
71/	P/C			1			15.75" top of shield to add 1
							16.23" top of shield to add 2
							17.50" top of shield to end
70	B(CJ & S/CJ)	D0OZ 6750-B		1			#Chrome-15.36" top of shield to full
71	F(S/CJ)			1			15.76" top of shield to add 1
							16.23" top of shield to add 2
69/70		C9AZ 6750-B			1		15.96" shield to safe mark
							17.00" shield to add
							17.90" shield to end
66/70	A, P/C	C5AZ 6754-D	1				TUBE ASSY. - OIL LEVEL INDICATOR -
67/68	S		1				approx. 6 7/8" long
66	S	C5SZ 6754-A	1				Approx. 13 1/2" long
68/70	B & F(CJ & Super CJ)	C7OZ 6754-A	1				Approx. 10 5/64" long
68/		C8SZ 6754-A		1	1	1	Approx. 9 19/32" long
66/68	A, S	C6AZ 6758-A	1				TUBE - CRANKCASE VENTILATION - emission reduction
66/69	P/C "Before 12/23/68"	C6AZ 6758-B	1				
68/69	B & F(CJ & Super CJ)	C8OZ 6758-B	1				
69/70	P/C "From 12/23/68"		1				
66/67	A, S, P/C	C3AZ 6766-D (EC-64)	1				CAP ASSY. - OIL FILLER and BREATHER - open system - rocker arm cover type
66/68	A, S (T/E)	C4TZ 6766-B (EC-31)	1				CAP ASSY. - OIL FILLER & BREATHER - T/E - Imco
67/68	F(GT500)	C3AZ 6766-E (EC-564)	1				
68/69	A, S, P/C, B & F(CJ)	C8AZ 6766-A (EC-1)	1	1			#Black
70	F(CJ), P/C		1				
70	B(CJ)			1			
70	A, B, S	C8AZ 6766-B (EC-2)	1	1			#Chrome
71	B & F(CJ & S/CJ)	D1ZZ 6766-A (EC-508)		1		1	#Chrome
72	A, B, S			1			Optional w/specified Black cap
71/	A, S, P/C	D1AZ 6766-A (EC-8-A)		1		1	#Black
72	B			1			
69		C9AZ 6766-B (EC-7)			1		#Black
70		D0AZ 6766-C (EC-11)			1		
		★ 6766	★				Oil separator-retain 6A666 valve-see group 6A665
68/		C8AZ 6767-A	1	1	1	1	ELBOW - CRANKCASE VENTILATION HOSE -
68/		D0SZ 6781-A		1	1	1	GASKET SET - OIL PAN
Consists of 1-C9VE 6710-B Gasket (R. H.) 1-C9VE 6711-A Gasket (L. H.) 2-D2VE 6722-AA Seal (front & rear) 1-C2OZ 6734-A Gasket (drain plug)							
72	P/C	D1AZ 6788-A		1			BRACKET - CRANKCASE VENT VALVE HOSE CLIP

Identification marking

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

—DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	RESTRICTIONS	PART NUMBER	QUANTITY				PART NAME AND DESCRIPTION
			428	429	429 Spec.	460	
69	B & F (S/CJ)	C7TZ 6837-A	1				SPRING - OIL FILTER BY-PASS
69					1		
		★ 6853	★	★			HOSE - CRANKCASE VENTILATION - cut to fit from bulk hose 4090 - also refer to group 6A664
66/67	A, S, P/C (T/E)	C5AZ 6A868-A	1				ADAPTER - OIL FILLER
66/69	P/C "Before 12/23/68"	†C6AZ 6869-A	1				COVER - CRANKCASE VENT
68	B & F (CJ)		1				
66/69	P/C, B & F (CJ)	20309-S8(B150)	2				Bolt (cover to manifold)-1/4"-28 x 1/4"
66/67	A, S	C0AZ 6881-A	1				ADAPTER ASSY. - OIL FILTER
67/70	P/C		1				
68/70	A, B & F (CJ)		1				
66	P/C	C6AZ 6881-A	1				
69/70	B, F (Super CJ)	C9OZ 6881-B	1				
70	B, B(S/CJ)	D0OZ 6881-B		1			
71	F(S/CJ)	D1ZZ 6881-A		1			Used w/oil cooler
69					1		
70	B, F	375688-S(II-196M)			2		Elbow-45° (hoses to adapter)
66/70	A, S, P/C, B & F (CJ & Super CJ)	20346-S8(B50)	4				Bolt (adapter to block)-5/16"-18 x 3/4"
		34806-S7(X64)	4				Lockwasher-5/16"
67/68	F(GT500)-w/A/C	S7MS 6881-A	1				DISTRIBUTOR - OIL COOLER
67/68	F(GT500)-w/A/C	★S7MS 6882-A	1				FITTING - OIL FILTER TO ADAPTOR
67/68	F(GT500)-w/A/C	★S7MS 6883-A	2				NIPPLE - OIL COOLER
68/		D1AZ 6890-A		1		1	INSERT - OIL FILTER MTG. BOLT - 3/4"-16 & 1 1/16"-12 male threads-1 13/64" long-shoulder type attaching filter to cyl. block-use with spin-on type filter
69	B & F (Super CJ)	B8A 6890-A	1				
69					1		Use as oil filter adapter mounting bolt
69		C9AZ 6890-A			1		Use as oil filter mounting bolt-1 1/16"-12 O.D.
70	B & F (CJ)			1			3/4 -16" I.D. x 1 9/64" long
		6A892					RETAINER - CRANKCASE VENTILATION - grommet
67/70	A, S, P/C "CHG/L3/"	ΔC7AZ 6A892-A	1				
68/70	B & F (CJ & Super CJ)		1				
68	A	C8AZ 6A892-B	1				Retains 6A666 valve to 6A665 cap-R.H. side
70	A-with evaporative emission		1				Retains PCV valve adaptor to valve cover
68/	A, B, S(exc. CJ & S. CJ)	C8SZ 6A892-A		1			Retains 6A666 valve to valve cover
72	A(P/C)			1			Retains valve (6A666) to oil filler cap
72	S					1	Retains valve to cover
70/71	B & F (CJ & S/CJ)	D0AZ 6A892-A		1			Retains 6A666 valve to valve cover
71	A(P/C)			1			
68	A, S, P/C, B & F (CJ)	C8AZ 6A892-A	1	1			Elbow to oil filler cap-1 7/16" O.D.-37/64" I.D.-
69/71	A, P/C, S		1	1			L.H. side-also refer to group 9600
69	A, S			1			Retains elbow to oil filler cap
69/70					1		Also refer to group 9600
70/71	B & F (CJ & S/CJ)			1			
72	A, B, S(exc. P/C)			1			Retains elbow (6767) to oil filler cap
72	P/C			1			Retains elbow to valve cover
72	S					1	Retains elbow to oil filler cap
69		C4GY 6894-A			1		BOLT ASSY. -OIL FILTER ADAPTOR MOUNTING
70	B(S/CJ)			1			
71	F(S/CJ)			1			

Δ Not used before CHG/L3

† Not used from 12/23/68