

INDEX

PART NAME	GROUP NUMBER	PART NAME	GROUP NUMBER
A		H	
Adjuster (rear axle differential bearing)	4067	Hose (rear axle)	4090
Axle assy. (rear)	4006	Hose (rear axle housing vent)	4A001, 4A049
B		Hose (rear axle vent)	4A058
Bearing (rear axle driving pinion pilot)	4625	Housing assy. (rear axle)	4010
Bolt (driveshaft universal joint)	4529	Hub (rear axle differential gear clutch)	4946
Bracket (rear axle bumper)	4731	J	
Bolt (rear axle differential carrier to rear axle housing)	4347	Joint (driveshaft universal)	4997
Bolt (rear axle differential cover to housing)	4346	K	
Bolt (rear axle differential gear)	4216	KIT - refer to appropriate noun name	
Bracket (rear axle driving pinion bearing retainer)	4298	For example	
Bracket (rear axle driving pinion bearing retainer)	4298	Gear & pitman kit (front axle differential)	4237
Bumper (rear axle)	4730	L	
C		Link (rear axle stabilizer)	4A343
Cap (rear axle universal joint knuckle dust)	4710	Lock (rear axle differential bearing adjuster)	4143
Carrier assy. (rear axle differential)	4141	Lubricator (rear axle differential)	4159
Case assy. (rear axle differential)	4204-5	M	
Clutch (rear axle driven)	4A233	Member (rear axle center drive)	4A347
Clutch & holdout ring assy. (rear axle differential)	4A351	P	
Clutch & ring (rear axle)	4A234	Pin (rear axle differential & pinion shaft lock)	4241
Cone & roller (rear axle differential bearing)	4221	Pin (rear axle differential bearing cap & carrier guide)	4A106
Cone & roller (rear axle driving pinion)	4621	Pinion (rear axle differential)	4215
Cone & roller (rear axle pinion bearing rear)	4630	Plate (rear axle differential clutch)	4214, 4A325, 4945
Cover assy. (rear axle housing)	4033	Plate (rear axle differential clutch spring preload)	4A326
Cup (rear axle differential bearing)	4222	Plate (rear axle differential gear clutch)	4947
Cup (rear axle driving pinion bearing)	4616, 4628, 4630	R	
D		Reinforcement (rear axle bumper mounting)	4A182-3
Damper (rear axle drive line vibration)	4A263	Reinforcement (rear axle bumper outer bracket)	4A172
Deflector (rear axle driving pinion oil seal)	4859	Reinforcement (rear axle drive line vibration damper)	4A079
Differential assy. (rear axle)	4200	Retainer (rear axle driving pinion pilot bearing)	4627
Differential assy. (rear axle locking)	4026, 4880	Retainer (rear axle rear wheel bearing outer)	4020
Driveshaft	4605	Retainer (rear axle side gear spring)	4A022
Driveshaft assy.	4602	Retainer assy. (rear axle driving pinion)	4614
Dust cap (driveshaft)	4818-20	Ring (rear axle differential lock)	4588
F		Ring gear & pinion kit (rear axle differential)	4209
Flange assy. (rear axle universal joint)	4851		
G			
Gasket (rear axle differential carrier)	4035		
Gasket (rear axle driving pinion shaft oil slinger)	4671		
Gasket (rear axle housing to cover)	4036		
Gear (rear axle differential side)	4236-7		
Gear & pitman kit (front axle differential)	4237		
Guide (rear axle differential clutch plate)	4A323		

INDEX

[illegible]

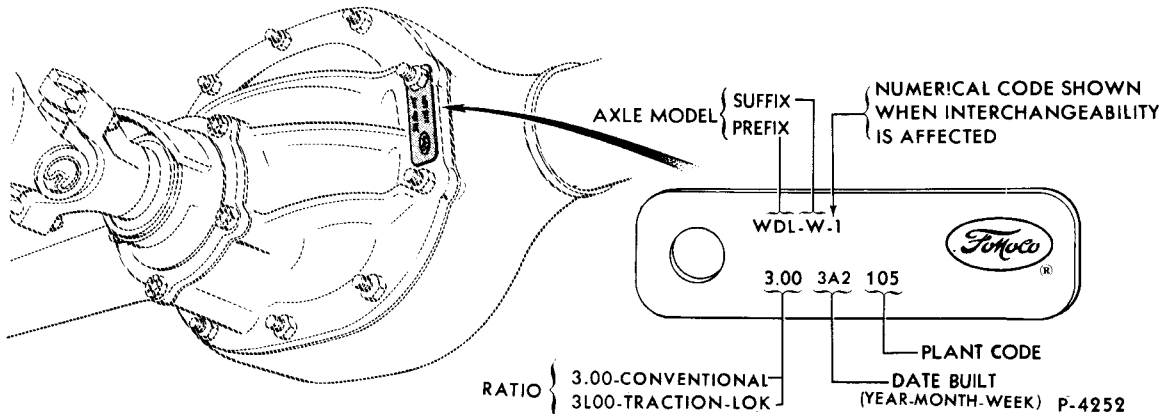
4001 REAR AXLE ASSY.

HOW TO FIND REAR AXLE PARTS

1. Determine the basic number of the part
 - a. Use the Illustration Index to find a detailed view of the rear axle on the unit being repaired and identify the part needed.
 - b. Use the Alphabetical Index which follows the General Information Section of the catalog.
2. Determine the axle model tag number
The picture below shows the location of axle model identification tags.
3. Find the axle model tag number in the Identification Chart which starts on the next page and note the information given there about ratio, ring gear, type, wheel bearings, differential bearings and shaft splines.
4. Turn to the Group Number of the part needed and select the correct part, using the information on ring gear size, type, etc.

FORD DESIGN REAR AXLE MODEL IDENTIFICATION TAG

Effective with the 1964 models, a service identification tag was attached to the Ford design rear axles as illustrated below. Inquiries pertaining to rear axles used on 1965 and subsequent models should include the axle model identification number.



REAR AXLE IDENTIFICATION CHART

The following chart lists models of Ford design rear axles built since 1965 in alphabetical order. Axle model suffixes with numerical codes are shown where interchangeability is affected. This chart will assist in determining the application for rear axle components which are cataloged throughout Sections 40 & 46 by size, description, ratio, type of differential or reference to size of ring gear, wheel bearings & differential bearings. Abbreviations used in the "type", "whl.brg." and "diff.brg. & cup" columns have the following meanings:

TYPE

C Conventional - 2 pinion - non-locking
 C4 Conventional - 4 pinion - non-locking
 E Equalock - 2 pinion - limited slip
 E4 Equalock - 4 pinion - limited slip

T Traction Lok - 2 pinion - locking
 T4 Traction Lok - 4 pinion - locking

W H E E L B E A R I N G					D I F F E R E N T I A L					
CODE	TYPE	PART NO.	I.D.(INCHES)	O.D.(INCHES)	B E A R I N G			C U P		
					CODE	TYPE	PART NO.	I.D.(INCHES)	PART NO.	O.D.(INCHES)
R	Straight roller	C7AZ 1225-A #R 1563-TAV	1 1/8	2 1/4	XS	Extra small	B7C 1201-A #LM 48548	1 3/8	B7C 1202-A #LM 48510	2 3/16
XS	Extra small	D1FZ 1225-A	1 3/16	2 43/64	S	Small	C1UW 4221-A #LM 29749	1 1/2	C1UW 4222-A #LM 29710	2 9/16
S	Small	D0DZ 1225-A	1 21/64	2 43/64	M	Medium	B7A 4221-A #LM 501349 #HM 503049	1 5/8	B7A 4222-A #LM 501310	2 57/64
M	Medium	D0AZ 1225-A #207-CC, DD	1 3/8	2 13/16	SL	Slim line	C9AZ 4221-A #LM 102949	1 25/32	C9AZ 4222-A #LM 102910	2 57/64
65/71					L	Large	B7A 4221-B #LM 603049	1 25/32	B7A 4222-B #LM 603011	3 1/16
M	Medium'	D2OZ 1225-A	1 3/8	2 13/16	XL	Extra large	B7T 1201-A #25590	1 51/64	C3TZ 1202-B #25520	3 17/64
72										
L	Large	C9AZ 1225-A	1 17/32	3 5/32						

Industry number

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

4001 REAR AXLE ASSY. - continued

REAR AXLE IDENTIFICATION CHART

AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL. BRG.	* DIFF. BRG. & CUP	REMARKS	AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL. BRG.	* DIFF. BRG. & CUP	REMARKS
WCD-E	65	S	3.00	9	C	L	L	28 Spline Shaft	WDC-H	65	A	3.89	9	C	L	M	28 Spline Shaft
WCD-F	65	S	3.50	9	C	L	L	28 Spline Shaft	WDC-J	65	A	3.89	9	C	L	M	Damper Type Flange 28 Spline Shaft
WCD-G	65	S	3.25	9	C4	L	L	28 Spline Shaft	WDC-K	65	A	3.00	9	C	L	L	28 Spline Shaft
WCD-H	66	S	3.00	9	C	L	L	28 Spline Shaft	WDC-L	65	A	3.25	9	C	L	L	Damper Type Flange 28 Spline Shaft
WCD-J	66	S	3.00	9	E	L	L	28 Spline Shaft	WDC-M	65	A	3.50	9	C	L	L	28 Spline Shaft
WCL-H	65	B	3.00	8	C	M	M	28 Spline Shaft	WDC-N	65	A	3.50	9	C	L	L	Damper Type Flange 28 Spline Shaft
WCL-J	65	B	3.50	8	C	M	M	28 Spline Shaft	WDC-P	65	A	3.89	9	C	L	L	Damper Type Flange 28 Spline Shaft
WCL-K	65	B	3.25	8	C	M	M	28 Spline Shaft	WDC-U	65	A	3.89	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCL-N	65	B	2.80	7 3/4	C	M	M	28 Spline Shaft	WDC-W	65	A	3.50	9	C4	L	L	31 Spline Shaft
WCU-B	65	B	3.50	9	C	M	M	Hi-Performance - 28 Spline Shaft	WDC-X	65	A	4.11	9	C4	L	L	31 Spline Shaft
WCU-C	65	B	3.89	9	C	M	M	Hi-Performance - 28 Spline Shaft	WDC-AA	65	A	3.50	9	C	L	L	28 Spline Shaft
WCU-D	65	B	4.11	9	C	M	M	Hi-Performance - 28 Spline Shaft	WDC-AB	65	A	3.00	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCY-E	65	X	3.20	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AC	65	A	3.25	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCY-E	65/70	F	3.50	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AD	65	A	3.50	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCY-F	65	X	3.50	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AE	65	A	3.89	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCY-F	65	F	3.50	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AF	65	A	4.11	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCY-L	65	X	3.20	7 1/4	E	S	S	Integral Carrier - 24 Spline Shaft	WDC-AG	65	A	3.00	9	C	L	L	28 Spline Shaft
WCY-L	65/66	F	3.50	7 1/4	E	S	S	Integral Carrier - 24 Spline Shaft	WDC-AK	65	A	3.25	9	C	L	L	28 Spline Shaft
WCY-M	65	X	3.50	7 1/4	E	S	S	Integral Carrier - 24 Spline Shaft	WDC-AL	65	A	3.89	9	C	L	L	28 Spline Shaft
WCY-N	65	X	2.83	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AM	65	A	3.25	9	C	L	L	28 Spline Shaft
WCY-R	65	X	2.83	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AN	65	A	3.25	9	C4	L	L	Damper Type Flange 28 Spline Shaft
WCY-R	65/70	F	2.83	7 1/4	E	S	S	Integral Carrier - 24 Spline Shaft	WDC-AP	65	A	3.50	9	C	L	L	Damper Type Flange 28 Spline Shaft
WCY-AA	65	X	2.83	7 1/4	E	S	S	Integral Carrier - 24 Spline Shaft	WDC-AS	66/69	A	3.25	9	C	L	M	28 Spline Shaft
WCY-AA	65/66	F	3.20	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AT	66/68	A	3.00	9	C	L	L	28 Spline Shaft
WCY-AJ, AJ1	66/68	F	3.20	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AT	67	A	3.00	9	C	L	L	28 Spline Shaft
WCY-AJ2	69/70	F	3.08	7 1/4	C	S	S	Integral Carrier - 24 Spline Shaft	WDC-AU	66/68	A	3.25	9	C	L	L	28 Spline Shaft
WCZ-E	65	X	2.80	8	C	M	M	28 Spline Shaft	WDC-AV	66/69	A	3.00	9	C	L	M	28 Spline Shaft
WCZ-E	65/67	F	3.00	8	C	M	M	28 Spline Shaft	WDC-AVX	66	A	3.00	9	C	L	L	28 Spline Shaft
WCZ-F, F1	65/70	F	3.00	8	C	M	M	28 Spline Shaft	WDC-BS	66	A	3.00	9	C	L	L	28 Spline Shaft
WCZ-F2	71/	F	3.00	8	C	M	M	28 Spline Shaft	WDC-BT	66	A	3.00	9	C	L	L	28 Spline Shaft
WCZ-G	65	F	3.50	8	C	M	M	28 Spline Shaft	WDC-BU	66	A	3.50	9	C	L	M	28 Spline Shaft
WCZ-H	65	F	3.89	9	C	M	M	28 Spline Shaft	WDC-BY	66	A	3.25	9	C	L	L	28 Spline Shaft
WCZ-J	65	F	4.11	9	C	M	M	28 Spline Shaft	WDC-BZ	67	S	3.00	9	C	L	L	28 Spline Shaft
WCZ-P	65	F	3.50	9	C	M	M	28 Spline Shaft	WDC-CA	72	A	3.00	9	C	L	SL	28 Spline Shaft
WCZ-R	66	F	3.89	9	C	M	M	28 Spline Shaft	WDC-CA, CA4	67/70	A	2.75	9	C	L	L	28 Spline Shaft
WCZ-S	66	F	3.50	9	C	M	M	28 Spline Shaft	WDC-CA4	70/	A	2.75	9	C	L	SL	28 Spline Shaft
WCZ-T	66	F	3.50	9	E	M	M	28 Spline Shaft	WDC-CAX	67	A	2.75	9	C	L	M	28 Spline Shaft
WCZ-V	72	F	2.79	8	C	M	M	28 Spline Shaft	WDC-CB	67	A	3.00	9	C	M	M	28 Spline Shaft
WCZ-V, V1	67/70	F	2.79	8	C	M	M	28 Spline Shaft	WDC-CC, CC4	68/70	A	3.00	9	C4	L	L	28 Spline Shaft
WCZ-V2	71/	F	2.79	8	C	M	M	28 Spline Shaft	WDC-CC4	70/	A	3.00	9	C4	L	SL	28 Spline Shaft
WCZ-W	68	F	3.25	8	C	M	M	28 Spline Shaft	WDC-CE	68	A	3.25	9	C	L	L	28 Spline Shaft
WDC-A	72	A	2.75	9	C	L	SL	28 Spline Shaft	WDC-CF	68	A	3.50	9	C	L	L	28 Spline Shaft
WDC-A, B	65	A	3.00	9	C	L	M	28 Spline Shaft	WDC-CG	68	A	3.00	9	C	L	M	28 Spline Shaft
WDC-C	65	A	3.00	9	C	L	M	28 Spline Shaft									
WDC-D	65	A	3.25	9	C	L	M	28 Spline Shaft									
WDC-E	65	A	3.25	9	C	L	M	Damper Type Flange 28 Spline Shaft									
WDC-F	65	A	3.50	9	C	L	M	28 Spline Shaft									
WDC-G	65	A	3.50	9	C	L	M	Damper Type Flange 28 Spline Shaft									

* Refer to page 1 of section 40 for an explanation of the codes shown.

† In 1972 WDC-A is alternate with WDC-CA4

() In 1972 WDC-CA is alternate with WDC-CS

‡ In 1972 WCZ-V2 is alternate with WCZ-V

4001 REAR AXLE ASSY. - continued

REAR AXLE IDENTIFICATION CHART

AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL BRG.	* DIFF. BRG. & CUP	REMARKS	AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL BRG.	* DIFF. BRG. & CUP	REMARKS
WDC-CH	68	A	3.25	9	C	L	M	28 Spline Shaft	WDL-AA, AA4	68/69	A	2.75	9	E	L	L	28 Spline Shaft
WDC-CJ	68	A	2.75	9	C	L	L	28 Spline Shaft	WDL-AA5	69	A	2.75	9	T2	L	L	28 Spline Shaft
WDC-CK, CK4	68/70	A	3.25	9	C	L	L	28 Spline Shaft	WDL-AB	68	A	3.00	9	E	L	M	28 Spline Shaft
WDC-CK4	70/	A	3.25	9	C	L	SL	28 Spline Shaft	WDL-AC, AC4	68/69	A	3.25	9	E	L	M	28 Spline Shaft
WDC-CL	68/69	A	3.25	9	C4	L	L	28 Spline Shaft	WDL-AC5	69	A	3.25	9	T	L	M	28 Spline Shaft
WDC-CM	68/69	A	3.50	9	C4	L	L	28 Spline Shaft	WDL-AD	68	A	2.75	9	E	L	L	28 Spline Shaft
WDC-CN, CN4	69/70	A	2.75	9	C4	L	L	28 Spline Shaft	WDL-AE	68/69	A	3.25	9	E	L	L	28 Spline Shaft
WDC-CN4	70/	A	2.75	9	C4	L	SL	28 Spline Shaft	WDL-AE5	69	A	3.25	9	T	L	L	28 Spline Shaft
WDC-CR	69/70	A	3.25	9	C4	L	L	28 Spline Shaft	WDL-AF	69	A	2.75	9	E4	L	L	28 Spline Shaft
WDC-CR	72	A	3.25	9	C4	L	SL	28 Spline Shaft	WDL-AF5	69	A	2.75	9	T4	L	L	28 Spline Shaft
† WDC-CR4	70/	A	3.25	9	C4	L	SL	28 Spline Shaft	WDL-AG	69	A	3.25	9	E4	L	L	28 Spline Shaft
WDC-CS	70	A	3.00	9	C	L	L	28 Spline Shaft	WDL-AG5	69	A	3.25	9	T4	L	L	28 Spline Shaft
WDC-CS	70/	A	3.00	9	C	L	SL	28 Spline Shaft	WDL-ZX	67	A	3.25	9	E	L	L	28 Spline Shaft
WDD-B, D	65	A	3.00	9	C	M	M	28 Spline Shaft	WDO-M2	71	F	3.25	9	T4	M	SL	31 Spline Shaft
WDD-C	65	A	3.00	9	C	M	M	Damper Type Flange 28 Spline Shaft	WDT-F	66/70	A	2.80	9 3/8	C	L	XL	31 Spline Shaft
WDD-E	65	A	3.50	9	C	M	M	28 Spline Shaft	WDT-G	66/68	A, S	3.00	9 3/8	C	L	XL	31 Spline Shaft
WDD-F	65	A	3.50	9	C	M	M	Damper Type Flange 28 Spline Shaft	WDT-H	66	A	3.00	9 3/8	E	L	XL	31 Spline Shaft
WDD-G, J	65	A	3.00	9	C	M	L	Damper Type Flange 28 Spline Shaft	WDT-H	67	S						
WDD-H	65	A	3.00	9	C	M	L	28 Spline Shaft	WDT-J	66/68	A	3.25	9 3/8	C	L	XL	31 Spline Shaft
WDD-K	66	A	3.50	9	C	M	M	28 Spline Shaft	WDT-L	66/68	A	3.50	9 3/8	C	L	XL	31 Spline Shaft
WDD-L	66	A	3.00	9	C	M	M	28 Spline Shaft	WDT-N	66/68	A	3.25	9 3/8	E	L	XL	31 Spline Shaft
WDD-LX	66	A	3.00	9	C	M	L	28 Spline Shaft	WDT-R	66/70	A	3.25	9 3/8	C	L	XL	Damper Type Flange 31 Spline Shaft
WDD-T	66	A	3.00	9	C	M	M	28 Spline Shaft	WDT-S	66/68	A	3.50	9 3/8	C	L	XL	Damper Type Flange 31 Spline Shaft
WDD-TX	66	A	3.00	9	C	M	L	28 Spline Shaft	WDT-T	66/68	A	3.25	9 3/8	E	L	XL	Damper Type Flange 31 Spline Shaft
WDE-B	65	S	3.00	9	E	L	L	28 Spline Shaft	WDT-U	66/68	A	2.80	9 3/8	E	L	XL	31 Spline Shaft
WDJ-B	65/66	F, X	2.80	8	E	M	M	28 Spline Shaft	WDT-Z	67	S	3.00	9 3/8	C	L	XL	31 Spline Shaft
WDJ-C, C1	65/69	F	3.00	8	E	M	M	28 Spline Shaft	WDT-AA	67	S	3.00	9 3/8	E	L	XL	31 Spline Shaft
WDJ-C2	69	F	3.00	8	T2	M	M	28 Spline Shaft	WDT-AG	68	S	2.80	9 3/8	C	L	XL	31 Spline Shaft
WDK-A	65	B	3.00	8	E	M	M	28 Spline Shaft	WDT-AH	68	S	3.00	9 3/8	C	L	XL	31 Spline Shaft
WDK-B	65	B	3.50	8	E	M	M	28 Spline Shaft	WDT-AJ	68	S	2.80	9 3/8	E	L	XL	31 Spline Shaft
WDK-C	65	B	3.25	8	E	M	M	28 Spline Shaft	WDT-AK	68	S	3.00	9 3/8	E	L	XL	31 Spline Shaft
WDL-A	65	A	3.00	9	E	L	M	28 Spline Shaft	WDT-AL	68/70	A	3.25	9 3/8	C	L	XL	31 Spline Shaft
WDL-B	65	A	3.25	9	E	L	M	28 Spline Shaft	WDT-AM	68/69	A	3.50	9 3/8	C	L	XL	Damper Type Flange 31 Spline Shaft
WDL-C, D	65	A	3.25	9	E	L	M	Damper Type Flange 28 Spline Shaft	WDT-AN	68/69	A	3.25	9 3/8	E	L	XL	Damper Type Flange 31 Spline Shaft
WDL-E	65	A	3.00	9	E	L	L	28 Spline Shaft	WDT-AR	68	A	2.80	9 3/8	C	L	XL	31 Spline Shaft
WDL-F	65	A	3.25	9	E	L	L	Damper Type Flange 28 Spline Shaft	WDT-AS	68/69	A	2.80	9 3/8	E	L	XL	31 Spline Shaft
WDL-H	65	A	3.50	9	E	L	M	28 Spline Shaft	WDT-AU	69/70	A	3.00	9 3/8	C	L	XL	31 Spline Shaft
WDL-K	65	A	3.25	9	E	L	L	28 Spline Shaft	WDT-AV	69	A	3.00	9 3/8	E	L	XL	31 Spline Shaft
WDL-L	65	A	3.25	9	E	L	L	Damper Type Flange 28 Spline Shaft	WDT-AY	69	A	3.25	9 3/8	E	L	XL	31 Spline Shaft
WDL-M	66	A	3.25	9	E	L	M	28 Spline Shaft	WDT-BA	69	A	3.00	9 3/8	C	L	XL	31 Spline Shaft
WDL-N	66/68	A	3.00	9	E	L	L	28 Spline Shaft	WDV-A, B	66/70	P, X	2.83	7 1/4	C	S	S	Integral Carrier- 24 Spline Shaft
WDL-P	66	A	3.50	9	E	L	M	28 Spline Shaft	WDV-C	66/68	X	3.20	7 1/4	C	S	S	Integral Carrier- 24 Spline Shaft
WDL-W, W1, W4	66/69	A	3.00	9	E	L	M	28 Spline Shaft	WDV-D	66	X	2.83	7 1/4	E	S	S	Integral Carrier- 24 Spline Shaft
WDL-W5	69	A	3.00	9	T	L	M	28 Spline Shaft	WDV-E	66/68	X	3.20	7 1/4	E	S	S	Integral Carrier- 24 Spline Shaft
WDL-WIX	67	A	3.00	9	E	L	L	28 Spline Shaft	WDV-F	66	X	3.20	7 1/4	C	S	S	Integral Carrier- 24 Spline Shaft
WDL-Z	67/68	A	3.25	9	E	L	M	28 Spline Shaft	WDV-G	67/69	X	3.20	7 1/4	C	S	S	Integral Carrier- 24 Spline Shaft

* Refer to page 1 of section 40 for an explanation of the codes shown.

† In 1972 WDC-CR4 is alternate with WDC-CR

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

4001 REAR AXLE ASSY. - continued

REAR AXLE IDENTIFICATION CHART

AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL BRG.	* DIFF BRG. & CUP	REMARKS	AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL BRG.	* DIFF BRG. & CUP	REMARKS
WDV-H	67/68	X	3.20	7 1/4	E	S	S	Integral Carrier-24 Spline Shaft	WEB-L	70/71	B	3.50	9	C4	M	SL	31 spline shaft
WDV-H1	69	X	3.08	7 1/4	E	S	S	Integral Carrier-24 Spline Shaft	WEB-L3	71	B	3.50	9	C4	M	SL	28 spline shaft
WDV-J	70	P	2.83	7 1/4	C	S	S	Integral Carrier-24 Spline Shaft	WEB-M	69/70	B	3.00	9	C4	M	L	28 Spline Shaft 1310 Flange
WDV-K	70	P	3.08	7 1/4	C	S	S	Integral Carrier-24 Spline Shaft	WEB-M	70/71	B	3.00	9	C4	M	SL	28 spline shaft
WDV-L	70	P	3.20	7 1/4	C	S	S	Integral Carrier-24 spline shaft	WEB-P	69	B	2.75	9	C4	M	L	28 Spline Shaft
WDV-M	70	P	2.79	8	C	S1	M	28 spline shaft	WEB-R	69/70	B	3.00	9	C	M	L	28 spline shaft
WDV-N	70	P	3.00	8	C	S1	M	28 spline shaft	WEB-R	70/71	B	3.00	9	C	M	SL	28 spline shaft
WDV-R	71	L	3.55	6 3/4	C	XS	XS	23 spline shaft	WEB-S	69	B	3.25	9	C	M	L	28 Spline Shaft
WDV-T	71	L	3.18	6 3/4	C	XS	XS	23 spline shaft	WEB-T	69/70	B	3.25	9	C4	M	L	28 Spline Shaft
WDW-A	66/67	B	2.80	8	C	M	M	28 Spline Shaft	WEB-T	70/71	B	3.25	9	C4	M	SL	28 spline shaft
WDW-B, B1	66/	B	3.00	8	C	M	M	28 Spline Shaft	WEB-Z	69/70	B	3.00	9	C4	M	L	31 Spline Shaft
WDW-C	66/70	B	3.25	8	C	M	M	28 Spline Shaft	WEB-AA	69/70	B	3.25	9	C4	M	L	31 Spline Shaft
WDW-D	66/67	B	3.50	8	C	M	M	28 Spline Shaft	WEB-AA	70/71	B	3.25	9	C4	M	SL	31 spline shaft
WDW-E	66/67	X	2.80	8	C	M	M	28 Spline Shaft	WEB-AA3	71	B	3.25	9	C4	M	SL	28 spline shaft
WDW-F	67/70	X	3.00	8	C	M	M	28 Spline Shaft	WEB-AD	72	B	2.75	9	C	M	SL	28 spline shaft
WDW-J	67/70	X	2.79	8	C	M	M	28 Spline Shaft	WEB-AF	72	B	3.25	9	C4	M	SL	28 spline shaft
WDW-K	67	B	2.79	8	C	M	M	28 Spline Shaft	WEB-AG	72	B	3.00	9	C	M	SL	28 spline shaft
WDW-K1	68/71	B	2.79	8	C	M	M	28 Spline Shaft	WEB-AH	72	B	3.25	9	C4	M	SL	28 spline shaft
WDW-K2	68	B	2.75	9	C	M	M	28 Spline Shaft	WEB-AM	72	B	3.25	9	C2	M	SL	28 spline shaft
WDW-L	70/	P	3.00	8	C	S1	M	28 Spline Shaft	WEC-A	66	B	3.00	9	C	M	L	28 spline shaft 1330 "U" joint
WDW-M	70/	P	2.79	8	C	S1	M	28 Spline Shaft	WEC-A1	66	B	3.00	9	C	M	L	28 spline shaft 1310 "U" joint
WDW-T	71/	P	2.79	8	C	M	M	28 spline shaft	WEC-A5	67	B	3.00	9	C	M	L	28 spline shaft 1330 "U" joint
WDW-U	71/	P	3.00	8	C	M	M	28 spline shaft	WEC-B	66/67	B	3.25	9	C	M	L	28 Spline Shaft
WDY-A, A1	66/	B, X	3.00	8	C	M	M	28 Spline Shaft	WEC-D	66/70	B	3.00	9	C4	M	L	28 Spline Shaft 1330 Flange
WDY-B	66/	B, X	3.25	8	C	M	M	28 Spline Shaft	WEC-E	66/69	B	3.25	9	C4	M	L	28 Spline Shaft
WDY-C	66/67	B, X	3.50	8	C	M	M	28 Spline Shaft	WEC-F	67	B	2.75	9	C	M	L	28 Spline Shaft
WDY-F	72	B	3.00	8	C	M	M	28 spline shaft	WEC-G	67	B	2.75	9	C4	M	L	28 Spline Shaft
WDY-G	72	B	2.79	8	C	M	M	28 spline shaft	WEC-H	69/70	B	3.00	9	C4	M	L	28 Spline Shaft 1310 Flange
WDZ-A	66	X	2.80	8	E	M	M	28 Spline Shaft	WEC-K	69/70	B	3.00	9	C	M	L	28 Spline Shaft
WDZ-B, B1	66/69	B	3.00	8	E	M	M	28 Spline Shaft	WEC-K	70/	B	3.00	9	C	M	SL	28 spline shaft
WDZ-B2	69	X	3.00	8	T	M	M	28 Spline Shaft	WEC-L	69/70	B	3.25	9	C4	M	L	28 Spline Shaft
WDZ-C	66/68	B	3.25	8	E	M	M	28 Spline Shaft	WEC-L	70/71	B	3.25	9	C4	M	SL	28 spline shaft
WDZ-E	67/69	X	3.00	8	E	M	M	28 Spline Shaft	WEC-N	69	B	3.25	9	C	M	L	28 Spline Shaft
WDZ-E1	69	X	3.00	8	T	M	M	28 Spline Shaft	WEC-R	69/70	B	3.50	9	C4	M	L	31 Spline Shaft
WEA-A, A1	66/69	B, X	3.00	8	E	M	M	28 Spline Shaft	WEC-R	70/71	B	3.50	9	C4	M	SL	31 spline shaft
WEA-A2	69	B, X	3.00	8	T	M	M	28 Spline Shaft	WEC-S	69/70	B	3.25	9	C4	M	L	31 Spline Shaft
WEA-B	66/67	B, X	3.50	8	E	M	M	28 Spline Shaft	WEC-S	70/71	B	3.25	9	C4	M	SL	31 spline shaft
WEA-F, F1	66/69	B, X	3.25	8	E	M	M	28 Spline Shaft	WEC-S3	71	B	3.25	9	C4	M	SL	28 spline shaft
WEA-F2	69	B, X	3.25	8	T	M	M	28 Spline Shaft	WEC-T	71	B	3.00	9	C4	M	SL	31 spline shaft
WEB-B	66	B	3.00	9	C	M	L	28 spline shaft 1330 "U" joint	WEC-T3	71	B	3.00	9	C4	M	SL	28 spline shaft
WEB-B1	66	B	3.00	9	C	M	L	28 spline shaft 1310 "U" joint	WEC-V	72	B	3.50	9	C4	M	SL	28 spline shaft
WEB-B5	67	B	3.00	9	C	M	L	28 spline shaft 1330 "U" joint	WEC-Z	72	B	3.25	9	C4	M	SL	28 spline shaft
WEB-C	66/67	B	3.25	9	C	M	L	28 Spline Shaft	WEC-AB	72	B	3.00	9	C	M	SL	28 spline shaft
WEB-E	66/70	B	3.00	9	C4	M	L	28 Spline Shaft	WEC-AG	72	B	3.00	9	C	M	SL	28 spline shaft
WEB-F	66/69	B	3.25	9	C4	M	L	28 Spline Shaft 1330 Flange	WEC-AH	72	B	3.25	9	C4	M	SL	28 spline shaft
WEB-F	72	B	3.25	9	C4	M	SL	28 Spline Shaft	WED-A, A1	66	B	3.25	9	E	M	L	28 Spline Shaft
WEB-G	67	B	3.89	9	C4	M	L	31 Spline Shaft	WED-A4, A5, A6	66/68	B	3.25	9	E4	M	L	28 Spline Shaft
WEB-H, H2	67/70	B	2.75	9	C	M	L	28 Spline Shaft	WED-C	66/67	B	3.00	9	E	M	L	28 Spline Shaft
WEB-H2	70/	B	2.75	9	C	M	SL	28 spline shaft	WED-D	66/68	B	3.00	9	E4	M	L	28 Spline Shaft
WEB-J	67/68	B	2.75	9	C4	M	L	28 Spline Shaft	WED-E	68	B	3.50	9	E4	M	L	28 Spline Shaft
WEB-K	68	B	3.25	9	C4	M	L	31 Spline Shaft	WED-F, F1	66/69	B, X	3.25	9	E	M	M	28 Spline Shaft
WEB-L	69/70	B	3.50	9	C4	M	L	31 Spline Shaft	WEE-A	66	B	3.25	9	E	M	L	28 Spline Shaft
									WEE-C	66/67	B	3.00	9	E	M	L	28 Spline Shaft
									WEE-D	66/68	B	3.00	9	E4	M	L	28 Spline Shaft
									WEF-D	66	S	2.80	9 3/8	C	L	XL	31 Spline Shaft
									WEF-E	66	S	2.80	9 3/8	E	L	XL	31 Spline Shaft
									WEF-H	66	S	3.00	9 3/8	C	L	XL	31 Spline Shaft
									WEF-J	66	S	3.00	9 3/8	E	L	XL	31 Spline Shaft

* Refer to page 1 of Section 40 for an explanation of the codes shown.

◇ WEC-AG is alternate with WEB-AG

† In 1972 WEB-F is alternate with WEB-AF

‡ In 1972 WEC-AH is alternate with WEB-AH

4001 REAR AXLE ASSY. - continued

REAR AXLE IDENTIFICATION CHART

AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* Y P E	* WHL BRG.	* DIFF. BRG. & CUP	REMARKS	AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* Y P E	* WHL BRG.	* DIFF. BRG. & CUP	REMARKS
WEM-A, A2	66/70	U	4.11	9	C	M	M	28 Spline Shaft	WES-AE2	71	F	3.50	9	C4	M	SL	31 spline shaft
WEM-A2	70/	U	4.11	9	C	M	SL	28 spline shaft	WES-AE3	71	F	3.50	9	C4	M	SL	28 spline shaft
WEM-B	66/69	U	4.11	9	E	M	M	28 Spline Shaft	WES-AG	69/70	F	2.75	9	C4	M	L	28 Spline Shaft
WEM-BIX	67	U	4.11	9	E	M	L	28 Spline Shaft	WES-AG	70/	F	2.75	9	C4	M	SL	28 spline shaft
WEM-C, C2	66/70	U	4.57	9	C	M	M	28 Spline Shaft	WES-AH	69/70	F	3.00	9	C4	M	L	31 Spline Shaft
WEM-C2	70/	U	4.57	9	C	M	SL	28 spline shaft	WES-AH	70/	F	3.00	9	C4	M	SL	31 spline shaft
WEM-D	66/67	U	4.57	9	E	M	M	28 Spline Shaft	WES-AJ	69/70	F	3.25	9	C4	M	L	31 Spline Shaft
WEM-E, E2	66/70	U	3.50	9	C	M	M	28 Spline Shaft	WES-AJ	70	F	3.25	9	C4	M	SL	31 spline shaft
WEM-E2	70/	U	3.50	9	C	M	SL	28 spline shaft	WES-AJ2	71	F	3.25	9	C4	M	SL	31 spline shaft
WEM-F	66/69	U	3.50	9	E	M	M	28 Spline Shaft	WES-AJ3	71	F	3.25	9	C4	M	SL	28 spline shaft
WEM-FIX	67	U	3.50	9	E	M	L	28 Spline Shaft	WES-AK	71	F	3.50	9	C4	M	SL	28 spline shaft
WEN-A, A2	66/70	U	4.11	9	C	L	M	28 Spline Shaft	WES-AK2	72	F	3.50	9	C4	M	SL	28 spline shaft
WEN-A2	70/	U	4.11	9	C	M	SL	28 spline shaft	WEZ-A	67/68	B	3.20	7 1/4	C4	M	S	Integral Carrier 24 Spline Shaft
WEN-B	66/69	U	4.11	9	E	L	M	28 Spline Shaft	WEZ-C	67/68	B	2.83	7 1/4	C4	M	S	Integral Carrier 24 Spline Shaft
WEN-BIX	67	U	4.11	9	E	L	L	28 Spline Shaft	WFA-A, C	69	B	3.25	9	T4	M	L	28 Spline Shaft
WEN-C	66/67	U	4.57	9	C	L	M	28 Spline Shaft	WFA-B	69	B	3.00	9	T4	M	L	28 Spline Shaft
WEN-D	66/67	U	4.57	9	E	L	M	28 Spline Shaft	WFA-D	69/70	B	3.25	9	T4	M	L	28 Spline Shaft
WEN-E, E2	66/70	U	3.50	9	C	L	M	28 Spline Shaft	WFA-D	70/71	B	3.25	9	T4	M	SL	28 spline shaft
WEN-E2	70/	U	3.50	9	C	M	SL	28 spline shaft	WFA-E	69/70	B	3.25	9	T4	M	L	28 Spline Shaft
WEN-F	66/69	U	3.50	9	E	L	M	28 Spline Shaft	WFA-E	70/71	B	3.25	9	T4	M	SL	28 spline shaft
WEN-FIX	67	U	3.50	9	E	L	L	28 Spline Shaft	WFA-G, H	69/70	B	3.00	9	T4	M	L	28 Spline Shaft
WER-A	67/69	A	3.10	8 1/2	C	R	M	Integral Carrier	WFA-G, H	70/71	B	3.00	9	T4	M	SL	28 spline shaft
WER-C	67/69	A	2.80	8 1/2	C	R	M	Integral Carrier	WFA-J	70	B	3.00	9	T4	M	L	28 Spline Shaft
WER-E	69	A	3.25	8 1/2	C	R	M	Integral Carrier	WFA-L	72	B	3.25	9	C4	M	SL	28 spline shaft
WER-F	69/	A	2.75	8.7	C	R	SL	Integral Carrier	WFA-L4	72	B	2.75	9	T4	M	SL	28 spline shaft
WER-G	69/71	A	3.07	8.7	C	R	SL	Integral Carrier	WFA-M	72	B	3.25	9	T4	M	SL	28 spline shaft
WER-H	69/	A	3.25	8.7	C	R	SL	Integral Carrier	WFA-N	72	B	3.00	9	T4	M	SL	28 spline shaft
WER-J	72	A	2.75	8.7	C	R	SL	Integral Carrier	WFA-R	72	B	3.25	9	T4	M	SL	28 spline shaft
WES-F	67/70	F	3.00	9	C4	M	L	28 Spline Shaft	WFA-S	72	B	3.00	9	T4	M	SL	28 spline shaft
WES-G	67	F	3.25	9	E4	M	L	28 Spline Shaft	WFB-A	69/70	F	3.25	9	T4	M	L	28 Spline Shaft
WES-H	67/68	F	3.50	9	C4	M	L	28 Spline Shaft	WFB-C	69/70	F	3.25	9	T4	M	L	28 Spline Shaft
WES-J	67	F	3.89	9	C4	M	L	28 Spline Shaft	WFB-C	70	F	3.25	9	T4	M	SL	28 spline shaft
WES-K	67	F	3.50	9	E4	M	L	28 Spline Shaft	WFB-C	72	F	3.25	9	T4	M	SL	28 spline shaft
WES-M	68/70	F	3.25	9	C4	M	L	28 Spline Shaft	WFB-C2	71/	F	3.25	9	T4	M	SL	28 spline shaft
WES-N	68	F	3.00	9	C	M	M	28 Spline Shaft	WFB-D	69/70	F	3.00	9	T4	M	L	28 spline shaft
WES-P	68	F	3.25	9	C	M	M	28 Spline Shaft	WFB-D	70/	F	3.00	9	T4	M	SL	28 spline shaft
WES-R	68	F	3.25	9	E	M	M	28 Spline Shaft	WFB-D2	72	F	2.75	9	T4	M	SL	28 spline shaft
WES-S	68	F	2.75	9	C4	M	L	28 Spline Shaft	WFC-A	69	B	3.50	9	T4	M	L	31 Spline Shaft
WES-T	69/70	F	2.75	9	C	M	L	28 Spline Shaft	WFC-B	68/70	B	3.91	9	T4	M	L	31 Spline Shaft
WES-T1	70	F	2.75	9	C	M	SL	28 spline shaft	WFC-C	69/70	B	4.30	9	T4	M	L	31 Spline Shaft
WES-T1	72	F	2.75	9	C	M	SL	28 spline shaft	WFC-D	69	B	3.91	9	T4	M	L	31 Spline Shaft
WES-T2	71/	F	2.75	9	C	M	SL	28 spline shaft	WFC-E	69	B	3.91	9	T4	M	L	31 Spline Shaft
WES-U	68	F	3.50	9	C4	M	L	31 Spline Shaft	WFC-F	69/70	B	3.91	9	T4	M	L	31 Spline Shaft
WES-V	68	F	3.00	9	E	M	M	28 Spline Shaft	WFC-G	69/70	B	3.00	9	T4	M	L	31 Spline Shaft
WES-Y	68	F	3.50	9	E4	M	L	31 Spline Shaft	WFC-J	69/70	B	3.50	9	T4	M	L	31 Spline Shaft
WES-Z	68	F	3.00	9	E4	M	L	28 Spline Shaft	WFC-J	70/71	B	3.50	9	T4	M	SL	31 spline shaft
WES-AA	69/70	F	3.00	9	C	M	L	28 Spline Shaft	WFC-J	72	B	3.50	9	T4	M	SL	28 spline shaft
WES-AA	70/	F	3.00	9	C	M	SL	28 spline shaft	WFC-J3	71	B	3.50	9	T4	M	SL	28 spline shaft
WES-AB	69/70	F	3.25	9	C	M	L	28 Spline Shaft	WFC-K	69	B	4.30	9	T4	M	L	31 Spline Shaft
WES-AB	70	F	3.25	9	C	M	SL	28 spline shaft	WFC-L	69/70	B	3.50	9	T4	M	L	31 Spline Shaft
WES-AB2	71/	F	3.25	9	C	M	SL	28 spline shaft	WFC-L	70/71	B	3.50	9	T4	M	SL	31 spline shaft
WES-AC	69/70	F	3.00	9	C4	M	L	28 spline shaft	WFC-L	72	B	3.50	9	T4	M	SL	28 spline shaft
WES-AD	72	F	3.25	9	C4	M	SL	28 spline shaft	WFC-L3	71	B	3.50	9	T4	M	SL	28 spline shaft
WES-AD	69/70	F	3.25	9	C4	M	L	28 spline shaft	WFC-M	69	B	3.00	9	T4	M	L	31 Spline Shaft
WES-AD	70	F	3.25	9	C4	M	SL	28 spline shaft	WFC-N, R	70	B	3.25	9	T4	M	L	31 Spline Shaft
WES-AD2	71/	F	3.25	9	C4	M	SL	28 spline shaft	WFC-N, R	70/71	B	3.25	9	T4	M	SL	31 spline shaft
WES-AE	69/70	F	3.50	9	C4	M	L	31 Spline Shaft	WFC-N3, R5	71	B	3.25	9	T4	M	SL	28 spline shaft
WES-AE	70	F	3.50	9	C4	M	SL	31 spline shaft	WFC-S	71	B	3.00	9	T4	M	SL	31 spline shaft
									WFC-S3	71	B	3.00	9	T4	M	SL	28 spline shaft
									WFC-T	72	B	3.25	9	T4	M	SL	28 spline shaft

* Refer to page 1 of section 40 for an explanation of the codes shown.

♦ In 1972 WES-T2 is alternate with WES-T1

† In 1972 WES-AD2 is alternate with WES-AD

‡ In 1972 WFB-C2 is alternate with WFB-C

4001 REAR AXLE ASSY. - continued

REAR AXLE IDENTIFICATION CHART

AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL BRG.	* DIFF. BRG. & CUP	REMARKS	AXLE MODEL	YEAR	CAR LINE	RATIO	RING GEAR O.D. (Inches)	* T Y P E	* WHL BRG.	* DIFF. BRG. & CUP	REMARKS
WFD-A	69/70	F	3.50	9	T4	M	L	31 Spline Shaft	WFR-A, A2	70	U	4.11	9	T	L	M	28 spline shaft
WFD-B	68/70	F	3.91	9	T4	M	L	31 Spline Shaft	WFR-A2	70/	U	4.11	9	T	L	SL	28 spline shaft
WFD-C	68/70	F	4.30	9	T4	M	L	31 Spline Shaft	WFR-B, B2	70	U	3.50	9	T	L	M	28 spline shaft
WFD-D	69/70	F	3.91	9	T4	M	L	31 Spline Shaft	WFR-B2	70/	U	3.50	9	T	L	SL	28 spline shaft
WFD-D	70	F	3.91	9	T4	M	SL	31 spline shaft	WFS-B	70/71	P	3.00	8	T	S1	M	28 Spline Shaft
WFD-D2	71/	F	3.91	9	T4	M	SL	31 spline shaft	WFS-C	71	P	3.00	8	T	M	M	28 spline shaft
WFD-E	69/70	F	4.30	9	T4	M	L	31 Spline Shaft	WFD-D	70	B	4.30	9	N	M	L	31 Spline Shaft
WFD-F	69/70	F	3.50	9	T4	M	L	31 Spline Shaft	WFD-E	70	F	4.30	9	N	M	L	31 Spline Shaft
WFD-F	70	F	3.50	9	T4	M	SL	31 spline shaft	WFD-E	70	F	4.30	9	T4	M	SL	31 spline shaft
WFD-F2	71	F	3.50	9	T4	M	SL	31 spline shaft	WFD-E1	71	F	4.11	9	T4	M	SL	31 spline shaft
WFD-F3	71/	F	3.50	9	T4	M	SL	28 spline shaft	WFD-E1	70	S	2.75	9	T4	L	L	28 Spline Shaft
WFD-J	69	F	3.25	9	T4	M	L	31 Spline Shaft	WFD-A	70/71	S	2.75	9	T4	L	SL	28 spline shaft
WFD-K, L	69/70	F	3.00	9	T4	M	L	31 Spline Shaft	WFD-A	72	S	2.75	9	T4	M	SL	28 spline shaft
WFD-M	70	F	3.25	9	T4	M	L	31 Spline Shaft	WFD-A, 5	72	S	2.75	9	T4	M	SL	28 spline shaft
WFD-M	70	F	3.25	9	T4	M	SL	31 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFD-M2	71	F	3.25	9	T4	M	SL	31 spline shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFD-M3	71	F	3.25	9	T4	M	SL	28 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFG-A	70	A	2.75	9	T	L	L	28 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFG-A	70/	A	2.75	9	T	L	SL	28 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFG-C	70	A	3.25	9	T	L	L	28 Spline Shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFG-C	70/	A	3.25	9	T	L	SL	28 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFG-D	70	A	2.75	9	T4	L	L	28 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFG-D	70/	A	2.75	9	T4	L	SL	28 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFG-E	70	A	3.25	9	T4	L	L	28 Spline Shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFG-E	70/	A	3.25	9	T4	L	SL	28 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFG-G	70	A	3.00	9	T4	L	L	28 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFG-G	70/	A	3.00	9	T4	L	SL	28 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFG-J	72	A	3.00	9	T	L	SL	28 spline shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFH-A	70	A	3.25	9 3/8	T	L	XL	Torsional Damper 31 Spline Shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFH-B	70	A	2.80	9 3/8	T	L	XL	31 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFH-C	70	A	3.25	9 3/8	T	L	XL	31 Spline Shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFH-D	70	A	3.00	9 3/8	T	L	XL	31 Spline Shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFJ-A	70/	B	3.00	8	T	M	M	28 Spline Shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFK-A	70/	B	3.00	8	T	M	M	28 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFK-B	70/	B	3.25	8	T	M	M	28 Spline Shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFK-C	72	B	3.00	8	T	M	M	28 Spline Shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFL-A	70	F	3.00	8	T	M	M	28 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFL-A	72	F	3.00	8	T	M	M	28 spline shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFL-A2	71/	F	3.00	8	T	M	M	28 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFL-B	72	F	2.79	8	T	M	M	28 spline shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFN-A	70	S	2.80	9 3/8	T	L	XL	31 Spline Shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFN-B	70	S	3.00	9 3/8	T	L	XL	31 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFN-F2	70/71	S	3.00	9 3/8	T	L	XL	31 Spline Shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFN-F3	72	S	3.25	9 3/8	T	M	XL	31 spline shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFN-F4	72	S	3.25	9 3/8	T	M	XL	31 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFN-G2	70/71	S	2.80	9 3/8	T	L	XL	31 Spline Shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFN-G2	72	S	2.80	9 3/8	T	M	XL	31 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFN-G4	72	S	2.80	9 3/8	T	M	XL	31 spline shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFN-H4	72	S	3.00	9 3/8	T	M	XL	31 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFN-J	72	S	3.00	9 3/8	T	M	XL	31 spline shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFN-5	72	S	3.00	9 3/8	T	M	XL	31 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft
WFP-A, A2	70	U	4.11	9	T	M	M	28 spline shaft	WFD-B	70/71	S	3.00	9	T4	L	SL	28 spline shaft
WFP-A2	70/	U	4.11	9	T	M	SL	28 spline shaft	WFD-B3	72	S	3.25	9	T4	M	SL	28 spline shaft
WFP-B, B2	70	U	3.50	9	T	M	M	28 spline shaft	WFD-B4, 5	72	S	3.00	9	T4	M	SL	28 spline shaft
WFP-B2	70/	U	3.50	9	T	M	SL	28 spline shaft	WFD-B	70	S	3.00	9	T4	L	L	28 Spline Shaft

* Refer to page 1 of section 40 for an explanation of the codes shown.

† In 1972 WFL-A2 is alternate with WFL-A

✓ In 1972 WFD-D2 is alternate with WFD-D

‡ In 1972 WFN-5 is alternate with WFN-J

- Production inadvertently installed axle tags with 9 3/8" ring gear model identification on some vehicles that have 9" ring gears. Vehicles with 9" ring gears can be identified by the differential carrier which has four horizontal and one vertical reinforcement rib and a 4 1/2" I.D. pinion hole. If a service differential carrier is installed it can be identified by five horizontal and two vertical reinforcement ribs and an "N" embossed between the two vertical ribs.

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4A001 HOSE - REAR AXLE HOUSING - VENT - Improve from 9324 or 17543 bulk hose					
65/	A, B, F, S, X		C9AZ 8287-A	1	Clamp-9/16" hose
65/	B		★353473-S8	1	Clip (rubber coated)
65/	B, F		355428-S(KK9)	1	Grommet-, 50" diam. hole
65/	B		40923-S8(U264)	1	Screw (tube to underbody)-
66	U		.	1	5/16"-18 x 1/2" washer head tapping
68	S		55981-S(U254E)	1	Screw (to underbody)-1/4"-14
68	S		374998-S(GG213A)	1	Clip (to underbody)

YEAR	MODEL	AXLE MODEL IDENTIFICATION NO.	PART NUMBER	QTY.	RATIO	GEAR SIZE	EQUA LOCK	DESCRIPTION
4006 AXLE ASSY. - REAR INTEGRAL								
69/	A	WER-F	D0AW 4006-G	1	2.75	8.7"	No	

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4010 HOUSING ASSY. - REAR AXLE					
- A -					
66/68	A	WDC exc. CB, WDL, WDT	C6AZ 4010-H	1	Standard or locking axle
68	A	WDC, WDL		1	
67/68	A	WER	D0AZ 4010-B	1	Integral axle
69/72	A	WDC, WDL, WDT, WFG, WFH	D0VY 4010-A	1	
69/72	A	WER	C9AZ 4010-D	1	Integral axle-use with C9AZ 4022-A on vehicles with 8 1/2", 8.7" ring gear

- B -					
68/69	B(exc. 66, 71), (8" R/G)	WDW(exc. K2), WDZ	C9OZ 4010-D	1	Medium wheel brgs. -44 1/2" spring seat center
67/69	B(66, 71), (8" R/G)	WDY, WEA	C9OZ 4010-A	1	Medium wheel brgs. -41 1/4" spring seat center
65	B(9" R/G)	WCU	C3OZ 4010-C	1	Backing plate flange inside of hsg. tube-use C4OZ 1177-A seal
68/69	B(exc. 66, 71), (9" R/G)	WDW-K2, WEB, WED, WFC, WFA-A, E	C9OZ 4010-C	1	Medium wheel brgs. -44 1/2" spring seat center
66/69	B(66, 71), (9" R/G)	WEC, WEE, WFA-B, C	C9OZ 4010-B	1	Medium wheel brgs. -41 3/16" spring seat center
70/71	B(exc. 66, 71), (8" R/G)	WDW, WFJ	D0OZ 4010-B	1	44 7/16" center spring seats-Medium size wheel brg.
70/71	B(66, 71), (8" R/G)	WDY, WFK	D0OZ 4010-A	1	41 3/16" center spring seats-Medium size wheel brg.
70/71	B(exc. 66, 71), (9" R/G)	WEB, WFA-E, G, WFC-B, C, G, N, WFU-D	D0OZ 4010-C	1	44 7/16" center spring seats- Medium size wheel brg.
70	B			1	No-spin differential
70/71	B(66, 71), (9" R/G)	WEC, WFA-D, H, J, WFC-F, J, R	D0OZ 4010-D	1	41 5/16" center spring seats-Medium size wheel brg.
72	B(8" R/G)	All	D2OZ 4010-A	1	
72	B(9" R/G)	All	D2SZ 4010-B	1	

- F -					
65/66	F(7 1/4" R/G)	WCY	C4DZ 4010-G	1	Integral carrier
67/69	F(7 1/4" R/G)	WCY	C7ZZ 4010-A	1	Integral carrier
70	F(7 1/4" R/G)	WCY	D0ZZ 4010-B	1	Integral carrier
65/66	F(8" R/G)	WCZ, WDJ	C4DZ 4010-F	1	Includes (1) 378511-S clamp
67/69	F(8" R/G)	WCZ, WDJ	C7ZZ 4010-E	1	
70	F(8" R/G)	WCZ, WFL	D0ZZ 4010-A	1	
71/	F(8" R/G)	WCZ, WFL	D1ZZ 4010-A	1	Medium wheel bearing

† Rear axle assemblies although not normally stocked as service items may be obtained from the nearest assembly plant when used in current production. Order through your local distribution center.

SECTION 40

FORD CAR PARTS

REFER TO CHART BEGINNING ON PAGE 2 BEFORE
SELECTING PARTS FROM GROUPS BELOW

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4010 HOUSING ASSY. - REAR AXLE - continued					
- F -					
67/68	F(9" R/G) "Before 4/1/68"	WES, WFD	C9ZZ 4010-B	1	
68/70	F(9" R/G)- "From 4/1/68 to 6/1/70"	WES, WFB, WFD, WFU	D0ZZ 4010-C	1	
70	F(9" R/G)- "From 6/1/70 to 9/25/70"	WES, WFB, WFD, WFU	D0ZZ 4010-D	1	
70	F(9" R/G)- "From 9/25/70"	WES, WFB, WFD, WFO	D0ZZ 4010-E	1	
71/	F(9" R/G)	WES, WFB, WFD, WFU	D1ZZ 4010-B	1	Medium wheel bearing
- L -					
71/72	L(71), (6 3/4" R/G)	All	@D2FZ 4010-B	1	Extra small wheel bearing
- P -					
70	P(7 1/4" R/G)	WDV	D0DZ 4010-A	1	Small wheel brg. -Integral carrier
70/	P(8" R/G)	WDV, WDW, WFS	D0DZ 4010-B	1	Small wheel brg. -w/4 stud wheel
71/	P(8" R/G)	WDW, WFS	D0DZ 4010-D	1	Medium wheel brg. -w/5 stud wheel
- S -					
67/68	S	WDC, WDT	C6AZ 4010-H	1	Standard or locking axle
70	S "Before 1/19/70"	All	D0SZ 4010-A	1	Without sure-track
70	S	All	D0SZ 4010-C	1	With sure-track
70	S "From 1/19/70"	All		1	Without sure-track
69	S	WGA		1	
71	S	All		1	
72	S(9" R/G)	All	D2SZ 4010-B	1	
72	S(9 3/8" R/G)	All	D2SZ 4010-B	1	
- U -					
66	U(2700 lb.) - "Before Ser. 844, 001"	WEM-A, B, C, D, E, F	C6TZ 4010-B	1	Medium wheel bearings
66	U(3300 lb.) - "Before Ser. 844, 001"	WEN-A, B, C, D, E, F	C6TZ 4010-A	1	Large wheel bearings
66/70	U "From Ser. 844, 001 to Ser. J30, 001"	WEM, WFP	D0TZ 4010-C	1	Medium wheel bearing
70/	U "From Ser. J30, 001"	WEM, WFP	D0TZ 4010-H	1	Medium wheel bearing
67/70	U "Before Ser. J30, 001"	WEN, WFR	D0TZ 4010-D	1	Large wheel bearing
66	U "From Ser. 844, 001"	WEN-A1, B1, C1, D1, E1, F1		1	
70/	U "From Ser. J30, 001"	WEN, WFR	D0TZ 4010-J	1	Large wheel bearing
- X -					
65	X(7 1/4" R/G)	WCY	C4DZ 4010-G	1	Small wheel brg. 2 43/64" O. D. - 1 21/64" I. D.
65	X(8" R/G)	WCZ, WDJ	C4DZ 4010-F	1	Includes (1) 378511-S clamp- medium wheel bearing
66	X(8" R/G)	WDY, WEA	C9OZ 4010-A	1	Medium wheel brgs. -41 1/4" spring seat centers
66/70	X(7 1/4" R/G)	WDV	C6DZ 4010-B	1	Small wheel brg. 2 7/16" I. D.
66/70	X(8" R/G)- "Before 9/30/69"	WDW, WDW	C6DZ 4010-C	1	Medium wheel brgs. -44 1/2" spring seat centers- includes lubricator
70	X(8" R/G)- "From 9/30/69"	WDW	D0DZ 4010-C	1	Medium wheel bearing- 44 1/2" spring seat centers
67/70	X(8" R/G)	WDY, WEA	C9OZ 4010-A	1	Medium wheel bearings. - 41 3/16" spring seat centers
65/	A		358048-S(PP43)	1	Plug(filler)- 3/4"-14 -sq. countersunk
65/	A, B, F, S, X			1	Plug (drain)
65	A		87675-S(P17)	1	Plug(drain&fill)-1/2"-14-hex. countersunk
70	P	WDV		1	
65/	A, B, F, S, U		379166-S(PP54-N)	1	Plug (filler) -7/8" -18-hex. head
			352733-S100(XX247)	1	Washer(plug sealing)-7/18" flat
65/	A, B, P, S, X		373820-S(XX155A)	5	Washer-flat (housing to carrier)- lower bolts-3/8"
66/	A	All	382599-S100 (MM173MZ)	2	Nut-1/2"-13 attach spring retainer to axle seat

@ Use with (2) pieces D2FZ 5A313-A wedge on 1971 vehicles

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4010 HOUSING ASSY. - REAR AXLE - continued					
65/	F, X(6 cyl.)		★43005-S	4	Bolt(captocarrier)-3/8"-16 x 1 7/8" -locking
70/	F	WES, WFB, WFD, WFJ	310485-S(P12B)	AR	Plug (filler)-3/8"-24-hex.head
66/	U		377574-S7-8(PP41B)	1	Plug (filler)-7/8"-18-hex.head
4020 RETAINER - REAR WHEEL BEARING - OUTER					
65/	A, B, F, S, P, U, X		C8UZ 4020-A	2	Used with medium wheel bearings
65/	A, S(exc. skid control), U		C6AZ 4020-A	2	Used with large wheel bearings
65/	F, X		C3DZ 4020-A	2	Used with small wheel bearings
70/71	P			2	
71/	L		D1FZ 4020-A	2	Use with small wheel bearings
72	B		385262-S	8	Attach 4020 to 4010
4022 VENT - REAR AXLE HOUSING					
65/66	A		C2AZ 4022-C	1	Right angle outlet
67/68	A, S		★C7AZ 4022-A	1	Press in type for 3/8" hole-R/B C2AZ 4022-C (3-73)
69/	A(8 1/2" & 8.7" R/G)		★C9AZ 4022-B	1	3/8"-24 x 1 3/8"-r/b D1FZ 4022-A (10-74)
69/71	A, S(9" & 9 3/8" R/G)		C9AZ 4022-A	1	7/16"-20
72	B, S(9" & 9 3/8" R/G)		D2OZ 4022-A	1	45° angle-9/16"-18 thread
72	B(8" R/G)		D2OZ 4022-B	1	45° angle-1/2"-20 thread
67/71	B(66, 71), X(71)		C7OZ 4022-A	1	2 1/8" long-1/2"-20 thread-3/4" long
66/71	B(exc. 66, 71)		D1OZ 4022-A	1	2 1/8" long-7/16"-20 thread
65/66	B			1	
71/	P(with 10" brakes & 5 stud axle)			1	
66/	U			1	
65/70	X(exc. 71)			1	
65/	F		C5ZZ 4022-B	1	
71/	L		D1FZ 4022-A	1	
70/	P(with 9" brakes & 4 stud axle)		D1OZ 4022-B	1	
66	S		C2AZ 4022-A	1	
4A022 RETAINER - REAR AXLE SIDE GEAR SPRING					
65/67	A(8 cyl. 427)		C5AZ 4A022-A	2	1 5/8" I. D. -2 3/8" O. D. -1 5/32" thick-
70/71	B, F	WFU-D, E		2	no spin differential
4A024 SPRING - REAR AXLE SIDE GEAR					
65/67	A(8 cyl. 427)		C5AZ 4A024-A	2	1 11/32" free length-1 7/8" O. D. -
70/71	B, F	WFU-D, E		2	no spin differential
4026 DIFFERENTIAL ASSY. - FRONT AXLE LOCKING					
71/	U		D1UZ 4026-C	1	4.09 ratio
			D1UZ 4026-D	1	3.54 ratio
4026 DIFFERENTIAL ASSY. - REAR AXLE LOCKING					
69/70	A, B, F, S, U(9" R/G)	All	★C9OZ 4026-B	1	Large differential brg., 28 spline shafts 2 or 4 pinion
70/	A, B, F, S, U(9" R/G)	All		1	Slim-line differential brg., 28 spline shaft, 2 or 4 pinions
70	A, S(9 3/8 R/G)	All	D0AZ 4026-A	1	XL differential brg., 31 spline shafts,
71/	S(9 3/8" R/G)	All		1	2 or 4 pinion
68/	B, F(9" R/G)		★D3TZ 4026-A	1	Large or Slim-line diff. brg., 31 spline shaft
72	A(9" R/G)			1	
69/71	B, F, P, X(8" R/G)	All	C9OZ 4026-D	1	Medium differential brg., 28 spline shaft
72	B, F(8" R/G)	All		1	
70	B, F(9" R/G)	WFU-D, E	D0OZ 4026-A	1	Dapco No-spin w/large or Slim-line
71	F(9" R/G)	WFU-E1		1	diff.brg., 31 spline shaft
4A031 SEAL REPAIR KIT - REAR AXLE					
68/	S		C8SZ 4A031-A	2	

▲ When used to replace differential assy. with medium differential bearing, use slim-line bearing (C9AZ 4221-A) and cup (C9AZ 4222-A).

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION	
4A079 REINFORCEMENT - REAR AXLE DRIVE LINE VIBRATION DAMPER - IMPROVISE						
4090 HOSE - REAR AXLE						
65/67	A		B3T 4090-B	AR	1/2" I.D. -25 ft. roll	
65/69	A,B,F,P,S,U,X		C9PZ 4090-F (KK-6)	AR	15/32" I.D.-13/16" O.D.- 50 ft.roll	
65/69	A,B,F,P,S,U,X		C9PZ 4090-C (KK-3)	AR	3/4" I.D.-29/32" O.D.-10 ft.roll	
65/	A,B,F,L,P,S,U,X		C9PZ 4090-G (KK-7)	AR	11/32" I.D.-11/16" O.D.-50 ft.roll	
65/	A,B,F,L,P,S,U,X		C9PZ 4090-E (KK-5)	AR	1/2" I.D.-15/16" O.D.-50 ft.roll	
4A106 PIN - REAR AXLE DIFFERENTIAL CAP & CARRIER GUIDE						
66/68	A, S	"Before 11/20/67"	WDT, WEF	C6AZ 4A106-A	2	1 9/32" O.D. -15/32" I.D. -1" long
66/68	A, S	"Before 11/20/67"	WDT, WEF	377146-S(BB401E)	2	Bolt (cap to carrier)- 7/16"-13 x 2 3/4" locking
4109 SHIM - FRONT PINION BEARING ADJUSTING						
66/71	U(front drive axle) "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4109-A	AR	.003" thick	
			C6TZ 4109-B	AR	.005" thick	
71/	U(front drive axle) - "From Ser.K20,001"	Dana (Spicer) 44	8M 4109-B	AR	.005" thick	
			8M 4109-C	AR	.010" thick	
4141 CARRIER ASSY. - REAR AXLE DIFFERENTIAL						
65/70	A,B,F,S,U,X		C0AZ 4141-C	1	9" R/G w/med.brgs. & cups	
66/67	A, S		C6AZ 4141-B	1	9 3/8" ring gear extra lge.carrier brgs.	
68/69	A, S		C6AZ 4141-C	1	9 3/8" ring gear-extra lge.carrier brgs.	
65/	A,B,F,S,U		AD00Z 4141-A	1	9" R/G w/Slim-line or large diff. rg.- includes (2) B7AZ 4067-A adjusters	
70/	A, S		D0TZ 4141-A	1	9 3/8" R/G with XL bearings & cups	
65/66	B, F, X		★C2OZ 4141-C	1	8" R/G with medium bearings & cups- repl. by C2OZ 4141-D (2-74)	
67/	B, F, P, X		C2OZ 4141-D	1	8" R/G with medium bearings & cups	
65/	A (8 cyl. 406, 427)		372116-S(MM140E)	10	Nut (carrier to hsg.)-3/8"-24 thickload	
65/	A, F, S, X		20538-S8(B125)	4	Bolt(cap to carrier)-1/2"-13 x 2 1/4"	
			34809-S8(X68)		Washer-1/2" Lock	
65/	A, B, F, S, U, X		373820-S(XX155A)	10	Washer (5 bottom carrier to housing bolts)-3/8" flat	
			34445-S7(M80)		Nut-carrier to hsg. 3/8"-24 (hex. lock)	
66/68	A, S	"Before 11/20/67"	WDT, WEF	377146-S(BB401E)	2	Bolt (cap to carrier)-7/16"-13 x 2 3/4" locking-use with 4A106
68/	A, S	"From 11/20/67"	WDT, WEF	46108-S(B271D)	2	Bolt (cap to carrier)-1/2"-13 x 2 1/4" locking
67	A, B, F, S, U, X		87675-S(P17)	1	Plug-filler 1/2"-14	
4143 LOCK - REAR AXLE DIFFERENTIAL BEARING ADJUSTER						
65/	A, B, F, S, U, X(7 3/4", 8", 8 1/2", 8.7", 9", 9 3/8" R/G)		C6AZ 4143-B	2		
65/70	B, F, X (6 3/4", 7", 7 1/4" R/G)		D0ZZ 4143-A	2		
71/	L(6 3/4" R/G)			2		
70	P(7 1/4" R/G)			2		
65/	A, B, F, P, S, X		350211-S(BB413)	2	Bolt(lock to diff.brg.cap)-5/16"-18 x 7/16"	
65/	B, X		34806-S7(X64)		Lockwasher-5/16"	
4159 LUBRICATOR - REAR AXLE DIFFERENTIAL						
65/67	A, B, F, S, U(9" R/G)		B9A 4159-A	1	With locking axle	
65/67	B, F, X(7 3/4", 8" R/G)		C4OZ 4159-A	1	With locking axle	
4A171 STOP - REAR AXLE BUMPER						
66/	U		C6TZ 4A171-A	2		
4A172 REINFORCEMENT - REAR AXLE BUMPER OUTER BRACKET - IMPROVISE						

▲ When used to replace large differential bearing carrier, use (2) B7AZ 4067-A adjuster. (2) C9AZ 4221-A cone and roller assembly and (2) C9AZ 4222-A cup. When used to replace medium differential bearing carrier, use existing (2) B7AZ 4067-A adjuster, (2) B7A 4221-A cone and roller assembly and (2) B7A 4222-A cup.

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	RATIO	GEAR SIZE	LOCK	DESCRIPTION
‡ 4200 DIFFERENTIAL ASSY. - REAR AXLE - For integral type assy. refer to Group 4006								
- A -								
67/	A	WDC-CA,CJ	C7AW 4200-BF	1	2.75	9"	No	Large or Slim-line bearing
67/	A	WDC-AU,CK	C7AW 4200-AN	1	3.25	9"	No	Large or Slim-line bearing
68/	A	WDC-CE,CL,CR	C8AW 4200-B	1	3.25	9"	No	Large bearing
69/	A	WDC-CN	C9AW 4200-C	1	2.75	9"	No	
70/	A	WFG-A	D0AW 4200-A	1	2.75	9"	Yes	Traction Lok
70/	A	WFG-D	D0AW 4200-D	1	2.75	9"	Yes	Traction Lok
70/	A	WDC-CS	D0AW 4200-S	1	3.00	9"	No	Large bearing
70/	A	WFG-G,L	D0AW 4200-T	1	3.00	9"	Yes	Large bearing-
70/	A	WFG-C	D0AW 4200-C	1	3.25	9"	Yes	Traction Lok
70/	A	WFG-E	D0AW 4200-E	1	3.25	9"	Yes	Traction Lok 28 spline shaft
- B -								
67/	B	WDW-K,K1,WDY-G	C7OW 4200-F	1	2.79	8"	No	
67/	B	WDW-B,WDY-A,F	C7OW 4200-G	1	3.00	8"	No	
67/	B	WDW-C,WDY-B	C7OW 4200-H	1	3.25	8"	No	
68/70	B	WFC-B,E,F	C8OW 4200-C	1	3.91	9"	Yes	
69/71	B	WEB-H	C9OW 4200-H	1	2.75	9"	No	
69/71	B	WEB-T,WEC-L	C9OW 4200-K	1	3.25	9"	No	
69/71	B	WFA-D,E	C9OW 4200-V	1	3.25	9"	Yes	
70/	B	WDW-A,WFJ-A, WFK-A,C	D0OW 4200-A	1	3.00	8"	Yes	Traction Lok
70/	B	WFK-B	D0OW 4200-B	1	3.25	8"	Yes	Traction Lok
71	B	WFC-S3	D1OW 4200-E	1	3.00	9"	Yes	
71	B	WEB-L3	D1ZW 4200-D	1	3.50	9"	No	
71	B	WFC-J3,L3	D1ZW 4200-F	1	3.50	9"	Yes	
72	B	WEB-AD,H2	C7AW 4200-BF	1	2.75	9"	No	
72	B	WEB-AF,AH	C8AW 4200-B	1	3.25	9"	No	
72	B	WFA-M,R	D0AW 4200-E	1	3.25	9"	Yes	
72	B	WFC-J,L	D2OW 4200-M	1	3.50	9"	Yes	
72	B	WEC-K,WEB-AG,AJ, WEC-AG	D0AW 4200-S	1	3.00	9"	No	
72	B	WFA-L4	D0AW 4200-D	1	2.75	9"	Yes	
72	B	WFA-S,U	D0AW 4200-T	1	3.00	9"	Yes	28 spline shaft
72	B	WEC-Z	D4OW 4200-C	1	3.25	9"	No	
72	B	WFC-T	D4OW 4200-D	1	3.25	9"	Yes	
72	B	WEC-AB	D2OW 4200-AA	1	3.00	9"	No	28 spline shaft
72	B	WFC-V	D2OW 4200-AB	1	3.00	9"	Yes	28 spline shaft
- F -								
67/	F	WCZ-V,V2	C7OW 4200-F	1	2.79	8"	No	
67/	F	WCZ-F,F2	C7OW 4200-G	1	3.00	8"	No	
68	F	WCZ-W	C7OW 4200-H	1	3.25	8"	No	
68/	F	WFD-B,D,D2	C8OW 4200-C	1	3.91	9"	Yes	
69/70	F	WES-AC	C9OW 4200-D	1	3.00	9"	No	
69/	F	WES-T,T1,T2	C9OW 4200-H	1	2.75	9"	No	
69/	F	WES-AA	C9OW 4200-G	1	3.00	9"	No	
71/	F	WFD-F3	D1ZW 4200-F	1	3.50	9"	Yes	
69/	F	WES-AD,AD2	C9OW 4200-K	1	3.25	9"	No	
69/	F	WFB-C,C2	C9OW 4200-V	1	3.25	9"	Yes	Traction Lok
70/	F	WFL-A,A2	D0OW 4200-A	1	3.00	8"	Yes	Traction Lok
71	F	WES-AK	D1ZW 4200-A	1	3.50	9"	No	
71	F	WFU-E1	D1ZW 4200-B	1	4.11	9"	Yes	No-spin differential

‡ Differential assemblies although not normally stocked as service items may be obtained from the nearest assembly plant when used in current production. Order through your local distribution center.

FORD CAR PARTS

SECTION 40

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	RATIO	GEAR SIZE	LOCK	DESCRIPTION
‡ 4200 DIFFERENTIAL ASSY. - REAR AXLE - continued - For integral type assy. refer to Group 4006								
- F -								
71/	F	WES-AE3,AK2	D1ZW 4200-D	1	3.50	9"	No	
71/	F	WFD-F3	D1ZW 4200-F	1	3.50	9"	Yes	
72	F	WFB-D2	D0OW 4200-L	1	2.75	9"	Yes	Traction Lok
72	F	WFL-B	D2ZW 4200-B	1	2.79	8"	Yes	Traction Lok
- P -								
70/	P	WDV-M,WDW-M,T	C7OW 4200-F	1	2.79	8"	No	
70/	P	WDV-N,WDW-L,U	C7OW 4200-G	1	3.00	8"	No	
70/71	P	WFS-B,C	D0OW 4200-A	1	3.00	8"	Yes	Traction Lok
- S -								
68	S	WDT-AC	★C8SW 4200-A	1	2.50	9 3/8"	No	R/b C8SW 4200-B & use 1-C7VY17271-A
70/71	S	WFB-B	D0SW 4200-Z	1	3.00	9"	Yes	28 spline shaft
70/71	S	WGB-D	D0SW 4200-AB	1	3.00	9"	No	28 spline shaft
72	S	WGB-E4	D2SW 4200-AL	1	2.75	9"	No	
72	S	WGB-G	D2SW 4200-AS	1	2.75	9"	No	
72	S	WFB-H	D3SW 4200-C	1	2.75	9"	Yes	Sure-Track
72	S	WFB-C	D2SW 4200-AA	1	3.00	9"	Yes	
72	S	WFB-J	D3SW 4200-D	1	3.00	9"	Yes	Sure-Track
72	S	WFB-K	D2SW 4200-AY	1	3.00	9"	Yes	
72	S	WGB-F	D2SW 4200-Z	1	3.00	9"	No	
72	S	WGB-F4	D2SW 4200-AM	1	3.00	9"	No	
72	S	WGB-H	D2SW 4200-AT	1	3.00	9"	No	
72	S	WGB-S	D2SW 4200-AV	1	3.00	9"		
72	S	WFB-G	D3SW 4200-E	1	3.25	9"	Yes	
- U -								
67/	U	WEM-E,WEN-E	C7UW 4200-N	1	3.50	8 3/4"	No	
67/	U	WEM-A,WEN-A	C7TW 4200-N	1	4.11	8 3/4"	No	
69/	U	WEM-C	C7UW 4200-H	1	4.57	9"	No	
70/	U	WFB-B,WFR-B	D0TW 4200-G	1	3.50	9"	Yes	
70/	U	WFB-A,WFR-A	D0TW 4200-F	1	4.11	9"	Yes	
- X -								
67/70	X	WDW-J	C7OW 4200-F	1	2.79	8"	No	
67/70	X	WDW-F,WDY-A	C7OW 4200-G	1	3.00	8"	No	
67/70	X	WDY-B	C7OW 4200-H	1	3.25	8"	No	
YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION			
4204 CASE ASSY. - REAR AXLE DIFFERENTIAL GEAR								
- A -								
65/67	A	WDC,WDD	★C3AZ 4204-B	1	Use w/9" R/G medium diff. brg. To convert from 2 to 4 pinion type axle, w/28 spline shaft-repl. by D0OZ 4204-D (10-74)			
67	A	WDC-CAX	D0OZ 4204-D	1	Use w/9" R/G small diff. brg. conventional 28 spline shaft			
65/69	A	WBV,WDL	C4AZ 4204-E	1	W/9" R/G, medium diff. brg., & 2 pinion Equalock axle			
65	A	WDC-CB	D0OZ 4204-D	1	Use w/9" R/G medium diff. brg., 2 pinion conventional 28 spline shaft			
66/69	A	WDC,WDD		1				
65/69	A	WDL	C4AZ 4204-F	1	W/9" R/G, large diff. brg., 2 or 4 pinion equalock, 28 spline shaft (1/2" dia. bolt holes,			

‡ Differential assemblies although not normally stocked as service items may be obtained from the nearest assembly plant when used in current production.

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4204 CASE ASSY. - REAR AXLE DIFFERENTIAL GEAR - continued					
- A -					
65/	A	All	▲D00Z 4204-D	1	W/9" R/G, Slim-line diff. brg., conventional 4 pinion, 28 or 31 spline shaft (incl. C9AZ 4221-A brg., C9AZ 4222-A cup)
65/	A	All	▲D2AZ 4204-A	1	With 9" R/G, Slim-line or large diff. brg., conventional 2 pinion, 28 spline shaft
69/	A	All	▲D00Z 4204-C	1	With 9" R/G, large or slim-line diff. brg., traction-lok, 2 or 4 pinion, 28 spline shaft (incl. C9AZ 4221-A, C9AZ 4222-A cup, (2) C9OZ 4228-A washers)
66/69	A	WDT	C6AZ 4204-D	1	With 9 3/8" R/G, XL diff. brg., 2 pinion Equalock, 31 spline shaft
66/70	A	WDT	C9AZ 4204-A	1	W/9 3/8" R/G, XL diff. brg., 2 pinion conventional, 31 spline shaft
67/69	A	WER-A, C, E	D0AZ 4204-B	1	W/8 1/2" R/G, integral type axle (incl. (2) D0AW 4220-A brg.)
69/	A	WER-F, G, H, J	C9AZ 4204-B	1	W/8.7" R/G, integral type axle
70	A	WFH	D0AZ 4204-A	1	W/9 3/8", XL diff. brg., 2 pinion traction-lock, 31 spline shaft
- B -					
65/69	B	WDK, WDZ, WEA	C4OZ 4204-B	1	W/8" R/G, medium diff. brg. 2 pinion equalock
65/	B	WCL, WDW (exc. K2) WDY	D00Z 4204-A	1	W/8" R/G, medium diff. brg. 2 pinion conventional
65	B	WCU	D00Z 4204-D	1	W/9" R/G, medium diff. brg., 2 pinion conventional
68	B	WDW-K2		1	W/9" R/G, large diff. brg., 2 or 4 pinion conventional, 28 spline shaft
66/70	B	WEB, WEC		1	W/9" R/G, large diff. brg., 2 or 4 pinion conventional, 28 spline shaft
66/68	B	WED, WEE	C4AZ 4204-F	1	W/9" R/G large diff. brg., 2 or 4 pinion equalock, 28 spline shaft, 7/16" or 1/2" dia. bolt holes optional
67/68	B	WEZ	C1DW 4204-B	1	W/7 1/4" R/G, small diff. brg. 4 pinion conventional
69/	B	WFJ	C9OZ 4204-F	1	W/8" R/G, medium diff. brg., 2 pinion traction-lok
69/72	B	WFK		1	W/9" R/G large diff. brg., 4 pinion conventional, 31 spline shaft
67/70	B	WEB	C9OZ 4204-B	1	W/9" R/G large diff. brg., 4 pinion conventional, 31 spline shaft
69/70	B	WFA	D00Z 4204-C	1	W/9" R/G, large diff. brg., 4 pinion Traction Lok, 28 spline shaft
68/70	B	WFC		1	W/9" R/G, large diff. brg., 4 pinion Traction Lok, 31 spline shaft
72	B	WFK	D3OZ 4204-A	1	W/8" R/G, medium diff. brg., 2 pinion Traction Lok
70/	B	"From 5/13/70"	▲D00Z 4204-D	1	W/9" R/G, Slim-line diff. brg., conventional 4 pinion, 31 spline shaft (incl. C9AZ 4221-A brg., C9AZ 4222-A cup, (2) C9AZ 4228-A washers)
			▲D2AZ 4204-A	1	W/9" R/G Slim-line diff. brg., conventional 2 pinion, 28 spline shaft
			▲D00Z 4204-C	1	W/9" R/G, Slim-line diff. brg., traction-lok, 2 or 4 pinion, 28 or 31 spline shaft, (incl. C9AZ 4221-A brg., C9AZ 4222-A cup)
70	B	WFU-D	▲D00Z 4204-E	1	W/9" R/G, slim line diff. brg., no-spin locker, 31 spline shaft
			24633-S(U107K)	3	Bolt-1/4"-20 x 5/8" (attach R.H. case to L.H. case)

● Includes (2) C9OZ 4228-A washers

▲ When used to replace case with large differential bearing, use existing large bearing (B7A 4221-B) and cup (B7A 4222-B).
When used to replace case with medium differential bearing, use slim-line bearing (C9AZ 4221-A) and cup (C9AZ 4222-A).

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4204 CASE ASSY. - REAR AXLE DIFFERENTIAL GEAR - continued					
- F -					
65/	F	WCL,WCZ	D00Z 4204-A	1	W/8" R/G, medium diff. brg., 2 pinion conventional
65/69	F	WDJ	C40Z 4204-B	1	W/8" R/G, medium diff. brg., 2 pinion equalock
69/72	F	"Before 5/15/72"	WFL	1	W/8" R/G, medium diff. brg., 2 pinion traction-lok
65/70	F	"Before 5/13/70"	WCZ,WES	1	W/9" R/G, medium diff. brg., 2 pinion conventional
67/70	F	"Before 5/13/70"	WES	1	W/9" R/G, large diff. brg., 2 or 4 pinion conventional, 28 spline shaft
69/70	F	"Before 5/13/70"	C90Z 4204-B	1	W/9" R/G, large diff. brg., 4 pinion conventional, 31 spline shaft
67/68	F	WES	C4AZ 4204-F	1	W/9" R/G, large diff. brg., 2 or 4 pinion equalock, 28 spline shaft, 7/16" or 1/2" dia. bolt holes optional
69/70	F	"Before 5/13/70"	WFB	1	W/9" R/G, large diff. brg., 4 pinion Traction-Lok, 28 spline shaft
69/70	F	"Before 5/13/70"	WFD	1	W/9" R/G, large diff. brg., 4 pinion Traction-Lok, 31 spline shaft
70/	F	"From 5/13/70"	All	1	W/9" R/G, slim line diff. brg., 4 pinion conventional, 31 spline shaft (incl. C9AZ 4221-A brg., C9AZ 4222-A cup, (2) C9AZ 4228-A washers)
			▲ D00Z 4204-D	1	W/9" R/G, slim line diff. brg., 4 pinion conventional, 31 spline shaft (incl. C9AZ 4221-A brg., C9AZ 4222-A cup, (2) C9AZ 4228-A washers)
			▲ D2AZ 4204-A	1	W/9" R/G, Slim-line diff. brg., conventional 2 pinion, 28 spline shaft
			▲ D00Z 4204-C	1	W/9" R/G, slim line diff. brg., 2 or 4 pinion traction-lok, 28 or 31 spline shaft, (incl. C9AZ 4221-A brg., C9AZ 4222-A cup)
			▲ D00Z 4204-E	1	W/9" R/G, slim line diff. brg., no-spin 2 pinion, 31 spline shaft (incl. C9AZ 4221-A brg., C9AZ 4222-A cup)
70	F	"Before 5/13/70"	WFO-E	1	W/9" R/G, large diff. brg., no-spin differential, 31 spline shaft
70	F	"From 5/13/70"	WFO-E	1	W/9" R/G, slim line diff. brg., no-spin locker, 31 spline shaft
			24633-S(U107K)	3	Bolt-1/4"-20 x 5/8" (attach R.H. case to L.H. case)
65/68	F	WCY	C4DZ 4204-A	1	W/7 1/4" R/G, small diff. brg., 2 pinion equalock
66	F	WCZ	C4AZ 4204-E	1	W/9" R/G, medium diff. brg., 2 pinion equalock, 28 spline shaft
68	F	WES-R		1	
72	F	"From 5/15/72"	WFL	1	W/8" R/G, medium diff. brg., 2 pinion Traction-Lok
65/70	F	WCY	★ C1DW 4204-A	1	W/7 1/4" R/G, small diff. brg., 2 pinion conventional -repl. by C1DW 4204-B (10-74)
65/70	F	WCY	C1DW 4204-B	1	W/7 1/4" R/G, small diff. brg., 4 pinion conventional
72	F	WFL-A,B	D30Z 4204-A	1	W/8" R/G traction-lok, 2 pinion
- L -					
71/	L	WDV,WGF	D1FZ 4204-A	1	W/6 3/4" R/G, extra small differential brg., conventional 2 or 4 pinion

● Includes (2) C90Z 4228-A washers

▲ When used to replace case with large differential bearing, use existing large bearing (B7A 4221-B) and cup (B7A 4222-B).
When used to replace case with medium differential bearing, use slim-line bearing (C9AZ 4221-A) and cup (C9AZ 4222-A).

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION	
4204 CASE ASSY. - REAR AXLE DIFFERENTIAL GEAR - continued						
- P -						
70	P	WDV	C1DW 4204-A	1	W/7 1/4" R/G, small diff. brg., 2 pinion conventional	
70	P	WDV	C4DZ 4204-A	1	W/7 1/4" R/G, small diff. brg., 2 pinion equalock	
70/71	P	WFS	C9OZ 4204-F	1	W/8" R/G, medium diff. brg., 2 pinion traction-lok	
70/	P	WDV,WDW	D0OZ 4204-A	1	W/8" R/G, medium diff. brg., 2 pinion conventional	
- S -						
65/66	S	WCD-J,WDE	C4AZ 4204-F	1	W/9" R/G, large diff.brg., 2 or 4 pinion, Equalock axle, 28 spline shaft, 1/2" dia. bolt holes	
65/67	S	WCD-H,WDC	C2AZ 4204-K	1	W/9" R/G, large diff.brg., 2 or 4	
70	S		r/b D0OZ 4204-D (12/72)	1	pinion conventional, 28 spline shaft, no oil scoop	
66/69	S	WDT,WEF,WGA	C6AZ 4204-D	1	W/9 3/8" R/G, XL diff.brg., 2 pinion Equalock, 31 spline shaft	
66/70	S	WDT,WEF,WGA	C9AZ 4204-A	1	W/9 3/8" R/G, XL diff.brg., 2 pinion	
71/	S	All		1	conventional, 31 spline shaft	
70	S	"Before 5/13/70"	WFFV	C9OZ 4204-D	1	W/9" R/G,large diff.brg., 2 or 4 pinion Traction-lok, 28 spline shaft
70/	S	"From 5/13/70"	All	▲D0OZ 4204-D	1	W/9" R/G, Slim-line diff. brg., conventional 4 pinion 31 spline shaft (inc: C9AZ 4221-A brg., C9AZ 4222-A cup)
			ΔD2AZ 4204-A	1	W/9" R/G slim-line diff. brg. conventional 2 pinion 28 spline shaft	
			▲D0OZ 4204-C	1	W/9" R/G, Slim-line diff.brg.,traction- lok, 2 or 4 pinion, 28 spline shaft (inc: C9AZ 4221-A, C9AZ 4222-A cup, (2) C9OZ 4228-A washers)	
70/	S	WFN	D0AZ 4204-A	1	W/9 3/8", XL diff. brg., 2or4 pinion Traction-lok, 31 spline shaft	
- U -						
66/69	U	WEM	C4AZ 4204-E	1	W/9" R/G, medium diff. brg. , 2 pinion equalock	
66/69	U	WEN	C4AZ 4204-F	1	W/9" R/G, large diff. brg. , 2 pinion equalock, 1/2" dia. bolt holes	
66/70	U	"Before Ser.J10,001"	WEN	C2AZ 4204-H	1	W/9" R/G, medium diff. brg.
69/70	U	"Before Ser.J10,001"	WEN	D0OZ 4204-D	1	W/9" R/G, large diff. brg. , 2 pinion conventional
69/70	U	"Before Ser.J10,001"	WFP	★D0TZ 4204-A	1	W/9" R/G, medium diff. brg. , 2 pinion traction-lok-repl. by D0OZ 4204-C (10-74)
69/70	U	"Before Ser.J10,001"	WFR	C9OZ 4204-D	1	W/9" R/G, large diff. brg. , 2 pinion traction-lok
70/	U	"From Ser.J10,001"	All	D0OZ 4204-D	1	W/9" R/G, slim line diff. brg., 4 conventional pinion, 31 spline shaft, (incl. C9AZ 4221-A brg., C9AZ 4222-A cup, (2) C9AZ 4228-A washers)
			D2AZ 4204-A	1	W/9" R/G slim-line diff. brg., conventional 2 pinion, 28 spline shaft	
			D0OZ 4204-C	1	W/9" R/G, slim line diff. brg., traction-lok, 2 or 4 pinion, 28 or 31 spline shaft (incl. C9AZ 4221-A brg., C9AZ 4222-A cup)	

▲ When used to replace case with large differential bearing, use existing large bearing (B7A 4221-B) and cup (B7A 4222-B).
When used to replace case with medium differential bearing, use slim-line bearing (C9AZ 4221-A) and cup (C9AZ 4222-A).

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4204 CASE ASSY. - REAR AXLE DIFFERENTIAL GEAR - continued					
- X -					
65/67	X	WCY, WDV	C1DW 4204-B	1	W/7 1/4" R/G, small diff. brg., used to convert 2 to 4 pinion conventional
65/69	X	WDW, WDY, WCZ	D0OZ 4204-A	1	W/8" R/G, medium diff. brg. 2 pinion conventional
65/69	X	WDZ, WEA	C4OZ 4204-B	1	W/8" R/G, medium diff. brg., 2 pinion equalock
65/70	X	WCY, WDV	C1DW 4204-A	1	W/7 1/4" R/G, small diff. brg., 2 pinion conventional
65/70	X	WCY, WDV	C4DZ 4204-A	1	W/7 1/4" R/G, small diff. brg., 2 pinion equalock

4204 CASE ASSY. - FRONT AXLE DIFFERENTIAL GEAR					
66/71	U (front drive axle)- "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4204-L	1	3.50 ratio-std.
66/71	U (front drive axle)- "Before Ser.K20,001" "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4204-M	1	3.50 ratio-locker
66/71	U (front drive axle)-	Dana (Spicer) 30	C6TZ 4204-C	1	4.10, 4.56 ratio-std.
66/71	U (front drive axle)- "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4204-N	1	4.10, 4.56 ratio-locker
71/	U(front drive axle)- "From Ser.K20,001"	Dana (Spicer) 44	C6TZ 4204-P	1	3.54 ratio-std.
71/	U(front drive axle)- "From Ser.K20,001"	Dana (Spicer) 44	D1TZ 4204-D	1	3.54 ratio-locker
71/	U(front drive axle)- "From Ser.K20,001"	Dana (Spicer) 44	C6TZ 4204-G	1	4.09, 4.55 ratio-std.
71/	U(front drive axle)- "From Ser.K20,001"	Dana (Spicer) 44	D1TZ 4204-C	1	4.09 ratio-locker

4209 RING GEAR and PINION KIT - REAR AXLE DIFFERENTIAL -Also refer to Group 3222 (Bronco Front Axle)

RING GEAR and PINION IDENTIFICATION CHART LISTED NUMERICALLY BY STAMPED NUMBER ON RING GEAR

IDENTIFICATION NUMBER		RING GEAR & PINION PART NUMBER	REPLACED BY	IDENTIFICATION NUMBER		RING GEAR & PINION PART NUMBER	REPLACED BY
RING GEAR	PINION			RING GEAR	PINION		
C0AW 4210-A	C0AW 4610-A	C0AZ 4209-A	C0AZ 4209-E	C2AW 4210-D	C2AW 4610-D	C2AZ 4209-D	C9OZ 4209-A
C1DW 4210-A	C1DW 4610-A		C1DZ 4209-Y	C2AW 4210-D	C2AW 4610-N	C2AZ 4209-D	C0AZ 4209-E
C1DW 4210-B	C1DW 4610-B		C1DZ 4209-Z	C2AW 4210-D	C2AW 4610-R	C0AZ 4209-D	C0AZ 4209-E
C1DW 4210-C	C1DW 4610-C		C1DZ 4209-Z	C2AW 4210-D	C2AW 4610-R	C0AZ 4209-E	
C1DW 4210-C	C1DW 4610-F	C1DZ 4209-Z		C2AW 4210-E	C2AW 4610-D	C2AZ 4209-E	C0AZ 4209-E
C1DW 4210-D	C1DW 4610-G	C1DZ 4209-V		C2AW 4210-E	C2AW 4610-N	C2AZ 4209-E	C0AZ 4209-E
C1DW 4210-D	C1DW 4610-R		C1DZ 4209-Z	C2AW 4210-E	C2AW 4610-R		C0AZ 4209-E
C1DW 4210-E	C1DW 4610-D	C1DZ 4209-Y					
C2AW 4210-A	C2AW 4610-A	C2AZ 4209-A	B7AZ 4209-K	C2AW 4210-F	C2AW 4610-B	C2AZ 4209-F	C9OZ 4209-A
C2AW 4210-A	C2AW 4610-H	C2AZ 4209-A	B7AZ 4209-K	C2AW 4210-F	C2AW 4610-K	C2AZ 4209-F	C9OZ 4209-A
C2AW 4210-A	C2AW 4610-J	B7AZ 4209-F	B7AZ 4209-K	C2AW 4210-F	C2AW 4610-L	C2AZ 4209-F	C9OZ 4209-A
C2AW 4210-A	C2AW 4610-J	B7AZ 4209-K					
C2AW 4210-B	C2AW 4610-B	C2AZ 4209-B	C9OZ 4209-A	C2AW 4210-G	C2AW 4610-C	C2AZ 4209-G	C8OZ 4209-A
C2AW 4210-B	C2AW 4610-K	C2AZ 4209-B	C9OZ 4209-A	C2AW 4210-G	C2AW 4610-M	C2AZ 4209-G	C8OZ 4209-A
C2AW 4210-B	C2AW 4610-L	B7AZ 4209-G	C9OZ 4209-A				
C2AW 4210-B	C2AW 4610-L	B7AZ 4209-L	C9OZ 4209-A	C2AW 4210-H	C2AW 4610-A	C2AZ 4209-H	B7AZ 4209-K
C2AW 4210-B	C2AW 4610-R		C0AZ 4209-E	C2AW 4210-H	C2AW 4610-H	C2AZ 4209-H	B7AZ 4209-K
				C2AW 4210-H	C2AW 4610-J	C3AZ 4209-D	B7AZ 4209-K
C2AW 4210-C	C2AW 4610-C	C2AZ 4209-C	C9OZ 4209-A	C2AW 4210-J	C2AW 4610-E	C2AZ 4209-J	C0AZ 4209-E
C2AW 4210-C	C2AW 4610-M	C2AZ 4209-C	C9OZ 4209-A	C2AW 4210-J	C2AW 4610-J		C0AZ 4209-E
				C2AW 4210-J	C2AW 4610-R	C2AZ 4209-J	C0AZ 4209-E

4209 RING GEAR and PINION KIT - REAR AXLE DIFFERENTIAL - continued -Also refer to Group 3222 (Bronco Front Axle)**RING GEAR and PINION IDENTIFICATION CHART LISTED NUMERICALLY BY STAMPED NUMBER ON RING GEAR**

RING GEARS ARE ALSO LISTED BY MODEL APPLICATION, BEGINNING ON THE NEXT PAGE.

IDENTIFICATION NUMBER		RING GEAR & PINION PART NUMBER	REPLACED BY	IDENTIFICATION NUMBER		RING GEAR & PINION PART NUMBER	REPLACED BY
RING GEAR	PINION			RING GEAR	PINION		
C2AW 4210-K	C2AW 4610-F	C2AZ 4209-K	C9OZ 4209-A	C6AW 4210-A	C6AW 4610-C	C6AZ 4209-A	D2AZ 4209-A
C2AW 4210-K	C2AW 4610-L	C2AZ 4209-K	C9OZ 4209-A	C6AW 4210-A	D0AW 4610-E	D2AZ 4209-A	
				C6AW 4210-B	C6AW 4610-B	C6AZ 4209-B	
C2AW 4210-L	C2AW 4610-G	C2AZ 4209-L	B7AZ 4209-K	C6AW 4210-C	C6AW 4610-A	C6AZ 4209-C	
C2AW 4210-L	C2AW 4610-J	C2AZ 4209-L	B7AZ 4209-K	C6AW 4210-D	C6AW 4610-D	C6AZ 4209-D	
				C6AW 4210-D	D0AW 4610-F	D2AZ 4209-B	
C2OW 4210-A	C2OW 4610-A	C2OZ 4209-A	C4OZ 4209-H				
C2OW 4210-A	C2OW 4610-D	C2OZ 4209-A	C4OZ 4209-H	C6OW 4210-A	C6OW 4610-A	C4OZ 4209-K	
C2OW 4210-A	C2OW 4610-G	C2OZ 4209-A	C4OZ 4209-H				
C2OW 4210-B	C2OW 4610-B	C2OZ 4209-B	C4OZ 4209-F	C7AW 4210-C	C7AW 4610-F	C7AZ 4209-H	
C2OW 4210-B	C2OW 4610-E	C2OZ 4209-B	C4OZ 4209-F	C7AW 4210-E	C7AW 4610-E	C7AZ 4209-G	
C2OW 4210-B	C2OW 4610-H	C2OZ 4209-B	C4OZ 4209-F	C7AW 4210-F	C7AW 4610-H	C7AZ 4209-J	
C2OW 4210-C	C2OW 4610-C	C2OZ 4209-C	C4DZ 4209-D				
C2OW 4210-C	C2OW 4610-F	C2OZ 4209-C	C4DZ 4209-D	C8AW 4210-A	C8AW 4610-A	C8AZ 4209-A	Not replaced
C2OW 4210-C	C2OW 4610-J	C2OZ 4209-C	C4DZ 4209-D	C8AW 4210-D	C8AW 4610-D	C9AZ 4209-A	
				C8OW 4210-A	C8OW 4610-A	C8OZ 4209-A	
C3AW 4210-A	C3AW 4610-A	C3AZ 4209-A	B8AZ 4209-C	C8OW 4210-B	C8OW 4610-B	C8OZ 4209-B	
C3AW 4210-B	C3AW 4610-A	B8AZ 4209-B	B8AZ 4209-C				
C3AW 4210-B	C3AW 4610-A	B8AZ 4209-B	B8AZ 4209-C	C9OW 4210-A	C9OW 4610-A	C9OZ 4209-A	
C3AW 4210-B	C3AW 4610-D	B7AZ 4209-E	C8OZ 4209-A	C9ZW 4210-A	C9ZW 4610-A	C9ZZ 4209-A	
C3AW 4210-C	C3AW 4610-B		C9OZ 4209-A	C9ZW 4210-C	C9ZW 4610-C	C9ZZ 4209-B	C4OZ 4209-K
C3AW 4210-D	C3AW 4610-B	B7AZ 4209-J	C8OZ 4200-A				
C3AW 4210-D	C3AW 4610-B	B7AZ 4209-N	C8OZ 4200-A	D0AW 4210-A	D0AW 4610-A	C9AZ 4209-B	
C3AW 4210-D	C3AW 4610-D	C3AZ 4209-B	C9OZ 4209-A	D0AW 4210-B	D0AW 4610-B	C9AZ 4209-C	
				D0AW 4210-C	D0AW 4610-C	C9AZ 4209-D	
C3UW 4210-A	C3UW 4610-A	C3UZ 4209-A	C3UZ 4209-C				
C3UW 4210-B	C3UW 4610-A	C3UZ 4209-B	C3UZ 4209-C	D12W 4210-A	D12W 4610-A	D1FZ 4209-A	
C3UW 4210-B	C3UW 4610-A	C3UZ 4209-C	C3UZ 4209-C	D12W 4210-C	D12W 4610-C	D1FZ 4209-C	
				D22W 4210-A	D22W 4610-A	D2FZ 4209-A	
C4AW 4210-A	WAB 4610-A	C4AZ 4209-L	C4AZ 4209-V	WAA 4210-B	WAB 4610-A	B7A 4209-B	C0AZ 4209-E
C4AW 4210-B	C4AW 4610-A	C4AZ 4209-B	Not replaced	WAA 4210-B	C1AW 4610-B	C1AZ 4209-B	C0AZ 4209-E
C4AW 4210-B	C4AW 4610-A	C4AZ 4209-M	Not replaced				
				WAB 4210-A	WAR 4610-C	B7A 4209-C	B7AZ 4209-K
C4AW 4210-C	C4AW 4610-B	C4AZ 4209-C	C8OZ 4209-B	WAB 4210-A	C1TW 4610-A	C1TW 4209-A	B7AZ 4209-K
C4AW 4210-C	C4AW 4610-B	C4AZ 4209-N	C8OZ 4209-B	WAB 4210-B	WAB 4610-C	WAB 4209-J	C4AZ 4209-C
				WAB 4210-C	WAB 4610-E	WAB 4209-H	C3UZ 4209-C
C4AW 4210-D	C4AW 4610-C	C3AZ 4209-H		WAB 4210-D	WAB 4610-F	WAB 4209-G	C4AZ 4209-E
				WAB 4210-E	WAB 4610-G	WAB 4209-F	C4AZ 4209-AB
C4AW 4210-E	C4AW 4610-D	C4AZ 4209-E		WAB 4210-F	WAB 4610-H	WAB 4209-E	C4AZ 4209-AC
C4AW 4210-E	C4AW 4610-D	C4AZ 4209-P	Not replaced	WAB 4210-G	WAB 4610-K	WAB 4209-D	Not replaced
				WAB 4210-H	WAB 4610-J	WAB 4209-C	Not replaced
C4AW 4210-F	C4AW 4610-E	C4AZ 4209-R	C4AZ 4209-AB	WAB 4210-J	WAB 4610-H	WAB 4209-C	Not replaced
C4AW 4210-G	C4AW 4610-F	C4AZ 4209-S	C4AZ 4209-AC	WAB 4210-K	WAB 4610-D	WAB 4209-K	C4AZ 4209-M
C4AW 4210-H	C4AW 4610-G	C4AZ 4209-T	Not replaced	WAC 4210-A	WAS 4610-A	B7A 4209-D	C9OZ 4209-A
C4AW 4210-J	C4AW 4610-H	C4AZ 4209-U	Not replaced	WAC 4210-A	C1AW 4610-C	C1AZ 4209-C	C9OZ 4209-A
				WAC 4210-B	WAM 4610-D	B7A 4209-E	C8OZ 4209-A
C4DW 4210-A	C4DW 4610-A	C4DZ 4209-D		WAC 4210-B	C1AW 4610-D	C1AZ 4209-D	C8OZ 4209-A
				WAL 4210-B	WAM 4610-B	B8E 4209-A	C0AZ 4209-E
C4OW 4210-A	C3OW 4610-A	C3OZ 4209-A	C3OZ 4209-D	WAL 4210-B	C1AW 4610-A	C1AZ 4209-A	C0AZ 4209-E
C4OW 4210-A	C4OW 4610-A	C4OZ 4209-D	C4OZ 4209-K				
C4OW 4210-B	C4OW 4610-B	C4OZ 4209-H		WAM 4210-A	WAM 4610-A	B8A 4209-E	B8AZ 4209-C
C4OW 4210-C	C4OW 4610-C	C4OZ 4209-J		WAM 4210-B	WAM 4610-B	B8A 4209-F	B8AZ 4209-C
C4OW 4210-D	C3OW 4610-A	C3OZ 4209-C	C3OZ 4209-D	WAR 4210-B	WAR 4610-D	B8A 4209-D	C0AZ 4209-E
C5DW 4210-A	C5DW 4610-A	C5DZ 4209-C		32919	32918	C6TZ 3222-A	
				32938	32937	C6TZ 3222-B	
				34411	34410	C6TZ 3222-G	

YEAR	MODEL	AXLE IDENTIFICATION	RATIO	PART NUMBER	QTY.	NO. of TEETH GEAR PINION		REMARKS
4209 RING GEAR and PINION KIT - REAR AXLE DIFFERENTIAL - continued -								
Also refer to Group 3222 (Bronco Front Axle)								
- A -								
8 1/2" R/G								
67/68	A	WER-C	2.80	C7AZ 4209-H	1	42	15	
		WER-A	3.10	C7AZ 4209-G	1	31	10	
69	A	WER-C	2.80	C7AZ 4209-H	1	42	15	
		WER-A	3.10	C7AZ 4209-G	1	31	10	
		WER-E	3.25	C9AZ 4209-A	1	39	12	
8.7" R/G								
69/71	A	WER-F	2.75	C9AZ 4209-B	1	44	16	
		WER-G	3.07	C9AZ 4209-C	1	43	14	
		WER-H	3.25	C9AZ 4209-D	1	39	12	
72	A	WER-F,J	2.75	C9AZ 4209-B	1	44	16	
		WER-H	3.25	C9AZ 4209-D	1	39	12	
8 3/4" R/G - USE 9" for service								
9" R/G								
65/67	A(high performance engine)-includes lubricant-for service installation only		3.10	C4AZ 4209-V	1	31	10	
			3.40	★C4AZ 4209-Y	1	34	10	Not replaced (10-74)
			4.30	C8OZ 4209-B	1	43	10	
			4.44	C3AZ 4209-H	1	40	9	
			4.71	C4AZ 4209-E	1	33	7	
			4.71	★C4AZ 4209-AA	1	33	7	Not replaced (10-74)
			4.86	C4AZ 4209-AB	1	34	7	
			5.14	C4AZ 4209-AC	1	36	7	
			5.43	★C4AZ 4209-AD	1	38	7	Not replaced
			5.67	★C4AZ 4209-AE	1	34	6	Not replaced (10-74)
65	A		3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
			3.89	★B7AZ 4209-N	1	35	9	Note 1 - repl. by C8OZ 4209-A(9-73)
			4.11	B7AZ 4209-K	1	37	9	
66	A		3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
67	A		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
68	A		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
69/	A	Exc. WER	2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
		Exc. WER	3.25	B8AZ 4209-C	1	39	12	
9 3/8" R/G								
66/68	A		2.80	★C6AZ 4209-A	1	42	15	r/b D2AZ 4209-A(9-73)
			3.00	C6AZ 4209-C	1	39	13	
			3.25	C6AZ 4209-D	1	39	12	
			3.50	C6AZ 4209-B	1	35	10	
69/70	A		2.80	C6AZ 4209-A	1	42	15	
			3.00	C6AZ 4209-C	1	39	13	
			3.25	C6AZ 4209-B	1	35	10	
			2.80	D2AZ 4209-A	1	42	15	
- B -								
7 1/4" R/G								
67/68	B		2.83	C5DZ 4209-C	1	34	12	
7 3/4" R/G - Use 8" R/G for service								

Note 1 - When using this kit to replace one with 1/2"-20 holes - use C3AZ 4216-A bolt

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	RATIO	PART NUMBER	QTY.	NO. of TEETH GEAR PINION		REMARKS
4209 RING GEAR and PINION KIT - REAR AXLE DIFFERENTIAL - continued -								
Also refer to group 3222 (Bronco Front Axle)								
- B -								
	8" R/G							
65/67	B		2.79	C4OZ 4209-K	1	39	14	
			2.80	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
			3.25	C4DZ 4209-D	1	39	12	
			3.50	C4OZ 4209-J	1	35	10	
68/	B		2.79	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
			3.25	C4DZ 4209-D	1	39	12	
8 3/4" R/G - Use 9" R/G for service								
	9" R/G							
65	B		3.50	C9OZ 4209-A	1	35	10	
			3.89	B7AZ 4209-N	1	35	9	Note 1
			4.11	B7AZ 4209-K	1	37	9	
66	B		3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
67	B		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.89	B7AZ 4209-N	1	35	9	Note 1
68/71	B		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
			3.91	C8OZ 4209-A	1	43	11	
72	B		4.30	C8OZ 4209-B	1	43	10	
			2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
- F -								
7 1/4" R/G								
65	F		2.83	C5DZ 4209-C	1	34	12	
3.50			C1DZ 4209-Z	1	35	10		
66/68	F		2.83	C5DZ 4209-C	1	34	12	
69/70	F		2.83	C5DZ 4209-C	1	34	12	
			3.08	C9ZZ 4209-A	1	37	12	
7 3/4" R/G - Use 8" R/G for service								
	8" R/G							
65	F		2.80	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
			3.50	C4OZ 4209-J	1	35	12	
66/67	F		2.79	C4OZ 4209-K	1	39	14	
			2.80	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
68	F		2.79	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
			3.25	C4DZ 4209-D	1	39	12	
69	F		2.79	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
70/	F		2.79	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	12	
8 3/4" R/G - Use 9" R/G for service								

Note 1 - When using this kit to replace one with 1/2"-20 holes - use C3AZ 4216-A bolt

YEAR	MODEL	AXLE IDENTIFICATION	RATIO	PART NUMBER	QTY.	NO. of TEETH		REMARKS
						GEAR	PINION	
4209 RING GEAR and PINION KIT - REAR AXLE DIFFERENTIAL - continued -								
Also refer to Group 3222 (Bronco Front Axle)								
- F -								
9" R/G								
65	F		3.50	C9OZ 4209-A	1	35	10	Note 1
			3.89	B7AZ 4209-N	1	35	9	
			4.11	B7AZ 4209-K	1	37	9	
66	F		3.50	C9OZ 4209-A	1	35	10	Note 1
			3.89	B7AZ 4209-N	1	35	9	
67	F		3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
			3.89	B7AZ 4209-N	1	35	9	
68/70	F		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
			3.91	C8OZ 4209-A	1	43	11	
			4.30	C8OZ 4209-B	1	43	10	
71	F		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
			3.91	C8OZ 4209-A	1	43	11	
			4.11	B7AZ 4209-K	1	37	9	
			4.30	C8OZ 4209-B	1	43	10	
			72	F		2.75	C7AZ 4209-J	
3.25	B8AZ 4209-C	1				39	12	
3.50	C9OZ 4209-A	1				35	10	
3.91	C8OZ 4209-A	1				43	11	
- L -								
6 3/4" R/G								
71	L		3.18	D1FZ 4209-C	1	35	11	
			3.55	D1FZ 4209-A	1	39	11	
72	L		3.18	D1FZ 4209-C	1	35	11	
			3.55	D1FZ 4209-A	1	39	11	
- P -								
7 1/4" R/G								
70	P		2.83	C5DZ 4209-C	1	34	12	
			3.08	C9ZZ 4209-A	1	37	12	
70/	P	8" R/G	2.79	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
- S -								
9" R/G								
65	S		3.00	C0AZ 4209-E	1	39	13	
			3.25	B8AZ 4209-C	1	39	12	
			3.50	C9OZ 4209-A	1	35	10	
66/67	S		3.00	C0AZ 4209-E	1	39	13	
70/71	S		2.75	C7AZ 4209-J	1	44	16	
			3.00	C0AZ 4209-E	1	39	13	
72	S		2.75	C7AZ 4209-J	1	44	16	
			3.25	B8AZ 4209-C	1	39	12	
			3.00	C0AZ 4209-E	1	39	13	

Note 1 - When using this kit to replace one with 1/2"-20 holes - use C3AZ 4216-A bolt

YEAR	MODEL	AXLE IDENTIFICATION	RATIO	PART NUMBER	QTY.	NO. of TEETH		REMARKS
						GEAR	PINION	

4209 RING GEAR and PINION KIT - REAR AXLE DIFFERENTIAL - continued -

Also refer to Group 3222 (Bronco Front Axle)

- S -

9 3/8" R/G								
66/67	S		2.80	C6AZ 4209-A	1	42	15	
			3.00	C6AZ 4209-C	1	39	13	
68	S		3.00	C6AZ 4209-C	1	39	13	
69/71			2.80	C6AZ 4209-A	1	42	15	
			3.00	C6AZ 4209-C	1	39	13	
72	S		2.80	D2AZ 4209-A	1	42	15	
			3.00	C6AZ 4209-C	1	39	13	
			3.25	D2AZ 4209-B	1	39	12	

- U -

8 3/4" R/G - Use 9" R/G for service

9" R/G								
66/	U		3.50	C9OZ 4209-A	1	35	10	
			4.11	B7AZ 4209-K	1	37	9	
			4.57	C3UZ 4209-C	1	32	7	

- X -

7 1/4" R/G

65	X		2.83	C5DZ 4209-C	1	34	12	
			3.50	C1DZ 4209-Z	1	35	10	
66/70	X		2.83	C5DZ 4209-C	1	34	12	

7 3/4" R/G - Use 8" R/G for service

8" R/G								
65	X		2.80	C4OZ 4209-K	1	39	14	
66/67	X		2.79	C4OZ 4209-K	1	39	14	
			2.80	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
			3.25	C4DZ 4209-D	1	39	12	
			3.50	C4OZ 4209-J	1	35	10	
68/70			2.79	C4OZ 4209-K	1	39	14	
			3.00	C4OZ 4209-H	1	39	13	
			3.25	C4DZ 4209-D	1	39	12	

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
65/	A, S, X		371518-S(MM180)	1	Locknut (pinion flange to pinion)-3/4"-20
65/	A, B, F, S, X		356214-S8(XX162)		Washer-flat-29/64"
65/	A(exc. locking axle)-exc. WER axle-refer to group 4216		372487-S(BB395)	10	Bolt (gear to case)-7/16"-20 x 15/16"-locking
65/	B, X (8 cyl.)			10	
66	U	WEM, WEN		8	
70	B, F	WFU-D, E		10	
65/	A, B, F, S, X-locking axles		350627-S(BB432)	10	Bolt (gear to case)-7/16"-20 x 1 1/8"-self locking
66/	A-exc. WER axle-refer to group 4216		377574-S7-8(PP41B)	10	Plug(gear to case)-7/16"-20 x .96" locking
65/70	F, X		379237-S(BB394A)	8	Bolt (ring gear to case)-3/8"-24 x 1.17"-locking
66/70	F, X		372768-S(BB347)	8	Bolt (gear to case)-3/8"-24 x 3/4 locking
66/	U (front drive axle)		350672-S(BB214)	10	Bolt (gear to case)-3/8"-24 x 15/16"
67	U(front locking axle)		350672-S(BB214)	10	Bolt (gear to case)-3/8"-24 x 15/16"
65/	X		372768-S(BB437)	8	Bolt (gear to case)-3/8"-24 x 3/4"-locking
65	F			8	
67	B	WEZ		8	
70	P	WDV		8	

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4211 SHAFT - REAR AXLE DIFFERENTIAL PINION					
- A -					
65/	A(2 pinion diff.)-8.7", 9" R/G		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin-(when replacing 69/ 8.7" R/G, use C7AZ 4241-A pin)
65/	A(4 pinion diff.)-9" R/G		C1AZ 4211-B	1	Includes (1) C9OW 4420-B seat, (2) WAB 44207-A shaft & (3) 359475-S pin-also use B7AZ 4211-A to replace long shaft if required
67/69	A(8 1/2" R/G)		C7AZ 4211-B	1	Includes (1) C7AZ 4241-A pin
66/71	A(9 3/8" R/G)		C6AZ 4211-B	1	7/8" dia.-5 3/8" long-includes (1) 359475-S pin & (1) C9AW 4211-B shaft
- B -					
67/68	B(2 pinion diff.)-7 1/4" R/G		C0DZ 4211-A	1	Includes (1) 305086-S pin
67/68	B(4 pinion diff.)-7 1/4" R/G		C1DZ 4211-A	1	Includes (2) C1DW 4419-A shaft, (1) C1DW 4420-A seat & (3) 305110-S pin
65/	B(2 pinion diff.)-7 3/4", 8", 9" R/G		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin
65/	B(4 pinion diff.)-9" R/G		C1AZ 4211-B	1	Includes (1) C9OW 4420-B seat, (2) WAB 44207-A shaft & (3) 359475-S pins-also use B7AZ 4211-A to replace long shaft if required
- F -					
65/70	F(2 pinion diff.)-7 1/4" R/G		C0DZ 4211-A	1	Includes (1) 305086-S pin
65/70	F(4 pinion diff.)-7 1/4" R/G		C1DZ 4211-A	1	Includes (2) C1DW 4419-A shaft, (1) C1DW 4420-A seat & (3) 305110-S pin
65/	F(4 pinion diff.)-9" R/G		C1AZ 4211-B	1	Includes (1) C9OW 4420-B seat, (2) WAB 44207-A shaft & (3) 359475-S pin-also use B7AZ 4211-A to replace long shaft if required
65/	F(2 pinion diff.)-8", 9" R/G		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin
- L -					
71/	L-6 3/4" R/G		C0DZ 4211-A	1	Includes (1) 305086-S pin
- P -					
70	P-7 1/4" R/G		C0DZ 4211-A	1	Includes (1) 305086-S pin
70/	P-8" R/G		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin
- S -					
65/	S(2 pinion diff.)-9" R/G		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin
65/	S(4 pinion diff.)-9" R/G	Exc. WFV-G,H,J,K, WGB-R,S	C1AZ 4211-B	1	Includes (1) C9OW 4420-B seat, (2) WAB 44207-A shaft & (3) 359475-S pin also use B7AZ 4211-A to replace long shaft if required
72	S(4 pinion)-9" R/G	WFV-G,H,J,K, WGB-R,S	D3SZ 4211-A	1	
66/	S-9 3/8" R/G		C6AZ 4211-B	1	Includes (1) C9AW 4211-B shaft & (1) 359475-S pin

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4211 SHAFT - REAR AXLE DIFFERENTIAL PINION - continued					
- U -					
66/	U(rear drive axle)		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin
66/71	U(front drive axle)- "Before Ser.K20,001"		C6TZ 4211-A	1	11/16" dia.-4 3/8" long-without locking differential
71/	U(front drive axle)- "From Ser.K20,001"		8L 4211	1	5" long-without locking differential
66/	U(front drive axle)		C6TZ 4211-D	2	4 19/64" long-with locking differential
- X -					
67/68	X(2 pinion diff.)-7 1/4" R/G		C0DZ 4211-A	1	Includes (1) 305086-S pin
67/68	X(4 pinion diff.)-7 1/4" R/G		C1DZ 4211-A	1	Includes (2) C1DW 4419-A shaft, (1) C1DW 4420-A seat & (3) 305110-S pin
65/70	X-7 3/4", 8" R/G		B7AZ 4211-A	1	Includes (1) C9AW 4211-A shaft & (1) 305105-S pin
65/	A (with locking axle)		352506-S(NN115)	1	Pin (shaft lock)-1/4"-1 1/2"
65/	A, B, F, S, U, X		359475-S(NN116)	1or3	Pin (shaft lock)-1/4" x 1 3/4"
66/	A, S	WDT, WEF	305140-S(NN117)	1	Pin (shaft lock)-1/4" x 2 1/4"
67/	A	WER	34806-S7(X64)	1	Lockwasher-7/16"
65/	B, F, P, X (6 cyl.)		353909-S8(NN109)	1	Pin (shaft lock)-3/16" x 1 1/2"
66/	U (front drive axle)		357228-S(NN130)	1	Pin (shaft lock)-15/64" x 1 7/16"
65	X (locking axle)		*350086-S	1	Pin (shaft lock)-3/16" x 1 1/8" spring
4214 WASHER - REAR AXLE DIFFERENTIAL CLUTCH - SPRING					
65/69	A, B, F, U, S, X(w/equallock)		C4AZ 4214-A	1	8", 9" & 9 3/8" R/G
68/	A, B, F, P, S, U, X- (w/traction lok)		D0AZ 4214-A	4	1 1/16" free length-7/16" O.D. -8 coils - 8", 9" & 9 3/8" R/G
65/70	F, X(w/equallock)		C4DZ 4214-A	1	Locking axle-integral carrier-7 1/4" R/G
4215 PINION KIT - REAR AXLE DIFFERENTIAL					
65/69	A, B, F, S, U, X(7 3/4", 8", 9" ring gear) (W/equallock axles)		*C1AZ 4215-C r/b C8OZ 4215-A (11-73)	1or2	Consists of -2-C1AW 4215-C pinion 2- B7A 4230-A washer
69/	A(8.7" ring gear)	WER-F, G, H	C9AZ 4215-A	1	Consists of -2-D0AW 4215-A pinion 2-D0AZ 4230-A washer
65/72	A, B, F, P, S, U, X(7 3/4", 8", 9" ring gear) (w/conventional axles)			1or2	
66/	A, S(9 3/8" ring gear)		C6AZ 4215-A	1	Consists of-2-C6AW 4215-A pinion gears 2-C6AZ 4230-A thrust washer
67/69	A (8 1/2" ring gear)	WER-A, C, E	C7AZ 4215-A	1	Consists of- (2)C7AZ 4215-A pinion gears (2)-C7AZ 4230-A thrust washer
68/	A, B, F, P, S, U, X-(8" & 9" R/G)-w/traction lok axles)		C8OZ 4215-A	1	Consists of -4-C9OW 4215-A gears 4-C9OZ 4230-A washers
65/	B, F, L, P, X(6 3/4", 7", 7 1/4" ring gear)		C0DZ 4215-C	1	Consists of- 2-C0DW 4215-C pinion 2-C0DW 4230-C washer
66/71	U (front drive axle) - "Before Ser.K20,001"		C6TZ 4215-A	AR	
71/	U(front drive axle)- "From Ser.K20,001"		8M 4215	AR	
4216 BOLT - REAR AXLE DIFFERENTIAL GEAR TO CASE					
65/67	A (8 cyl. 406, 427)		C3AZ 4216-A	10	To attach ring gear with 7/16" holes to case with 1/2" holes
66/69	A, S(9 3/8" ring gear)	WDT, WEF	C6AZ 4216-A	10	7/16"-20 x .96" use with Equa Lock diff. only
67/	A(8 1/2", 8.7" ring gear)	WER	C7AZ 4216-A	10	7/16"-20 x 3/4"
66/	U (front drive axle)		C6TZ 4216-D	8	3/8"-24 x 2 29/32" L.H. thread for locking diff. only
65/	A		350627-S	10	7/16" x 20" x 1 3/16"

4221-2 CONE - ROLLER and CUP - REAR AXLE DIFFERENTIAL BEARING

CONE-ROLLER and CUP CROSS-REFERENCE CHART

(FOR MODEL APPLICATION, REFER TO MODEL APPLICATION CHART ON THIS PAGE)

CONE-ROLLER		CUP	
IDENTIFICATION	SERVICE PART NUMBER	IDENTIFICATION	SERVICE PART NUMBER
25590	B7T 1201-A	25520	C3TZ 1202-B
29749	C1UW 4221-A	25523	8M 4222
LM48548	B7C 1201-A	29710	C1UW 4222-A
LM102949	C9AZ 4221-A	48510	B7C 1202-A
LM501349	B7A 4221-A	LM102910	C9AZ 4222-A
LM603049	B7A 4221-B	LM501310	B7A 4222-A
		LM501314	C6TZ 4222-A
		LM603011	B7A 4222-B

YEAR	MODEL	CONE-ROLLER	QTY.	CUP	QTY.	DESCRIPTION
- A -						
65/70	A(8 1/2" 9" R/G)- "Before 5/13/70"	B7A 4221-A	2	B7A 4222-A	2	●M-medium size
65/70	A(9" R/G)-"Before 5/13/70"	B7A 4221-B	2	B7A 4222-B	2	●L-large size
69/70	A(8.7" R/G)	C9AZ 4221-A	2	C9AZ 4222-A	2	●SL-slim-line size
70/	A(9" R/G)-"From 5/13/70"		2		2	
66/70	A(9 3/8" R/G)	B7T 1201-A	2	C3TZ 1202-B	2	●XL-extra large size
- B -						
67/68	B(7 1/4" R/G)	C1UW 4221-A	2	C1UW 4222-A	2	●S-small size
65/	B(7 3/4" 8" R/G)	B7A 4221-A	2	B7A 4222-A	2	●M-medium size
65/70	B(9" R/G)-"Before 5/13/70"		2		2	
65/70	B(9" R/G)-"Before 5/13/70"	B7A 4221-B	2	B7A 4222-B	2	●L-large size
70/	B(9" R/G)-"From 5/13/70"	C9AZ 4221-A	2	C9AZ 4222-A	2	●SL-slim-line size
- F -						
65/70	F(7 1/4" R/G)	C1UW 4221-A	2	C1UW 4222-A	2	●S-small size
65/	F(7 3/4" 8" R/G)	B7A 4221-A	2	B7A 4222-A	2	●M-medium size
65/70	F(9" R/G)-"Before 5/13/70"		2		2	●M-medium size
65/70	F(9" R/G)-"Before 5/13/70"	B7A 4221-B	2	B7A 4222-B	2	●L-large size
70/	F(9" R/G)-"From 5/13/70"	C9AZ 4221-A	2	C9AZ 4222-A	2	●SL-slim-line size
- L -						
71/	L(6 3/4" R/G)	B7C 1201-A	2	B7C 1202-A	2	●XS-extra small size
- P -						
70	P(7 1/4" R/G)	C1UW 4221-A	2	C1UW 4222-A	2	●S-small size
70/	P(8" R/G)	B7A 4221-A	2	B7A 4222-A	2	●M-medium size
- S -						
65/70	S(9" R/G)-"Before 5/13/70"	B7A 4221-B	2	B7A 4222-B	2	●L-large size
70/	S(9" R/G)-"From 5/13/70"	C9AZ 4221-A	2	C9AZ 4222-A	2	●SL-slim-line size
66/	S(9 3/8" R/G)	B7T 1201-A	2	C3TZ 1202-B	2	●XL-extra large size
- U -						
66/70	U(rear drive axle)- "Before 5/13/70"	B7A 4221-A	2	B7A 4222-A	2	●M-medium size
67	U(rear drive axle)	B7A 4221-B	2	B7A 4222-B	2	●L-large size
70/	U(rear drive axle)	C9AZ 4221-A	2	C9AZ 4222-A	2	●SL-slim-line size
66/	U(front drive axle)-Dana (Spicer) 30,44	B7A 4221-B	2	B7A 4222-B	2	●L-large size-used as inner wheel bearing & cup
66/71	U(front drive axle)-Dana (Spicer) 30- "Before Ser.K20,001" "Before Ser.K20,001" "Before Ser.K20,001"	B7A 4221-A	2			Used as outer wheel & differential bearing
				B7A 4222-A	2	Used as outer wheel bearing cup
				C6TZ 4222-A	2	Used as differential bearing cup

● Refer to Page 1, Section 40 for explanation.

YEAR	MODEL	CONE-ROLLER	QTY.	CUP	QTY.	DESCRIPTION
4221-2 CONE - ROLLER and CUP - DIFFERENTIAL BEARING - continued						
- U -						
71/	U(front drive axle)-Dana(Spicer) (Spicer) 44- "From Ser.K20,001"	B7A 4221-A	2	B7A 4222-A	2	Used as outer wheel bearing & cup
71/	U(front drive axle)-Dana (Spicer) 44- "From Ser.K20,001"	B7T 1201-A	2	8M 4222	2	Used as differential bearing & cup
- X -						
65/70	X(7 1/4" R/G)	C1UW 4221-A	2	C1UW 4222-A	2	●S-small size
65/70	X(8" R/G)	B7A 4221-A	2	B7A 4222-A	2	●M-medium size

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4228 WASHER - REAR AXLE DIFFERENTIAL SIDE GEAR THRUST					
65/69	A,B,F,S,U,X(7 3/4", 8", 8 1/2", 8.7", 9" R/G) "Before 11/18/68"		C2OW 4228-A	2	1 25/32" I.D. - 2 7/8" O.D. -.031" thick
69/	A,B,F,S,U,X(7 3/4", 8", 8 1/2", 8.7", 9" R/G) "From 11/18/68"		C9OZ 4228-A	2	2.84 O.D. - 1.78 I.D. -.030 to .032 thick color code yellow-also supplied in 4236 kit
69/	A,S(9 3/8" R/G)	Traction Lok		1	
66/	A,S(9 3/8" ring gear)	All exc.Traction Lok	C6AZ 4228-A	2	1 25/32" I.D. - 3 3/64" O.D. -.032" thick-
69/	A,S(9 3/8" R/G)	Traction Lok		1	also supplied in 4236 kit
65/70	B,F,P,X(6 3/4", 7", 7 1/4" ring gear)		C0DW 4228-A	2	1 25/64" I.D. - 2 1/4" O.D. -.032" thick-
71/	L(6 3/4" R/G)			2	also supplied in 4236 kit
66/71	U (front drive axle)- "Before Ser.K20,001"		C6TZ 4228-A	2	1 37/64" I.D. - 2 3/8" O.D. -.032" thick
71/	U(front drive axle)- "From Ser.K20,001"		C1VY 4228-A	1	1 49/64" I.D.-2 13/16" O.D.-.031" thick

4230 WASHER - REAR AXLE DIFFERENTIAL PINION THRUST					
65/71	A,B,F,P,S,U,X(7 3/4", 8", 9" R/G)	All exc.Traction Lok	B7AZ 4230-A	2or4	25/32" I.D. - 1 33/64" O.D. -.032" thick- phosphate coated
66/	A,S(9 3/8" ring gear)		C6AZ 4230-A	2	29/32" I.D. - 1 3/4" O.D. -.031" thick- phosphate coated-also supplied in 4215 kit
67/ 69	A(8 1/2" ring gear)	WER-A, C, E	C7AZ 4230-A	2	49/64" I.D. - 1 33/64" O.D. -.032" thick - phosphate coated-also supplied in 4215 kit
68/	A,B,F,P,U,X (8", 9" R/G)	Traction Lok	C9OZ 4230-A	4	1 7/16" O.D. - 3/4" I.D.-also supplied in 4215 kit
70 /	S(9" ring gear)			4	
69/	A(8.7" R/G)	WER-F,G,H	D0AZ 4230-A	2	3/4" I.D. - 1 1/2" O.D. -also supplied in
72	A,B,F,P,S(8", 9" R/G) all exc. Traction Lok			2or4	4215 kit
65/ 70	B,F,P,X(6 3/4", 7", 7 1/4" ring gear)		C0DW 4230-C	2	21/32" I.D. - 1 11/32" O.D. -.032" thick - cadmium plate - White-also supplied in 4215 kit
71/	L(6 3/4" R/G)			2	
66/71	U (front drive axle)- "Before Ser.K20,001"		C6TZ 4230-A	AR	45/64" I.D. - 1 19/32" O.D. -.032" thick
71/	U(front drive axle)- "From Ser.K20,001"		8M 4230-A	AR	

4A233 CLUTCH - REAR AXLE DRIVEN					
65/67	A (8 cyl. 427)		C5AZ 4A233-A	2	20 teeth-27 splines-no spin differential

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4234-5 SHAFT ASSY. - REAR AXLE					
- A -					
65	A (9" R/G)	WDC-W, X	▲C5AZ 4234-C ▲C5AZ 4234-D	1 1	31 splines-R. H. -32 5/16" long -L. H. -29 19/32" long
65/67	A (9" R/G)	WDC-CB, WDD	●C5AZ 4234-A ●C5AZ 4234-B	1 1	28 splines-R. H. -32 1/4" long -L. H. -29 19/32" long
65/68	A (9" R/G)	WDC(exc. CB) WDL	▲C5AZ 4234-G ▲C5AZ 4234-H	1 1	28 splines-R. H. -32 5/16" long -L. H. -29 19/32" long
66/68	A (9 3/8" R/G)	WDT	▲C6SZ 4234-A ▲C6AZ 4234-B	1 1	31 splines-R. H. -31 7/8" long -L. H. -29 13/16" long
67/68	A (8 1/2" R/G)	WER	*C7AZ 4234-C *C7AZ 4234-D	1 1	28 splines-R. H. -32 7/32" long -L. H. -30 1/8" long
69/70	A (9 3/8" R/G)	WDT, WFH	▲C9AZ 4234-E ▲C9AZ 4234-F	1 1	31 splines-R. H. -33" long -L. H. -30 3/4" long
69/	A (9" R/G)	WDC, WDL, WFG	▲C9AZ 4234-C ▲C9AZ 4234-D	1 1	28 splines-R. H. -33 1/4" long -L. H. -30 9/16" long
69/	A (8 1/2" & 8.7" R/G)	WER	*C9AZ 4234-A *C9AZ 4234-B	1 1	28 splines-R. H. -33 3/16" long -L. H. -31 1/8" long
- B -					
65	B (8" R/G)	WCL, WDK	●C2OZ 4234-A ●C2OZ 4235-A	1 1	28 splines-R. H. -30 1/8" long -L. H. -26 5/64" long
65	B (9" R/G)	WCU-B, C, D	●C5OZ 4234-B ●C5OZ 4234-A	1 1	28 splines-R. H. -30 1/8" long -L. H. -26 5/64" long
66/69	B (8" & 9" R/G)		●C9OZ 4234-A ●C9OZ 4234-B	1 1	28 splines-R. H. -31 1/8" long -L. H. -27 1/16" long
67/68	B (7 1/4" R/G)	WEZ	●C7OZ 4234-C ●C7OZ 4234-D	1 1	24 splines-R. H. -30 59/64" long -L. H. -27 27/64" long
67/69	B (9" R/G)		●C9OZ 4234-C ●C9OZ 4234-D	1 1	31 splines-R. H. -31 1/8" long -L. H. -27 1/16" long
70/71	B (8" & 9" R/G)		●D0OZ 4234-C ●D0OZ 4234-D	1 1	28 splines-R. H. -31 7/8" long -L. H. -27 13/16" long
70/71	B (9" R/G)		●D0OZ 4234-A ●D0OZ 4234-B	1 1	31 splines-R. H. -31 7/8" long -L. H. -27 13/16" long
72	B (8 & 9" R/G)	All	†D2OZ 4234-C †D2OZ 4234-D	1 1	28 splines-R. H. -32 29/64" long -L. H. -29 51/64" long
- F -					
*65/66	F (7 1/4" R/G)	WCY	◇C4DZ 4234-A ◇C4DZ 4234-B	1 1	24 splines-R. H. -29 15/16" long -L. H. -26 7/16" long
*65/66	F (7 1/4" R/G)	WCY	◇C4DZ 4234-A CC4DW 4275-A	1 1	24 splines-R. H. -29 15/16" long -L. H. -26 7/16" long
65/66	F (8" R/G)	WCZ, WDJ	●C2OZ 4234-A ●C2OZ 4235-A	1 1	28 splines-R. H. -30 1/8" long -L. H. -26 5/64" long
65/66	F (9" R/G)	WCZ	●C5OZ 4234-B ●C5OZ 4234-A	1 1	28 splines-R. H. -30 1/8" long -L. H. -26 5/64" long
67/69	F (8" & 9" R/G)- "Before 3/15/69"	WCZ, WDJ, WES exc. U, WFB	●C6OZ 4234-F ●C9OZ 4234-B	1 1	28 splines-R. H. -31 1/8" long -L. H. -27 1/16" long
69/70	F (8" & 9" R/G)- "From 3/15/69"		●C9OZ 4234-A ●C9OZ 4234-B	1 1	28 splines-R. H. -31 1/8" long -L. H. -27 1/16" long
67/70	F (7 1/4" R/G)	WCY	◇C6DZ 4234-C ◇C6DZ 4234-D	1 1	24 splines-R. H. -30 15/16" long -L. H. -27 7/16" long
67/70	F (9" R/G)		●C9OZ 4234-C ●C9OZ 4234-D	1 1	31 splines-R. H. -31 1/8" long -L. H. -27 1/16" long
71	F (8" & 9" R/G)	All-exc. WES-AE3, AJ3, WFD-F3, M3	●D0OZ 4234-C ●D0OZ 4234-D	1 1	28 splines-R. H. -31 7/8" long -L. H. -27 13/16" long

▲ Includes C9AZ 1225-A bearing (large) ● Includes D0OZ 1225-A bearing (med.) * Includes C7AZ 1225-A bearing
☆ U.S. Only ♦ Canada Only ◇ Includes C0DZ 1225-C bearing (small) † Includes D2OZ 1225-A bearing

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4234-5 SHAFT ASSY. - REAR AXLE - continued					
- F -					
71	F(9" R/G)	WES-AE3, AJ3, WFD-F3, M3	★D1ZZ 4234-C ●D1ZZ 4234-D	1 1	28 splines-R.H. -31 49/64" long -repl. by D3ZZ 4234-A (10-74) -L.H. -27 13/16" long
71/	F(9" R/G)		●D1ZZ 4234-A ●D1ZZ 4234-B	1 1	31 splines-R.H.-31 25/32" long -L.H.-27 13/16" long
72	F(8" & 9" R/G)	WCZ, WES(exc. AK), WFL, WFB	●D0OZ 4234-C ●D0OZ 4234-D	1 1	28 splines-R.H. -31 7/8" long -L.H. -27 13/16" long
72	F(9" R/G)	WES-AK, WFD-F3	●D1ZZ 4234-C ●D1ZZ 4234-D	1 1	28 splines-R.H. -31 49/64" long -L.H. -27 13/16" long
- L -					
71/72	L(6 3/4" R/G)	WDV, WGF	†D3FZ 4234-A †D3FZ 4234-B	1 1	23 splines-R.H.-29 11/16" long -L.H.-26 3/16" long
- P -					
70	P(7 1/4" R/G)	WDV	◇D0DZ 4234-A ◇D0DZ 4234-B	1 1	24 splines-R.H.-29 7/16" long -L.H.-25 15/16" long
70/	P(8" R/G)	WDV-M, N, WDW-L, M WFS-B	◇D0DZ 4234-E ◇D0DZ 4234-F	1 1	28 splines-4 wheel bolts- -R.H.-29 1/2" long -L.H.-25 9/16" long
71/	P(8" R/G)	WDW-T, U, WFS-C	●D3DZ 4234-A §D3DZ 4234-B	1 1	28 splines-5 wheel bolts- -R.H.-29 5/8" long -L.H.-25 9/16" long
- S -					
65	S(9" R/G)	WCD, WDE	▲C2SZ 4234-C ▲C2SZ 4234-D	1 1	28 splines-R.H. -32 1/4" long -L.H. -27 15/16" long
66	S(9" R/G)	WCD	▲C6SZ 4234-C ▲C6SZ 4234-D	1 1	28 splines-L.H. -27 7/8" long -R.H. -32 1/4" long
66	S(9 3/8" R/G)	WEF	▲C6SZ 4234-A ▲C6SZ 4234-B	1 1	31 splines-R.H. -31 7/8" long -L.H. -27 31/32" long
67/68	S(9 3/8" R/G)	WDT	▲C6SZ 4234-A ▲C6AZ 4234-B	1 1	31 splines-R.H. -31 7/8" long -L.H. -29 13/16" long
67	S(9" R/G)	WDC	▲C5AZ 4234-G	1	28 splines-R.H. -32 5/16" long
69	S(9" R/G) - "Before 6/15/70"	WFB, WGB	▲C5AZ 4234-H	1	-L.H. -29 19/32" long
69/71	S(9" R/G) - "From 6/15/70"	WFB, WGB	▲C9SZ 4234-F ▲C9SZ 4234-E	1 1	28 splines-R.H. -32 5/16" long -L.H. -29 19/32" long
69/71	S(9 3/8" R/G)	WGA, WFN (w/o anti-skid system)	▲C9SZ 4234-A ▲C9SZ 4234-B	1 1	31 splines-R.H. -31 7/8" long -L.H. -29 13/16" long
69	S(9 3/8" R/G)	WGA (with anti-skid system)	▲C9SZ 4234-C ▲C9SZ 4234-D	1 1	31 splines-R.H. -31 7/8" long -L.H. -29 13/16" long
70	S(9 3/8" R/G) - "Before 1/19/70"	WGA, WFN (with anti-skid system)	§D0SZ 4234-A §D0SZ 4234-B	1 1	31 splines-R.H. -31 7/8" long -L.H. -29 13/16" long
70/71	S(9 3/8" R/G) - "From 1/19/70"	WGA, WFN (with sure-track)	▲C9SZ 4234-A ▲C9SZ 4234-B	1 1	31 splines-R.H. -31 7/8" long -L.H. -29 13/16" long
72	S(9" R/G) -		◇†D2OZ 4234-C ◇†D2OZ 4234-D	1 1	28 splines-R.H. -32 29/64" long -L.H. -29 51/64" long
72	S(9 3/8" R/G)		†D2SZ 4234-A †D2SZ 4234-B	1 1	31 splines-R.H. -32 3/16" long -L.H. -29 63/64" long
- U -					
66/	U(8 3/4" & 9" R/G w/ medium wheel brg.) medium wheel brg.)	WEM, WFP	★C6TZ 4234-A ★C6TZ 4234-B	1 1	28 splines-R.H. -29 11/16" long - repl. by D3TZ 4234-G (10-74) -L.H. -27 1/4" long-repl. by D3TZ 4234-F (10-74)
66/	U(8 3/4" & 9" R/G w/ large wheel brg.)	WEN, WFP	★C6TZ 4234-D ★C6TZ 4234-C	1 1	28 splines-R.H.-29 3/21" long-repl. by D3TZ 4234-H (10-74) -L.H. -26 31/32" long-repl. by D3TZ 4234-J (10-74)

- ▲ Includes C9AZ 1225-A bearing (large)
● Includes D0AZ 1225-A bearing (medium)
◇ Includes D0DZ 1225-A bearing (small)
§ Includes rotor, sensor & bearing

- ◇ Includes C0DZ 1225-C bearing (small)
†† Includes D5DZ 1225-A bearing
† Includes D1FZ 1225-A bearing (extra small)
‡ Includes D2OZ 1225-A bearing

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4234-5 SHAFT ASSY. - REAR AXLE - continued					
- X -					
65	X(7 1/4" R/G)	WCY	◇ C4DZ 4234-A ◇ C4DZ 4234-B	1 1	24 splines-R.H.-29 15/16" long -L.H.-26 7/16" long
65	X(8" R/G)	WCZ, WDJ	● C2OZ 4234-A ● C2OZ 4235-A	1 1	28 splines-R.H.-30 1/8" long -L.H.-26 5/64" long
66	X(7 1/4" R/G)	WDV	◇ C6DZ 4234-C ★◇ C6DZ 4234-B r/b C6DZ 4234-D(5-73)	1 1	24 splines-R.H.-30 15/16" long -L.H.-27 7/16" long
66/67	X(8" R/G)	WDW, WDY, WDZ, WEA	● C6OZ 4234-F ● C9OZ 4234-B	1 1	28 splines-R.H.-31 1/4" long -L.H.-27 1/16" long
67/70	X(7 1/4" R/G)	WDV	◇ C6DZ 4234-C ◇ C6DZ 4234-D	1 1	24 splines-R.H.-30 15/16" long -L.H.-27 7/16" long
68/69	X(8" R/G)- "Before 3/15/69"	WDW, WDY, WDZ, WEA	● C6OZ 4234-F ● C9OZ 4234-B	1 1	28 splines-R.H.-31 1/8" long -L.H.-27 1/16" long
69/70	X(8" R/G)- "From 3/15/69"	WDW, WDY-A, WDZ, WEA	● C9OZ 4234-A ● C9OZ 4234-B	1 1	28 splines-R.H.-31 1/8" long -L.H.-27 1/16" long
70	X(8 & 9" R/G)	WDY-A1	● D0OZ 4234-C ● D0OZ 4234-D	1 1	28 splines-R.H.-31 7/8" long -L.H.-27 13/16" long
65/	A, S, X		356080-S32(MM270)	4or6	Spring nut (shaft to brake drum)-1/2"
4A234 CLUTCH & RING REAR AXLE					
65/67	A (8 cyl. 427)		C5AZ 4A234-A	1	No spin differential
4236 GEAR - REAR AXLE DIFFERENTIAL SIDE - Also refer to group 4236-7 kits					
65/68	A, B, F, S, U, X (with locking axle)-except 7 1/4", 9 3/8" ring gear		C2AZ 4236-B	1	28 splines-4 omitted-no hub- use with 1 pc. C2AW 4236-A included in C2AZ 4236-A kit
66/70	B, F, X(7 1/4" R/G)		C4DZ 4236-B	1	24 splines-no hub-with locking axle
68/71	B, F, (9" R/G)-traction lok		C8OZ 4236-A C8OZ 4236-B	1 1	31 spline-R.H.-16 teeth, 1 3/16" long -L.H.-16 teeth-2 1/32" long
72	F(9" R/G)-traction lok			1	
69/71	B, F, (9" R/G)-conventional		C8OZ 4236-A	2	31 spline-16 teeth-1 3/16" long
72	F(9" R/G)-conventional			2	
65/70	B, F, P, X(7 1/4" R/G)		D0DZ 4236-A	AR 1 2	16 teeth-24 spline with locking axle with non-locking axle
71/	L(6 3/4" R/G)		D1FZ 4236-A	1	16 teeth-23 spline-also serviced in D1FZ 4263-B kit
4236 GEAR - REAR AXLE DIFFERENTIAL SIDE - Also refer to group 4236-7 kits					
65	A (8 cyl. 427)- with locking axle		C5AZ 4236-A	2	27 teeth-31 splines- no spin differential
4236 GEAR KIT - REAR AXLE DIFFERENTIAL SIDE					
65/68	A, B, F, S, U, X(8", 9" R/G)		★C2AZ 4236-A r/b C9AZ 4236-B (3-74)	1	28 splines-4 omitted-with hub Consists of 2-C2AW 4236-A Gear (use 1 pc. for locking axle) 2-C9OZ 4228-A Washer
65/68	A, B(8 cyl. 427)- Exc. locking axle		C4AZ 4236-A	1	31 splines-4 omitted-with hub
70/71	B, F	WFO-D, E		2	Consists of - 2-C4AW 4236-A Gear, 2-C9OZ 4228-A Washer
66/	A, S (with locking axle)- 9 3/8" R/G		C6AZ 4236-A	1	Consists of 1-C6AW 4236-A side gear w/o hub-1-C6AW 4236-B side gear with hub-2-C6AZ 4228-A thrust washer- 31 splines/4 omitted
66/	A, S(Exc. locking axle) - 9 3/8" R/G		C6AZ 4236-B	1	Consists of 2-C6AW 4236-B side gear with hub-2-C6AZ 4228-A thrust washer 31 spines 4 omitted

● Includes D0AZ 1225-A bearing (med.) ◇ Includes C0DZ 1225-C bearing (small)

May, 1975

COPYRIGHT © 1975 -

FORD MOTOR
COMPANY

- DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4236 GEAR KIT - REAR AXLE DIFFERENTIAL SIDE -continued					
67/	A(8 1/2", 8.7" R/G)	WER	C7AZ 4236-A	1	28 splines-4 omitted-with hub includes (2)C7AW 4236-A Gear, (2) C9OZ 4228-A Washer
69/	A, B, F, P, S, U, X(8", 9" R/G)		C9AZ 4236-A	1	With locking differential-28 spline includes: (1) C9OW 4236-A gear-21/32" long (1) C9OW 4236-B gear-1 3/16" long (2) C9OZ 4228-A Washers
			C9AZ 4236-B	1	With standard differential-28 spline includes: (2) C9OW 4236-B gears-1 3/16" long (2) C9OZ 4228-A washers
65/70	B, F, P, X(6 3/4", 7", 7 1/4" R/G)		C1DZ 4236-C	1	24 splines - Consists of 2 - D0DZ 4236-A Gear 2 - C0DW 4228-A Washer
71/	L(6 3/4" R/G)	WDV, WGF	D1FZ 4236-B	1	Includes (2) D1FZ 4236-A gears, (2) C0DW 4228-A washers
4237 GEAR KIT - FRONT AXLE DIFFERENTIAL SIDE					
66/71	U (front drive axle)- "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4236-D	2	Except locking differential
66/71	U (front drive axle)- "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4237-A	1	With locking differential - consists of 2 side gears stamped 34007, 4 pinions stamped 34011
71/	U(front drive axle)- "From Ser.K20,001"	Dana (Spicer) 44	D1TZ 4237-A	1	With locking differential-includes (2) side gears, (2) pinions, (1) shaft, (2) snap rings, (2) thrust washers
71/	U(front drive axle)- "From Ser.K20,001"	Dana (Spicer) 44	D1TZ 4237-B	1	Except locking differential-includes (1) 8L 4211 shaft, (2) 8M 4215 pinions, (2) CIVY 4228-A thrust washers, (2) 8M 4230 thrust washers, (2) C6TZ 4236-E gears, (1) 357228-S10ck
4N237 "U" WASHER - REAR AXLE SHAFT RETAINING					
67/	A(8 1/2", 8.7" R/G)	WER	C7AZ 4N237-A	2	
4238 SHAFT - REAR AXLE - Refer to Group 4234-5					
4241 PIN - REAR AXLE DIFFERENTIAL & PINION SHAFT LOCK					
67/	A(8 1/2", 8.7" R/G)	WER	C7AZ 4241-A	1	2" long-1/2" shoulder with 5/16"-18 thread-pin 1/4" dia.
4A263 DAMPER - REAR AXLE DRIVE LINE VIBRATION					
66	A(63)240, 289, 352, 390- (except 390 LTD)-not used with 4 speed trans. - "From 5/2/66"		★C6AZ 4A263-C	1	On axle
69/	A(8 cyl. 302-w/C4 A/T)		C9AZ 4A263-A	1	15" long
70/	A(8 cyl. 351 w/all-A/T)			1	
71/	A(8 cyl. 400, 429 w/A/T)			1	
67	B(exc. 66, 76)(6 cyl. auto. trans.)(8 cyl. 289, 302 3/S/T or auto.trans.)- "Before 2/1/68"		C7OZ 4A263-C	1	On transmission
68	B(exc. 66, 76)(6 cyl. auto. trans.)(8 cyl. 302 3/S/T or A/T)-"From 2/1/68"		C7OZ 4A263-D	1	
69	B(exc. 66, 76)(6 & 8 cyl., 250, 302, 351 with A/T)			1	
70/71	B(exc. 66, 71)-6&8 cyl. 250, 302, 351		D0OZ 4A263-B	1	


YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4A263 DAMPER - REAR AXLE DRIVE LINE VIBRATION -continued					
71	L(4 cyl. 122 with A/T&A/C)	All	D1FZ 4A263-C	1	On transmission - stamped L
72	L(4 cyl. 122 with A/T)	All	D2FZ 4A263-A	1	On transmission
72	L(4 cyl.122 with M/T)	All	D2FZ 4A263-B	1	On transmission
68/71	S		C8SZ 4A263-A	1	
67	B		381813-S2 (BB545AB)	2	Bolt(damper assy. to transmission) 5/16"-18 x 1 3/4"
68/	B		56324-S(B318GH)	3	Bolt-hex. head-5/16"-18 x 1 1/2" (damper assy. to transmission extension)
71	L(4 cyl. 122 with A/T & A/C		384720-S100 (BB545AD)	2	Bolt-hex. head-5/16"-18 x 1 1/2" (damper assy. to transmission extension)
4269 STUD - REAR AXLE TRACK BAR					
65/71	A		C6AZ 4269-A	1	Rear
67/70	S			1	
67/	A, S		33847-S(M58)	1	Nut (to axle)-9/16"-12
67/	A, S		34810-S(X69)	1	Washer (to axle)-9/16" lock
4298 BRACKET - REAR AXLE DRIVING PINION BEARING RETAINER - Also refer to group 4730					
65/67	A	WDC, WDD, WDL	C6AZ 4298-B	1	Bracket
66/67	B	"From 10/24/65" WEB, WED		1	
66	A	"Before 3/23/66" WDT	C6AZ 4298-D	1	Bracket-except model 63 with damper
66/67	A	"From 3/23/66" WDT	C6AZ 4298-D	1	Bracket
66	B	"Before 10/24/65" WEB, WED		1	
67/68	B	WEC, WEE	C7OZ 4298-A	1	Bracket
68/71	B(exc. 66 & 71)-9" R/G		C8OZ 4298-A	1	Bracket
69/	B(66, 71 & 96)-9" R/G		C5ZZ 4298-B	1	
65/67	F(8 cyl. 289-4/B Special- 4/S/T)	WCZ	★C5ZZ 4298-A	1	Repl. by C5ZZ 4298-B (2-74)
67	F	"Before 11/15/66" WES		1	
67/	F	"From 11/15/66" WES, WFB, WFD	C5ZZ 4298-B	1	
71	L	All	D1FZ 4298-A	1	
72	L	All	D2FZ 4298-A	1	
70/	P	All	D0DZ 4298-A	1	
72	S(9" R/G)	WFB-A, E, WGB-D, E, G	D2SZ 4298-A	1	
72	S(9" R/G)	WFB-G, H, J, K, WGB, R, S	D3SZ 4298-A	1	
72	S(9 3/8" R/G)		D2SZ 4298-B	1	
4A300 SLEEVE - REAR AXLE SHAFT SEAL					
67/	B, F(9" R/G)		C7OZ 4A300-A	2	1 3/8" I. D. -1 1/2" O. D. -5/8" long
72	S(9 3/8" R/G)			2	Use w/31 spline side gears
4A323 GUIDE - REAR AXLE DIFFERENTIAL CLUTCH PLATE					
68/	A, B, F, P, U, X (8" & 9" R/G traction lok)		D0OZ 4A323-A	4	
70/	S(9" R/G traction-lok)			4	
70/	A, S, (9 3/8" R/G traction-lok)		D0AZ 4A323-A	4	
4A324 SHIM KIT - REAR AXLE DIFFERENTIAL CLUTCH					
68/	A, B, F, P, S, U, X, (all traction lok)		C8OZ 4A324-A	1	Includes 4-C9OW 4A324-E-.010" thick 2-C9OW 4A324-F-.005" thick
4A325 PLATE - REAR AXLE DIFFERENTIAL CLUTCH					
68/	A, B, F, P, S, U, X, (all traction lok)		C8OZ 4A325-B	1	4 7/8" O. D. with 4 tabs-.085" thick
4A326 PLATE - REAR AXLE DIFFERENTIAL CLUTCH SPRING PRELOAD					
68/	A, B, F, P, U, X (8" & 9" R/G traction lok)		C8OZ 4A326-A	1or2	
70/	S(9" R/G)			1	Traction Lok-28 spline shaft
70/	A, S, (9 3/8" R/G traction lok)		D0AZ 4A326-A	1	

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4A332 SEAL - REAR AXLE SHAFT RETAINER WASHER					
67/71	A	WER	C7AZ 4A332-A	1	5/8" I.D.-11/16" O.D.
4A340 MOUNTING KIT - REAR AXLE STABILIZER					
69	F-Boss 429		★C9ZZ 4A340-A	2	Includes 1-C9ZZ 5486-A bracket 1-C9ZX 4A340-A "U" bolt 1-C9ZX 4A341-A plate 2-33771-S4 nut
4A343 LINK - REAR AXLE STABILIZER					
69	F-Boss 429		C9ZZ 4A343-A	2	Includes-link assy, bushing, stud & nut
4346 BOLT - REAR AXLE COVER TO HOUSING					
67/69	A	WER-A, C, E	C7AZ 4346-A	10	3/8"-16 x 5/8" locking
69/	A	WER-F, G, H	C9AZ 4346-A	10	5/16"-18 x 5/8" hex. washer head locking
66/	U(front drive axle)		C6TZ 4346-B	AR	
4347 BOLT - DIFFERENTIAL CARRIER TO REAR AXLE HOUSING					
65/66	A, S, U		C1AW 4347-A	10	3/8"-24 x 1 9/16"
65/66	B, F, X			10	
67/	A, B, F, P, S, U, X		C1AZ 4347-A	10	3/8"-24 x 1 11/16"
			34445-S7-8(M80)	10	Locknut-3/8"-24
			353667-S(XX156)	5or10	Washer-flat (copper)-25/64"
4A347 MEMBER - REAR AXLE CENTER DRIVE					
70/71	B, F	WFU-D, E	D0OZ 4A347-A	1	No-spin differential-l Includes 1-D0OW 4A021-B cam 1-D0OW 4A348-A member 1-D0OW 4A349-A snap ring
4A351 CLUTCH & HOLDOUT RING ASSY. - REAR AXLE DIFFERENTIAL					
70/71	B, F	WFU-D, E	D0OZ 4A351-A	2	No-spin differential - Includes 1-D0OW 4A232-A clutch 1-D0OW 4A353-B holdout ring
4374 SHIM - REAR AXLE SHAFT					
70/71	• Unique competition part		★D0ZX 4374-A	2	
4420 SEAT - REAR AXLE DIFFERENTIAL PINION SHAFT					
69/	A, B, F, P, S, U, X (8" & 9" R/G, 2 pinion traction-lock)		C9AZ 4420-A	1	
70/71	L				
70/	A, S 9 3/8" R/G, 2 pinion traction-lock)		D0AZ 4420-A	1	
72	L		D2FZ 4420-A	1	
4529 BOLT - DRIVESHAFT UNIVERSAL JOINT					
65/72	A, B "Before 5/1/72"	(a)	★C1AZ 4529-A	2	5/16"-24 for 1 1/8" bearing caps
65/67	X, F(8 cyl.)	r/b	D3AZ 4529-A(7-73)	2	
68/70	X(66, 71)			2	
68/70	X(54, 62)-6 cyl. 200 with A/T & 8 cyl. 289, 302			2	
68/72	F, L, P "Before 5/1/72"			2	
72	A, B, F, L, P - "From 5/1/72"	(c)	D3AZ 4529-A	2	5/16"-18
		(c)	34976-S4(M89CA)	4	Locknut-5/16"-18
65/67	S, P/C	(a)	C8UZ 4529-A	2	5/16"-24-for 1 1/16" bearing caps
66/	U			4	
65/67	X, F(6 cyl.)	(b)	C0DD 4529-A	2	1/4"-28 for 1" bearing caps
68/70	X(54, 62)-Except 6 cyl. 200 with A/T			2	
		(a)	33798-S7-8(M62)		Nut-5/16"-24
		(a)	34806-S7(X64)		Lockwasher-5/16"
		(b)	33796-S7(M61)		Nut-1/4"-28
		(b)	34805-S8(X62)		Lockwasher-1/4"
4588 RING - REAR AXLE DIFFERENTIAL LOCK					
65/67	A (8 cyl. 427)		★C5AZ 4528-A	2	No spin differential

• Refer to appropriate muscle parts catalog

4602 DRIVE SHAFT ASSY.

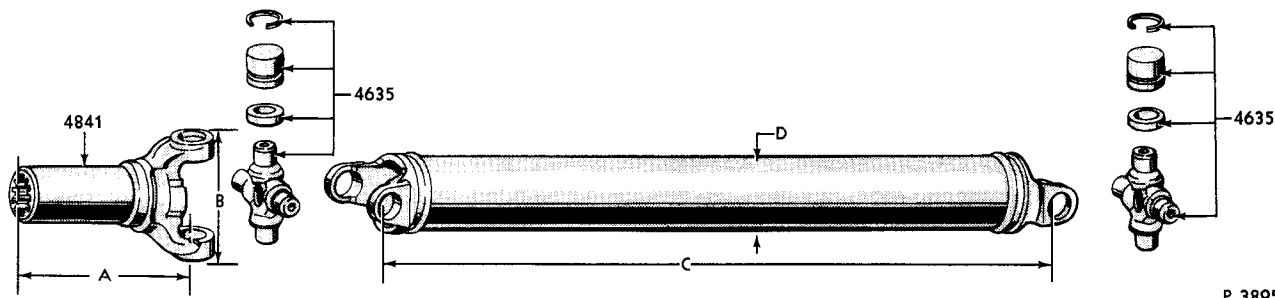Drive Shafts Group 4602, Universal Joints Group 4635 and Knuckle & Plug Assemblies Group 4841 are cataloged in chart form under group numbers 4602. The drive shafts and related parts are listed by model years and within the model years designated by car line. The various codes designating the universal joints and knuckle & plug assemblies are explained below. Identification charts showing the various dimensions of universal joints and knuckle & plug assemblies appear under Groups 4635 and 4841.



P-3895

Universal Joint Codes used throughout the chart apply to Part Numbers as indicated
Also refer to Group 4635 for Universal Joint Identification Chart

CODE	PART NO.	T Y P E	CODE	PART NO.	T Y P E
A	B6TZ 4635-A	Dana (Spicer) or Ford-1310-3 15/32" span	G	C3AZ 4635-G	Cleveland Steel-1330-3 5/8" span
B	C3DZ 4635-A	Mechanics or SACO-1100-2 21/32" span	H	C3AZ 4635-H	Cleveland Steel-1330-3 5/8" span
C	★C3AZ 4635-C r/b C3AZ 4635-E	Dana (Spicer) or Ford-1260-3 15/32" span	J	C3UZ 4635-B	Dana (Spicer)- 1100-2 21/32" span
D	★C3AZ 4635-D r/b C3AZ 4635-F	Dana (Spicer) or Ford-1260-3 15/32" span (2-73)	K	C4SZ 4635-B	Dana (Spicer)- 1330-3 5/8" span
E	C3AZ 4635-E	Cleveland Steel-1310-3 1/4" span	L	C5DZ 4635-A	Mechanics-1260-3 15/32" span
F	C3AZ 4635-F	Cleveland Steel-1310-3 1/4" span	M	C5DZ 4635-B	Mechanics-1260-3 15/32" span
			N	C8SZ 4635-A	Saginaw-1330
			P	C6TZ 4635-H	Mechanic-2.5 RL
			Q	C9TZ 4635-B	Dana (Spicer)- 1310

Slip Yoke Codes used throughout the chart apply to part numbers as indicated
Also refer to Group 4841 for Knuckle and Plug Identification Chart

CODE	PART NO.	A	B	NO. SPLINES	REPLACED BY	CODE	PART NO.	A	B	NO. SPLINES	REPLACED BY
1	C1DD 4841-D	7 3/4"	2 15/32"	25		16	C7SZ 4841-A	8 5/32"	3 29/32"	31	
2	C3AZ 4841-A	8 7/32"	3 1/2"	31		17	C7SZ 4841-B	7 1/2"	3 7/8"	31	
3	C3AZ 4841-D	8 3/32"	3 1/2"	28		18	C8SZ 4841-A	9 7/16"	3 1/2"	31	
4	C3AZ 4841-G	8 7/32"	3 7/8"	28		19	C5TZ 4841-F	6"	3 11/32"	16	
5	C1UZ 4841-A	5 29/32"	2 15/32"	25		20	C9TZ 4841-A	7 7/8"	3 15/32"	16	
6	C5DZ 4841-A	8 3/32"	3 3/16"	28		21	D1AZ 4841-A	8 1/2"	3 1/2"	28	
7	C5DZ 4841-B	8 1/4"	3 3/16"	25		22	D1AZ 4841-B	8 1/8"	3 1/2"	31	
8	C3DZ 4841-A	8 1/4"	3 1/2"	25		23	D1FZ 4841-A	5 3/16"	3 1/2"	20	
9	C6DZ 4841-A	5 29/32"	3 3/16"	25		24	D1FZ 4841-B	5 29/32"	3 1/2"	25	
10	C6DZ 4841-B	5 29/32"	2 15/32"	25		25	D1AZ 4841-C	8 1/8"	3 15/16"	31	
11	C7AZ 4841-A	8 3/32"	3 1/2"	28		26	D2SZ 4841-A	8 9/64"	3 15/16"	31	
12	C7AZ 4841-B	8 7/32"	3 1/2"	31		27	D2AZ 4841-A	8 9/16"	3 29/32"	31	
13	C7AZ 4841-C	8 7/32"	3 15/16"	31		28	D2ZZ 4841-A	8 1/4"	3 17/32"	28	
14	C5ZZ 4841-B	5 29/32"		28		29	D2AZ 4841-B	6 7/8"	3 15/16"	31	
15	★C6DZ 4841-D	5 29/32"	2 1/2"	25	C6DZ 4841-B (12-73)	30	C7SZ 4841-C	8 5/32"	3 29/32"	31	

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION						U JOINT			SLIP YOKE CODE TYPE	DRIVE SHAFT		PART NUMBER
			C4	C/M	C6	3.5/T	4.5/T	O/D	SIZE	FRONT	REAR		D DIAMETER (INCHES)	C LENGTH (INCHES)	
- A -			1965										• #		
65	A	240,289 2/B				x		x	1260	C	D	3	3 3/8	62 55/64	C8AZ 4602-F
65	A	240,289 2/B	x	x					1310	E	F	3 4	3 3/8	62 7/16	C8AZ 4602-G
65	A (PCT-J1 trans.)-A	289 2/B 352 4/B		x					1310	A	F	3 2	3 3/8	59 9/32	★C5AZ 4602-H
65	A(3.00,3.25 ratio) axle mod.WDC-AG, BB,BN,WDL-E,S	352 4/B	x	x		x			1330	K	H	4 4	3 3/8	62 9/32	C5AZ 4602-S
65	A-axle mod.WDD-D, N,WDC-A,AW	352 4/B	x	x					1310	A	F	3 4	3 3/8	62 9/32	★C5AZ 4602-Z r/b C6AZ 4602-E
65	A (3.00 ratio & PCD-U,V trans. long extension housing	352 4/B		x					1310	A	F	3 3	3 3/8	59 3/32	★C5AZ 4602-D
65	A (exc. 3.00 ratio) PDC-U, V trans. long extension housing	352 4/B		x					1310	A	F	3 1	3 3/8	59 3/32	★C5AZ 4602-Y
65	A (3.00, 3.25 ratio) "Before 3/8/65"	352 4/B				x			1310	A	F	3 3	3 3/8	59 9/32	★C5AZ 4602-E
65	A	427					x		1330	K	H	4 4	3 3/8	59 9/32	★C5AZ 4602-W
65	A	390 4/B				x	x								
65	A(exc. XL)(exc. 3.00 ratio)- "From 3/8/65	352 4/B				x	x								
65	A (exc. XL)(exc. 3.00 ratio)	390 4/B		x				x	1330	K	H	16 4	3 3/8	59 9/32	C5AZ 4602-V
65	A (3.25 ratio)	390 4/B		x											
65	A(P/I)	352 4/B		x											
- B -															
65	B	200	x						1260	C	D	3 4	3	58	★C5OZ 4602-A r/b C5OZ 4602-C
									1260	C	D	3 4	3	57 21/32	★C5OZ 4600-C
65	B (except 71)- "Before 2/1/65"	200 H/D				x			1260	C	D	8 4	3	57 21/32	★C4OZ 4602-E
65	B (except 71)- "From 2/1/65"	200 H/D				x			1260	C	D	3 4	3	57 25/32	C5OZ 4602-C
65	B (except 71)	200				x			1260	C	D	8 4	3	58 1/2	★C4OZ 4602-C
65	B (exc. 71) "Before 2/1/65"	289 2/B				x		x							
65	B (except 71) "From 2/1/65"	289 Exc.Special	x			x		x	1260	C	D	3 4	3	58 43/64	C6OZ 4602-V
65	B (except 71)	289 Exc.Special					x		1260	C	D	3 4	3	57 1/8	★C4OZ 4602-H r/b C5OZ 4602-B(1-74)
65	B (except 71)	289 4/B Special	x						1260	C	D	3 2	3	57 35/64	★C4OZ 4602-G
65	B (except 71)	289 4/B Special					x		1260	C	D	3 2	3	56 7/64	★C4OZ 4602-F
65	B (71) "Before 2/1/65"	170, 200 H/D				x			1260	C	D	8 4	3	57 5/32	★C3OZ 4602-A
65	B (71) "From 2/1/65"	200 H/D				x			1260	C	D	3 4	3	57 5/32	★C5OZ 4602-B
65	B (71) "Before 2/1/65"	200				x			1260	C	D	8 4	3	58	★C3OZ 4602-B
65	B (71)	260,289 2/B				x		x							
65	B (71) "From 2/1/65"	260, 289 2/B	x			x		x	1260	C	D	3 4	3	58 13/64	★C4OZ 4602-A r/b C5OZ 4602-C
65	B (71)	289 4/B exc. Special				x			1260	C	D	3 4	3	57 21/32	★C5OZ 4602-C

• Refer to Page 1 of Section 46 to translate Codes into Part Numbers

Type 1 - Steel shaft, 2 - Cardboard lined, 3 - (2C) Integral rubber biscuits, 4 - (T/T) Tube in tube drive thru rubber

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION						U JOINT			SLIP YOKE CODE	TYPE	DRIVE SHAFT		PART NUMBER
			C4	C/M	C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR			DIAMETER (INCHES)	C LENGTH (INCHES)	
- F -																
1965 - continued																
65	F	170, 200				x	x		1100	J	J	5	2	2 1/2	51	C5ZZ 4602-G
65	F	170, 200	x						1100	J	J	14	1	2 1/2	51	C5ZZ 4602-B
65	F	200	x						1260	M	L	6	2	2 3/4	50 25/32	C5ZZ 4602-J
	F	"From 12/15/64"				x	x									
		289 2 & 4/B exc. Special														
65	F	"Before 12/15/64"				x	x		1260	M	L	7	2	2 3/4	50 25/32	C5ZZ 4602-D
65	F-Mechanics	289 exc. 4/B Special	x						1260	M	L	6	2	2 3/4	51 1/16	C5ZZ 4602-H
		260														
		289 exc. 4/B Special														
	-Ford								1260	C	D	3				
65	F	"From 10/5/64"					x		1260	M	L	7	2	2 3/4	49 23/32	C5ZZ 4602-E
	F	"Before 10/5/64"					x			C	D	3				
- S -																
65	S			x					1330	K	K	17	4	3	52 1/8	C4SZ 4602-B
- X -																
65	X (66, 78)	170, 200					x		1100	B	B	5	1	2 1/2	52 17/32	C3DZ 4602-C
65	X(66, 71, 78)	170, 200				x			1100	B	B	5	2	2 3/4	54 17/32	C3DZ 4602-A
65	X-Spicer	170	x						1100	J	J	14	2	2 1/2	52 17/32	C5DZ 4602-F
	-Mechanics								1100	B	B	14				
65	X(exc. 71)-Mechanics	170, 200				x			1100	B	B	1	2	2 1/2	54 17/32	C5DZ 4602-C
	-Spicer								1100	J	J	5	2			
65	X(66, 71, 78)-Spicer	200	x						1260	C	D	3	2	2.75	52 23/64	C5DZ 4602-E
	-Spicer	289 2/B				x	x									
	-Spicer	289 4/B				x	x									
	-Mechanics								1260	M	L	6	2			
65	X-Spicer	289	x						1260	C	D	3	2	2 3/4	52 45/64	C4GY 4602-B
65	X(66, 71, 78)-Spicer	289 4/B Premium	x													
	-Mechanics								1260	M	L	6	2			
65	X(exc. 66, 71, 78)-Spicer	200	x													
65	X-Spicer	289				x	x		1260	C	D	8	2	2 3/4	52 23/64	C3DZ 4602-G
	-Mechanics								1260	M	L	7	2			
- A -																
1966																
66	A (N. Y. Taxi)-P/I	240, 289 2/B		x					1310	A	F	2	3	3 3/8	59 35/64	C7AZ 4602-K
66	A	240, 289 2/B				x		x	1260	C	D	3	4	3 3/8	62 55/64	C8AZ 4602-F
66	A	240, 289 2/B	x	x					1260	C	D	3	4	3 3/8	62 7/16	C5AZ 4602-U
																r/b C8AZ 4602-G
									1310	E	F	3	4	3 3/8	62 7/16	C8AZ 4602-G
66	A	352 4/B	x	x					1330	K	H	4	4	3 3/8	62 9/32	C5AZ 4602-S
66	A	352 4/B	x	x					1310	A	F	3	4	3 3/8	62 9/32	C5AZ 4602-Z
	A(71)	352 4/B		x												
66	A	352 4/B	x	x					1330-F	G	F	4	4	3 3/8	62 9/32	C6AZ 4602-E
									1310-R							
66	A	390 2/B, 4/B		x	x				1330	K	H	16	4	3 3/8	59 9/32	C5AZ 4602-V
66	A	390 2/B, 4/B		x					1330-F	G	F	16	4	3 3/8	59 9/32	C6AZ 4602-F
									1310-R							
66	A	390 2/B, 4/B				x	x		1330	G	H	4	4	3 3/8	58 25/32	C6AZ 4602-B

• Refer to Page 1 of Section 46 to translate Codes into Part Numbers.

Type 1 - Steel shaft, 2 - Cardboard lined, 3 - (2C) Integral rubber biscuits, 4 - (T/T) Tube in tube drive thru rubber

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION						U JOINT			SLIP YOKE CODE TYPE	DRIVE SHAFT		PART NUMBER	
			C4	C/M	C6	3/ST	4/ST	O/D	SIZE	FRONT	REAR		D DIAMETER (INCHES)	C LENGTH (INCHES)		
- A -																
1966 - continued																
66	A A(71) A	390 4/B 390 4/B 428 4/B		x	x x x				1330	G	H	16 1/4	3 3/8	58 25/32	C6AZ	4602-A
66	A-P/I A(71), P/I A	428 4/B P/I 427			x x		x		1330	G	H	16 1/4	4	58 25/32	★C6AZ	4602-D
- B -																
66	B (except 71)	200				x			1260	C	D	8 1/4	3	57 25/32	★C6OZ	4602-G
66	B(except 71)	200 H/D				x			1260	C	D	3 1/4	3	57 25/32	C5OZ	4602-C
66	B (except 71)	200	x						1260	C	D	3 1/4	3	58 43/64	C6OZ	4602-V
66	B (except 71)	289 2/B	x			x	x	x								
66	B(except 71)- " Before 1/3/66"	390 2/B, 4/B			x				1330-F 1310-R	K	F	16 1/4	3	54 1/32	★C6OZ	4602-P
66	B (except 71)- " From 1/3/66"	390 2/B, 4/B			x				1330	K	H	16 1/4	3	54 1/32	★C6OZ	4602-B r/b C7SZ 4602-E(12-73)
66	B (except 71)	390 2/B, 4/B			x	x			1330	K	H	4 1/2	3	57 7/16	C6OZ	4602-D
66	B(except 71)	390 2/B, 4/B			x	x			1330-F 1310-R	K		4 1/4	3	57 7/16	★C6OZ	4602-R
66	B (71)	200			x				1260	C	D	8 1/4	3	54 3/4	★C6OZ	4602-F
66	B (71)	200 H/D			x				1260	C	D	3 1/4	3	54 3/4	★C6OZ	4602-J
66	B (71)	289 2/B	x		x		x		1260	C	D	3 1/4	3	55 41/64	C6OZ	4602-U
66	B (71)	200	x													
66	B (71)	390 2/B, 4/B			x				1330	K	H	16 1/4	3	51 1/64	C6OZ	4602-A
66	B(71)	390 2/B, 4/B			x				1330-F 1310-R	K	F	16 1/4	3	51 1/64	★C6OZ	4602-N
66	B (71)	390 2/B, 4/B			x				1330	K	H	4 1/4	3	54 15/32	C6OZ	4602-E
66	B(71)	390 2/B, 4/B			x				1330-F 1310-R	K		4 1/4	3	54 15/32	★C6OZ	4602-S
- F -																
66	F	200				x			1100	J	J	5 1/2	2 1/2	49 63/64	C6ZZ	4602-A
66	F	200					x		1100	J	J	5 1/2	2 1/2	51	C5ZZ	4602-G
66	F	200	x						1260	M	L	6 1/2	2 3/4	50 25/32	C5ZZ	4602-J
66	F	289 2/B, 4/B Premium fuel			x	x										
66	F	289 2/B, 4/B Premium fuel	x						1260	M	L	6 1/2	2 3/4	51 1/16	C5ZZ	4602-H
66	F	289 4/B-Special			x	x			1260	M	L	6 1/2	2 3/4	49 23/32	C5ZZ	4602-E
- S -																
66	S-(axles with 9" ring gear)	390 4/B	x						1330	K	K	17 1/4	3	52 1/8	C4SZ	4602-B
66	S-(axles with 9 3/8" ring gear)	390 4/B, 428 4/B			x				1330	K	K	17 1/4	3	51 5/8	★C6SZ	4602-A
- U -																
66	U (Front)	170,289			x				2.5 RL	P	P	Δ 1	2	%††	★C7TZ	4602-DB r/b C9TZ 4602-Z(6-72)
66	U (Rear)	170,289			x				2.5 RL	P	P	Δ 1	2	18 1/16	▲C6TZ	4605-A
					x				2.5 RL	P	P	Δ 1	2	%††	★C7TZ	4602-DC r/b C9TZ 4602-AA(6-72)
					x				2.5 RL		P	Δ 1	2	25 17/32	▲C6TZ	4605-B

● Refer to Page 1 of Section 46 to translate Codes into Part Numbers.

† Double Cardan Universal Joints

Type 1 - Steel shaft, 2 - Cardboard lined, 4 - (T/T) Tube in tube drive thru rubber

X Knuckle and plug and intermediate universal joint serviced in 4997 assembly only

▲ Drive shaft tube assembly

% Also refer to basic 4602 Kit drive shaft (Conversion-Mechanics to Dana-Spicer)

† Drive shaft complete

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION						U JOINT			SLIP YOKE CODE	DRIVE SHAFT			PART NUMBER
			C4	C/M	C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		TYPE	D DIAMETER (INCHES)	C LENGTH (INCHES)	
- X -																
1966 - continued																
66	X (except 66, 71)	170, 200	x						1100	J	J	142	2 1/2	53 3/8	C6DZ	4602-A
66	X (except 66, 71)	170				x			1100	J	J	51	2 1/2	55 7/16	C6DZ	4602-G
66	X (except 66, 71)	200				x			1100	J	J	102	2 1/2	52 41/64	C6DZ	4602-F
	X (except 66, 71)	200				x			1100	B	B	10				
66	X (except 66, 71)	200	x						1260	M	L	62	2 3/4	53 35/64	C6DZ	4602-C
		289 2/B	x			x	x									
66	X(66)	170, 200	x						1260	M	L	62	2 3/4	55 33/64	C6DZ	4602-D
	X(66)	289 2/B, 4/B	x			x	x									
		Premium fuel														
	X(71)	200	x													
	X(71)	289 2/B	x			x										
66	X(66)	170				x			1260	M	L	92	2 3/4	55 33/64	C6DZ	4602-B
66	X(66, 71)	200				x			1260	M	L	72	2 3/4	54 5/8	C6DZ	4602-E
- A -																
1967																
67	A(8 3/4" ring gear except 3.10 ratio)	240, 289 2/B				x		x	1260	C	D	34	3 3/8	62 55/64	C8AZ	4602-F
67	A(8 1/2" Ring gear 3.10 ratio)	240, 289 2/B				x			1260	C	D	34	3 3/8	63 7/64	C7AZ	4602-J
67	A(8 1/2" ring gear 2.80 ratio)	240	x						1260	C	D	112	3 3/8	62 29/32	C7AZ	4602-B
		289 2/B	x	x												
67	A(8 3/4" ring gear except 2.80 ratio)	240	x						1260	C	D	34	3 3/8	62 7/16	C5AZ	4602-U
		289 2/B	x	x											r/b C8AZ	4602-G
									1310	E	F	34	3 3/8	62 7/16	C8AZ	4602-G
67	A	240	x						1260	C	D	112	3 3/8	62 7/16	C7AZ	4602-D
	A	289 2/B	x	x												
67	A	240, 289 2/B				x		x	1260	C	D	112	3 3/8	62 55/64	C7AZ	4602-C
															r/b C8AZ	4602-F(2-74)
67	A(P/I, Fleet & Taxi)	240, 289 2/B		x					1310	A	F	24	3 3/8	59 35/64	C7AZ	4602-K
67	A	390		x		x			1330	G	H	164	3 3/8	59 9/32	C5AZ	4602-V
67	A(P/I, Fleet & Taxi)	390				x	x		1330	G	H	44	3 3/8	58 25/32	C6AZ	4602-B
67	A	428 4/B				x		x	1330	G	H	164	3 3/8	58 25/32	C6AZ	4602-A
67	A	428 P/I				x		x	1330	G	H	161	4	58 25/32	C6AZ	4602-D
67	A	427 4/B, 8/B						x								
- B -																
67	B(except 66, 71)-H/D clutch	200				B			1260	C	D	34	3	57 25/32	C5OZ	4602-C
67	B(66, 71)-H/D clutch	200				B			1260	C	D	34	3	54 3/4	C6OZ	4602-J
67	B(except 66, 71)-(P/I, Fleet & Taxi)	200	x						1260	C	D	34	3	58 43/64	C6OZ	4602-V
		289 2/B	x			B	x	x								
67	B(66)	200	x			B			1260	C	D	34	3	55 41/64	C6OZ	4602-U
	B(66)	289 2/B	x			B	x									
	B(71)	200	x													
	B(71)	289 2/B	x			B		x								
67	B(except 66, 71)	390				B	x		1330	K	H	42	3	57 7/16	C6OZ	4602-D
67	B(71)	390				B			1330	K	H	44	3	54 15/32	C6OZ	4602-E
67	B(66)	390				B	x									
67	B(except 66, 71)	390				x			1330	K	H	164	3	54 1/32	C6OZ	4602-B
67	B(66, 71)	390				x			1330	K	H	164	3	51 1/64	C6OZ	4602-A
67	B(except 66, 71)	427						x	1330	G	H	162	3	57 7/16	C7OZ	4602-A

• Refer to Page 1 of Section 46 to translate codes into Part Numbers

B - Standard 3 speed 3.03

Type 1 - Steel shaft, 2 - Cardboard lined, 4 - (T/T) Tube in tube drive thru rubber
May, 1975

COPYRIGHT © 1975 — FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT			SLIP YOE CODE	DRIVE SHAFT			PART NUMBER
			C4	C/M		C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		TYPE	D DIAMETER (INCHES)	C LENGTH (INCHES)	
- F -																	
1967 - continued																	
67	F	200					B			1100	J	J	14 2	2 1/2	51		C7ZZ 4602-E
67	F	200	x							1260	C	D	3 4	2 3/4	50 31/32		★C7ZZ 4602-F
67	F	289 2/B, 4/B Premium fuel	x				B	x									r/b C7ZZ 4602-G
										1310	E	F	3 4	3	50 31/32		C7ZZ 4602-G
67	F	390 4/B					B	x		1330	G	H	4 2	3	50 1/64		C7ZZ 4602-C
67	F	289 4/B	x					x									
67	F	390 4/B				x				1330	G	H	16 2	3 1/2	46 19/32		C8ZZ 4602-C
67	F(GT350/500)							x		1330	G	H	16 2	3	50 1/64		★C7ZX 4602-A
- S -																	
67	S(Model 65)- WDC axles	390 4/B				x				1330	K	H	30 4	3	54 39/64		C7SZ 4602-F
67	S(Model 65)- WDT axles	390, 428 4/B				x				1330	K	H	30 4	3	54 1/8		C7SZ 4602-E
- U -																	
67	U (Front)	170, 289					x			2.5 RL	P	P	Δ 1	2			★%†† C7TZ 4602-DB r/b C9TZ 4602-Z(4-72)
							x			2.5 RL	P		Δ 1	2	18 1/16		▲C6TZ 4605-A
67	U (Rear)	170, 289					x			2.5 RL	P	P	Δ 1	2			★%†† C7TZ 4602-DC r/b C9TZ 4602-AA(6-72)
							x			2.5 RL		P	Δ 1	2	25 27/32		▲C6TZ 4605-B
- X -																	
67	X(except 71)	170					A			1100	J	J	5 1	2 1/2	55 7/16		C6DZ 4602-G
67	X(except 71)	170	x							1100	J	J	14 2	2 1/2	53 3/8		C6DZ 4602-A
	X(except 71)	200					B										
67	X(except 71)	200					A			1100	J	J	10 2	2 1/2	52 41/64		C6DZ 4602-F
67	X(except 71)	200, 289 2/B	x							1260	C	D	3 4	3	53 35/64		C7DZ 4602-D
67	X(except 71)	289 2/B					B	x		1260	C	D	3 2	2 3/4	53 35/64		C7DZ 4602-D
67	X(71) " Before 9/19/66"	200					B			1260	C	D	8 2		54 3/4		★C7DZ 4602-C
67	X(71)	200, 289 2/B	x				B			1260	C	D	3 2	2 3/4	55 33/64		C7DZ 4602-B
- A -																	
1968																	
68	A(8 1/2" ring gear, 2.80 ratio)	240, 302	x							1310	E	F	11 2	3 3/4	62 55/64		★C7AZ 4602-L r/b C8AZ 4602-F(1-74)
68	A(8 1/2" ring gear, 3.10 ratio)	240, 302	x							1310	E	F	3 4	3 3/4	62 55/64		C8AZ 4602-F
68	A(9" ring gear)	240, 302					x										
68	A(9" ring gear, 3.00 ratio)	240, 302	x							1310	E	F	11 2	3 3/4	62 7/16"		★C7AZ 4602-M r/b C8AZ 4602-G(4-72)
			x							1310	E	F	3 4	3 3/8	62 7/16		C8AZ 4602-G
68	A(8 1/2" ring gear, 3.10 ratio)	240					x			1260	C	D	3 4	3 3/8	63 7/64		C7AZ 4602-J
		302					x			1310	E	F	3 4	3 3/4	63 7/64		★C8AZ 4602-C

● Refer to Page 1 of Section 46 to translate codes into Part Numbers

† Double Cardan Universal Joints

Type 1 - Steel shaft. 2 - Cardboard lined. 4 - (T/T) Tube in tube drive thru rubber

Δ Knuckle and plug and intermediate universal joint serviced in 4997 assy. only ▲ Drive shaft tube assembly

A - Standard 3 speed 2.77, B - Standard 3 speed 3.03

† Drive shaft complete

% Also refer to basic 4602 Kit drive shaft (Conversion-Mechanics to Dana-Spicer)

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT				SLIP YOKE CODE TYPE	DRIVE SHAFT			PART NUMBER
			C4	C/M		C6	3/S/T	4/S/T	O D	SIZE	FRONT	REAR	D DIAMETER (INCHES)		C LENGTH (INCHES)			
				MX	FMX													
- A -																		
1968 - continued																		
68	A(2.80 ratio) Use with ⊕ PHA-B trans. Use with ⊕ PHA-C trans.	302			x					1310	E	F	122	3 3/4	63 9/32	C8AZ	4602-A	
					x					1310	E	F	122	3 3/8	59 15/16	C8AZ	4602-K	
	A(3.10 ratio) Use with ⊕ PHA-B trans. Use with ⊕ PHA-C trans.	302			x					1310	E	F	2 4	3 3/4	63 9/32	C8AZ	4602-E	
					x					1310	E	F	2 4	3 3/8	59 15/16	C8AZ	4602-K	
	A(3.00 ratio)	302			x					1310	E	F	122	3 3/4	63 7/64	★C8AZ	4602-B	
																r/b C8AZ	4602-H(2-74)	
	A(3.25 ratio)	302			x					1310	E	F	3 4	3 3/8	63 7/64	C8AZ	4602-H	
	A(all ratios)	240, 302		x						1310	A	F	2 4	3 3/8	59 35/64	★C7AZ	4602-K	
68	A(9" ring gear & 3.00 & lower ratios)	390		x	x	x				1330	G	H	13 2	3 3/8	59 9/32	★C8AZ	4602-J	
																r/b C5AZ	4602-V(1-74)	
68	A(9" ring gear & 3.25 & higher ratios)	390		x		x				1330	G	H	16 4	3 3/8	59 9/32	C5AZ	4602-V	
68	A(Police & Fleet with 9" ring gear)	390		x		x												
68	A(9 3/8" ring gear)	390, 428		x		x		x		1330	G	H	16 4	3 3/8	58 25/32	C6AZ	4602-A	
68	A	390					x			1330	G	H	4 4	3 3/8	58 25/32	C6AZ	4602-B	
68	A	427						x		1330	G	H	16 1	4	58 25/32	C6AZ	4602-D	
		428 P/C				x		x										
- B -																		
68	B(66, 71)	200, 289, 302	x				x	x		1310	E	F	3 4	3	55 41/64	C6OZ	4602-U	
68	B(except 66, 71)	200, 289, 302	x				x	x		1310	E	F	3 4	3	58 43/64	C6OZ	4602-V	
68	B(66, 71)	390				x				1330	K	H	16 4	3	51 1/64	C6OZ	4602-A	
68	B(except 66, 71)	390				x				1330	K	H	16 4	3	54 1/32	C6OZ	4602-B	
68	B(except 66, 71)	390					x	x		1330	K	H	4 2	3	57 7/16	C6OZ	4602-D	
68	B(66)	390					x	x		1330	K	H	4 4	3	54 15/32	C6OZ	4602-E	
	B(71)	390					x											
68	B	428CJ				x				1330	G	H	16 2	3	54 1/32	C8OZ	4602-B	
68	B	428CJ						x		1330	G	H	16 2	3	57 7/16	C7OZ	4602-A	
- F -																		
68	F	289 4/B	x				x	x		1330	G	H	4 2	3	50 1/64	C7ZZ	4602-C	
		390					x	x										
68	F	390, 427, 428CJ				x				1330	G	H	16 2	3 1/2	46 19/32	C8ZZ	4602-C	
68	F	200					x			1100	J	J	14 2	2 1/2	51	C7ZZ	4602-E	
68	F	200	x							1310	E	F	3 4	3	50 31/32	C7ZZ	4602-G	
	F(except GT)	289 2/B, 302	x				x	x										
68	F(GT)	289 2/B, 302	x				x	x		1310	E	F	3 4	3	50 7/32	C8ZZ	4602-A	
68	F	428CJ						x		1330	G	H	16 2	3	50	C8ZZ	4602-B	
- S -																		
68	S(model 57)	390, 429				x				1330	2-N	2-N	18 4	3 1/4	57 7/32	C8SZ	4602-B	
68	S(model 65)	390, 429				x				1330	2-N	2-N	18 4	3 1/4	54 23/32	C8SZ	4602-A	
- U -																		
68	U(front)	170, 289					x			2.5 RL	P	P	Δ 1	2		★%††C7TZ	4602-DE	
																r/b C9TZ	4602-Z(4-72)	
							x			2.5 RL	P	P	Δ 1	2	18 1/16	▲C6TZ	4605-A	
68	U(rear)	170, 289					x			2.5 RL	P	P	Δ 1	2		★%††C7TZ	4602-DE	
																r/b C9TZ	4602-AA(6-72)	
							x			2.5 RL	P	P	Δ 1	2	25 27/32	▲C6TZ	4605-B	

● Refer to Page 1 of Section 46 to translate codes into Part Numbers

† Double Cardan Universal Joints

Type 1 - Steel shaft, 2 - Cardboard lined, 4 - (T/T) Tube in tube drive thru rubber ⊕ Identification marking

Δ Knuckle and plug and intermediate universal joint serviced in 4997 assy. only ▲ Drive shaft tube assembly

% Also refer to basic 4602 Kit drive shaft (Conversion-Mechanics to Dana-Spicer) † Drive shaft complete

May, 1975

COPYRIGHT © 1975 --

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT			SLIP YOKE CODE	DRIVE SHAFT			PART NUMBER																						
			C4	C/M		C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		D DIAMETER (INCHES)	C LENGTH (INCHES)																								
				MX	FMX																																		
- X -																			1968 - continued																			#	
68	X (except 71)	170 200	x				x x			1100	J	J	142	2	2 1/2	53 3/8	C6DZ	4602-A																					
68	X(71)	200, 289, 302	x				x	x		1260	C	D	32	2	2 3/4	55 33/64	C7DZ	4602-B																					
68	X(except 71)	200 289, 302	x x				x	x		1260	C	D	34	3		53 35/64	C7DZ	4602-D																					
- A -																			1969																				
69	A(8 1/2" ring gear, A(8.7" ring gear)	240, 302	x x		x x		x			1310	E	F	34	3	1 1/2	64 15/16	C9AZ	4602-A																					
69	A(P/C & Fleet 9" ring gear)	240, 302			x					1310	E	F	24	3	1 1/2	61 11/16	C9AZ	4602-B																					
69	A(8 1/2" ring gear, 3.10 ratio)	240, 302					x			1310	E	F	34	3	1 1/2	65 5/32	D0AZ	4602-D																					
69	A	351			x					1330	G	H	164	3	1 1/2	61 11/16	D0AZ	4602-E																					
69	A(9" ring gear, 3.00 or higher ratio)	390					x			1330	G	H	44	3	1 1/2	61 5/16	C9AZ	4602-E																					
69	A(9 3/8" ring gear)	390					x			1330	G	H	44	3	1 1/2	60 13/16	C9AZ	4602-N																					
69	A(9" ring gear, 2.75 ratio exc. P/C & Fleet, 3.25 ratio)	390, 429		x	x	x				1330	G	H	164	3	1 1/2	61 5/16	C9AZ	4602-H																					
69	A(9 3/8" ring gear, 3.25 or higher ratio)	390, 429			x	x		x		1330	G	H	164	3	1 1/2	60 13/16	C9AZ	4602-L																					
69	A(9 3/8" ring gear, 3.25 ratio)	428, 429				x				1330	G	H	161	4		60 13/16	C9AZ	4602-K																					
69	A(9 3/8" ring gear, 2.80 ratio exc. P/C & Fleet)	429				x				1330	G	H	132	3	1 1/2	60 13/16	C9AZ	4602-J																					
- B -																																							
69	B(exc. 66, 71)	250	x				x			1310	E	F	34	3	58 1/4		C9OZ	4602-A																					
69	B(66, 71)	250	x				x			1310	E	F	34	3	55 1/4		C9OZ	4602-B																					
69	B(exc. 66, 71)	302	x				x	x		1310	E	F	34	3	58 43/64		C6OZ	4602-V																					
69	B(66, 71)	302	x				x	x		1310	E	F	34	3	55 41/64		C6OZ	4602-U																					
69	B(exc. 66, 71)	351			x					1310	E	F	24	3	58 1/4		C9OZ	4602-D																					
69	B(66, 71)	351			x					1310	E	F	24	3	55 1/4		C9OZ	4602-F																					
69	B(exc. 66, 71)	351					x	x		1310	E	F	34	3	57 13/16		C9OZ	4602-C																					
69	B(66, 71)	351					x	x		1310	E	F	34	3	54 13/16		C9OZ	4602-E																					
69	B(exc. 66, 71)	390				x				1330	K	H	164	3	54 1/32		C6OZ	4602-B																					
69	B(66, 71)	390				x				1330	K	H	164	3	51 1/64		C6OZ	4602-A																					
69	B(exc. 66, 71)	390					x	x		1330	K	H	44	2	57 7/16		C6OZ	4602-D																					
69	B(66, 71)	390					x	x		1330	K	H	44	3	54 15/32		C6OZ	4602-E																					
69	B(exc. 66)	428						x		1330	G	H	162	3	57 7/16		C7OZ	4602-A																					
69	B(66)	428						x		1330	G	H	162	3	54 15/32		C9OZ	4602-G																					
69	B(exc. 66)	428				x				1330	G	H	162	3 1/2	54		C8OZ	4602-B																					
69	B(66)	428				x				1330	G	H	162	3	51		C9OZ	4602-H																					
- F -																																							
69	F	200	x				x			1100	J	J	142	2	1 1/2	51		C7ZZ	4602-E																				
69	F(7 1/4", 8" ring gear)	200	x							1310	E	F	34	3	50 31/32		C7ZZ	4602-G																					
69	F(7 1/4", 8" ring gear)-exc. Boss	200, 302	x				x	x		1310	E	F	34	3	50 31/32		C7ZZ	4602-G																					
69	F	250	x				x			1310	E	F	34	3	50 11/16		C9ZZ	4602-A																					
69	F(8 3/4", 9" ring gear)-exc. Boss	302	x				x	x		1310	E	F	34	3	50 7/32		C8ZZ	4602-A																					
69	F	250	x																																				
69	F	351					x	x																															

• Refer to Page 1 of Section 46 to translate codes into Part Numbers

Type 1 - Steel shaft, 2 - Cardboard lined, 4 - (T/T) Tube in tube drive thru rubber

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT			SLIP YOKE CODE	DRIVE SHAFT			PART NUMBER	
			C4	C/M		C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		TYPE	D DIAMETER (INCHES)	C LENGTH (INCHES)		
				MX	FMX													
- F -																		
1969 - continued																		
69	F	351			x					1310	E	F	2 4	3	50 5/8	C9ZZ	4602-B	
69	F	390					x	x		1330	G	H	4 2	3	50 1/64	C7ZZ	4602-C	
69	F(Boss)	302						x										
69	F	390, 428				x				1330	G	H	16 2	3 1/2	46 19/32	C8ZZ	4602-C	
69	F	428						x		1330	G	H	16 2	3	50	C8ZZ	4602-B	
69	F	429 Boss					x			1330	G	H	16 2	3	50 7/8	C9ZZ	4602-C	
- S -																		
69	S(57)	429				x				1330	2-N	2-N	18 4	3 1/4	57 7/32	†C8SZ	4602-B	
69	S(65)	429				x				1330	2-N	2-N	18 4	3 1/4	54 23/32	†C8SZ	4602-A	
- U -																		
69	U(front)	All					x			2.5 RL	P	P	Δ 1	2			★%†C7TZ 4602-DB r/b C9TZ 4602-Z(4-72)	
69	U(rear)	All					x			2.5 RL	P	P	Δ 1	2	18 1/16		C6TZ 4605-A	
							x			2.5 RL		P	Δ 1	2			★%†C7TZ 4602-DC r/b C9TZ 4602-AA(6-72)	
							x			2.5 RL		P	Δ 1	2	25 27/32		C6TZ 4605-B	
- X -																		
69	X(except 71)	170, 200	x				x			1260	C	D	3 4	3	53 35/64	C7DZ	4602-D	
		302	x				x	x										
69	X(71)	200, 302	x				x	x		1260	C	D	3 2	2 3/4	55 33/64	C7DZ	4602-B	
- A -																		
1970																		
70	A-exc. P/C (8.7" R/G integral axle)	240, 302, 351	x				x			1310	E	F	3 4	3 1/2	64 15/16	C9AZ	4602-A	
70	A-P/C (8.7" R/G integral axle)	240, 302					x			1310	E	F	3 4	3 1/2	65 5/32	D0AZ	4602-D	
70	A(8.7" ring gear-integral axle)	240, 302, 351			x					1310	E	F	2 4	3 1/2	62	D0AZ	4602-C	
	A-exc. P/C(9" R/G)	240, 302, 351	x				x			1330	G	H	4 4	3 1/2	64 11/16	D0AZ	4602-B	
					x					1330	G	H	16 4	3 1/2	61 11/16	D0AZ	4602-E	
70	A-P/C(9" R/G)	302					x			1330	G	H	4 4	3 1/2	64 15/16	★D0AZ	4602-A r/b D0AZ 4602-B(4/74)	
70	A(9 3/8" R/G)	351					x			1330	G	H	4 4	3 1/2	60 13/16	C9AZ	4602-N	
70	A(9" R/G)	390, 429				x				1330	G	H	16 4	3 1/2	61 5/16	C9AZ	4602-H	
70	A(9 3/8" R/G)	390, 429				x		x		1330	G	H	16 4	3 1/2	60 13/16	C9AZ	4602-L	
70	A(9" R/G)	390					x			1330	G	H	4 4	3 1/2	61 5/16	C9AZ	4602-E	
70	A(P/C)-(9 3/8" R/G)	428, 429				x				1330	G	H	16 1	4	60 13/16	C9AZ	4602-K	
70	A (9" R/G)	428, 429				x				1330	G	H	16 1	4	61 5/16	D0AZ	4602-F	
- B -																		
70	B(exc. 66, 71)	250, 302	x				x			1310	E	F	3 4	3	59 13/16	D00Z	4602-E	
70	B(66, 71)	250, 302	x				x			1310	E	F	3 4	3	56 13/16	D00Z	4602-F	
70	B (Police & Fleet)	302-2V					x			1310	E	F	3 4	3	58 5/8	D00Z	4602-J	
70	B(exc. 66, 71) w/28 spline axle shaft	351	x				x	x		1310	E	F	3 4	3 1/2	58 5/8	D00Z	4602-J	
70	B(66, 71) w/28 spline axle shaft	351	x				x	x		1310	E	F	3 4	3 1/2	55 11/16	D00Z	4602-L	

• Refer to Page 1 of Section 46 to translate Codes into Part Numbers.

Type 1 - Steel shaft, 2 - Cardboard lined, 4 - (T/T) Tube in tube drive thru rubber

⌘ Knuckle and plug and intermediate universal joint serviced in 4997 assy. only

+ Double Cardan Universal Joints

% Also refer to basic 4602 Kit drive shaft (Conversion-Mechanics to Dana-Spicer)

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION								U JOINT			SLIP YOKE CODE	DRIVE SHAFT													
			C/M			C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR	TYPE		D DIA. (INCHES)	C LENGTH (INCHES)	PART NUMBER											
			C4	MX	FMX																							
- B -																	1970 - continued										● #	
70	B(exc.66,71)	351			x					1310	E	F	2 4	3	59 7/32	D00Z 4602-G												
70	B(66, 71)	351			x					1310	E	F	2 4	3	56 1/4	D00Z 4602-N												
70	B(exc.66,71) w/31 spline axle shaft	351						x		1330	G	H	16 2	3 1/2	55 9/32	D00Z 4602-A												
70	B(exc.66,71)	429				x		x																				
70	B(66, 71) w/31 spline axle shaft	351						x		1330	G	H	16 2	3 1/2	52 5/16	D00Z 4602-B												
70	B(66, 71)	429				x		x																				
F																												
70	F	200, 250	x				x			1310	E	F	3 4	3	50 11/16	C9ZZ 4602-A												
70	F(7 1/4", 8" ring gear)	200, 302	x				x	x		1310	E	F	3 4	3	50 31/32	C7ZZ 4602-G												
70	F(W/28 spline axle shaft)	351	x				x	x		1310	E	F	3 4	3	50 7/32	C8ZZ 4602-A												
70	F(W/28 spline axle shaft)	351			x					1310	E	F	2 4	3	50 5/8	C9ZZ 4602-B												
70	F(W/31 spline axle shaft)	302, 351						x		1330	G	H	4 2	3	50 1/64	C7ZZ 4602-C												
70	F(W/31 spline axle shaft)	351			x					1330	G	H	16 2	3 1/2	50 5/8	D0ZZ 4602-A												
70	F	428				x				1330	G	H	16 2	3 1/2	46 19/32	C8ZZ 4602-C												
70	F	428						x		1330	G	H	16 2	3	50	C8ZZ 4602-B												
70	F	429						x		1330	G	H	16 2	3	50 7/8	C9ZZ 4602-C												
P																												
70	P	170, 200, 250	x				x			1310	E	F	3 1	2 1/4	46 5/8	D2DZ 4602-B												
S																												
70	S(57)	429				x				1330	2-N	2-N	18 4	3 1/4	57 7/32	†C8SZ 4602-B												
70	S(65)	429				x				1330	2-N	2-N	18 4	3 1/4	54 23/32	†C8SZ 4602-A												
U																												
Mechanics Type - "BEFORE SER.G70,001"																												
70	U(front)	All					x			2.5RL	P	P	4 1	2		★%††C7TZ 4602-DB r/b C9TZ 4602-Z(4-72)												
70	U(rear)	All					x			2.5RL	P	P	4 1	2	18 1/16	▲C6TZ 4605-A												
							x			2.5RL		P	4 1	2		★%††C7TZ 4602-DC r/b C9TZ 4602-AA(6-72)												
							x			2.5RL		P	4 1	2	25 27/32	▲C6TZ 4605-B												
Dana (Spicer) Type - "FROM SER.G70,001"																												
70	U(front)	All					x			1310	Q	Q	19 1	2 1/2	23 1/4	†C9TZ 4602-V												
							x			1310		Q	19 1	2 1/2	19	▲C9TZ 4605-A												
70	U(rear)	All					x			1310	Q	Q	20 1	2 1/2	26 1/2	†C9TZ 4602-W												
							x			1310	Q		20 1	2 1/2	26 3/8	▲C9TZ 4605-B												
X																												
70	X(except 71)	200	x				x			1260	C	D	3 4	3	53 35/64	C7DZ 4602-D												
70	*X(except 71)	302	x				x	x																				
70	X(71)	200, 302	x				x	x		1260	C	D	3 2	2 3/4	55 33/64	C7DZ 4602-B												
70	♦X(except 71)	302	x				x			1260	C	D	3 4	2 3/4	53 35/64	CC7DW 4602-E												

● Refer to Page 1 of Section 46 to translate codes into Part Numbers

Type 1 - Steel shaft, 2 - Carboard lined, 4 - (T/T) Tube in tube drive thru rubber

† Double Cardan Universal Joints

‡ Drive shaft complete

▲ Drive shaft tube assembly

% Also refer to basic 4602 Kit drive shaft (Conversion-Mechanics to Dana-Spicer)

▲ Knuckle and plug and intermediate universal joint serviced in 4997 assy. only

☆ U.S. only

♦ Canada only

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT			SLIP YOKE CODE TYPE	DRIVE SHAFT			
			C4	C/M		C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		D DIA. (INCHES)	C LENGTH (INCHES)	PART NUMBER	
				MX	FMX												
- A -																	
1971- continued																	
71	A-exc.P/C(8.7" R/G-integral axle)	240, 302, 351	x				x			1310	E	F	3 4	3 1/2	64 15/16	C9AZ 4602-A	
71	A-P/C(8.7"R/G- integral axle)	240, 302					x			1310	E	F	3 4	3 1/2	65 5/32	D0AZ 4602-D	
71	A(8.7"R/G- integral axle)	240, 302, 351			x					1310	E	F	2 4	3 1/2	62	D0AZ 4602-C	
71	A(8.7"R/G- integral axle)	240, 302, 351	x				x			1310	E	F	2 1/2	3 1/2	64 15/16	D1AZ 4602-A	
71	A(8.7"R/G- integral axle)	302, 351			x					1310	E	F	2 2 1/2	3 1/2	61 15/16	D1AZ 4602-B	
71	A(9" R/G)	351					x			1330	G	H	4 4	3 1/2	61 5/16	C9AZ 4602-E	
71	A(9" R/G)	240, 302, 351	x				x			1330	G	H	4 4	3 1/2	64 11/16	D0AZ 4602-B	
					x					1330	G	H	16 4	3 1/2	61 11/16	D0AZ 4602-E	
71	A(9"R/G)	390,400,429- exc.P/C					x			1330	G	H	16 4	3 1/2	61 5/16	C9AZ 4602-H	
71	A(9" R/G)	429 P/C					x			1330	G	H	25 2	3 3/4	57 13/16	D1AZ 4602-C	
- B -																	
71	B(exc. 66, 71)	250, 302	x				x			1310	E	F	3 4	3	59 13/16	D0OZ 4602-E	
71	B(66, 71)	250, 302	x				x			1310	E	F	3 4	3	56 13/16	D0OZ 4602-F	
71	B(exc. 66, 71)- w/28 spline axle shaft	351	x				x	x		1310	E	F	3 4	3 1/2	58 5/8	D0OZ 4602-J	
71	B(66, 71)- w/28 spline axle shaft	351	x				x	x		1310	E	F	3 4	3 1/2	55 11/16	D0OZ 4602-L	
71	B(exc. 66, 71)	351					x			1310	E	F	2 4	3 1/2	55 1/4	D1OZ 4602-A	
71	B(66, 71)	351					x			1310	E	F	2 4	3 1/2	52 5/16	D1OZ 4602-B	
71	B(exc. 66, 71) w/31 spline axle shaft	351						x		1330	G	H	16 2	3 1/2	55 9/32	D0OZ 4602-A	
71	B(exc. 66, 71)	429					x		x								
71	B(66, 71) w/31 spline axle shaft	351						x		1330	G	H	16 2	3 1/2	52 5/16	D0OZ 4602-B	
71	B(66, 71)	429					x		x								
- F -																	
71	F	250, 302	x				x			1310	E	F	3 4	3	51 3/4	D1ZZ 4602-A	
71	F	351			x					1310	E	F	2 2	2 3/4	51 3/32	D1ZZ 4602-C	
71	F	351					x			1310	E	F	2 2	3	47 7/32	D1ZZ 4602-D	
71	F	351						x	x	1310	E	F	3 2	2 3/4	50 13/16	D1ZZ 4602-B	
71	F	302, 351							x	1330	G	H	4 2	3	50 21/32	D1ZZ 4602-E	
71	F	351, 429					x			1330	G	H	16 2	3 1/2	47 7/32	D1ZZ 4602-F	
71	F	429						x		1330	G	H	16 2	3	50 21/32	D1ZZ 4602-G	
- L -																	
71	L(20 spline yoke)- (E/4/S)	98						x		1310	E	F	23 4	2 3/4	46 15/16	D1FZ 4602-A	
71	L(25 spline yoke)- (G/4/S)	98, 122						x		1310	E	F	24 4	2 3/4	46 15/16	D1FZ 4602-B	
71	L	122	x							1310	E	F	3 4	2 3/4	45 3/4	D1FZ 4602-C	
- P -																	
71	P(54)	170, 200, 250	x				x			1310	E	F	3 1	2 3/4	52 9/16	D1DZ 4602-A	
71	P(62)	170, 200, 250	x				x			1310	E	F	3 1	2 1/4	46 5/8	D0DZ 4602-B	
71	P(54)	302	x				x			1310	E	F	3 1	2 3/4	53 9/16	D1DZ 4602-B	
71	P(62)	302	x				x			1310	E	F	3 1	2 1/4	46 5/8	D1DZ 4602-C	

• Refer to Page 1 of Section 46 to translate Codes into Part Numbers.

Type 1 - Steel shaft, 2 - Carboard lined, 4 - (T/T) Tube in tube drive thru rubber 5 - Tuned yoke & damper

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT			SLIP YOKE CODE TYPE	DRIVE SHAFT			PART NUMBER
			C4	C/M		C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		D DIA. (INCHES)	C LENGTH (INCHES)		
				MX	FMX												
- S -																	
1971 - continued • #																	
71	S(57)	429				x				1330	2-N	2-N	18 4	3 1/4	57 7/32	+C8SZ	4602-B
71	S(65)	429				x				1330	2-N	2-N	18 4	3 1/4	54 23/32	+C8SZ	4602-A
- U -																	
71	U(front)	All					x			1310	Q	Q	19 1	2 1/2	22 1/4	D1TZ	4602-G
							x			1310	Q		19 1	2 1/2	17 31/32	D1TZ	4605-A
71	U(rear)	All					x			1310	Q	Q	20 1	2 1/2	26 1/2	+C9TZ	4602-W
							x			1310		Q	20 1	2 1/2	26 3/8	+C9TZ	4605-B
- A -																	
1972																	
72	A(8.7" R/G)	240, 302, 351	x							1310	E	F	21 5	3 1/2	64 15/16	D1AZ	4602-A
72	A(8.7" R/G)	240 Taxi w/disc brakes, 302, 351				x				1310	E	F	22 5	3 1/2	61 15/16	D1AZ	4602-B
72	A(8.7" R/G)	400					x			1330	G	H	27 5	3 1/2	61 3/64	D2AZ	4602-A
72	A(9" R/G)	240 Taxi w/disc brakes, 302, 351				x				1330	G	H	16 4	3 1/2	61 11/16	D0AZ	4602-E
72	A(9" R/G)	240, 302, 351	x							1330	G	H	4 4	3 1/2	64 11/16	D0AZ	4602-B
72	A(9" R/G)	400, 429 exc. P/C					x			1330	G	H	16 4	3 1/2	61 5/16	C9AZ	4602-H
72	A(3.25 ratio)	429 P/C					x										
72	A(9" R/G)	429 P/C					x			1330	G	H	25 2	3 3/4	57 13/16	D1AZ	4602-C
	(3.00 ratio)																
- B -																	
72	B(53B, D, K, 71B, D, K, 97D, K, R)(8" R/G)	250, 302					x			1310	E	F	3 2	3	61 39/64	D2OZ	4602-B
72	B(63D, R, 65B, D, R)(8" R/G)	250, 302	x				x			1310	E	F	3 2	3	57 29/32	D2OZ	4602-A
72	B(53B, D, K, 71B, D, K, 97D, K, R)(9" R/G)- 28 spline yoke	250, 302, 351	x				x	x		1330	G	H	4 2	3 1/2	60 11/32	D2OZ	4602-D
72	B(63D, R, 65B, D, R)(9" R/G)- 28 spline yoke	250, 302, 351	x			x		x		1330	G	H	4 1	3 1/2	56 13/32	D2OZ	4602-C
72	B(53B, D with 2.79/3.00 ratio)	302				x				1310	E		2 2 3		61 31/32	D2OZ	4602-L
72	B(53B, D, K, 71B, D, K, 97D, K, R)(8" R/G)	302	x				x			1310	E	F	3 2	3 to 3 1/2	61 3/4	D2OZ	4602-J
72	B(65B, D, R with 2.79/3.00 ratio)- 31 spline yoke	302				x		x		1310	E		2 2	3	58 9/64	D2OZ	4602-K
72	B(53, 71, 97)	302, 351-2/B				x				1330	G		16 5	3 1/2	60 13/16	D2AZ	4602-B
										1310		F					
72	B(63, 65)	302, 351-2/B				x				1330	G	H	16 2	3 1/2	57	D2OZ	4602-F
72	B(53, 63, 71, 97)(9" R/G)- 31 spline yoke	351, 400, 429				x	x		x	1330	G	H	16 2	3 1/2	57	@D2OZ	4602-F
72	B(63D, R, 65B, D, R)(9" R/G)- 31 spline yoke	351-4/B, 400, 429				x	x		x	1330	G	H	16 2	3 1/2	53 3/16	D2OZ	4602-E

• Refer to Page 1 of Section 46 to translate Codes into Part Numbers

Type 1 - Steel Shaft, 2 - Carboard lined, 4 - (T/T) Tube in tube drive thru rubber 5 - Tuned yoke & damper

† Double Cardan Universal Joints ▲ Drive shaft tube assembly

@ Requires C7SZ 4841-A slip yoke

4602 DRIVE SHAFT ASSY. - continued

APPLICATION CHART

YEAR	MODEL	ENGINE	TRANSMISSION							U JOINT			SLIP YOKE CODE	DRIVE SHAFT																									
			C4	C/M		C6	3/S/T	4/S/T	O/D	SIZE	FRONT	REAR		TYPE	D DIA. (INCHES)	C LENGTH (INCHES)	PART NUMBER																						
				MX	FMX																																		
- F -																			1972 - continued																			● #	
72	F	250,302	x				x			1310	E	F	3 4	3	51 3/4	D1ZZ	4602-A																						
72	F	302			x					1310	E	F	3 4	3	52 3/16	D2ZZ	4602-A																						
72	F	302,351				x				1310	E	F	2 2	3	47 7/32	D1ZZ	4602-D																						
72	F	351			x					1310	E	F	2 2	2 3/4	51 3/32	D1ZZ	4602-C																						
72	F	351					x	x		1310	E	F	3 2	2 3/4	50 13/16	D1ZZ	4602-B																						
72	F	351						x		1330	G	H	4 2	3	50 21/32	D1ZZ	4602-E																						
72	F	351				x				1330	G	H	16 2	3 1/2	47 7/32	D1ZZ	4602-F																						
- L -																																							
72	L(20 spline yoke)- (E/4/S)	98						x		1310	E	F	23 4	2 3/4	46 15/16	D1FZ	4602-A																						
72	L(25 spline yoke)- (G/4/S)	98, 122						x		1310	E	F	24 4	2 3/4	46 15/16	D1FZ	4602-B																						
72	L(25 spline yoke)	122	x							1310	E	F	24 4	2 3/4	45 3/4	D1FZ	4602-C																						
72	L(28 spline yoke)	122	x							1310	E	F	3 4	2 3/4	45 23/32	D2FZ	4602-B																						
72	L(28 spline yoke)	122	x							1310	E	F	28 1		45 23/32	D2FZ	4602-A																						
- P -																																							
72	P(62)	170,200,250	x				x			1310	E	F	3 1	2 1/4	46 5/8	D2DZ	4602-B																						
72	P(62)	302	x				x			1310	E	F	3 1	2 1/4	46 5/8	D1DZ	4602-C																						
72	P(54)	170,200,250	x				x			1310	E	F	3 1	2 3/4	52 9/16	D1DZ	4602-A																						
72	P(54)	302	x				x			1310	E	F	3 1	2 3/4	53 9/16	D1DZ	4602-B																						
- S -																																							
72	S-w/sure track- "Before 12/1/71"	All					x			1330	G	H	26 4	3 1/2	55 19/32	D2SZ	4602-B																						
72	S-w/o sure track- "Before 12/1/71"	All					x			1330	G	H	26 4	3 1/2	56 7/64	D2SZ	4602-A																						
72	S-w or w/o sure track- "From 12/1/71"	All					x			1330	G	G	26 4	3 1/2	55 19/32	D2SZ	4602-C																						
- U -																																							
72	U(front)	All					x			1310	Q	Q	19 1	2 1/2	22 1/4	D1TZ	4602-G																						
										1310	Q		19 1	2 1/2	17 31/32	D1TZ	4605-A																						
72	U(rear)	All					x			1310	Q	Q	20 1	2 1/2	26 1/2	†C9TZ	4602-W																						
							x			1310		Q	20 1	2 1/2	26 3/8	▲C9TZ	4605-B																						

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
69/	S		384341-S4 (BB425FA)	4	Bolt-7/16"-14 x 1 3/8" hex. hd. - (attach 4602 to 4001)
			384353-S4 (MM173X)	4	Nut-7/16"-14
70/	U		384036-S2 (BB210E)	8	Bolt-5/16"-24 x 1 1/4" hex. hd. (attach 4602 driveshaft to 7E028 transfer case)
4602 DRIVE SHAFT KIT - (CONVERSION-MECHANICS TO DANA - SPICER)					
66/70	U(front)		C9TZ 4602-Z	1	Kit consists of (1)C9TZ 4602-V drv/shft. (1) C9TZ 7B214-B flange (4) 34791-S2 lockwasher (4) 384036-S2 bolt
66/70	U(rear)		C9TZ 4602-AA	1	Kit consists of (1)C9TZ 4602-W drv/shft. (1) C9TZ 7B214-B flange (4) 34791-S2 lockwasher (4) 384036-S2 bolt

4605 DRIVE SHAFT -Refer to Group 4602

• Refer to page 1 of Section 46 to translate codes into Part Numbers

Type 1 - Steel shaft, 2 - Carboard lined, 4 - (T/T) Tube in tube drive thru rubber

† Double Cardan Universal Joints

▲ Drive shaft tube assembly

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

4614-21 RETAINER ASSY. - REAR AXLE PINION BEARING

BEARING & CUP CROSS REFERENCE CHART

(FOR MODEL APPLICATION, REFER TO MODEL APPLICATION CHART ON THIS PAGE)

BEARING			CUP		
IDENTIFICATION NUMBER	P & A NUMBER		IDENTIFICATION NUMBER	P & A NUMBER	
02872	8M	4621	02820	8A	4616
31594	8M	4630	31520	8A	4628
HM88649	C0DW	4630-A	HM88610	C0DW	4628-A
HM89443	TBAA	4621-A	HM89410	TBAA	4616-A
HM89444	C6AZ	4630-A	M86610	C0DW	4616-A
HM89446	C1DZ	4630-A	M88010	B7A	4616-A
M86647	C6TZ	4621-B	M802011	C7AZ	4628-A
M86649	C0DW	4621-A	HM88510	B5A	4616-B
M88048	B7A	4621-A	HM88542	B5A	4621-B
M802048	C7AZ	4630-A			

YEAR	MODEL APPLICATION	RETAINER & CUP ASSY. 4614 ▲	CUPS 4616 ●	FRONT	REAR	BEARINGS 4621	FRONT	REAR
- A -								
67/	A(8 1/2", 8.7" R/G)-integral carrier	None req'd	B7A 4616-A C7AZ 4628-A	1		B7A 4621-A C7AZ 4630-A	1	1
65	A(9" R/G-2 pinion) A(9" R/G-4 pinion)	D2SZ 4614-A C3AZ 4614-B	B7A 4616-A B7A 4616-A TBAA 4616-A	1 1 1	1 1 1	B7A 4621-A B7A 4621-A TBAA 4621-A	1 1 1	1 1 1
66	A(9" R/G)	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
67	A(9" R/G)	C7AZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
68/	A(9" R/G)	C7AZ 4614-D	B7A 4616-A	1	1	B7A 4621-A	1	1
66	A(9 3/8" R/G)	D2VY 4614-A	B7A 4616-A TBAA 4616-A	1 1		B7A 4621-A	1	1
67	A(9 3/8" R/G)	★C7AZ 4614-B r/b C7AZ 4614-C(1-74)	B7A 4616-A TBAA 4616-A	1 1		B7A 4621-A C6AZ 4630-A	1	1
68/70	A(9 3/8" R/G)	D2VY 4614-A	B7A 4616-A TBAA 4616-A	1 1	1	B7A 4621-A	1	1
- B -								
67/68	B(7 1/4" R/G)-integral carrier	None req'd	C0DW 4616-A TBAA 4616-A	1		C0DW 4621-A C1DZ 4630-A	1	1
65/67	B(7 3/4", 8" R/G)	★C6OZ 4614-A r/b C6OZ 4614-B(10/74)	C0DW 4616-A	1	1	C0DW 4621-A	1	1
68/	B(8" R/G)	C6OZ 4614-B	C0DW 4616-A	1	1	C0DW 4621-A	1	1
65/71	B(9" R/G-28 spline shaft)	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
67/71	B(9" R/G-31 spline shaft)	C3AZ 4614-B	B7A 4616-A TBAA 4616-A	1 1	1	B7A 4621-A TBAA 4621-A	1	1
72	B(9" R/G)-WEC, WFC	D2OZ 4614-A	B7A 4616-A TBAA 4616-A	1 1		B7A 4621-A	1	1
72	B(9" R/G)-WEB, WFA	C7AZ 4614-D	B7A 4616-A	1	1	B7A 4621-A	1	1
- F -								
65/70	F(7 1/4" R/G)-integral carrier	None req'd	C0DW 4616-A TBAA 4616-A	1		C0DW 4621-A C1DZ 4630-A	1	1
65/67	F(8" R/G)	★C6OZ 4614-A r/b C6OZ 4614-B(10/74)	C0DW 4616-A	1	1	C0DW 4621-A	1	1
68/	F(8" R/G)	C6OZ 4614-B	C0DW 4616-A	1	1	C0DW 4621-A	1	1
65/71	F(9" R/G-28 spline shaft)	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
67/	F(9" R/G-31 spline shaft)	C3AZ 4614-B	B7A 4616-A TBAA 4616-A	1 1	1	B7A 4621-A TBAA 4621-A	1	1
72	F(9" R/G-28 spline shaft)	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
- L -								
71/	L(6 3/4" R/G)-integral carrier	None req'd	C0DW 4616-A B7A 4616-A	1		C0DW 4621-A B7A 4621-A	1	1

▲ Consists of retainer and two (4616) cups

● Also serviced in retainer and cup assy. (4614)

YEAR	MODEL APPLICATION	RETAINER & CUP ASSY. 4614 ▲	CUPS 4616 ●	FRONT	REAR	BEARINGS 4621	FRONT	REAR
------	-------------------	--------------------------------------	-------------------	-------	------	------------------	-------	------

4614-21 RETAINER ASSY. - REAR AXLE PINION BEARING - continued

- P -								
70	P(7 1/4" R/G)-integral carrier	None req'd	C0DW 4616-A	1		C0DW 4621-A	1	
70/	P(8" R/G)	C6OZ 4614-B	TBAA 4616-A		1	C1DZ 4630-A		1
			C0DW 4616-A	1	1	C0DW 4621-A	1	1

- S -								
65/66	S	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
67	S(9" R/G)	C7AZ 4614-D	B7A 4616-A	1	1	B7A 4621-A	1	1
67	S(9 3/8" R/G)	C7AZ 4614-B	B7A 4616-A	1		B7A 4621-A	1	
			TBAA 4616-A		1	C6AZ 4630-A		1
68/70	S "Before 1/19/70"	D2VY 4614-A	B7A 4616-A	1		B7A 4621-A	1	
			TBAA 4616-A		1			
70/71	S-w/o sure-track "From 1/19/70"	D2VY 4614-A	B7A 4616-A	1		B7A 4621-A	1	
			TBAA 4616-A		1			
70/71	S-w/sure track "From 1/19/70"	★D0SZ 4614-A r/b D2SZ 4614-B(10/74)	B7A 4616-A	1		B7A 4621-A	1	
			TBAA 4616-A		1	C6AZ 4630-A		1
72	S(9 3/8" R/G) -exc. WFN-J	D2SZ 4614-B	B7A 4616-A	1		B7A 4621-A	1	
			TBAA 4616-A		1			
72	S(9" R/G) -exc. WFF-G,H,J, WGB-R,S	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
72	S(9 3/8" R/G)-WFN-J	D2VY 4614-A	B7A 4616-A	1		B7A 4621-A	1	
			TBAA 4616-A		1			
72	S(9" R/G)-WFF-G,H,J, WGB-R,S	D3SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1

- U -								
66/71	U(rear drive axle)	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
72	U(rear drive axle)	D2SZ 4614-A	B7A 4616-A	1	1	B7A 4621-A	1	1
66	U(front drive axle)- "Before Ser. 816,001"	None req'd.	C0DW 4628-A	1		C0DW 4630-A	1	
			C0DW 4616-A		1	C6TZ 4621-B		1
66/71	U(front drive axle)- "From Ser. 816,001 to K20,001"	None req'd.	C0DW 4628-A	1		C0DW 4630-A	1	
			8A 4616		1	8M 4621		1
71/	U(front drive axle)- "From Ser. K20,001"	None req'd.	8A 4628	1		8M 4630	1	
			8A 4616		1	8M 4621		1

- X -								
65/70	X(7 1/4" R/G)-integral carrier	None req'd.	C0DW 4616-A	1		C0DW 4621-A	1	
			TBAA 4616-A		1	C1DZ 4630-A		1
65/67	X(8" R/G)	★C6OZ 4614-A r/b C6OZ 4614-B(10/74)	C0DW 4616-A	1	1	C0DW 4621-A	1	1
68/70	X(8" R/G)	C6OZ 4614-B	C0DW 4616-A	1	1	C0DW 4621-A	1	1

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
65/	A, B, S, U		42999-S(B253)	5	Bolt (retainer to differential carrier)- 3/8"-16 x 1 1/8" self locking
70/	S		384245-S (WW97CX)	1	Stud-5/16"-18 & 3/8"-16 x 1 29/32"- (retainer to differential carrier)-with sure-track

4616-21 Refer to Group 4614

4625 BEARING - REAR AXLE DRIVING PINION PILOT					
65/	A, B, F, S, U(8 3/4" & 9" R/G)		C2AZ 4625-B	1	1.10" I.D. -1.85" O.D. -21/32" thick
66/	A, S(9 3/8" R/G)		φC6AZ 4625-A (N 5204-TV)	1	1.10" I.D. -1.85" O.D. -13/16" thick
65/	B, F, P, X(7 3/4" & 8" R/G)		φC2OZ 4625-B (R 1558-TAV)	1	3/4" I.D. -1 1/4" O.D. -5/8" thick

4627 RETAINER - REAR AXLE DRIVING PINION PILOT BEARING					
65/	A, B, F, S, U(8 3/4" & 9", 9 3/8" R/G)		B7AZ 4627-A	1	
65/	B, F, P, X(7 3/4" & 8" R/G)		C2OZ 4627-A	1	1 1/4" O.D. -7/8" I.D. - 12 tabs

4628-30 Refer to Group 4614

▲ Consists of retainer and two (4616) cups

● Also serviced in retainer and cup assy. (4614)

May, 1975

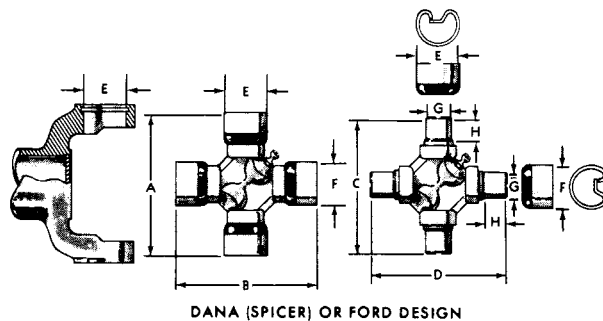
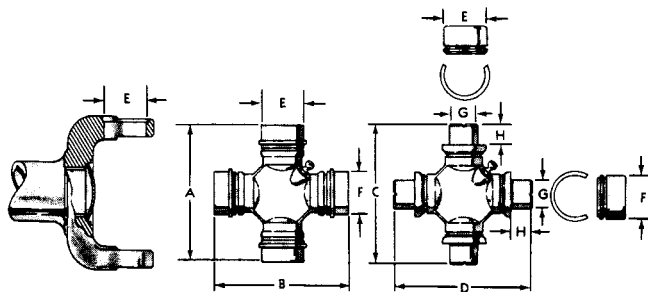
COPYRIGHT © 1975 -

FORD MOTOR COMPANY — DEARBORN, MICHIGAN

FINAL ISSUE

4635 UNIVERSAL JOINT KIT - DRIVESHAFT**UNIVERSAL JOINT IDENTIFICATION CHART**

Universal joints, Group 4635 are cataloged also by year and model on the pages following the Identification Chart
 Universal joints are also listed by code in Group 4602

**DANA (SPICER) OR FORD DESIGN****MECHANICS, CLEVELAND STEEL OR SACO DESIGN**

P-4917

*U/JT CODE	PART NUMBER	INDUSTRY DESIGNATION	A	B	C	D	E	F	G	H	DESIGN
A	B6TZ 4635-A	1310	3 1/4"	3 1/4"	2 31/32"	2 31/32"	1 1/16"	1 1/16"	21/32"	11/16"	Dana (Spicer) or Ford
B	C3DZ 4635-A	1100	2 11/16"	2 11/16"	2 1/4"	2 1/4"	1"	1"	37/64"	37/64"	Mech., or Saco
C	C3AZ 4635-C	1260	3 15/32"	3 15/32"	2 31/32"	2 31/32"	1 1/16"	1 1/16"	19/32"	9/16"	Dana (Spicer) or Ford
D	★C3AZ 4635-D r/b C3AZ 4635-F (2-73)	1260	3 15/32"	3 15/32"	2 31/32"	2 31/32"	1 1/16"	1 1/8"	19/32"	9/16"	Dana (Spicer) or Ford
E	C3AZ 4635-E	1310	3 1/4"	3 1/4"	3"	3"	1 1/16"	1 1/16"	11/16"	17/32"	Cleveland
F	C3AZ 4635-F	1310	3 1/4"	3 1/4"	3"	3"	1 1/16"	1 1/8"	11/16"	17/32"	Cleveland
G	C3AZ 4635-G	1330	3 5/8"	3 5/8"	3 13/32"	3 13/32"	1 1/16"	1 1/16"	11/16"	19/32"	Cleveland
H	C3AZ 4635-H	1330	3 5/8"	3 5/8"	3 13/32"	3 13/32"	1 1/16"	1 1/8"	11/16"	19/32"	Cleveland
J	C3UZ 4635-B	1100	2 21/32"	2 21/32"	2 13/64"	2 1/2"	1"	1"	35/64"	17/32"	Dana (Spicer)
K	C4SZ 4635-B	1330	3 5/8"	3 5/8"	3 3/8"	3 3/8"	1 1/16"	1 1/16"	21/32"	35/64"	Dana (Spicer)
L	C5DZ 4635-A	1260	3 15/32"	3 15/32"	2 31/32"	2 31/32"	1"	1 1/8"	19/32"	29/64"	Mechanics
M	C5DZ 4635-B	1260	3 15/32"	3 15/32"	2 31/32"	2 31/32"	1"	1"	19/32"	29/64"	Mechanics
N	C8SZ 4635-A	1330									Saginaw
P	C6TZ 4635-H	2.5RL									Mechanics
Q	C9TZ 4635-B	1310	3 1/4"	3 1/4"	2 31/32"	2 31/32"	1 1/16"	1 1/16"	21/32"	11/16"	Dana (Spicer)

* Universal joints are listed by model application with the related drive shafts-see page 1 of Section 46 for additional information

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4662 SPACER - REAR AXLE DRIVING PINION BEARING - Selective fit					
65/	A,B,F,S,U(9" R/G)	28 spline shaft	B7A 4662-A	1	1.315" I.D. -.480" long (collapsible)
67/69	A(8 1/2" R/G)	WER		1	
65/	A,S(9",9 3/8" R/G)	31 spline shaft	C4AZ 4662-A	AR	1.313" I.D. -1.625" O.D. -.466" long (solid)
67/	B,F(9" R/G)	31 spline shaft	C4AZ 4662-B	AR	.468" long
			C4AZ 4662-C	AR	.470" long
			C4AZ 4662-D	AR	.472" long
			C4AZ 4662-E	AR	.474" long
			C4AZ 4662-F	AR	.476" long
			C4AZ 4662-L	AR	.477" long
			C4AZ 4662-G	AR	.478" long
			C4AZ 4662-M	AR	.479" long
			C4AZ 4662-H	AR	.480" long
			C4AZ 4662-N	AR	.481" long
			C4AZ 4662-J	AR	.482" long
			C4AZ 4662-P	AR	.483" long
			C4AZ 4662-K	AR	.484" long
			C4AZ 4662-R	AR	.485" long
			C6AZ 4662-A	AR	.486" long
			C6AZ 4662-B	AR	.487" long
			C6AZ 4662-C	AR	.488" long
			C6AZ 4662-D	AR	.489" long
			C6AZ 4662-E	AR	.490" long
69/	A(8.7" R/G)	WER	D0AZ 4662-A	1	1 3/8" small I.D. -1 21/32" large I.D. -1 9/16" small O.D. -1 27/32" large O.D.
65/70	B,F,P,X(7 1/4" R/G)		C3DZ 4662-B	1	2.014" long
65/	B,F,P,X (7 3/4" & 8" R/G)		C2OW 4662-A	1	.480" long-1.21" I.D. -collapsible
71/	L(6 3/4" R/G)		D1FZ 4662-A	1	2 1/8" long tapered I.D. 1 1/4" x 1 11/32"
4669 SEAL - REAR AXLE DRIVING PINION BEARING RETAINER					
65/	A, B, F, S, U(9" R/G)		B7A 4669-A	1	4 3/4" I.D.
65/	A, S(9 3/8" R/G)	WDT, WEF	C6AZ 4669-A	1	5 1/2" I.D.
65/	B,F,P,X (7 3/4" & 8" R/G)		C2OZ 4669-A	1	4" I.D.
4670 SLINGER - REAR AXLE DRIVING PINION SHAFT OIL					
65/	A, B, F, S, U(9.9 3/8" R/G)		C3AZ 4670-A	1	2 5/8" O.D. -1 5/16" I.D. -.020" thick
65/67	B, F, X(7 3/4" & 8" R/G)		C3OZ 4670-A	1	2 15/32" O.D. -1 3/16" I.D. -.020" thick
66/71	U(front axle) "Before Ser. K20, 001"		C0TT 4670-A	1	Pinion gear shaft-inner brg. -front 4 1/8" O.D. -1 7/16" I.D. -1/32" thick
			C6TZ 4670-A	1	Pinion gear shaft-front brg. -rear- 2 7/8" O.D. -1 1/8" I.D. -1/32" thick
			C6TZ 4670-C	1	Baffle-pinion gear shaft rear brg. - saucer shaped
71/	U(front axle) "From Ser. K20, 001"		C0TT 4670-A	1	Pinion gear shaft-inner bearing-front- 4 1/8" O.D. -1 7/16" I.D. -1/32" thick
			C6TZ 4670-B	1	Pinion gear shaft-inner bearing-rear- 2 63/64" O.D. -1 7/16" I.D. -1/64" thick
			8M 4670	1	Baffle-front bearing-rear
4671 GASKET - FRONT AXLE DRIVING PINION SHAFT OIL SLINGER					
66/71	U	Dana (Spicer) 30	8M 4671	1	
4672 SHIM - FRONT AXLE DRIVE PINION ADJUSTING					
66/71	U "Before Ser. K20, 001"	Dana (Spicer) 30	C6TZ 4672-E	1	2 53/64" O.D. -2 3/8" I.D. -.003" thick
			C6TZ 4672-F	1	.005" thick
71/	U "From Ser. K20, 001"	Dana (Spicer) 44	8M 4672-A	1	.003" thick
			8M 4672-C	1	.010" thick
			8M 4672-D	1	.030" thick

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4676 SEAL ASSY. - REAR AXLE DRIVE PINION OIL					
65/67	A (8 cyl. 406, 427)		C3AZ 4676-A	1	1 13/16" I. D. -3" O. D. -1/2" thick - silicone rubber
67	A(8 1/2", 8.7" R/G)	WER	C7AZ 4676-A	1	1 13/16" I. D. -3 1/8" flange dia.,
68/	* A(8 1/2", 8.7" R/G)			1	2 25/32 seal dia. -17/32" thick
65/67	*A,B,F,S,U(9", 9 3/8" R/G)	EXC. WER	*C2AZ 4676-B	1	1 13/16" I. D. -3 5/16" flange dia.,
71	U(9" R/G)- "Before Ser.K80,001"		R/B D1UZ 4676-A (10-72)	1	3" seal dia. -1/2" thick-double lip seal
68/70	*A,B,F,S,U(9", 9 3/8" R/G)			1	
71/	U(9" R/G)- "From Ser.K80,001"		D1UZ 4676-A	1	1 13/16" I. D. -3 5/16" flange dia.,
71/	A, B, F, S(9", 9 3/8" R/G)			1	3" seal dia. -1/2" thick
65/67	B, F, X(7 1/4", 8" R/G)		C2OZ 4676-B	1	1 13/16" I. D. -2 15/16" flange dia.,
71/	L(6 3/4" R/G)			1	2 5/8" seal dia. -29/64" thick
68/	* B, F, P, X(7", 8" R/G)			1	
65/69	F, X (7 1/4" R/G)		C1UZ 4676-C	1	1 21/32" I. D. -2 5/8" O. D. -29/64" thick - use with 1100 universal joints only
66	U (front drive axle)		B6A 4676-A	1	1 1/2" I. D. -3. 16" O. D. -19/32" thick
67/	U(front drive axle)		C6TZ 4676-A	1	#34027, #35723
68/	*A(8 1/2", 8.7" R/G)	WER	CC7AZ 4676-A	1	
68/	*A,B,F,S,U(9", 9 3/8" R/G)	EXC. WER	CC2AZ 4676-B	1	
68/	*B, F, P, X(7", 8" R/G)		CC2OZ 4676-B	1	
4710 CAP - REAR AXLE UNIVERSAL JOINT KNUCKLE - DUST					
66/70	U	Mechanics	C6TZ 4710-C	2	
4730 BUMPER - REAR AXLE - Also refer to Groups 4298 and 5783					
65/	A		C9AZ 4730-A	2	Axle
68/71	S			2	Crossmember or frame
66/67	A		C6AZ 4730-A	1	Carrier
71/	F, P			2	Crossmember or frame
71/72	L "Before 1/17/72"			2	Crossmember or frame
72	L "From 1/17/72"		D2FZ 4730-A	2	Crossmember or frame
65/68	B(exc. 8 cyl.260,3/S/T,O/D)		C3OZ 4730-A	1	Differential carrier
65/68	B			2	Axle
65/68	F(exc. 289 4/B Special)			1	Carrier
65/68	B (exc. 71)(8 cyl.289 4/B)		C3OZ 4730-D	1	Differential carrier
65/67	F (8 cyl.289 4/B Special)			1	Carrier
66/67	B, X		C6DZ 4730-C	2	Axle bumper
66/71	B, X			1	Pinion bumper
65/68	F (8 cyl. 289 2/B & 4/B Premium fuel)		C5ZZ 4730-B	1	On floor pan
68/	A			1	Carrier
65	F(8 cyl.289 4/B Special)		C3AZ 4730-B	1	Differential carrier
66/70	B(71)-8 cyl. 390			1	Differential carrier
68/70	B(8 cyl.351, 390, 427, 428)			1	Differential carrier
68/70	F(8 cyl.289, 302GT, 390, 428)			1	Differential carrier
71/	F		D1ZZ 4730-A	1	Pinion bumper
70	P		D0DZ 4730-A	1	Bumper-pinion
71/	P		D1DZ 4730-A	1	Bumper-pinion
65/68	S		C1VV 4730-B	2	Axle
67	S		C7SZ 4730-B	1	Carrier
68/71	S		C8SZ 4730-A	1	Carrier
66/	U		C1TT 4730-B	2	On frame
71/	L		D1FZ 4730-A	1	Axle
65/67	X		*C0DZ 4730-A	3	Axle-r/b C6AZ 4730-A(10/74)
65/67	X(6 cyl.)			3	Axle to frame & carrier
65/67	F(6 cyl.)			1	Axle to frame
65/70	F(8 cyl.)			1	
65/70	X(8 cyl. 260, 289)			1or3	Differential carrier
68/70	B, P, X			2	Axle to frame
65/67	X (8 cyl.)		*C3DZ 4730-A	2	Axle-r/b C6AZ 4730-A(10/74)
65/70	F			2	Axle

Identification marking






* U.S. only

* Canada only

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4730 BUMPER - REAR AXLE - continued -Also refer to Groups 4298 and 5783					
65/70	X (8 cyl.)		C3DZ 4730-B	1	Differential carrier
65/67	B (8 cyl.)			1	Differential carrier
68/70	F(8 cyl. 289, 302)-except GT			1	Differential carrier
72	B(71, 97), S		D2OZ 4730-A	2	Axle bumper
72	B(exc. 71, 97)		D2OZ 4730-C	2	Axle bumper
72	B		D2OZ 4730-E	1	Differential carrier
72	S		D2SZ 4730-A	1	Differential carrier
4731 BRACKET - REAR AXLE BUMPER					
66	B		C6OZ 4731-A	1	Center
67	B (except 54, 62, 63-6 cyl.)			1	
	"From 4/3/67"				
68/71	B(54, 57, 62, 63, 65, 76)-6 & 8 cyl. 250, 302			1	Center
68/71	B (76)-6 cyl. & 8 cyl. 302			1	
67	B, X(66, 71)-6 & 8 cyl. 289		C7OZ 4731-A	1	Axle bumper
68/71	B(66, 71)-6 & 8 cyl. 200, 250, 302			1	
68/70	X(71)-6 & 8 cyl. 200, 289, 302			1	
72	L		D4DZ 4731-A	1	Pinion
72	L(73)		D2FZ 4731-A	1	Axle bumper inner R.H.
72	L(73)		D2FZ 4731-C	1	Axle bumper inner L.H.
72	L(73)		D2FZ 4731-B	1	Axle bumper outer R.H. & L.H.
70	P		D0DZ 4731-A	1	Axle
71	P		D1DZ 4731-A	1	Axle
72	S		D2SZ 4731-A	1	Axle bumper
66/	U		C6TZ 4731-A	2	On frame
66/67	X (54, 62)		C6DZ 4731-A	1	Axle
67/	B		378459-S2(UU52K)	2	Screw (Bracket to underbody)-5/16"-18 x 5/8"
65/68	S		372158-S8(BB572F)	8	Bolt (bracket to underbody)-3/8"-16 x 1 1/8" washer head
65/68	S		373139-S(BB163)		Bolt (rear axle bumper to underbody)-3/8"-16 x 2 3/4"
			44727-S8(X24)		Washer-3/8"
65/	X		★41209-S8	AR	Screw (bracket to rail)-5/16"-18 x 3/4" tapping
4782 YOKE - DRIVE SHAFT CENTERING SOCKET					
67	S(57)		C3VY 4782-A	1	Used with double cardan joint
68/71	S		C8SZ 4782-A	1	Rear support
72	S		D2SZ 4782-A	1	Rear support
70/72	U "Before Ser. N40,001"	Dana (Spicer)	★C9TZ 4782-A	1	R/b D2TZ 4782-A (2-73)
72	U "From Ser. N40,001"	Dana (Spicer)	D2TZ 4782-A	2	Used front and rear
4784 YOKE - DRIVE SHAFT CENTER					
67	S(57)		C3VY 4784-A	1	Used with double cardan joint
68/71	S		C8SZ 4784-A	2	Link
70/	U	Dana (Spicer)	C9TZ 4784-A	2	Used front and rear
4790 SEAL - DRIVE SHAFT CENTERING BALL					
67	S(57)		C3VY 4790-A	1	Used with double cardan joint
4791 SLINGER - DRIVE SHAFT STUD YOKE					
67	S(57)		C3VY 4791-A	1	Used with double cardan joint
4819-20 DUST CAP - DRIVE SHAFT					
70/	U	Dana (Spicer)	01Y 7077	1	Dust cap - 1 11/16" - 24
			B5T 4819-A	1	Split washer-1 5/32" I.D. - 1 1/2" O.D. , 1/32" thick
70/72	U "Before Ser. N40,001"		B9T 4820-A	1	Seal-1 1/8" I.D.-1 5/8" O.D.-5/16" thick
72	U "From Ser. N40,001"		D2TZ 4820-A	1	Seal-1 5/8" O.D.
4820 SEAL - DRIVE SHAFT UNIVERSAL JOINT KNUCKLE DUST CAP					
66/70	U	Mechanic	C6TZ 4820-C	2	4 5/16" long

4841 SLIP YOKE - DRIVE SHAFT**UNIVERSAL JOINT SLIP YOKE IDENTIFICATION CHART**

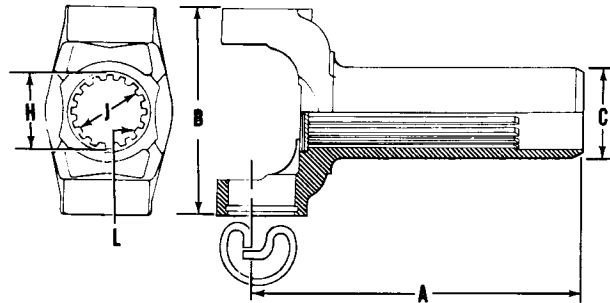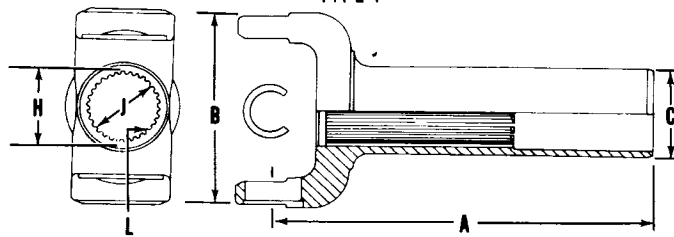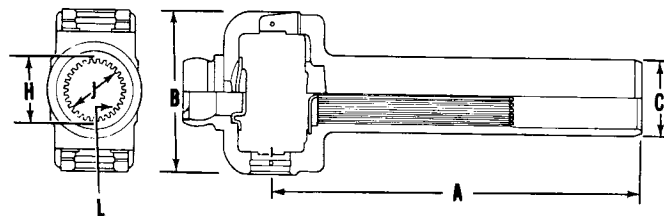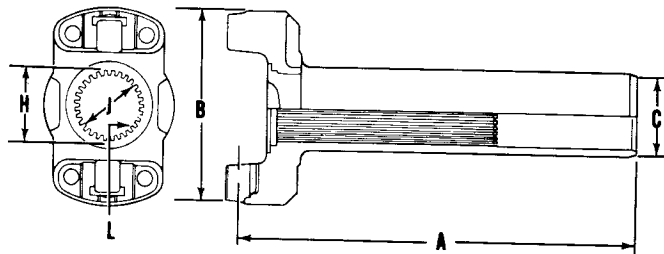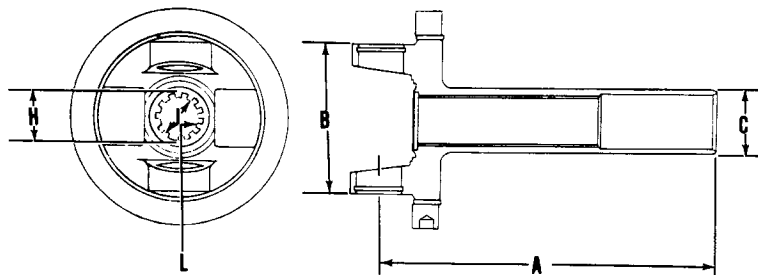Universal joint knuckle and plug assemblies, Group 4841 are cataloged also by year and model in the Drive Shaft and Universal Joint Chart under Group 4602.

**TYPE 1****TYPE 2****TYPE 3****TYPE 4****TYPE 5**

PART NUMBER	SLIP YOKE CODE ▲	A	B	C	H	J	L	TYPE
4841 SLIP YOKE - DRIVESHAFT - continued								
C1DD 4841-D	1	7 3/4"	2 15/32"	1 3/8"	1 7/64"	63/64"	25	2
CIUZ 4841-A	5	5 29/32"	2 15/32"	1 3/8"	1 7/64"	63/64"	25	2
C3AZ 4841-A	2	8 7/32"	3 1/2"	1 11/16"	1 3/8"	1 17/64"	31	1
C3AZ 4841-D	3	8 3/32"	3 1/2"	1 1/2"	1 7/32"	1 3/32"	28	1
C3AZ 4841-G	4	8 7/32"	3 7/8"	1 1/2"	1 7/32"	1 3/32"	28	1
C3DZ 4841-A	8	8 1/4"	3 1/2"	1 1/2"	1 7/64"	63/64"	25	1
C5DZ 4841-A	6	8 3/32"	3 3/16"	1 1/2"	1 7/32"	1 3/32"	28	2
C5DZ 4841-B	7	8 1/4"	3 3/16"	1 1/2"	1 7/64"	63/64"	25	2
C5TZ 4841-F	19	6	3 11/32"	1 3/4"	1 3/8"	1 3/16"	16	1
C5ZZ 4841-B	14	5 29/32"		1 1/2"	1 7/32"	1 3/32"	28	2
C6DZ 4841-A	9	5 29/32"	3 3/16"	1 3/8"	1 7/64"	63/64"	25	2
C6DZ 4841-B	10	5 29/32"	2 15/32"	1 1/2"	1 7/64"	63/64"	25	2
C7AZ 4841-A Δ	11	8 3/32"	3 1/2"	1 1/2"	1 7/32"	1 3/32"	28	1
C7AZ 4841-B Δ	12	8 7/32"	3 1/2"	1 11/16"	1 3/8"	1 17/64"	31	1
★C7AZ 4841-C Δ r/b C7SZ 4841-A	13	8 7/32"	3 15/16"	1 11/16"	1 3/8"	1 17/64"	31	1
C7SZ 4841-A	16	8 5/32"	3 29/32"	1 11/16"	1 3/8"	1 17/64"	31	1
C7SZ 4841-B	17	7 1/2"	3 7/8"	1 13/16"	1 3/8"	1 17/64"	31	1
C8SZ 4841-A	18	9 7/16"	3 1/2"	1 11/16"	1 3/8"	1 17/64"	31	3
C9TZ 4841-A	20	7 7/8"	3 15/32"	1 11/16"	1 3/16"	1 3/8"	16	1
D1AZ 4841-A	21	8 1/8"	3 1/2"	1 1/2"	1 7/32"	1 3/32"	28	5
D1AZ 4841-B	22	8 1/8"	3 1/2"	1 11/16"	1 3/8"	1 1/4"	31	5
D1FZ 4841-A	23	5 3/16"	3 1/2"	1 3/16"	1 1/64"	13/16"	20	1
D1FZ 4841-B	24	5 29/32"	3 1/2"	1 3/8"	1 1/8"	1	25	1
D1AZ 4841-C	25	8 1/8"	3 15/16"	1 11/15"	1 25/64"	1 17/64"	31	1
D2AZ 4841-A	27	8 9/16"	3 29/32"	1 11/16"	1 25/64"	15/32"	31	5
D2SZ 4841-A	26	8 9/64"	3 15/16"	1 11/16"	1 25/64"	1 1/8"	31	1
D2ZZ 4841-A	28	8 1/4"	3 17/32"	1 1/2"	1 13/64"	1 7/64"	28	1
D2AZ 4841-B	29	6 7/8"	3 15/16"	1 11/16"	1 25/64"	1 17/64"	31	6
C7SZ 4841-C	30	8 5/32"	3 29/32"	1 11/16"	1 3/8"	1 17/64"	31	1

Δ Inertia type
May, 1975

▲ This Code shown with Driveshaft in Group 4602.

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN


FINAL ISSUE

SECTION 46

4851 FLANGE ASSY. - REAR AXLE UNIVERSAL JOINT

UNIVERSAL JOINT FLANGE IDENTIFICATION CHART

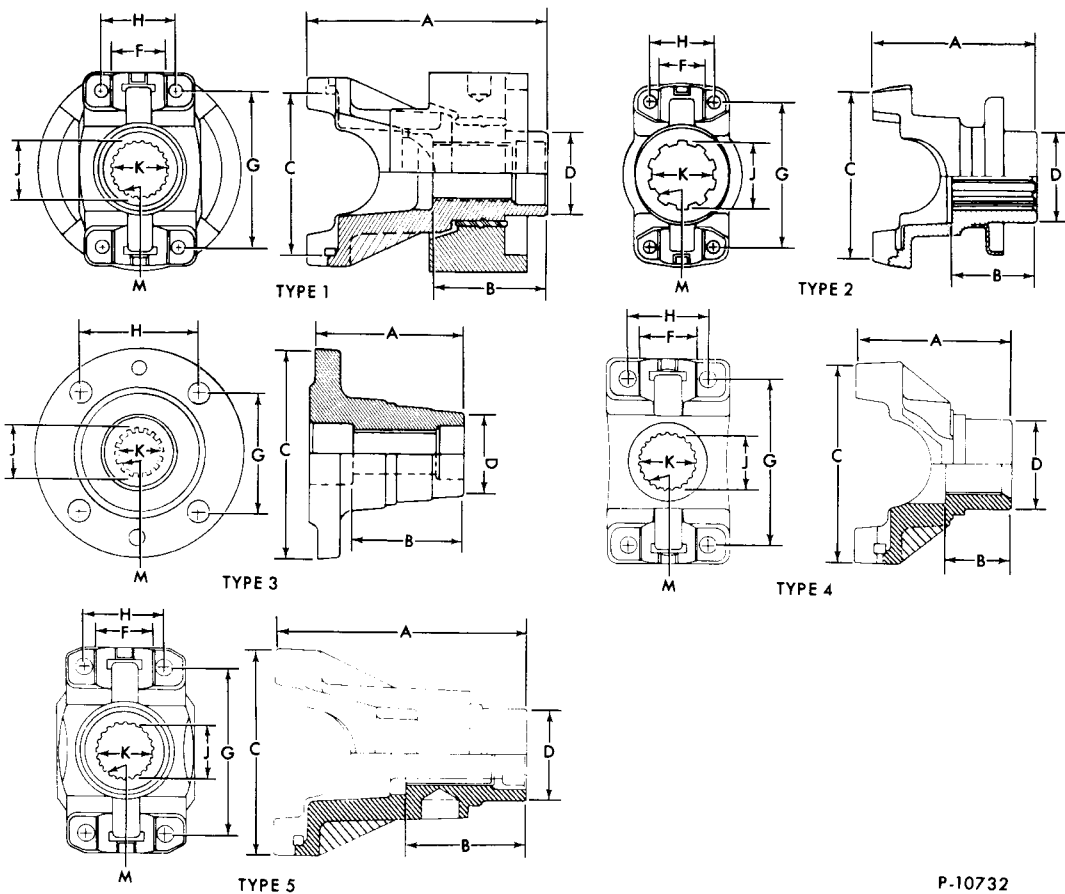Universal joint flanges, Group 4851 are also listed by year and model following the identification chart.



P-10732

PART NUMBER	A	B	C	D	E	F	G	H	J	K	M	T TYPE
C5DZ 4851-A	2 59/64"	1 13/64"	3 7/32"	1 13/16"		1 1/8"	2 31/32"	1 37/64"	1 1/64"	15/16"	23	2
★C7AZ 4851-A r/b D2AZ 4851-A (3-73)	2 59/64"	1 5/16"	3 7/32"	1 13/16"		1 1/8"	2 31/32"	1 37/64"	1 7/32"	1 9/64"	28	2
★C5DZ 4851-B r/b D2FZ 4851-A (3-73)	2 15/16"	1 15/64"		1 21/32"		1"	2 7/32"	1 23/64"	1 1/64"	15/16"	23	2
C2DZ 4851-A	2 15/16"	1 15/64"		1 21/32"		1"	2 7/32"	1 23/64"	1 1/64"	15/16"	23	2
C8SZ 4851-A	3 1/4"	2 27/64"	4 45/64"	1 13/16"			2 21/32"	2 15/16"	1 15/64"	1 9/64"	28	3
D0SZ 4851-A	3 1/4"	2 27/64"	4 45/64"	1 13/16"			2 21/32"	2 15/16"	1 15/64"	1 9/64"	28	3
D0SZ 4851-B	3 3/4"	2 27/64"	4 45/64"	2 3/16"							28	3
C7SZ 4851-A	4 1/32"	2 27/64"	3 5/8"	1 13/16"		1 1/16"	2 7/8"	1 1/2"	1 15/64"	1 9/64"	28	2
C3SZ 4851-A	4 1/16"	2 27/64"	3 5/8"	1 13/16"		1 1/16"	3 5/16"	1 13/32"	1 15/64"	1 9/64"	28	2
C3TZ 4851-A	4 1/16"	2 27/64"	3 15/64"	1 13/16"		1 1/16"	2 29/32"	1 13/32"	1 15/64"	1 9/64"	28	2
C3OZ 4851-A	4 13/32"	2 5/8"	3 7/32"	1 13/16"		1 1/8"	2 31/32"	1 37/64"	1 7/64"	1 1/64"	25	2
★C4AZ 4851-A	4 25/32"	2 9/64"	3 5/8"	1 13/16"		1 1/8"	3 5/16"	1 37/64"	1 15/64"	1 9/64"	28	2
★C5AZ 4851-C	4 25/32"	2 9/64"	3 5/8"	1 13/16"		1 1/8"	3 5/16"	1 37/64"	1 15/64"	1 9/64"	28	1
C6VY 4851-B	5 1/32"	2 27/64"	3 5/8"	1 13/16"		1 1/16"	2 7/8"	1 1/2"	1 15/64"	1 9/64"	28	2
C3AZ 4851-L	5 1/16"	2 27/64"	3 7/32"	1 13/16"		1 1/8"	2 31/32"	1 37/64"	1 15/64"	1 9/64"	28	2
C3AZ 4851-M	5 1/16"	2 27/64"	3 5/8"	1 13/16"		1 1/8"	3 5/16"	1 37/64"	1 15/64"	1 9/64"	28	2
C3OZ 4851-C	5 1/16"	2 5/8"	3 7/32"	1 13/16"		1 1/8"	2 31/32"	1 37/64"	1 7/64"	1 1/64"	25	2
C6AZ 4851-B	5 1/16"	2 27/64"	3 5/8"	1 13/16"		1 1/8"	3 5/16"	1 37/64"	1 15/64"	1 9/64"	28	1
D2OZ 4851-A	4 25/32"	2 9/64"	3 5/8"	1 23/64"		1 1/8"	3 5/16"	1 37/64"	1 15/64"	1 9/64"	28	4
D2SZ 4851-A	5 1/16"		3 5/8"	1 13/64"			3 5/16"	1 37/64"	1 15/64"	1 9/64"	28	5
D0SZ 4851-C	3 29/64"	2 27/64"	4 45/64"	1 13/16"			2 21/32"	2 15/16"	1 7/32"	1 9/64"	28	3
D2SZ 4851-B	5 1/16"	2 27/64"	4"	1 13/16"		1 1/8"	3 5/16"	1 37/64"	1 7/32"	1 9/64"	28	5

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4851 FLANGE ASSY. - REAR AXLE UNIVERSAL JOINT - continued					
- A -					
65	A	28 spline axle shaft	★C5AZ 4851-C	1	●1330-with torsional damper stamped "B", "C", "D" or "E"
65	A	31 spline axle shaft	★C4AZ 4851-A	1	● 1330 - without torsional damper-r/b D2OZ 4851-A (10-73)
65/71	A(9" R/G)	28 spline axle shaft	C3AZ 4851-L	1	●1310-without torsional damper
66/71	A(9", 9 3/8" R/G)	28 & 31 spline axle shaft	D2SZ 4851-A	1	●1330-without torsional damper
66/70	A(9 3/8" R/G)	31 spline axle shaft	C6AZ 4851-B	1	●1330-with torsional damper
72	A(9" R/G)		D2SZ 4851-A	1	●1330
67/71	A(8 1/2", 8.7" R/G)	WER	C7AZ 4851-A	1	●1260
72	A(8.7" R/G)	WER-F, H	D2AZ 4851-A	1	●1310
72	A(8.7" R/G)	WER-J	D2AZ 4851-B	1	●1330
- B -					
65/	B(8" R/G)		C3OZ 4851-A	1	●1260, ●1310
65/71	B(9" R/G)		C3AZ 4851-L	1	●1310
66/71	B(9" R/G)	28 spline axle shaft	D2SZ 4851-A	1	●1330
67/68	B(7 1/4" R/G)		C5DZ 4851-B	1	●1260
67/	B(9" R/G)	31 spline axle shaft	C4AZ 4851-A	1	●1330
72	B(9" R/G)	WEB, WFA	D2SZ 4851-A	1	●1330
72	B(9" R/G)	WEC, WFC	D2OZ 4851-A	1	●1330
- F -					
65/68	F(7 1/4" R/G)	WCY (exc. R, AA, AJ)	C2DZ 4851-A	1	●1100
65/70	F(7 1/4" R/G)	WCY-R, AA, AJ	C5DZ 4851-B	1	●1260
65/	F(8" R/G)	WCZ, WDJ	C3OZ 4851-A	1	●1260-without torsional damper
65/	F(9" R/G)		C3AZ 4851-L	1	●1310
67/71	F(9" R/G)	28 spline axle shaft	D2SZ 4851-A	1	●1330
68/71	F(9" R/G)	31 spline axle shaft	★C4AZ 4851-A	1	●1330-r/b D2OZ 4851-A (10-73)
72	F(9" R/G)		D2OZ 4851-A	1	●1330
- L -					
71	L(6 3/4" R/G)		C5DZ 4851-B	1	●1260
72	L(6 3/4" R/G)		D2FZ 4851-A	1	●1260
- P -					
70	P(7 1/4" R/G)	WDV	C5DZ 4851-B	1	●1260
70/	P(8" R/G)		C3OZ 4851-A	1	●1260
- S -					
65/66	S	WCD, WDE, WEF	C3SZ 4851-A	1	●1330-without torsional damper
67	S(57)-9" R/G	WDC	C6VY 4851-B	1	●1330-without torsional damper
67	S(57)-9 3/8" R/G	WDT	C7SZ 4851-A	1	●1330-without torsional damper
67	S(65)	WDC, WDT	D2SZ 4851-A	1	●1330-without torsional damper
68/71	S (w/o sure-track)	WGA, WDT	C8SZ 4851-A	1	●1330-without torsional damper
70	S (w/sure-track)- "Before 1/19/70"	WGA, WFN		1	
72	S(9 3/8" R/G)	WFN-J		1	
70/71	S (w/sure-track)- "From 1/19/70"	WGA, WFN	D0SZ 4851-C	1	●1330-without torsional damper
70/71	S (9" R/G)	WFB, WGB	D0SZ 4851-B	1	●1330-without torsional damper
72	S(9" R/G)-"Before 12/1/71"	WGB, WFB	D2SZ 4851-A	1	●1330
72	S(9" R/G)- "From 12/1/71"	WGB, WFB	D0SZ 4851-B	1	●1330-without torsional damper
72	S(9 3/8" R/G)- "Before 12/1/71"	WGA, WFN(exc. WFN-J)	D2SZ 4851-B	1	●1330
72	S(9 3/8" R/G)- "From 12/1/71"	WGA, WFN(exc. WFN-J)	D0SZ 4851-C	1	●1330-without torsional damper
72	S(9" R/G w/sure-track)	WFB-G, H, J, WGB-R, S	D3SZ 4851-A	1	

● Industry designation

May, 1975

COPYRIGHT © 1975 —

FORD MOTOR
COMPANY

— DEARBORN, MICHIGAN

FINAL ISSUE

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4851 FLANGE ASSY. - REAR AXLE UNIVERSAL JOINT - continued					
	- U -				
66/	U	WEM, WEN	C3TZ 4851-A		
	- X -				
65	X(7 1/4" R/G)	WCY-R, AA	C5DZ 4851-B	1	●1260-r/b C5DZ 4851-B(4-72)
65/68	X(7 1/4" R/G)	Exc. WCY-R, AA	C2DZ 4851-A	1	●1100
65/70	X (8" R/G)	WCZ, WDJ	C3OZ 4851-A	1	●1260
66/70	X	WDW, WDY, Wdz, WEA		1	
66/70	X(7 1/4" R/G)	WDV-B, D, G, H	C5DZ 4851-B	1	●1260-use C5DZ 4859-A deflector
65/	A, F, S, X		371518-S(MM180)	1	Locknut u/jt.(flange to pinion)-3/4"-20
65/	A, S		351588-S(XX227)	1	Washer-flat-.77" I. D.
70/	P	WDV	375646-S(MM180L)	1	Locknut(flange to pinion)-3/4"-20
65/70	X		351521-S(XX237)	1	Washer-flat-3/4" I. D.
4851 FLANGE ASSY. - FRONT AXLE UNIVERSAL JOINT					
66/	U (front drive axle)		C6TZ 4851-D	1	Includes 8M 4859
66/	U (front drive axle)		351126-S(MM145)	1	Locknut (flange to pinion)-3/4"-16
66/	U (front drive axle)		356504-S(XX238)	1	Washer-flat-3/4"
4859 DEFLECTOR - REAR AXLE DRIVING PINION OIL SEAL					
65/71	A, B, F, U (9", 9 3/8" R/G)		C8SZ 4859-A	1	3 1/2" large I.D. x 2" small I.D.
65/71	S			1	Without sure-track
65/70	S "Before 1/19/70"			1	With sure-track & 9 3/8" ring gear
70/	S "From 1/19/70"		D0SZ 4859-A	1	With sure-track-2 3/16" I.D.
67/71	A(8 1/2", 8.7" R/G)	WER	C5DZ 4859-A	1	2 31/32" large I.D. x 1 43/64" small I.D. use w/C7AZ 4851-A
65/71	B (8" R/G)		C3OZ 4859-A	1	3" large I.D. x 2" small I.D.
65/70	F(6 cyl.)(7 1/4" R/G)	WCY-E, F, L, M, N, AB, AC, AD	C2DZ 4859-A	1	3 9/16" large I.D. x 1 11/16" small I.D. use with 1100 universal joint
65/71	F, X(8" R/G)	WCZ-A, E, F, G, L, WDJ-A, B, C, E, WDW	C3OZ 4859-A	1	3" large I.D. x 2" small I.D.
71	P(8" R/G)	WDV, WDW		1	
72	A, B, F, L, P(8 3/4", 8.7" R/G)		D2AZ 4859-A	1	2 15/16" large I.D. x 2" small I.D.
72	S	WV-F-K		1	
65/70	F, X(6 cyl. 200)-C4 trans. (7 1/4" R/G)	WCY-R, AA, AF, AH, AJ, AK, AL, WDV-B, D, G, H	C5DZ 4859-A	1	2 31/32" large I.D. x 1 43/64" small I.D. use with 1260 universal joint
67/69	B(7 1/4" R/G)	WEZ		1	
70	P(7 1/4" R/G)	WDV		1	
72	A, B, F, U(9" R/G)		D2SZ 4859-A	1	2 25/32" large I.D. x 2" small I.D.
72	S			1	Without sure-track
66/	U (front drive axle)		8M 4859		2 1/8" large I.D. x 1 35/64" small I.D.
65/70	X(7 1/4" R/G)	WCY-E, F, L, M, N, AB, AC, AD, WDV-A, C, E	C2DZ 4859-A	1	3 9/16" large I.D. x 1 11/16" small I.D. use with 1100 universal joint

● Industry Number

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4880 DIFFERENTIAL KIT - REAR AXLE LOCKING (For complete repair or conversion of "EQUALOCK" type locking axles) For TRACTION-LOK kits refer to Group 4026					
65/66	A, S, U (8 3/4" & 9" R/G)		B9AZ 4880-C	1	Use with 2 pinion medium bearing diff.-for original installation or pinion replacement also use C1AZ 4215-C
Consists of					
1-B9AZ 4159-A	Lubricator	1-352506-S	Pin	4-B9AZ 4947-A	Clutch plate
1-C4AZ 4204-E	Case	1-C4AZ 4214-A	Spring	10-371246-S	Bolt-7/16"-20
1-C2AW 4236-A	Side gear	3-B9AZ 4945-A	Clutch plate	1-4121	Identification tag
1-C4AZ 4946-A	Hub	1-C2AZ 4236-B	Side gear	5 1/2 Pts.	Lubricant
65/69	A, B, F, S (8 3/4" & 9" R/G)		C9OZ 4026-B	1	Use with 2 or 4 pinion large bearing differential & 28 spline axle shaft-for original installation or pinion replacement also use C1AZ 4215-C
Consists of					
1-C4AZ 4204-F	Case	1-C2AZ 4236-B	Gear	4-B9AZ 4947-A	Plate
1-C4AZ 4214-A	Spring	3-B9AZ 4945-A	Plate	1-352506-S	Pin
1-C2AW 4236-A	Gear	1-C4AZ 4946-A	Hub	10-350627-S	Bolt
				5 1/2 Pts.	Lubricant
67/69	A, U (8 3/4" & 9" R/G)		C9AZ 4026-A	1	Use with 2 pinion medium bearing diff.-for original installation or pinion replacement also use C1AZ 4215-C
Consists of					
1-C4AZ 4204-E	Case	1-C2AZ 4236-B	Gear	4-B9AZ 4947-A	Plate
1-C4AZ 4214-A	Spring	3-B9AZ 4945-A	Plate	1-352506-S	Pin
1-C2AW 4236-A	Gear	1-C4AZ 4946-A	Hub	10-350627-S	Bolt
				5 1/2 Pts.	Lubricant
66/69	A, S (9 3/8" R/G)		C6AZ 4880-B	1	Use with extra large diff. bearing-for pinion replacement use C6AZ 4215-A
Consists of					
1-C6AZ 4204-D	Case	1-C6AW 4236-B	Gear	4-C6AZ 4947-A	Plate
1-C4AZ 4214-A	Spring	3-B9AZ 4945-A	Plate	1-359475-S	Pin
1-C6AW 4236-A	Gear	1-C6AZ 4946-A	Hub	5 1/2 Pts.	Lubricant
65/70	B, F, X (7" & 7 1/4" R/G)		C4DZ 4880-B	1	With integral carrier
Consists of					
1-C4DZ 4204-A	Case	1-C4DZ 4236-B	Side gear	4-C4DZ 4947-A	Plate
1-C4DZ 4214-A	Spring	3-C4DZ 4945-A	Plate assy.	1-305086-S	Pin
1-C4DZ 4236-A	Side gear	1-C4DZ 4946-A	Hub	8-379237-S	BOLT 3/8" X 1 1/4"

YEAR	MODEL	AXLE IDENTIFICATION	PART NUMBER	QTY.	DESCRIPTION
4880 DIFFERENTIAL KIT - REAR AXLE LOCKING - continued					
65/67	F(GT350)(8" R/G)		★S1MS 4880-B	1	●LS 124D
	F(GT350)(9" R/G)		S1MS 4880-A	1	Use w/small differential bearing- ●LS 124B
	8 cyl. 289)		S2MS 4880-C	1	Use w/large differential bearing- 28 spline shaft-●LS 124A
4880 PLATE KIT - FRONT AXLE LOCKING DIFFERENTIAL					
66/71	U (front drive axle) "Before Ser.K20,001"	Dana (Spicer) 30	C6TZ 4880-A	1	Locking differential repair kit only Consists of 10 friction plates and disc
71/	U (front drive axle) "From Ser. K20,001"	Dana (Spicer) 44	D1TZ 4880-B	1	
4891 SNAP RING - UNIVERSAL JOINT BEARING					
65/	A,B,F,P,X		C3AZ 4891-A	AR	1 1/4" Major O.D.
68/	S		C8SZ 4891-A	AR	
65/68	X		★A8AZ 4891-A	8	.918" I.D.
4945 PLATE - REAR AXLE DIFFERENTIAL CLUTCH					
65/69	A,B,F,S,U,X- (8",9",9 3/8" R/G)	Equalock axles	B9AZ 4945-A	3	
65/70	F,X (7 1/4" R/G)	Equalock axles	C4DZ 4945-A	3	Locking axle with integral carrier
68/	A,B,F,P,S,U,X- (8",9",9 3/8" R/G)	Traction-lock axles	C8OZ 4945-B	4	4 7/8" O.D.-3 3/4" I.D.-46 splines- .062" thick
4946 HUB - REAR AXLE DIFFERENTIAL GEAR CLUTCH					
65/69	A,B,F,S,U,X- (8",9" R/G)	Equalock axles	C4AZ 4946-A	1	With locking axle-with 28 spline shafts
66/69	A,S(9 3/8" R/G)	Equalock axles	C6AZ 4946-A	1	With 31 spline shafts
69/	A,B,F,P,U,X- (8",9" R/G)	Traction-lock axles	C9OZ 4946-B	1	4 57/64" O.D.-41 teeth-28 splines
70/	S (9" ring gear)			1	
70	A,S(9 3/8" R/G)	Traction-lock axles	D0AZ 4946-A	1	With 31 spline shafts
71/	S(9 3/8" R/G)			1	
68/	B,F(9" R/G)	Traction-lock axles	C9OZ 4946-C	1	4 57/64" O.D.-41 teeth-31 splines
65/70	F,X (7 1/4" R/G)	Equalock axles	C4DZ 4946-A	1	Locking axle with integral carrier
66/71	U (front drive axle)	Dana(Spicer)30	C6TZ 4946-B	2	With locking axle 20 internal teeth
4947 PLATE - REAR AXLE DIFFERENTIAL GEAR CLUTCH					
65/69	A,B,F,S,U,X- (8",9" R/G)	Equalock axles	B9AZ 4947-A	4	
66/69	A,S(9 3/8" R/G)	Equalock axles	C6AZ 4947-A	4	
68/	A,B,F,P,S,U,X- (8",9",9 3/8" R/G)	Traction-lock axles	C8OZ 4947-A	4	4 7/8" O.D.-3 3/4" I.D.-.050" thick
65/70	F,X(7 1/4" R/G)	Equalock axles	C4DZ 4947-A	4	
4997 JOINT - DRIVESHAFT UNIVERSAL					
66/70	U "Before Ser.G70,001"		C9TZ 4602-Z (front)or C9TZ 4602-AA (rear)	1	Mechanics type-includes knuckles and plugs-universal joints and centering yoke
70/	U "From Ser. G70,001"				Not required - Dana (Spicer) type drive shaft assy.

▲ Refer to basic 4602 Kit drive shaft (Conversion-Mechanics to Dana Spicer)

● Detroit Automotive Number