

## Subwoofers: Optimum Number and Locations

by
Todd Welti
Research Acoustician,
Harman International Industries, Inc.
twelti@harman.com

1

# Low Frequency Optimization Goals

- 1. Get lots of output
- 2. Get lots of output, with flat frequency response at a single listening seat
- 3. Get lots of output, with flat frequency response over a defined listening area

2

#### The Crux of the Matter

- It is possible, and perhaps desirable to have multiple subwoofers operating simultaneously and coherently.
- The locations of the subs might be selected to optimize the modal response of the room.

Intuition tells us that putting a large number of subwoofers at different locations in a room is likely to excite room modes in a more "balanced" manner, as compared to a single subwoofer. This idea has potential where there is not a single listening location, but rather a listening area. In this case we look for consistency of acoustical response with in this area. One way to approach this problem is to excite all modes evenly. Another approach is to excite as few modes as possible. Using simulations and measurements we have made an investigation to determine if using a large number of subwoofers is advantageous, and in particular what configurations give the best results. Several interesting and surprising results were uncovered along the way.

**Get lots of output.** The high level of acoustical output we take for granted in today's subwoofers was not always a given. The "get lots of output at any price" approach is certainly not dead (witness nightclubs and many car stereo systems).

Get lots of output, with flat frequency response at a single listening seat. With 2-channel stereo systems and a single listener, it is natural to equalize for flat acoustical response of the combined subwoofer-room system. In fact, the interaction of room and loudspeaker is often the dominant factor in the perceived timbre [1]. This is especially true at lower frequencies.

Get lots of output, with flat frequency response over a defined listening area. With multichannel entertainment systems, there is more than one seat, so the acoustical response will be different at each seat, and the problem becomes more complex. Note that multichannel entertainment systems with large seating areas have been around for a long time, in the form of cinemas. It is when we see these systems reproduced in small rooms that low frequency modes start to become an issue.

With the advent of consumer multichannel systems, there is a potential for a large number of low frequency devices in a relatively small room to be operating simultaneously. This could occur either by running the mains and surround full range, as some advocate or by having multiple LFE's. From an intuitive standpoint, putting a large number of subwoofers at different locations in a room might seem likely to excite room modes in a more "balanced" manner, as compared to a single subwoofer. This idea has particular appeal where there is not a single listening location, but rather a listening area. Typical approaches to this problem have involved exciting all modes evenly, or trying not to excite modes at all. There is not much agreement on whether this is possible, how many subwoofers are required, and where best to place them.

#### **Existing Research**

- Mostly involves single subwoofers and/or single listening locations.
- Not a lot of work involving positional equalization with multiple sources and listening locations has been done.

There is a substantial body of research on optimization of loudspeaker-room interaction at low frequencies, sometimes referred to as positional equalization [2], [3]. See [4] for an overview. Much of this work is directed toward optimization for a single listening position, and a single subwoofer. Of more interest to the present study are [5], [6], and [7] which assume a listening area. None of these studies look at more than a couple of subwoofers with more than a couple of configurations. Currently, there is much interest in multipoint equalization via complex matrix inversions or adaptive filters, as for example in [8]. Some of this work also considers positional equalization, however it is not the primary focus.

These are the specific questions we address in this paper.

4

#### **Questions Posed**

- Is there a correlation between number of subwoofers and desirability of frequency response?
- How many subwoofers are enough?
- What is the optimal placement?

5

#### Some corollary questions must be addressed:

- Is computer optimization feasible?
- What metric is appropriate to quantify performance of various subwoofer configurations?

#### **Limiting Assumptions**

- · Rectangular room, subs located along walls.
- · System is equalized
- · Subwoofers driven coherently
- · Maximizing LF output is secondary goal
- We are interested in acoustical response in a seating area, not at one particular seat

These are assumptions we made to simplify our investigation a bit. Unequalized systems are briefly considered as well, in Investigation 8.

A large percentage of listening rooms are rectangular, but for those that are not, conclusions reached here are not valid.

Even with the above assumptions, there are many variables left to consider, making a complete analytical treatment difficult. This study is somewhat empirical in nature, and is broken up into a number of smaller investigations. It is hoped that the cumulative results of these investigations, taken together, will provide satisfying answers to our questions.

#### Investigations

- 1. Large numbers of subwoofers
- 2. Rule of thumb placement
- 3. Brute force optimization
- 4. "Typical" subwoofer locations
- 5. Different room dimensions
- 6. Subwoofers in real rooms
- 7. "Typical" listening locations
- 8. Effect of equalization

8

These are the investigations we made in this study.

But before discussing the investigations, some background...

# ... but first, some background ...

7

#### Possible Subwoofer Optimization Goals

- Minimize variation of frequency response from seat to seat
- Minimize variation of overall frequency response within the seating area
- Maximize low frequency output
- Optimize "imaging" or other spatial attributes of subwoofers

The first goal for low frequency optimization should be to minimize variation of frequency response from one location to the next within the seating area. Assuming the room and listening area dimensions are fixed, the only way to do this is optimization of the number and location of subwoofers within the room. The second goal should be to minimize variation of overall frequency response within the seating area, i.e. take the spatial average of frequency responses at all seats and equalize this <u>average</u> frequency response flat.

If the first goal is not addressed, subsequent efforts at equalization will be of questionable value. If the frequency response from one seat to the next varies too greatly, equalizing the sound flat at one seat will simply make the frequency response less flat at another seat. We cannot have our cake and eat it too.

A secondary goal should be to maximize low frequency output of the subwoofers. Other, less quantifiable factors in subwoofer optimization are: practicality of subwoofer locations, number of subwoofers (cost), and possible spatial attributes [9].

# Subwoofer Optimization Goals in this Study

 Minimize variation of frequency response from seat to seat

Primary consideration

 Minimize variation of overall frequency response within the seating area

Not considered for the most part (assume spatial average is equalized flat)

· Maximize low frequency output

Secondary consideration

 Optimize "imaging" or other spatial attributes of subwoofers Not considered. Subs not localizable below 80 Hz anyway!

10

# Multiple Subwoofers, Single Low Frequency Channel

Multiple Subwoofers ≠ Mu

Multiple Subwoofer Channels

Bass management is assumed in this investigation, i.e. a single channel for low frequencies.

1

In this investigation, bass management is assumed, i.e. there is one and only one audio low frequency channel, which is sent to all subwoofers. There are many advantages to bass management and only questionable advantages to using multiple bass channels ("stereo" bass etc.). There is much debate on this subject. Much of it has to do with the implementation of the bass management — headroom, mixing of LFE etc. This is another subject entirely, and is not considered here.

Some have argued that there is a subtle envelopment which can occur at low frequencies when out of phase material is reproduced on the left and right side of the listener [9]. This has not been shown conclusively, and in any case is likely outweighed by the more immediate advantages of bass management.

Some will also argue that bass below 80 Hz IS localizable. This is often the result of:

Port noise in ported subwoofers which are poorly designed and/or overdriven

Non-linear distortion in subwoofers which are poorly designed and/or overdriven

Visual cues or knowledge of the subwoofer location, which in the absence of actual audible cues cause localization

Effective <u>acoustical</u> crossover frequencies which are actually higher than 80 Hz . Just because the electronic crossover is at 80 Hz does not mean that the actual crossover as measured in the room is at 80 Hz, especially if the crossover is low order.

# Multiple Subwoofers, Single Low Frequency Channel

Two big advantages of bass management:


- Allows mains and surrounds to be smaller/more efficient (they don't have to reproduce bass).
- Consistent frequency response. Sending low frequency signals to multiple loudspeakers results in multiple, and often widely diverging frequency responses!

12

In this investigation, bass management is assumed, i.e. there is one and only one audio low frequency channel, which is sent to all subwoofers. There are many advantages to bass management and only questionable advantages to using multiple bass channels ("stereo" bass etc.). There is much debate on this subject. Much of it has to do with the implementation of the bass management – headroom, mixing of LFE etc. This is another subject entirely, and is not considered here.

Some have argued that there is a subtle envelopment at low frequencies which is enhanced when out of phase material is reproduced at the left and right side of the listener [9]. This has not been shown conclusively, and in any case this subtle effect is likely outweighed by the more immediate advantages of bass management.

#### A Tale of Five Subwoofers




The "classic" monitoring arrangement in a 20' x 24' room

13

#### A Tale of Five Subwoofers

Five measurements of the five loudspeakers



Note wide variance from one loudspeaker to the next at low frequency. THIS CAN BE AUDIBLE...

Signal Panned to Each Speaker.

Note that the sound from the different subwoofer locations might not sound as different as the frequency responses suggest visually, the difference may certainly be audible. Would we allow this degree of variation in any loudspeaker or amplifier if we could avoid it? The answer is an emphatic NO.

#### Modal Behavior is Complicated!

- Modes are complex literally!
- · Modes overlap. They interact!
- "Eyeballing" expected room responses from generalized standing wave plots is tricky.

The modal behavior sound in rectangular rooms is well described in the literature, as in [10], [11], and [12], however it is often oversimplified or misunderstood. There are some aspects of room modes which make "eyeballing" expected room responses from generalized standing wave plots risky. Modal resonances have a finite bandwidth, that is to say they do not occur only at one discrete frequency. This means that adjacent modes will overlap to some degree (quite a bit if the room has 2 or more similar dimensions). If you further consider that modal response is complex, i.e. has a phase component, it can be seen that the interaction of multiple adjacent modes over a range of frequencies is complicated. When you have a defined seating area rather than a single seat, things can really get convoluted.

#### Simulations using Matlab®

Closed form solution of wave equation for rectangular room:

$$p_r \cong \frac{\rho c^2 Q_o}{V} e^{-i\omega t} \sum_{N} \frac{\mathcal{E}_{n_x} \mathcal{E}_{n_y} \mathcal{E}_{n_z} \psi(S) \psi(R)}{2\omega_N k_N / \omega_{+i}(\omega^2_n / \omega - \omega)}$$

 $p_r = \text{total } \underline{\text{reverberant}} \, \text{SPL}$ 

 $Q_o$  = volume velocity of the source

 $k_N = 3$ -dimensional damping factor

 $\rho$  = density of the medium C = speed of sound in the

 $\mathcal{E}_n$  = scaling factors (1 for zero order modes and 2 for all other orders )

 $\omega_N = \text{mode natural angular}$ 

frequency

. medium


 $\psi(S) \psi(R)$  = source and receiver

 $V\,$  = volume of the room coupling function

Due to the complexity of room modal response and the desire to investigate a large number of subwoofer/room configurations, an accurate room model is needed. Fortunately, modeling a rectangular room is relatively straightforward. A room modeling program was written using Matlab<sup>1</sup> to model various configurations. This is based on the well-known closed form solution of the wave equation in a rectangular enclosure [13].

The actual response will be the sum of the reverberant sound (P<sub>r</sub>) and the direct sound from the subwoofer.

<sup>&</sup>lt;sup>1</sup> Mathworks Inc. www.mathworks.com.

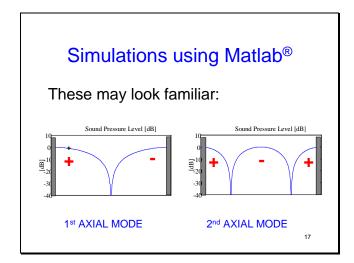

### Manipulating Room Modes


- Place speakers at or near nulls
- · Place listeners at or near nulls
- Cancel modes

These are some ways which room modes can be mitigated.


18

# Simulations using Matlab® No sound at nulls Sound Pressure Level [dB] 1st AXIAL MODE 2nd AXIAL MODE 19

George doesn't hear anything at the nulls!

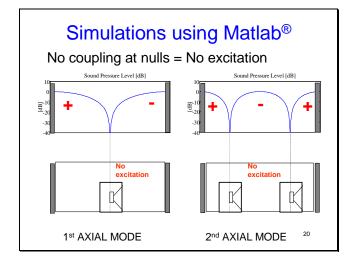

Loudspeakers located at a null point of a given mode will not couple to that mode, resulting in no excitation of that mode.

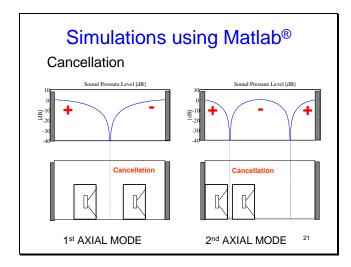

Putting subwoofers on either side of a null results in cancellation, due to the opposite polarity.

#### **Metrics**


- Some type of metric is required to characterize one frequency response as better or more desirable than another.
- The standard deviation of the frequency response at each seat from the spatial average of all seats is one such metric.


22

Some metric is needed to quantify the relative merit of a given room/subwoofer configuration. Due to the complexity of room modal response, and the capricious nature of listener's preferences, this is not a trivial problem.


The most commonly used metrics in the frequency domain are based on the flatness of the steady state frequency response. A flat frequency response is generally regarded as ideal. A simple measure of deviation from a mean level is the standard deviation, Std. If it is assumed that the playback system will be equalized flat, this means that the average frequency response of all seats (the spatial average) will be flat. The standard deviation of the frequency response at each seat from this equalized (flat) response can then be calculated. If an average of the Std at each seat is made, a single descriptor results. The lower this number is the better. This is the method used here, and has been used elsewhere [Room Optimizer], [CARA].

Most of the simulations were made in this 24' x 20' x 9' virtual test room, with a 6' x 6' grid of seats spaced 2' on center.

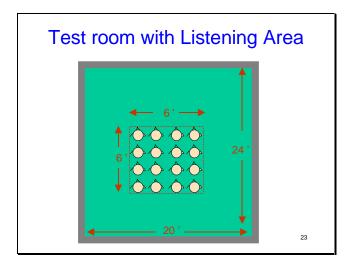


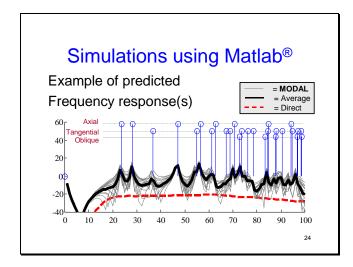

A typical room simulation looks like this. There are 16 individual predicted frequency responses, as well as the calculated average (heavy black line). This is a spatial average. The red line show the "direct" sound from the subwoofers. Modal classification is also shown, i.e. axial, tangential, and oblique.




The direct plus modal (i.e. reverberant) sound is the total soundfield, and this is what we are interested in.



If we equalize so that the spatial average is flat, the 16 frequency responses look like this. We can then calculate the standard deviation of the (equalized) frequency response at each seat. Averaging the standard deviations at all 16 seats gives a single number metric, the Std.

In addition to the Std metric, two other metrics were used in this investigation: the difference between the absolute maximum and absolute minimum frequency response (Max-Min), and the difference between the maximum and the average of the frequency response (Max-Ave). These metrics are more likely to reflect the effect of a single prominent frequency response feature on the subjective sound.



In addition to the frequency based metrics, it would be nice to know how well a subwoofer configuration performs with respect to overall low frequency output. The LF factor metric is simply the sum of the energy over the bandwidth of interest (20-80 Hz here) produced by a given configuration, assuming a correction factor to normalize for the number of subwoofers: 20log<sub>10</sub>n.

For all metrics used in this study, calculated values at each seat are averaged over the entire seating area grid, to give a single number.

# 


Most of the experiments were carried out in a 20' x 24' x 9' virtual test room. These dimensions match the dimensions of the physical listening room chosen for Investigation 6, where actual room measurements are used instead of simulations. Though most simulations are based on a 20' x 24' room, the effect of varying room dimensions is addressed in Investigation 5.

# Investigation 1: Really Large Numbers of Subwoofers

Can a sufficiently large number of subwoofers cancel out all room modes?


The purpose of this experiment is to test the idea that placing a large number of subwoofers in a room would in theory virtually eliminate <u>any</u> modal excitation. Each subwoofer excites a given mode according to its coupling function (the same curves as in Fig. 2-1), which in turn depends on its location in the room. For any given mode, placing subwoofers at locations of equal coupling magnitude and opposite phase will result in no excitation of the mode.


Using a large enough number of subwoofers distributed around the room should theoretically result in approximately equal positive and negative excitation of all possible modes.

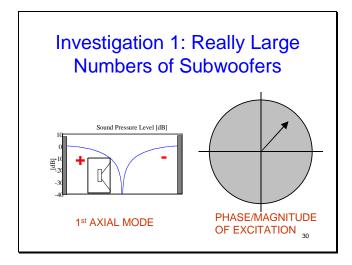


Remember: modes are complex. They have a different magnitude and phase at different locations in the room. Different subwoofer locations and/or different listening locations result in different phases for the room response.

The magnitude and phase of multiple resonances can be represented as a phasor diagram.

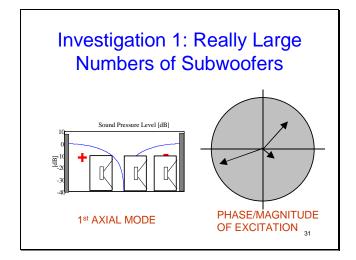

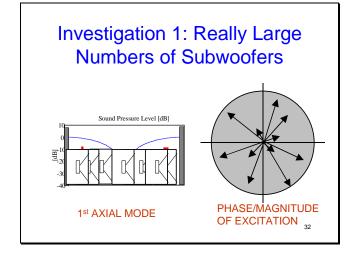


This shows lots of subwoofers with varying magnitudes and phases due to different (random) locations.

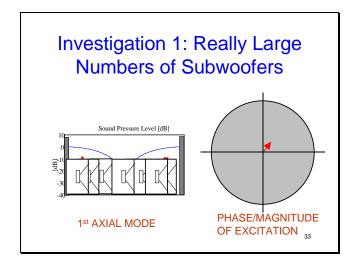

With enough subwoofers, these vectors will theoretically cancel each other out. This should be true at any location in the room.


In Investigation 1, this theory was tested!



This simulation shows 50 subwoofers randomly located in test room, with the seating grid at the center.

# Investigation 1: Really Large Numbers of Subwoofers • 50 subwoofers randomly located in test room:


With 50 subwoofers, the variation in frequency response for the 16 seats is much closer to the average.

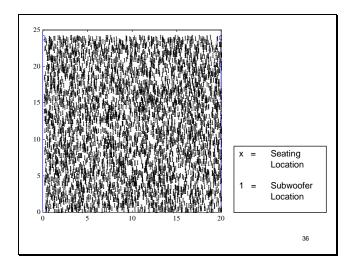

This simulation shows 5000 subwoofers randomly located in test room, with the seating grid at the center!

# Investigation 1: Really Large Numbers of Subwoofers

 5000 subwoofers randomly located in test room:



With 5000 subwoofers, modal variation is virtually eliminated. The frequency response at all 16 seats is nearly identical.

#### **ASIDE**

This curve is a combination of 2 influences:

The power response of the modeled subwoofers (the simulations included measured Entre 12" subwoofer power responses). The effect of the real-world subwoofer response can be seen above 8 Hz.

The pressure zone response of the room. This is non-modal response of the room, I.e the room acts as a  $2^{\rm nd}$  order low-pass filter at low frequencies. This low pass characteristic can be seen below about 8 Hz in the above plot.

# Investigation 1: Really Large Numbers of Subwoofers

Can a sufficiently large number of subwoofers cancel out all room modes?

Theoretically yes

**Practically NO** 

Since putting even 50 subwoofers in a room is not practical, this approach is not practical.


# Investigation 2: Rule of Thumb Subwoofer Placement

 Lets face it, its fun to think up cool subwoofer configurations!



order and type of mode, it is tempting to come up with simple rule-of-thumb subwoofer configurations. For example, put one subwoofer in the corner to excite all the modes, or put in opposite corners to cancel out odd order modes. Most of these rules of thumb are based on axial modes only, ignoring the effect of tangential modes (oblique modes can generally be ignored). In addition, room response between modes is ignored.

Knowing the basic spatial distribution of energy for each



This configuration should result in cancellation of all odd order axial modes, and the cancellation of the first even order axial mode (where the subwoofers are at a null).

This can be verified by looking at generalized standing wave plots like those on pages 17-21.


Note that floor/ceiling axial modes would not be cancelled, however these modes are much less important. Floor/ceiling axial modes do not cause variation in frequency response over the seating are, assuming ear height does not vary.

Subwoofers (4) at 1/4 of room dimensions


- Total

-


In this case, rule of thumb subwoofer placement worked well.

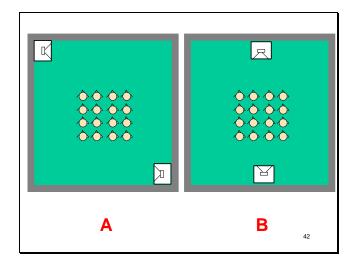

Using the "eyeball" method of predicting modal response, one would be tempted to say that the configuration in A should result in cancellation of all odd order axial modes (ignoring floor-ceiling axial modes). The configuration in B should result in cancellation of all odd order axial modes in one direction and will not excite any odd order modes in the other direction, since it is at a node. Both subwoofer configurations above should result in no excitation of odd order axial modes.

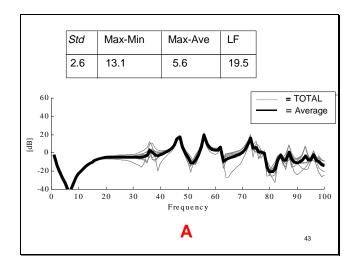

The calculated metrics show very different results, with the configuration in A having a much higher seat to seat variation.

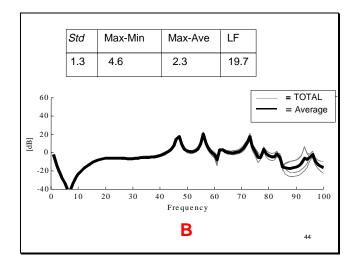

The calculated metrics show very different results, with the configuration in A having a much higher seat to seat variation than B.

# Investigation 2: Rule of Thumb Subwoofer Placement

- · May be useful
- · Results often not intuitive
  - Tangential modes may be significant
  - What happens in-between modes
  - Frequency response is complex

45

# Investigation 3: Brute Force Computer Optimization

- Let the computer try all possible combinations, and pick the best
- Can be time consuming, not practical for more than a few subs
- Do in Matlab to have control over methodology

extremely time consuming.

In order to do optimization for small numbers of subwoofers using the methodology in this investigation, an optimization routine was written in Matlab.

Rather than picking subwoofer locations using analytical or rule of thumb methods, is it certainly possible to use brute

force to find the best number and locations. There are a number of commercially available programs which do this

[CARA], [Room Optimizer]. Unfortunately, neither of these calculates metrics in the same manner as was desired for


optimization of non-rectangular rooms, is either not accurate (low order ray tracing) or too time consuming (high order ray

tracing). Room Optimizer only optimizes for one seat, not a


seating area. Even with fast computers, optimization can be


this study. CARA uses ray tracing, which while allowing


46

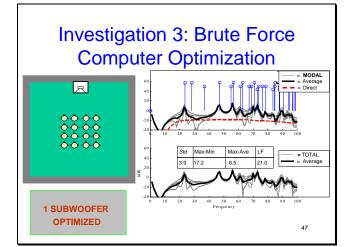


The next four figures show results of optimization of 1 to 4 subwoofers in the test room. Locations of subwoofers were constrained to be along the walls, at intervals of 2 feet. Optimization is based on Std only, i.e. the configuration with the lowest std is considered optimum.

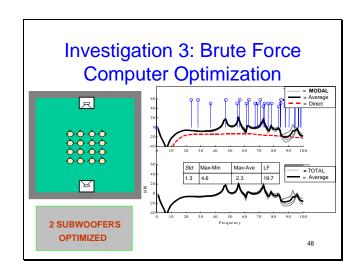



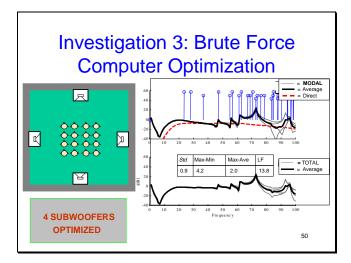

# Investigation 3: Brute Force Computer Optimization



Obviously, wall midpoint locations result in optimum room response, based on the std anyway. Not surprisingly, symmetrical configurations seem to work better than non-symmetrical ones. Four subwoofers results in the most symmetrical configuration and the best results, but with significantly less (normalized) low frequency output than two subs. Time did not permit full optimization using more than four subwoofers.


# Investigation 3: Brute Force Computer Optimization

- · Best results found with four subwoofers
- Two subwoofers almost as good, with better low frequency support
- Symmetrical locations seem best

52


# Investigation 4: Practical Subwoofer Locations

What about "typical" subwoofer locations?




The discussion of subwoofer configurations has been somewhat hypothetical up to this point. What about "typical" subwoofer locations? Some locations are likely to be more practical than others. Locations corresponding to ITU-R BS. 775-1 standard surround locations (5.1) are also of particular interest. In general, symmetrical positions are preferred to non-symmetrical. The difficulty involved here is of course the large number of possible locations/combinations of subwoofers. Regardless, an effort was made to investigate practical subwoofer locations, using up to 18 subwoofers.


This figure shows subwoofer locations chosen for the experiment.

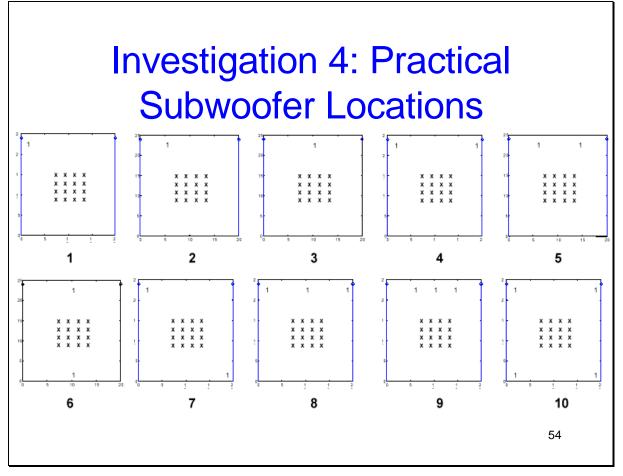


This figure shows subwoofer configurations chosen for the experiment.

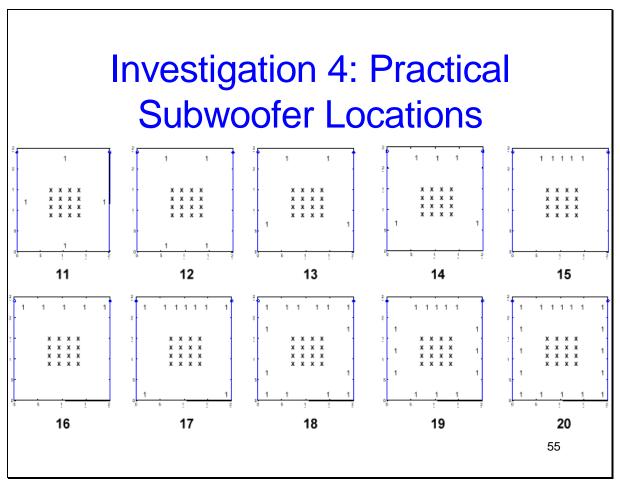


This figure shows subwoofer configurations chosen for the experiment.

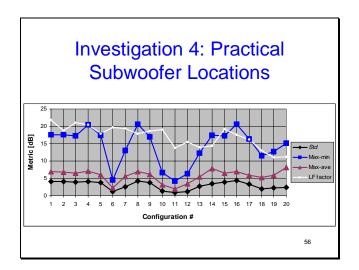

Results of Investigation 4.

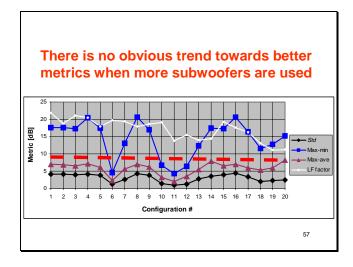


This figure shows that there is no obvious trend towards lower Std, Max-Min or Max-Ave metrics when more subwoofers are used. In other works, there is no obvious benefit to using a large number of subs. Configurations 6 and 10-12 show the best results. Subwoofers at each wall midpoint (#11) shows the lowest Std, Max-Min and Max-Ave. Subwoofers in all four corners (#10) is almost as good and shows a strong low frequency support. The LF generally goes down for larger numbers of subwoofers, possibly due to having more locations away from the corners.



 These are the best 3 configurations of the "practical" configurations tried in Investigation 4.

# Investigation 5: Different Room Dimensions



Calculated *Std* and LF factor for five different dimensioned rooms, same configurations as on pages 53-55. 1:1.25:1.6 is a commonly referenced "magic" ratio, 1:2.22:2.89 is random.

60

To test the effect of differing room dimensions, configurations 1-20 on pages 53-55 were duplicated (to scale) in five differently dimensioned rooms. For clarity, only Std and LF factor are shown. Given the widely varying dimensions, the results are surprisingly consistent. This is a result of using multiple receiver locations and statistical treatment of the predicted frequency responses. The statistical descriptors emphasize general variability of frequency response over all seats rather than specific frequency response features at each seat.


#### Investigation 6: Real Rooms

 Do predicted results match measured results in a real room?

$$p_r \cong \frac{\rho c^2 Q_o}{V} e^{-i\omega t} \sum_{N} \frac{\mathcal{E}_{n_x} \mathcal{E}_{n_y} \mathcal{E}_{n_z} \psi(S) \psi(R)}{2\omega_N k_N / \omega_{t+i} (\omega^2_{n'} / \omega - \omega)}$$



No serious investigation of this sort would be complete without considering a real room.

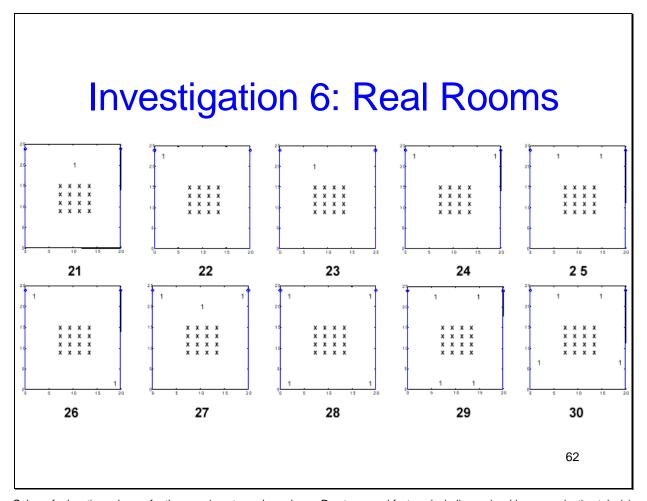

Subwoofer locations chosen for the experiment are shown here. Due to several factors, including a sizeable rear projection television located at the front center of the room, and a limited number of available subwoofers, the configurations are slightly different than those modeled in Investigation 4.

Note that this set of configurations (21-37) was only used for Investigation 6, i.e. real rooms. For the rest of this paper, configurations 1-20 are used.

# Investigation 6: Real Rooms 31 32 33 34 35 36 37



The test room used in the computer modeling is based on a real 20' x 24' x 9' listening room. This room is of standard stud/sheetrock construction. The only source of significant absorption at low frequencies is the sheetrock walls, and a large sofa. The room ,as set up for these tests, was fairly live (500 Hz RT $_{60}$  = .85). This room is known to have unevenly distributed complex boundary absorption, due most likely to a door which reduces the structural stiffness of one wall. The result is that the nodes and antinodes along one dimension of the room are "skewed" to one side, and the measured eigenfrequencies of many modes do not exactly match the calculated values. Note that this condition is not at all unusual in real rooms.


In-room measurements were made using a custom fabricated grid with AKG-C98 microphones suspended at seated ear height.

## 

Agreement between measured and calculated metrics is good, providing justification for using modeled results. There is a very slight overall trend towards lower Std, Max-Min or Max-Ave metrics when more subwoofers are used. Configurations #8 and #9, with only 4 subwoofers still show the best results. The LF factor still goes down when more subwoofers are used.


# 

So far, the listening area has been assumed to be in the enter of the room. Practically speaking, it is more likely that listeners will be situated a bit further back in a typical home entertainment system. In addition, seats located near the center of the seating area may be considered more important than the outer seats. An experiment was conducted to see how making these changes might affect the results, using subwoofer configurations 1-20. The center seats were weighted with a factor of \*2 relative to the outer seats in the calculation of the metrics.



# Investigation 7: "Typical" Listening Locations

· Results using modified seating grid:



It can be seen that there is less difference between "good" and "bad" seats, and that there is less low frequency support for some configurations compared to when the grid is centered and unweighted. Two and four subwoofers at the wall midpoints are still the best configurations overall. Four subwoofers in the corners does not seem as advantageous as when the grid was centered. There is still little or no advantage to using a large number of subwoofers. LF factor still goes down for higher numbers of subwoofers.

The Std, Max-ave and Max-min are significantly higher overall as compared to the centered unweighted seating grid.

# Investigation 8: Effect of Equalization • Are results dependent on equalizing the system?

Results based on

Up to this point, it has been assumed that the playback system would be equalized such that the spatial average over the seating area is perfectly flat, as seen on the left side of this figure. This is not as unreasonable as it seems, given the fact the spatially averaged response is smoother than the frequency response at individual seats, and therefore easier to equalize flat.

It is also of interest to look at the case where there is no equalization at all. This is shown on the right side of this figure. Using subwoofer configurations 1-20, an experiment was conducted to test the effect of assuming no equalization. The calculated metrics then include not just seat to seat variation, but variation of the overall spatial average.

## 

Not surprisingly, the Std, Max-min and Max-ave are much higher when no equalization is included. The general shape of the curves is still the same as for the case of no equalization. One subwoofer at each wall midpoint (#11) is still the best configuration. Configurations #19 and #20 are almost as good, but why spend the money? There is no change in the LF factor when no equalization is used.

# Investigation 8: Effect of Equalization

 Are results dependent on equalizing the system?

Some effect, but does not change overall conclusions

71

THE FOLLOWING
CONCLUSIONS ARE BASED
ON THE ASSUMPTION OF A
RECTANGULAR ROOM AND A
SEATING AREA IN THE
CENTER OR CENTER-REAR
OF THE ROOM

Using very large numbers of subwoofers would result in cancellation of room modes. For practical numbers of subwoofers, there appears to be no obvious correlation. When you consider the additional expense of using more subwoofers, there is certainly no justification for using more than four. To the contrary, it was observed that the LF factor actually went down for larger numbers of subwoofers

7

#### CONCLUSIONS

 Is there a correlation between number of subwoofers and desirability of frequency response?

For practical number of subwoofers, there appears to be no obvious correlation. There is certainly no justification for using more than four.

Using very large numbers of subwoofers would result in cancellation of room modes. For practical numbers of subwoofers, there appears to be no obvious correlation. When you consider the additional expense of using more subwoofers, there is certainly no justification for using more than four. To the contrary, it was observed that the LF factor actually went down for larger numbers of subwoofers

#### **CONCLUSIONS**


· How many subwoofers are enough?

Four subwoofers are enough to get the best results of any configuration tried. Two subwoofers is very nearly as good and has very good low frequency support as well.

74

#### **CONCLUSIONS**

· What is the optimal placement?



One subwoofer at each wall midpoint is the best in terms of Std, Max-ave and Max-min but does not support low frequencies particularly well. Two subwoofers, at opposing wall midpoints, performs very nearly as well as four at the midpoints and gives a much better LF factor. One subwoofer in each corner also has good low frequency support, but does not perform quite as well as one subwoofer at each wall midpoint, in terms of Std, Max-ave and Max-min. If cost and aesthetics are considered, subwoofers at 2 wall midpoints is preferred.

#### **FUTURE WORK**

Further work needs to be done to verify the adequacy of the metrics used here, vis á vis their correlation to actual listener preference. It is likely that there are better metrics which could be developed, though this is not a simple task. This is the subject of current investigation.

The combination of the positional approach described here and a multiple channel multiple receiver equalization technique ([16][17]) should also be pursued.

SOME ADDITIONAL DETAILS ARE INCLUDED IN THE AES PREPRINT VERSION OF THIS PAPER:

AES 112th convention

#5602

http://www.aes.org/publications/preprints/lists/112.cfm

7

#### References

- S. Olive, P. Schuck, S. Sally, and M. Bonneville, "The Effects of Loudspeaker Placement on Listeners' Preference Ratings", J. Audio Eng. Soc., vol. 42, pp. 651-669, (1994 Aug).
- A. R. Groh, "High Fidelity Sound System Equalization by Analysis of Standing Waves", J. Audio Eng. Soc., vol. 22, pp. 795-799 (1974 Dec).
- [3] R. F. Allison and R. Berkovitz, "The Sound Field in Home Listening Rooms", J. Audio Eng. Soc., vol. 24, pp. 14-19 (1975 Dec).
- [4] M. Kleiner and H. Lahti, "Computer Prediction of Low Frequency SPL Variations in Rooms as a Function of Loudspeaker Placement", J. Audio Eng. Soc., preprint 3577, (1993 Mar).
- [5] J. A. Pedersen, K. Hermansen and P. Rubak, "The Distribution of the Low Frequency Sound Field and its Relation to Room Equalization", J. Audio Eng. Soc., preprint 3852, (1994 Feb).
- [6] E. Benjamin and B. Gannon, "The Effect of Room Acoustics on Subwoofer Performance and Level Setting", J. Audio Eng. Soc., preprint 5232, (2000 Sept).
- N. Zacharov, S. Bech, and D. Meares, "The Use of Subwoofers in the Context of Surround Sound Program Reproduction", J. Audio Eng. Soc., vol. 46, pp. 276-287 (1998 April).
- [8] S. J. Elliott, "Practical Implementation of Low-Frequency Equalization Using Adaptive Digital Filters", J. Audio Eng. Soc., vol. 42, pp. 988-998 (1994 Dec).

78

#### References

- [9] D. Griesinger, "Multichannel Sound Systems and Their Interaction with the Room", J. Audio Eng. Soc. 15th International Conference: Audio, Acoustics & Small Spaces, Paper 15, pp. 159-173 (1998 Sept).
- [10] P. M. Morse, Vibration and Sound, (Mcgraw Hill, NY, 1948), p. 313, 418.
- [11] P. M. Morse and K. U. Ingard, Theoretical Acoustics, (Mcgraw Hill, NY, 1968), p. 576-598.
- [12] J. Borwick (ed.), Loudspeaker and Headphone Handbook, (Mcgraw Hill, NY, 1968), ch. 7.
- [13] R. Walker, "Low-Frequency Room Responses: Part 2 Calculation Methods and Experimental Results", BBC Research Department Report BBC RD 1992/9, 1992, Appendix.
- [14] Room Optimizer, RPG Diffuser Systems, Inc. 651-C Commerce Dr. , Upper Marlboro, MD.
- [15] CARA (Computer Aided Room Acoustics), ELAC Technische Software GmbH, Rendsburger Landstrasse 215.
- [16] F. Asano, D. C. Swanson, "Sound Equalization in Enclosures Using Modal Reconstruction", J. Acoust. Soc. Am., 98 (4), pp. 2062-2069, (1995 Oct).
- [17] S.J. Elliott, P. A. Nelson, "Multiple-Point Equalization in a Room Using Adaptive Digital Filters", J. Audio Eng. Soc., vol. 37 no. 11, pp. 899-907, (1989 Sept).

## Acknowledgements

Thanks to Floyd Toole for instigating this work, and Kevin Voecks for going over this with a fine tooth comb and asking good questions.