


X2212 EEPROM EMULATOR

BY
N4TXI & KG4LNE

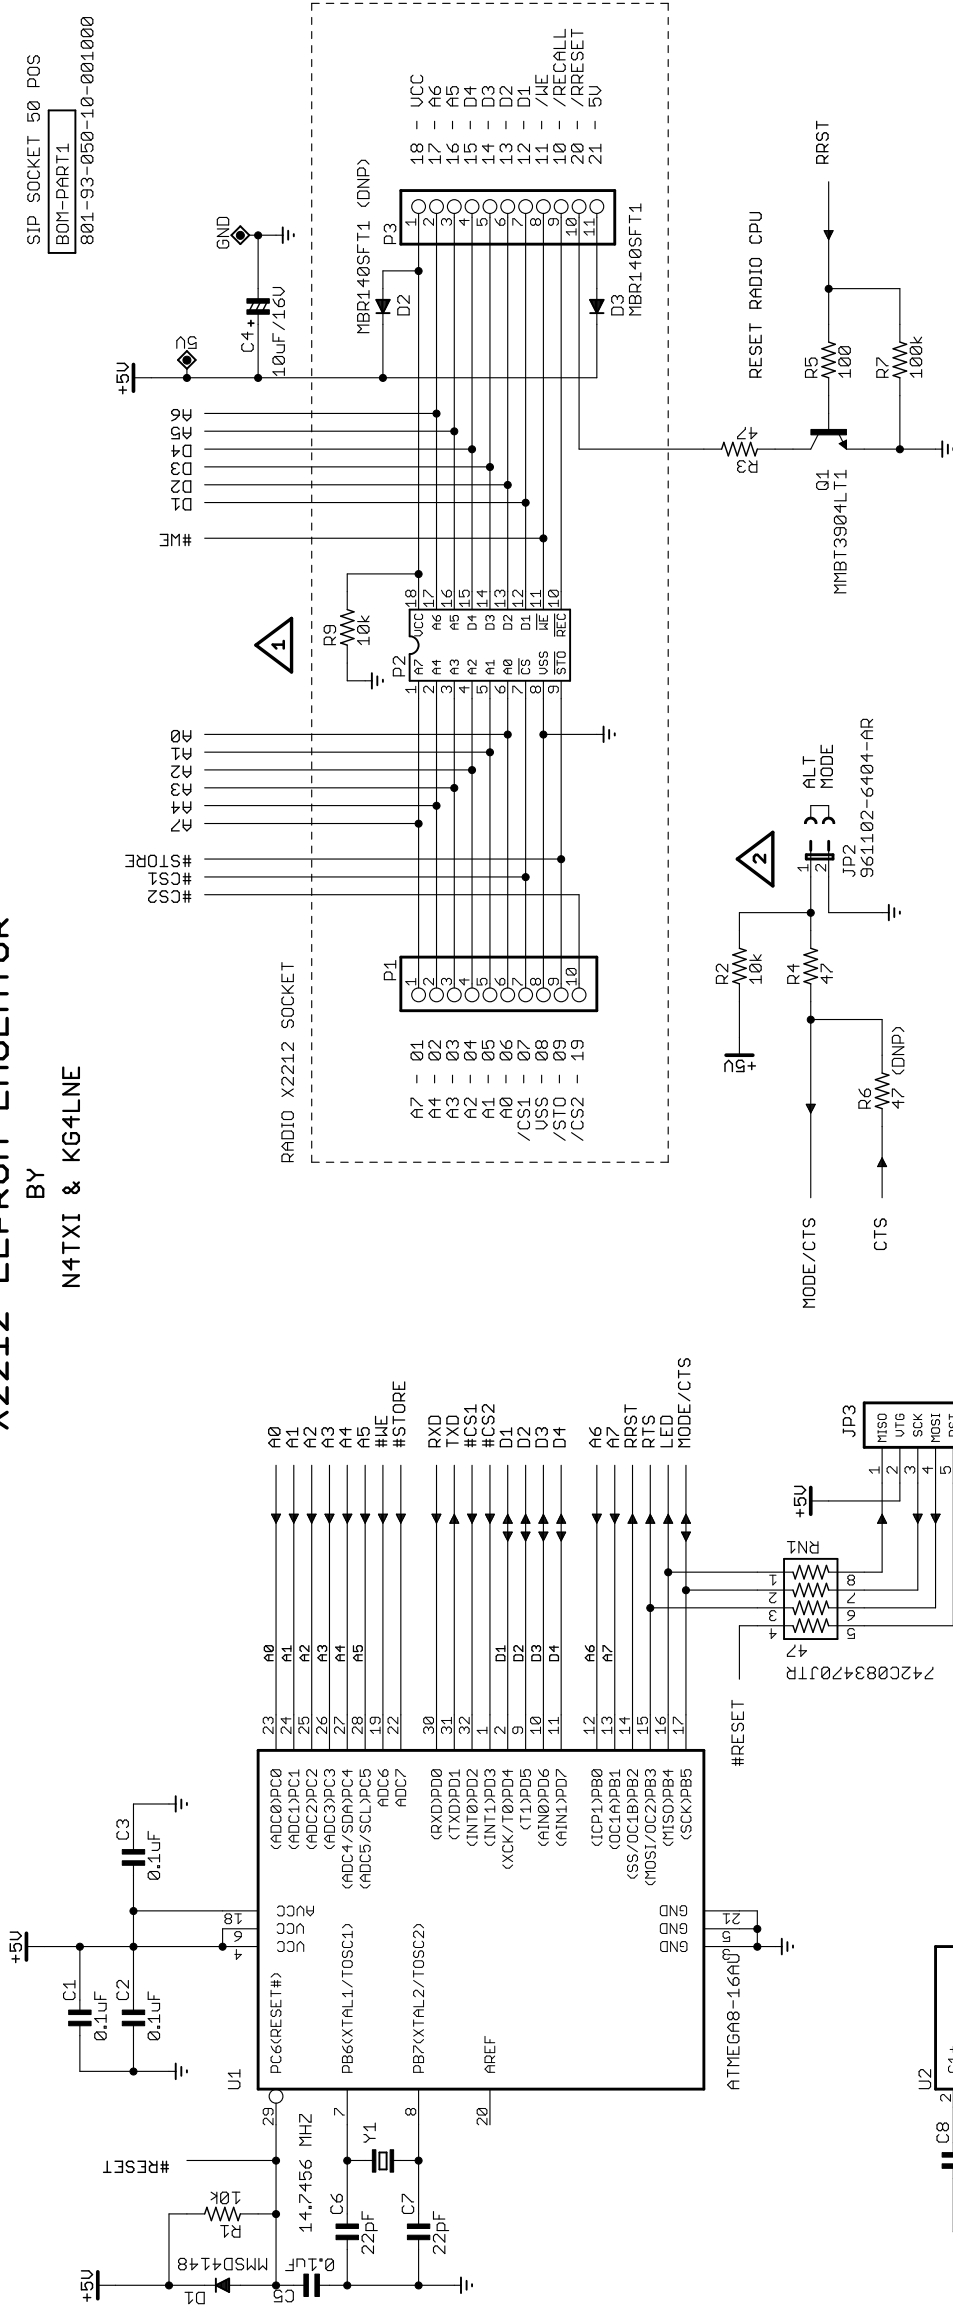

NOTES

UNITS EQUIPPED WITH DISPLAY REQUIRE R9 10K LOAD RESISTOR FROM PIN 18 TO GND ON P2. THE ORIGINAL EPROM POWER IS SUPPLIED BY AN OPEN COLLECTOR DRIVER THAT ALSO LATCHES THE DISPLAY DRIVER!

JUMPER JP2 FOR ALTERNATE BANK SELECT OPTION, DO NOT PLACE R6 IF CTS FEATURE IS USED REMOVE JP2 AND INSTALL R6.

ISSUE	KG41NE ALPHARETTA, GA U.S.A		THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	© 2013
DRAWN	TITLE		REV	
R-STARR	X2212 EEPROM EMULATOR		B	
CHECKED	DATE		DRG NO	
R-STARR	7/18/2013 9:58:16 PM		ED-2XXX.100	
DATE	FILE: UX2212-REV-B		PAGE: 1/2	
XX/XX/XX				

