



## External Power in 5v–35v max in, 4.9–5.1v out

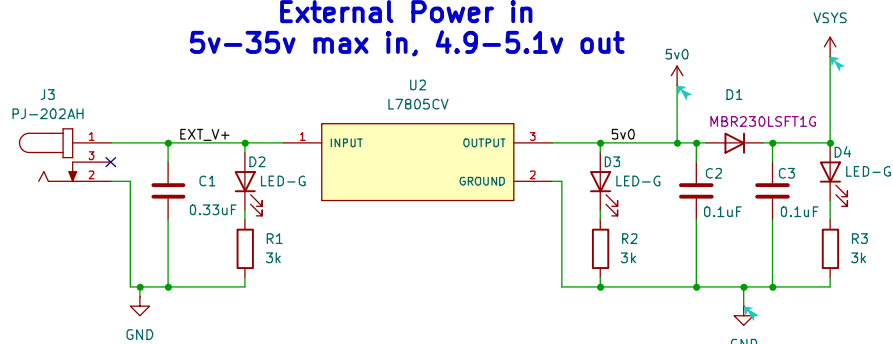


## RPI MCU + Headers

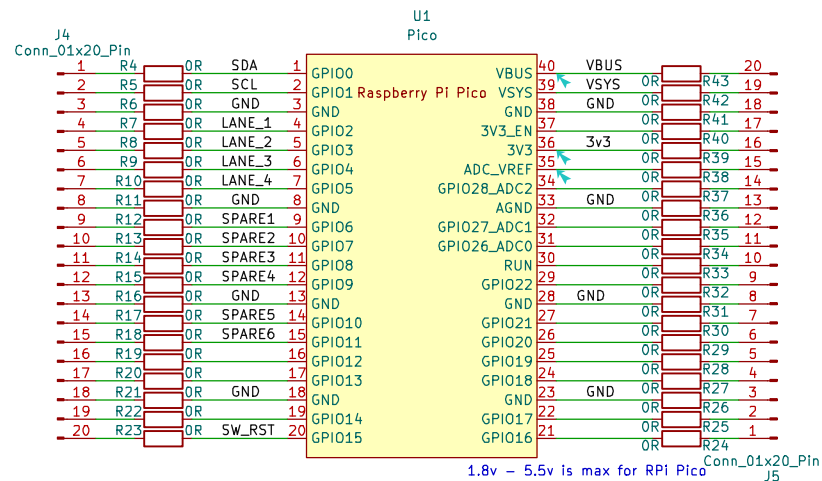


Headers are only needed for reworks / unplanned additions.  
OR 0805 resistors are used to isolate the pins


## LCD breakout

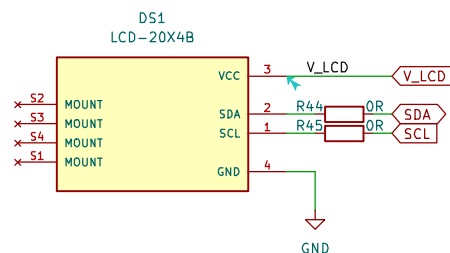


### LCD voltage selector



## LDR Sensor breakout

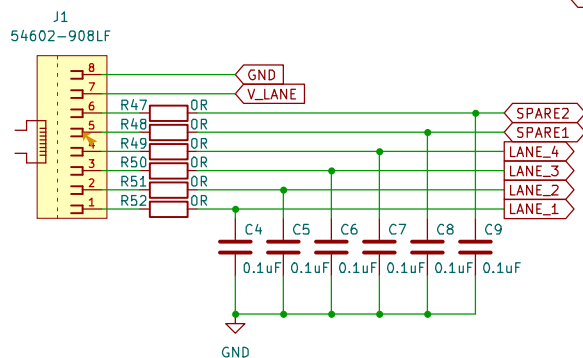

### V\_LANE voltage selector

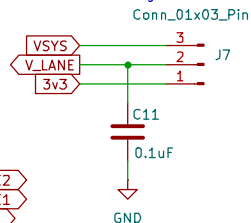

Simple RC – Low pass filter for MCU input.  
 $1kR + 0.1\mu F = 1.5kh$  cut off /  $1\mu s$  rise time  
Stuff with OR to bypass

## Switch breakout board

