


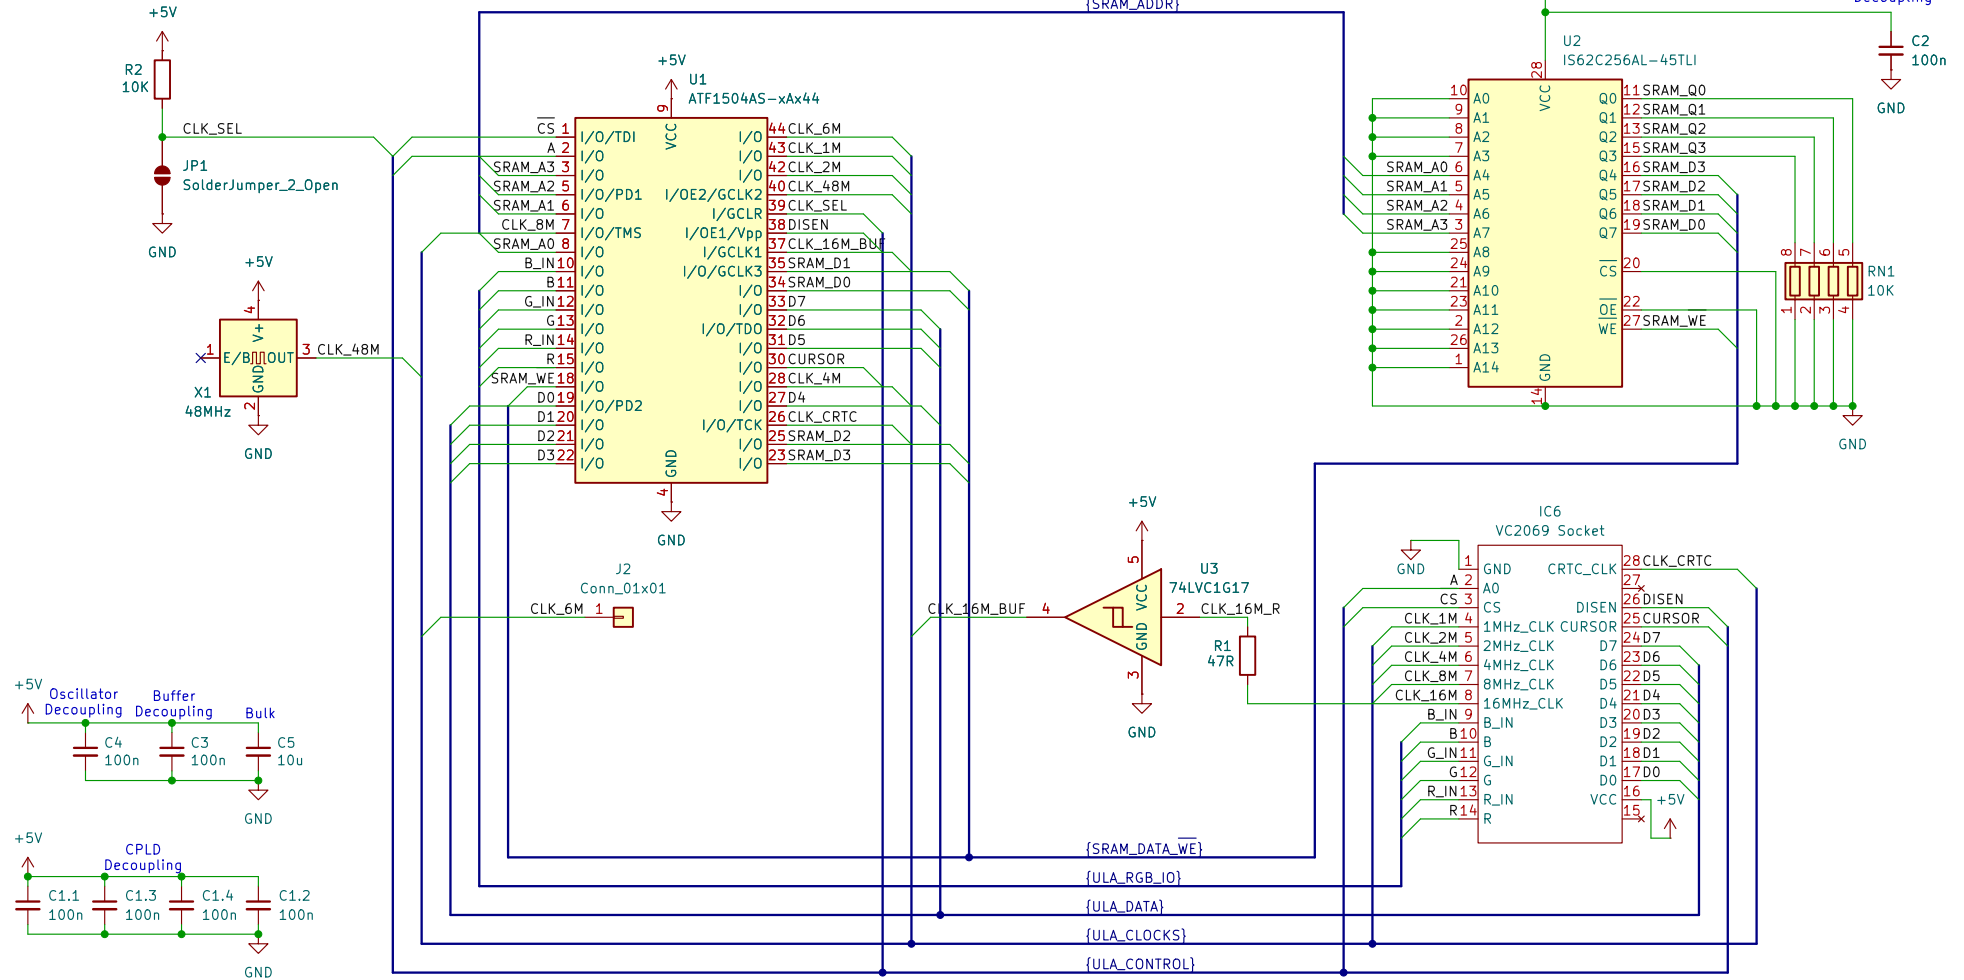

Notes

1. JP1 & CLK_SEL are unused. Instead, two separate .jed files have been produced to run the module from either the onboard 48MHz oscillator, or the original BBC Micro 16MHz clock circuit.
2. In 48MHz mode, the 8/4/2/1MHz clocks will be derived from the onboard 48MHz oscillator. The 6MHz clock will be derived from the existing circuit on the BBC motherboard. Other hardware on the BBC motherboard that uses the 16MHz clock will continue to use the motherboard 16MHz clock (eg 8" floppy / serial interface).
3. In 16MHz mode, the 8/6/4/2/1MHz clocks will still be derived from the original motherboard 16MHz clock and associated clock circuits.
4. In both 16MHz or 48MHz mode you can either use the original BBC micro 6MHz clock circuit for the teletext IC, or the onboard 6MHz clock circuit, which can be patched into the teletext IC.
5. The onboard 6MHz clock circuit will likely give a much cleaner and more stable teletext display, and should be pixel perfect when used in conjunction with RGBtoHDMI.

V01: 44 pin XC9572XL
V02: 64 pin XC9572XL
V03 Rev 01: 44 pin ATF1504AS

Ken Lowe

Sheet: /
File: VideoULA.kicad_sch

Title: Model B – Video ULA Replacement V03

Size: A4 Date: 2026-08-17
KiCad E.D.A. 10.0.5

Rev: 01
Id: 1/1