

keypad

packaging of 10 pcs.



recommended accessories:

-

							technical drawing	mounting dimension	components layout
	marking	electrical switching	material of con- tacts	colour of key	colour of marking	part no.			
keypad plastic keys for in- ternal use	12 (telephone)	common point	carbon/Au	white	black	ECO.12100.06	1	1	1
		matrix	carbon/Au	white	black	ECO.12150.06	1	1	1
	16 (hexadecimal II)	common point	carbon/Au	white	black	ECO.16200.06	2	1	2
		matrix	carbon/Au	white	black	ECO.16250.06	2	1	2

technical drawing as of page ECO.3. mounting dimensions ECO.3. components layouts as of page ECO.4

ECO

electrical characteristics

contact power rating
nominal: 0,5 W

contact resistance
< 200 Ω

current
nominal: 20 mA,
minimum: 10 mA

ESD protection
5000 V

insulation resistance
at 100 Vcc: > 1000 MΩ

life time
at nominal rating: > 10⁶ operations

voltage
nominal: 24 V,
maximum: 24 V,
minimum: 500 mV

mechanical characteristics

actuating force
1,2 N +/- 35%

actuating travel
1,4 mm +/- 0,1

contacts
carbon/Au

marking height
3,5 mm

climatic characteristics


service temperature
-20°C + 60°C

storage temperature
-40°C + 65°C

Technical Drawing


1 keypad
page ECO.1

12 – BUTTON KEYPAD

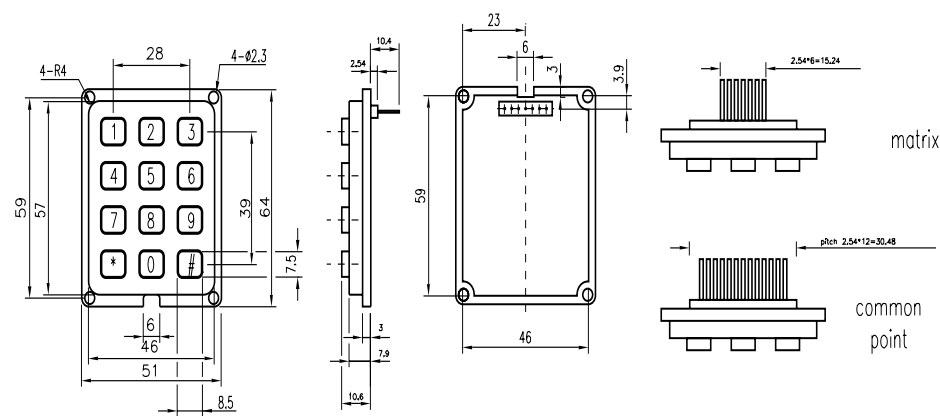

2 keypad
page ECO.1


16 – Button Keypad

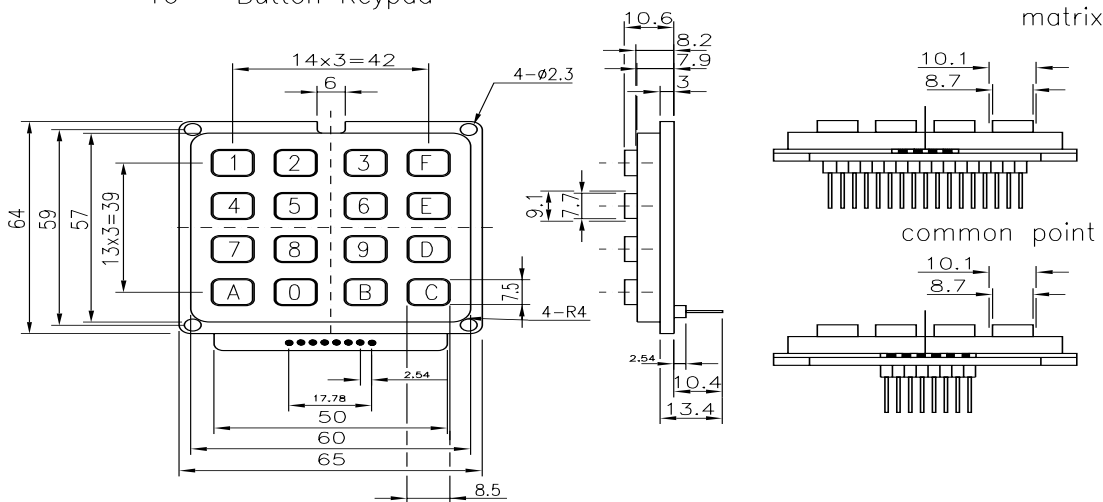

Mounting Dimension


1 keypad
page ECO.1

Flush mount
4 holes in the angles



Components Layouts

1 keypad
page ECO.1
12 KEYS – CONNECTOR
(rear view)

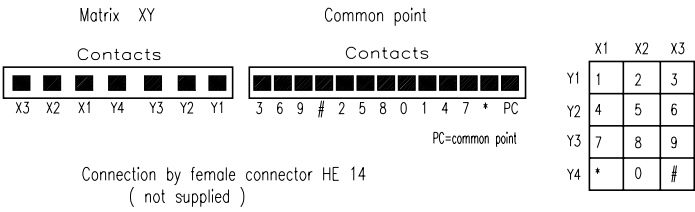

2 keypad
page ECO.1
16 KEYS – CONNECTOR
(rear view)

