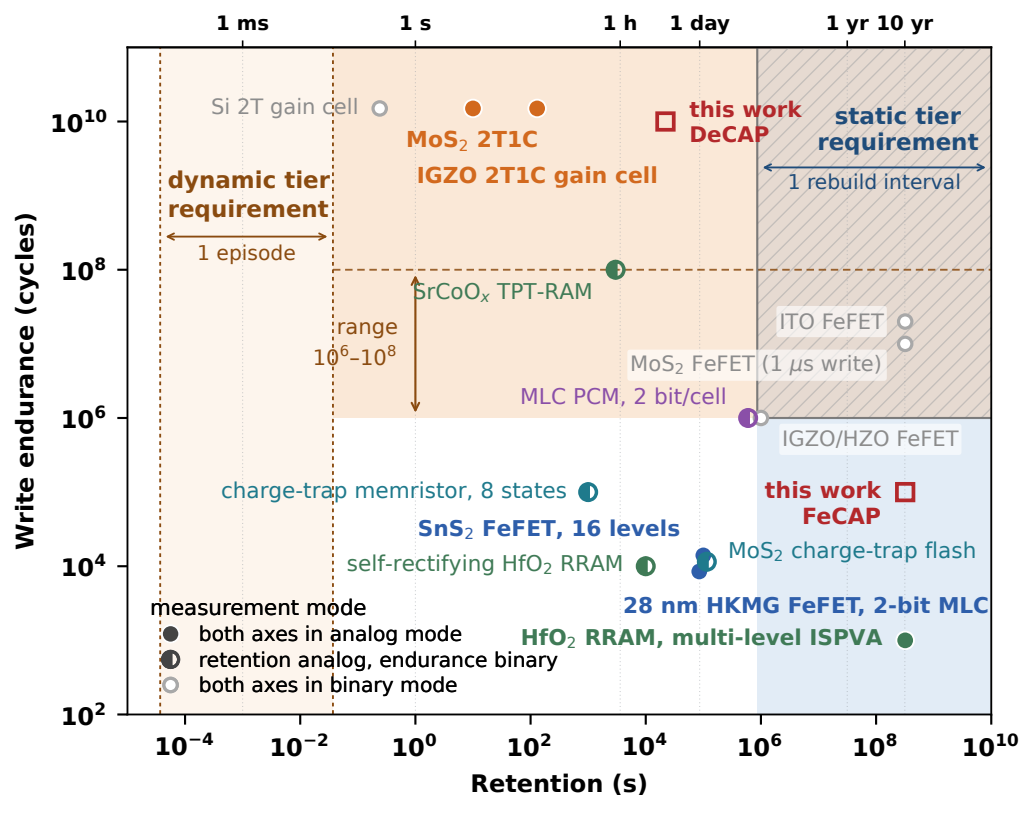
1 ms
1 s
1 h
1 day
1 yr
10 yr
Write endurance (cycles)
10^{10}
10^{8}
10^{6}
10^{4}
10^{2}
Retention (s)
10^{-4}
10^{-2}
10^{0}
10^{2}
10^{4}
10^{6}
10^{8}
10^{10}
Si 2T gain cell
MoS_2 2T1C
IGZO 2T1C gain cell
this work
DeCAP
static tier
requirement
1 rebuild interval
dynamic tier
requirement
1 episode
$SrCoO_x$ TPT-RAM
range
10^6–10^8
ITO FeFET
MoS_2 FeFET (1 μs write)
MLC PCM, 2 bit/cell
IGZO/HZO FeFET
charge-trap memristor, 8 states
this work
FeCAP
SnS_2 FeFET, 16 levels
self-rectifying HfO_2 RRAM
MoS_2 charge-trap flash
28 nm HKMG FeFET, 2-bit MLC
HfO_2 RRAM, multi-level ISPVA
measurement mode
both axes in analog mode
retention analog, endurance binary
both axes in binary mode