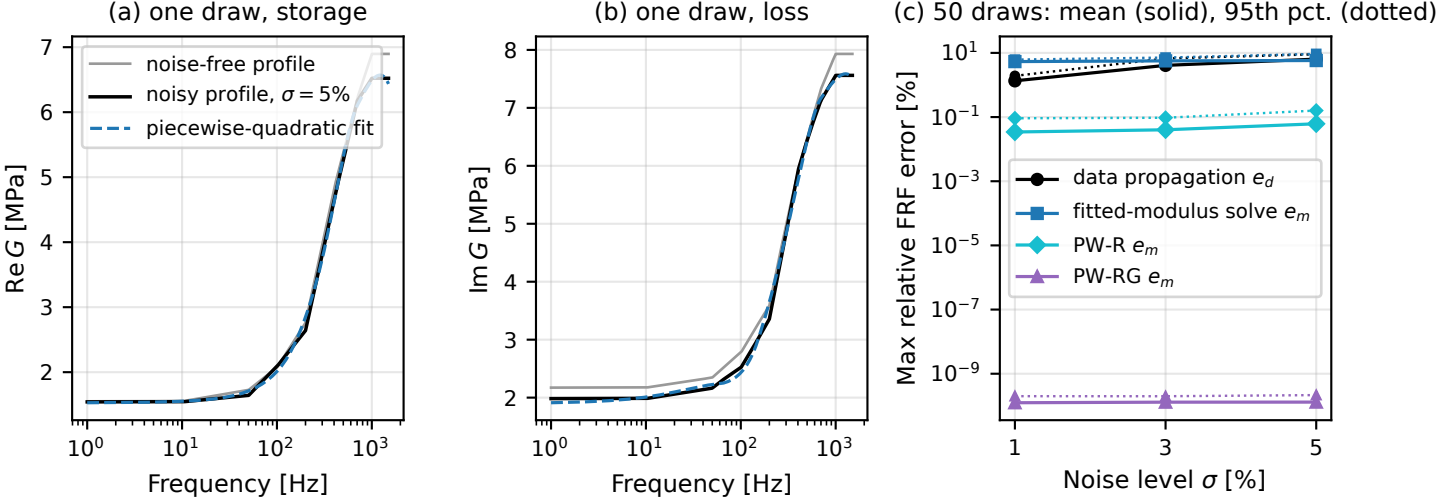
(a) one draw, storage
noise-free profile
noisy profile, $\sigma = 5\%$
piecewise-quadratic fit
Re G [MPa]
Frequency [Hz]
(b) one draw, loss
Im G [MPa]
Frequency [Hz]
(c) 50 draws: mean (solid), 95th pct. (dotted)
data propagation e_d
fitted-modulus solve e_m
PW-R e_m
PW-RG e_m
Max relative FRF error [%]
Noise level σ [%]