

Computer Architecture and Organization

I / O Units

Lecture 7

Dr.Shada Mabgar

✂ INPUT / OUTPUT DEVICE ✂

- ❖ The computer system's I/O architecture is its interface to the outside world.
- ❖ The third key element of a computer system is a set of I/O modules

✗ INPUT / OUTPUT DEVICE ✗

❖ why one does not connect peripherals directly to the system bus . **The reasons are as follows:**

1- There are a wide variety of peripherals with various methods of operation.

2- The data transfer rate of peripherals is often much slower than that of the memory or processor.

3- The data transfer rate of some peripherals is faster than that of the memory or processor.

4- Peripherals often use different data formats and word lengths than the computer to which they are attached.

3 ✗

Computer Architecture Dr.Shada Mabgar

✗ INPUT / OUTPUT DEVICE ✗

❖ Each module interfaces to the system bus or central switch and controls one or more peripheral devices.


❖ An **I/O** module is not simply a set of mechanical connectors that wire a device into the system bus.

❖ The **I/O** module contains logic for performing a communication function between the peripheral and the bus.

4 ✗

Computer Architecture Dr.Shada Mabgar

I/O Module

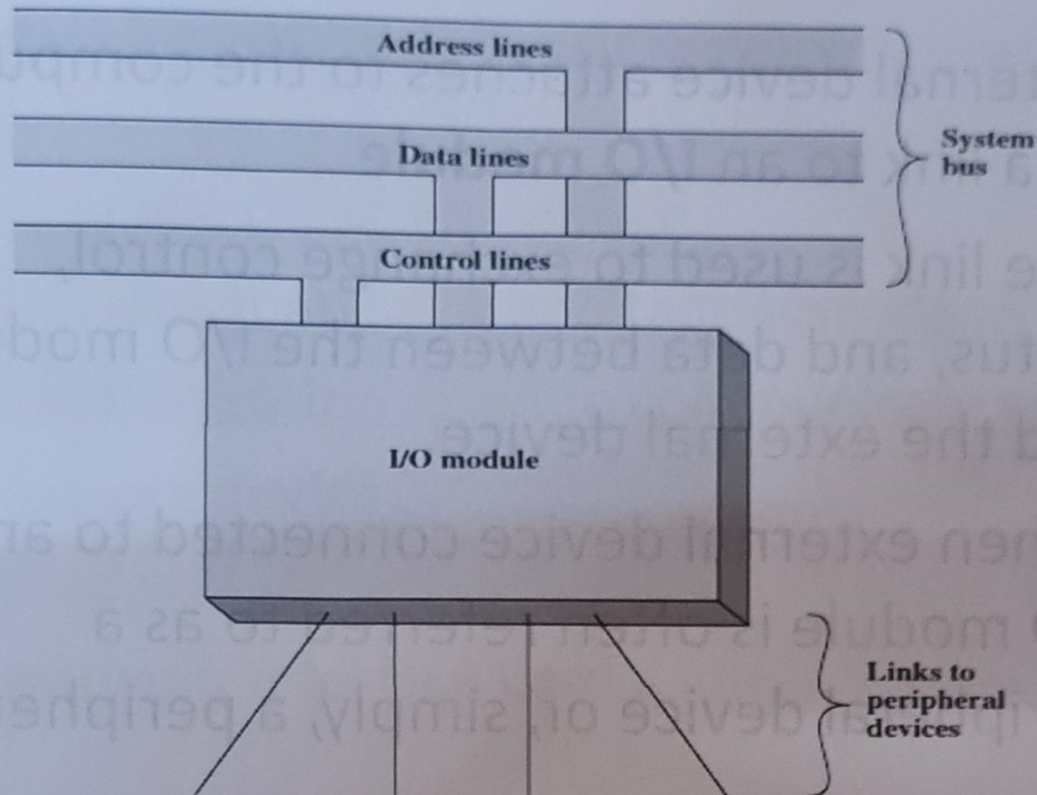

I/O Module

❖ This module has **two major** functions :

1- Interface to the processor and memory via the system bus or central switch .

2- Interface to one or more peripheral devices by **tailored data links** (is the means of connecting one location to another for the purpose of transmitting and receiving digital information .

EXTERNAL DEVICES

- ❖ External device attaches to the computer by a link to an **I/O module**.
- ❖ The link is used to exchange control, status, and data between the I/O module and the external device.
- ❖ When external device connected to an I/O module is often referred to as a peripheral device or, simply, a peripheral.

7

Computer Architecture Dr.Shada Mabgar

EXTERNAL DEVICES

- ❖ **Classify External Devices into Three Categories:**

1- Human readable: used to communicate with:

- the computer user .
- video display terminals (VDTs).
- printer.
- keyboard .
- mouse

EXTERNAL DEVICES


\ **2- Machine readable** : used to communicate with :

- \ - electronic equipment
- \ - magnetic disk and tape systems .

\ **3- Communication** :used to communicate with :

- \ - remote device .
- \ - modem .
- \ - Network Interface Card .

EXTERNAL DEVICE Block Diagram

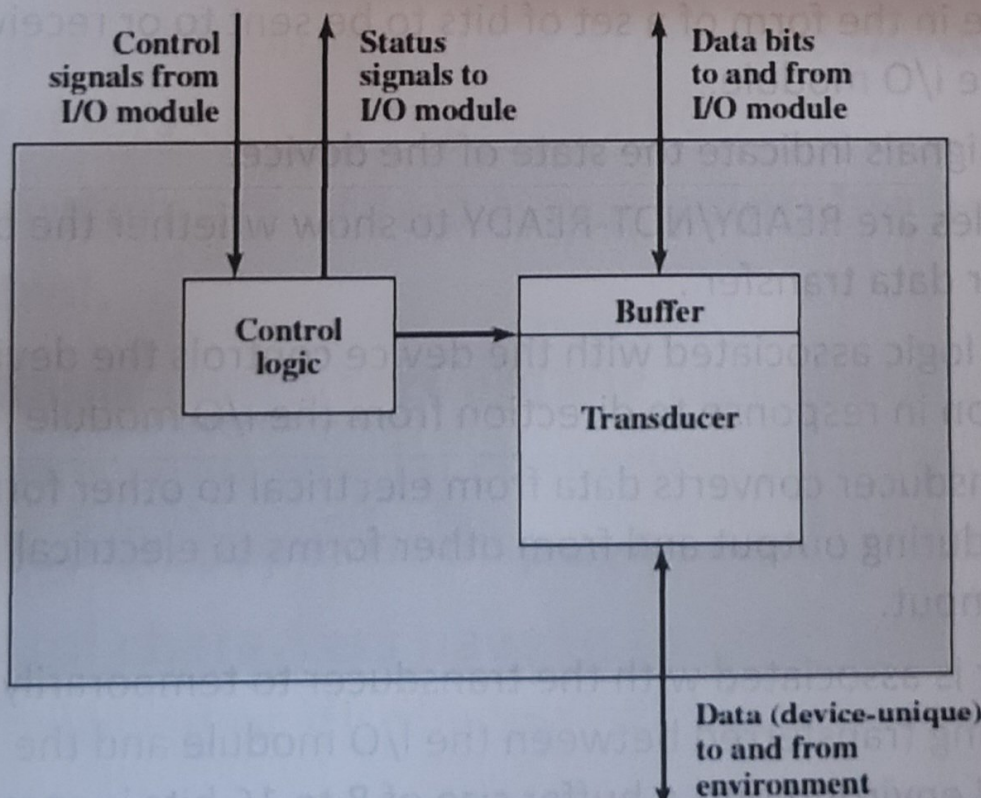

EXTERNAL DEVICE Block Diagram

- The interface to the I/O module is in the form of control, data, and status signals.
- Control signals determine the function that the device will perform- send data to the I/O module (INPUT or READ), accept data from the I/O module (OUTPUT or WRITE), report status, or perform some control function particular to the device (e.g., position a disk head).

EXTERNAL DEVICES Block Diagram

- Data are in the form of a set of bits to be sent to or received from the I/O module.
- Status signals indicate the state of the device.
 - Examples are READY/NOT-READY to show whether the device is ready for data transfer .
- Control logic associated with the device controls the device's operation in response to direction from the I/O module
- The transducer converts data from electrical to other forms of energy during output and from other forms to electrical during input.
- A buffer is associated with the transducer to temporarily hold data being transferred between the I/O module and the external environment- a buffer size of 8 to 16 bits is common.

EXTERNAL DEVICES

- The most common means of computer/user interaction is a keyboard/monitor .
- The user provides input through the keyboard.
- This input is then transmitted to the computer and may also be displayed on the monitor.
- The monitor displays data provided by the computer.
- The basic unit of exchange is the character.
- with each character is a code, typically 7 or 8 bits in length.
- used text code is the **International Reference Alphabet (IRA)**.
The U.S. national version of IRA is referred to as the American Standard Code for Information Interchange (ASCII).

EXTERNAL DEVICES

- Each character in this code is represented by a unique 7-bit binary code; thus, 128 different characters can be represented.
- Characters are of two types: **printable and control.**
- **Printable characters** are the alphabetic , numeric, and special characters that can be printed on paper or displayed on a screen.
- **Control characters** have to do with controlling the printing or displaying of characters;

✕ EXTERNAL DEVICES ✕

- For **keyboard input**, when the user depresses a key, this generates an electronic signal that is interpreted by the transducer in the keyboard and translated into the bit pattern of the corresponding **IRA code**. This bit pattern is then transmitted to the I/O module in the computer. At the computer, the text can be stored in the same IRA code.

✕ EXTERNAL DEVICES ✕

- On output, **IRA** code characters are transmitted to an external device from the I/O module . The transducer at the device interprets this code and sends the required electronic signals to the output device either to display the indicated character or perform the requested control function.

I/O MODULES

Module Function

- The major requirements for an I/O module fall into the following categories:
 - Control and timing
 - CPU communication
 - Device communication
 - Data buffering
 - Error detection
- Any period of time, the processor may communicate with one or more external devices

I/O MODULES

Module Function

Control and Timing :

- coordinate the flow of traffic between internal resources and external devices.
- Example
 - CPU inquires I/O module about device status
 - I/O module returns the device status.
 - If the device ready to transmit, CPU requests the transfer of data.
 - I/O module gets data from the device .
 - I/O module transfers data to CPU

I/O MODULES

Module Function

CPU communication

- **Command decoding:**

- I/O module accepts commands from the CPU sent as signals on the control bus . **For example, an I/O module for a disk drive might accept the following commands: READ SECTOR, WRITE SECTOR, SEEK track number, and SCAN record ID.**

- **Data:** Data are exchanged between the processor and the I/O module over the data bus.


I/O MODULES

Module Function

- **Status reporting:** Because peripherals are so slow, it is important to know the status of the I/O module . ***For example, if an I/O module is asked to send data to the processor (read), it may not be ready to do so because it is still working on the previous I/O command. This fact can be reported with a status signal .Common status signals are BUSY and READY .***

4-Address recognition: each word of memory has an address, so does each I/O device.an I/O module must recognize one unique address for each peripheral it controls.

Typical I/O Data Rates

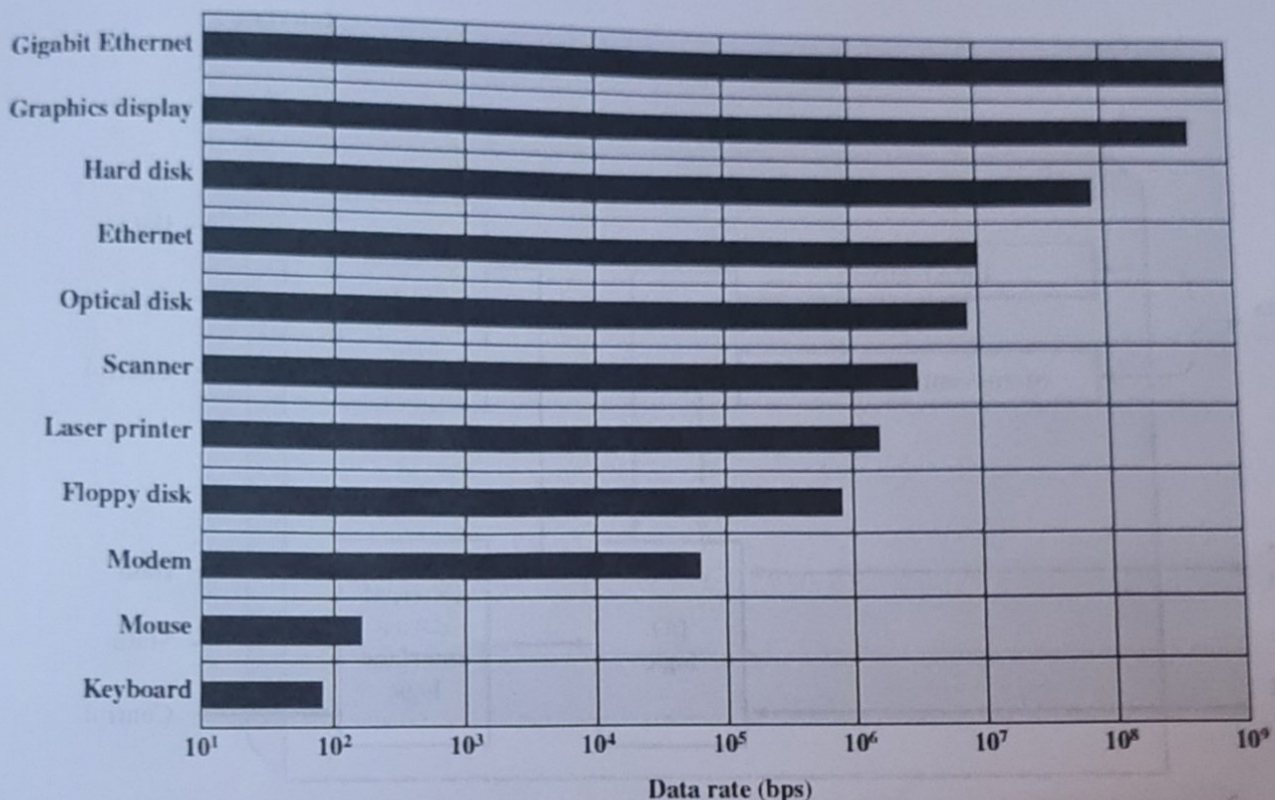

21

Computer Architecture Dr.Shada Mabgar

I/O MODULES Module Function

Device communication

This communication involves :

- commands, status information, and data.

Data buffering

-Data coming from main memory are sent to an I/O module in a rapid burst

-Data are buffered in the I/O module and then sent to the peripheral device at its data rate.


Error detection - One class of errors includes mechanical and electrical errors reported by the device (e.g., paper jam, bad disk track).

22

Computer Architecture Dr.Shada Mabgar

I/O Module Structure

Block Diagram of an I/O Module

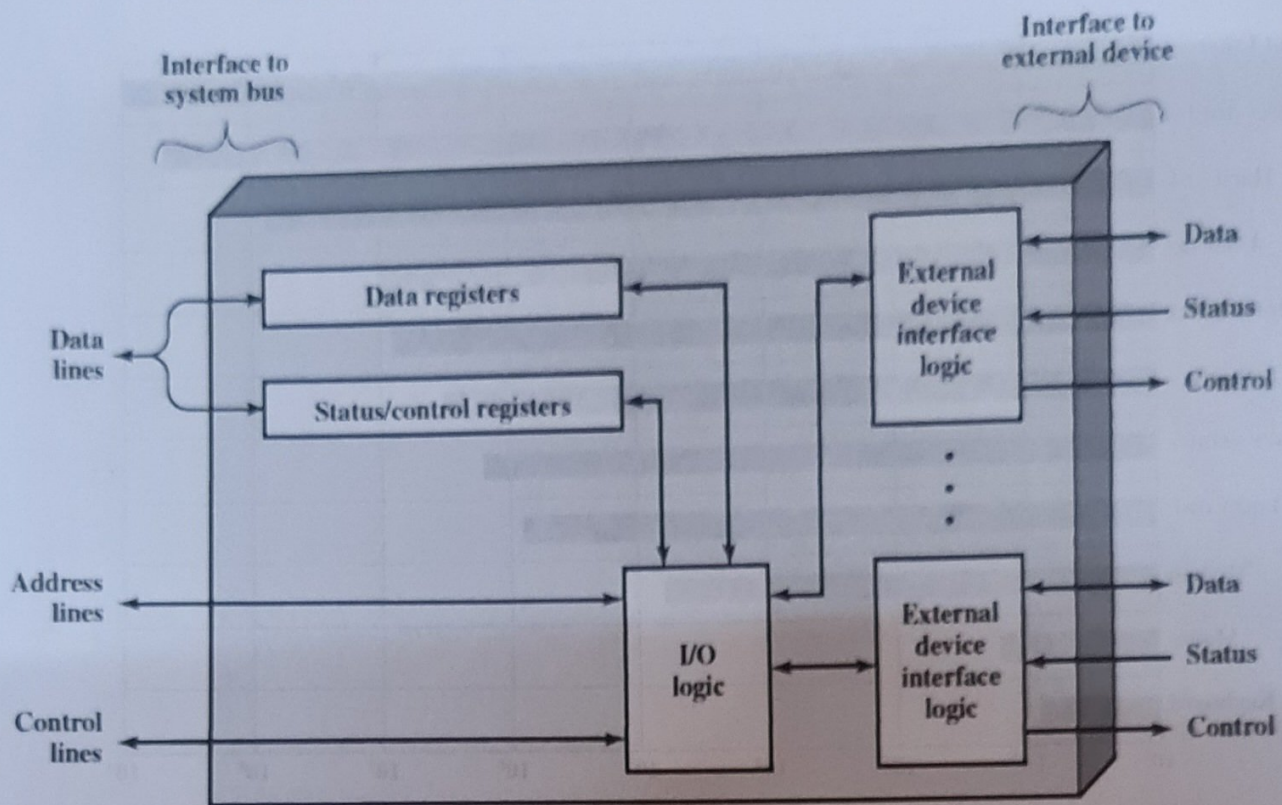

23

Computer Architecture Dr.Shada Mabgar

I/O Module Structure

Block Diagram of an I/O Module

- The module connects to the rest of the computer through a set of signal lines (e.g., system bus lines).
- Data transferred to and from the module are buffered in one or more data registers.
- There may also be one or more status registers that provide current status information. A status register may also function as a control register, to accept detailed control information from the processor.
- The I/O module contains logic specific to the interface with each device that it controls.

24

Computer Architecture Dr.Shada Mabgar

THE EXTERNAL INTERFACE

- One major characteristic of the interface is whether it is **serial or parallel**.

ما الفرق بين
Parallel
Serial

- **Parallel interface** - there are multiple lines connecting the I/O module and the peripheral, and multiple bits are transferred simultaneously, just as all of the bits of a word are transferred simultaneously over the data bus.

- **Serial interface**, there is only one line used to transmit data, and bits must be transmitted one at a time.

multiple line عبارة عن Parallel
one line كلمة series

25

Computer Architecture

Dr.Shada Mabgar

Types of Interfaces

- A **parallel** interface has traditionally been used for higher-speed peripherals-**tape and disk**.
- The **serial** interface has traditionally been used for **printers and terminals**.
- **I/O module** has an internal buffer compensate for the differences in speed between the system bus and external device

Types of Interfaces

