






REV.	MODIFICATION	ECN No.	NAME	DATE
A/0	新版发行			
A/1				

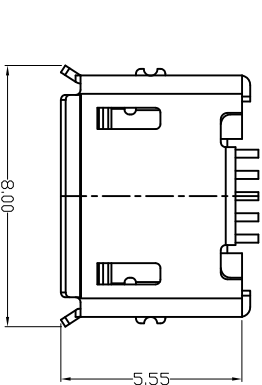



NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT CURRENT RATING: 0.5 AMPERES.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: AC100V R. M. S.
- 1.3 INSULATION RESISTANCE: 100 M Ω MINIMUM.
- 1.3 CONTACT RESISTANCE: 50 m Ω MAXIMUM.

2. MECHANICAL:

- 2.1 INSERTION FORCE: 3.57 Kgf Max.
- 2.2 EXTRACTION FORCE: 1.0 Kgf Min. (INITIAL)
0.81~2.05 Kgf Min. (AFTER)
- 2.3 DURABILITY: 10000 CYCLES MIN.
3. OPERATING TEMPERATURE: -30° C~+80° C
4. The self-adhesive tape and reel packaging 1000pcs / plate

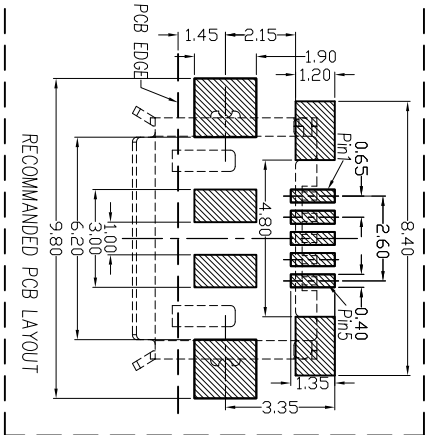

E

ROOM:

外壳 SHELL 黄铜 (C2680 H) OR SPCC, T=0.25 ±0.03mm
Tin OR Nickel Plating

胶心 INSULATOR THERMOPLASTIC UL 94V-0 BLACK

端子 CONTACT 黄铜 (C2680 H), T=0.15 ±0.02mm
CONTACT AREA: GOLD PLATE OVER 50u" Nickel min.
SOLDER AREA: 120u" Bright TIN PLATE OVER 50u" Nickel min.

PART NAME Specifications

1

2

3

4

QTY NOTE

5

6

7

8

东莞市江涵电子有限公司
DONG GUAN JIANG HAN ELECTRONICS CO., LTD
TEL: 0769-87815809 FAX: 0769-82065390
ADD: 广东省东莞市塘厦镇石潭埔青云岭工业区骏鹏路六号

产品名称: PRODUCT NAME

料号 Part No. 2230853023 (JH-M01-F10)

Micro usb 5P B type SMT 母座

核准 Approved by

GENERAL TOLERANCES
X. ±0.15 X°. ±2°
. X ±0.10 . X° ±0.5°
. XX ±0.05 . XX° ±0.3°

材质 Material

料号 Part No.

2230853023 (JH-M01-F10)

审核 Checked by

制图 Drawn by

聊星文

THIRD ANGLE

F