

The Importance of Temporal Resolution in Evaluating Residential Energy Storage

Khalid Abdulla, Kent Steer
and Andrew Wirth
Melbourne School of Engineering
University of Melbourne
Melbourne, VIC 3010, Australia

Email: kabdulla@student.unimelb.edu.au

Julian de Hoog
IBM Research – Australia
19/60 City Road
Melbourne VIC 3006, Australia

Saman Halgamuge
Research School of Engineering
Australian National University
Canberra ACT 2601, Australia

Abstract—Much research is being conducted into the potential value of residential energy storage. The temporal resolution of the analyses carried out in these studies is typically driven by the available data, which is often only at 30-minute or 1-hour intervals. This study uses higher temporal resolution data to examine the effect of input time-series resolution on the value determined for residential storage. In the case study considered, an analysis carried out at a 30-minute interval underestimates the cost-saving delivered by 5kWh of residential energy storage by 17% on average, compared to the same battery analyzed at a 1-minute interval. The sensitivity of storage value to temporal resolution is found to vary significantly from one customer to the next. A method for improving estimates of the real-time value of energy storage using coarser time-series data is introduced. Finally the impact of temporal resolution on storage technology selection is also evaluated.

Index Terms—Energy storage, optimal operation, temporal resolution

I. INTRODUCTION

A. Motivation

Many existing studies (see Table I) use relatively low resolution temporal data in their analyses of the value of residential energy storage. Whilst this is a pragmatic approach, given that a majority of data-sets are only available at 30-minute or 1-hour intervals, it risks an incorrect assessment of the true value of residential energy storage when operated in real time. This paper seeks to determine how significant this value estimation problem is, by carrying out an empirical study using a dataset of the household demand and rooftop solar photovoltaic (PV) output of several hundred homes from a dataset sourced in Texas [1] that we consider a good representation of residential demand and generation.

Considering a realistic Australian scenario in which a residence has a two-part time-of-use tariff (say, of \$¹0.40/kWh during peak times and \$0.20/kWh at other times), and a low fixed export tariff (say, of \$0.05/kWh), a householder with a PV system might be able to derive value from a behind-the-meter battery by maximizing

solar self-consumption (*i.e.* minimizing export of energy for minimal return), and tariff optimization (*i.e.* minimizing imports during peak-price times). For a 30-minute interval during which a residence's demand and PV output match (on average over the interval), a study carried out on 30-minute resolution data would determine that the battery would not be operated, and so would not deliver value during that interval. However, if during this interval PV output was fluctuating significantly (for example due to passing clouds, or repeated inverter drop-outs as a result of local voltage rise) a study completed at a higher temporal resolution would result in the battery being charged and discharged repeatedly, and delivering some saving to the household. This study evaluates how significant this difference is, as the input data (local demand and PV output) is aggregated from an initial 1-minute resolution, up to a 1-hour interval.

B. Contributions & Paper Organization

This work addresses some shortcomings of existing research which evaluates residential battery energy storage systems. The contributions are to:

- (i) Identify the empirical relationship between temporal resolution of input data, and the valuation of residential energy storage, for real 1-minute demand and PV data [1] (Section III-A);
- (ii) Present an approach to approximating the true real-time operational value of energy storage using coarser time-series data (Section III-C);
- (iii) Evaluate the impact of temporal resolution on the most appropriate energy storage technology choice for an application (III-D).

C. Literature Survey

Smart electricity meters which are being installed by utilities the world over are often capable of recording domestic electricity consumption at 1-minute intervals, or finer, but often this data is not kept or made available to researchers for a variety of reasons:

¹Throughout this paper \$ refers to Australian Dollars

TABLE I: Time Intervals of studies on IEEE Xplore matching search: {(value OR evaluation) AND (residential OR domestic) AND (battery OR “energy storage”)}.

Time Interval of Demand/RES Data [minutes]	No. of References	References
≤ 1	5	[2]–[6]
10	4	[7]–[10]
15	9	[11]–[19]
30	5	[20]–[24]
60	30	[25]–[54]

- 1) Bandwidth limitations mean that it is not always feasible to communicate the higher resolution data to the outside world (but only the lower resolution data required for billing);
- 2) High temporal resolution data presents a privacy risk, as it is possible to determine a great deal about a household from their 1-minute consumption data;
- 3) Data-warehousing and management costs increase with higher temporal resolution, as a result of the increased data-volume and throughput rates.

As a result much of the publicly available consumption data is at a 30-minute or 1-hour temporal resolution. For example, Table I presents all of the references found on IEEE Xplore by using the search terms {(value OR evaluation) AND (residential OR domestic) AND (battery OR “energy storage”)}. It suggests that the majority (66% in a sample size of 53 papers) of studies use data with 30-minute intervals or longer.

A number of existing studies consider the question of how the temporal resolution of input data can affect the conclusions of analyses; these are reviewed briefly here. In [55] Urquhart *et al.* consider the change in copper-loss estimates in the distribution network, when simulations are carried out at varying levels of temporal aggregation. They find that between simulations at 1-minute, and those at 30-minute intervals, a 40% underestimation of losses can occur; and that the level of underestimation varies significantly between customers. Kools and Phillipson, [56], study the impact of data temporal granularity on the optimal planning (sizing) of distributed energy resources, concluding that for the planning problem 1-hour resolution data is sufficient. In [57] Hawkes *et al.* evaluate the importance of temporal resolution when determining the optimal sizing of a micro-combined heat-and-power system, concluding that using 5-minute data produces substantially different results to the 1-hour interval data used in many other studies.

The low temporal resolution used in many studies considering the value of residential energy storage, and the significant sensitivity to temporal resolution seen in

closely related research, suggests the sensitivity of residential energy storage valuation to temporal resolution is worthy of further study.

II. METHOD

A. Analysis

We consider a battery that is owned by, and operated in the interests of, a residential electricity customer who has a rooftop PV system. The battery is operated using a simple rule-based controller which seeks to charge the battery with any excess solar PV output (subject to state-of-charge and rate-of-charge constraints). This control law, and the resulting value-estimation of the battery, are described in Algorithm 1. We choose a PV-self-consumption-maximizing controller for two reasons: (i) It is typical of the capability and configuration of storage systems being installed in Australia today and (ii) With prevailing Australian tariff structures, minimizing exports is the most financially attractive value proposition. This simulation and analysis is then repeated at multiple temporal resolutions, *i.e.* we complete this analysis at the finest resolution possible given an available data-set, and then accumulate that data into coarser intervals to mimic the data-set only being available at a coarser resolution.

The simulation is detailed in Algorithm 1. The inputs required are: $\{d, p\}$ the time-series of demand and PV output for the household being considered, suitably aggregated to the interval-length of interest; $\{P_t^i, P_t^e\}$, the tariff structure (see Table II); and the properties of the battery $\{C_{\text{rate}}, B, \eta_c, \eta_d\}$ (see Table III). For each interval we calculate the excess demand ($\hat{d} \leftarrow d_t - p_t$), and if it is positive we satisfy it by discharging the battery (subject to the battery’s rate-of-charge and state-of-charge constraints), and if it is negative (*i.e.* we have excess PV output during the interval) we charge the battery so that no energy is exported to the grid (again subject to battery operational constraints). During the simulation we keep track of the net cost (cost of grid imports less money received for grid exports) of operation with a battery, C , and also what the cost would be if no battery were available, C^{NB} (*i.e.* if excess demand is satisfied directly by grid imports). The cost-saving for a particular {customer, battery, interval length} instance is then estimated as $C^{\text{NB}} - C$.

The Matlab code used to simulate the battery’s operation is available in a public repository to allow other researchers to reproduce our results [58]

B. Case Study Data

The following specific data is used for our case-study:

1) *The Tariff Structure*: for this study is given in Table II and is typical of those available to homes connected to the National Electricity Market in Australia.

2) *Battery Properties*: are given in Table III, and are representative of commercially available home-storage offerings in Australia.

²Applying this search to papers’ meta-data returned 151 papers. The relevant ones using discrete interval data are included in Table I.

Algorithm 1 Set-Point Operation & Value Estimation

Require: d, p ▷ Demand/PV time-series
Require: P_t^i, P_t^e ▷ Import and export tariffs
Require: $C_{\text{rate}}, B, \eta_c, \eta_d$ ▷ Battery properties
1: $b \leftarrow B/2$ ▷ Initialize battery to half-full
2: $C \leftarrow 0$ ▷ Variable to count cost with battery
3: $C^{\text{NB}} \leftarrow 0$ ▷ Variable to count cost without battery
4: **for** $t = 1 \dots N_{\text{intervals}}$ **do** ▷ Excess demand
5: $\hat{d} \leftarrow d_t - p_t$ ▷ Excess demand
6: $C^{\text{NB}} \leftarrow C^{\text{NB}} + \min(\hat{d}, 0)P_t^i - \min(-\hat{d}, 0)P_t^e$
7: **if** $\hat{d} > 0$ **then**
8: $e \leftarrow \min(\hat{d}/\eta_d, C_{\text{rate}}, b)$ ▷ Energy from battery
9: $g \leftarrow \hat{d} - e\eta_d$ ▷ Energy from grid
10: $b \leftarrow b - e$ ▷ Update battery state-of-charge
11: $C \leftarrow C + gP_t^i$
12: **else**
13: $e \leftarrow \min(-\hat{d}\eta_c, C_{\text{rate}}, B - b)$ ▷ Energy to battery
14: $g \leftarrow -\hat{d} - e/\eta_c$ ▷ Energy to grid
15: $b \leftarrow b + e$ ▷ Update battery state-of-charge
16: $C \leftarrow C - gP_t^e$
return $C^{\text{NB}} - C$ ▷ Value estimate of battery

TABLE II: Tariff Structure

Tariff	Symbol	Value
Export (all times)	P_t^e	\$0.05/kWh
Import (7am - 10pm)	P_t^i	\$0.40/kWh
Import (other times)	P_t^i	\$0.20/kWh

TABLE III: Battery Properties


Property	Symbol	Value	[units], Notes
Usable capacity	B	{1.0, 5.0, 10}	[kWh]
Charging rate	C_{rate}	1.0	[hr ⁻¹], kW charging rate divided by B
(Dis)Charging efficiency	η_c, η_d	0.96	[]

3) *Demand and PV Generation Data:* for this study are taken from the Pecan Street Dataport database [1], which we consider a representative dataset for residential demand and generation. 71 customers had complete data for 2013-2014 (525,600 one-minute readings per year), and are included in this study. The source data is recorded as kW power for the 1-minute metering period. This is converted into kWh consumed/produced over the minute (scaling by 1/60). To study the battery valuation determined at different temporal resolutions, the data was then aggregated over several interval lengths: {1, 2, 5, 10, 30, 60} minutes, by summing over an appropriate number of 1-minute intervals.

III. RESULTS

A. Impact of Interval Length on Battery Value

Fig. 1 illustrates the reduction in observable battery value with increasing temporal aggregation level (*i.e.* reducing temporal resolution). Two conclusions can be

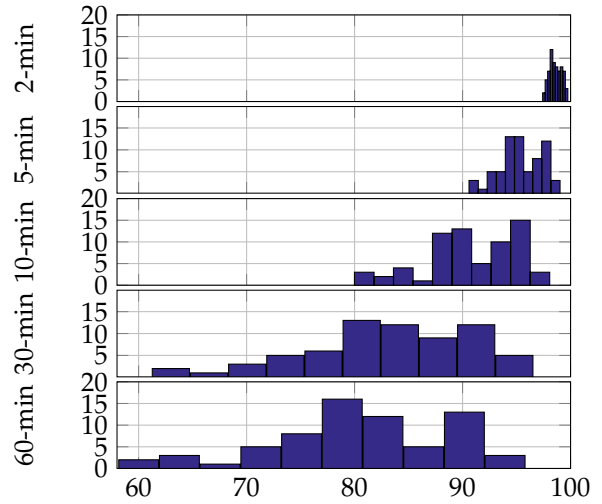

Battery Value relative to value at 1-minute Interval [%]

Fig. 1: Histogram of values for a 5kWh battery with data aggregated to increasing interval lengths. Source data from [1].

drawn: (i) For some customers, reducing temporal resolution can significantly affect the battery value determined (by over 40%); and (ii) The extent to which the resolution of the input data affects the resulting battery value varies significantly between customers. Similar plots were produced for 1 and 10 kWh batteries, and the percentage value hidden at reduced temporal resolution is greatest for smaller batteries, as might be expected.

B. Interval-Length Sensitivity Between Customers

To determine what characteristics of an individual customer's demand/PV profile cause a high or low sensitivity of storage value estimate to temporal resolution, we look at the time series PV and demand data for the customers with greatest and least sensitivity. These are plotted in Fig. 2 which shows that, as might be expected, the customer with most value hidden at higher temporal resolution has a demand signal with significant high frequency content, and that with the least hidden value has a relatively smooth demand profile.

C. Estimating real-time Value from Coarser Data

Fig. 1 demonstrates that a significant number of customers would underestimate the value which energy storage might offer them, if they considered coarser temporal resolution data only. This raises two questions:

1) *Is 1-minute data fine enough?*: It is not possible to address this question definitively without access to finer temporal resolution data. However, looking at the curves in Fig. 3 they appear to be smooth, and approximately linear for the finest {1, 2, 5}-minute resolutions. This is consistent with the results found in [55] using a dataset of UK households. If we extrapolate these linear trends

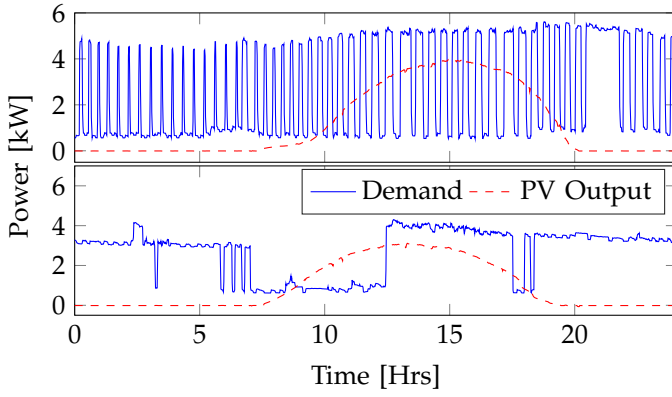


Fig. 2: Time series of demand and PV output for the customer with the most (top) and least (bottom) value hidden at higher temporal resolution. Data from [1].

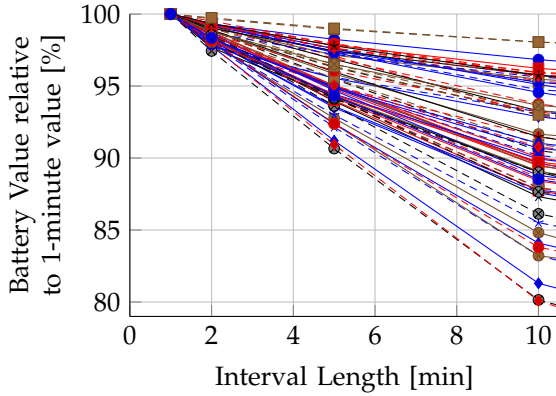


Fig. 3: Value of 5kWh battery with data aggregated to {1, 2, 5, 10}-minute intervals. Source data from [1].

to an interval length of zero minutes (*i.e.* the value of a battery operated in continuous time) for a 5kWh battery we get a value of between 1% and 3% greater than the value determined at a 1-minute interval.

2) *Can a better estimate of the fine-resolution value be made from coarse data?:* In many settings only coarser temporal data is available, motivating an attempt to estimate the true value of energy storage from coarse data. To attempt this we randomly divide the data into a training set of 45 customers, with the remaining being used as a test-set. We then treat the value determined using data at {30, 60}-minute intervals as regressors (*i.e.* assuming 30-minute input data is available), and the value determined at a 1-minute resolution as the regressand, and use least-squares linear regression to determine the coefficients of a model (using the training set). Finally, for the test customers we estimate the 1-minute value of the battery in two ways; firstly using a simulation with data at 30-minute intervals, and secondly by estimating value at {30, 60}-minute intervals (aggregating the input data before running the analysis as required) and then using

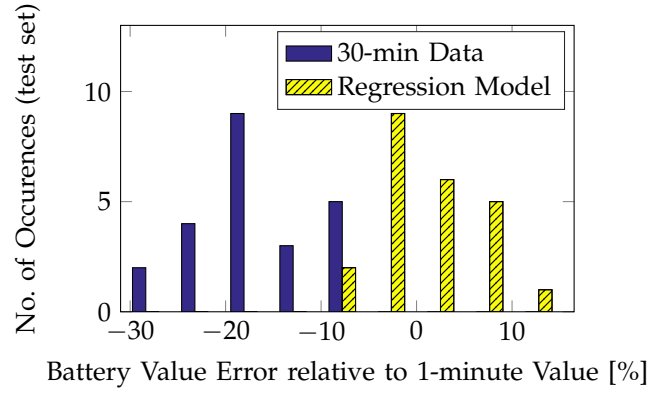


Fig. 4: Histogram of errors of 1-minute value of 5kWh battery using value-estimates from 30-minute data only (solid), and from the linear regression model using {30, 60}-minute interval performance as inputs (hatched). Source data from [1].

the linear regression model. The battery value errors are then normalized to the true 1-minute battery value and are plotted in Fig. 4. The results from 30-minute interval data consistently underestimate the battery value (consistent with the results from the fourth panel of Fig. 1), with a mean error of -17% and a standard deviation of 6.4%. Using the regression model results in relative errors with a mean of +1.1% and a standard deviation of 5.5%. Using the regression model has reduced bias without increasing the variance of errors in trying to estimate the continuous-time value of a battery based on only 30-minute interval input data.

D. Impact of Temporal Resolution on Technology Selection

The main thesis of this paper is that the value estimate of residential energy storage is sensitive to the temporal resolution of the data used. A related question is whether the resolution of data might affect the choice of energy storage technology. To examine this we consider a simple analysis of the cost-saving of an energy storage asset, relative to its purchase cost. Table IV gives properties for a particular battery and supercapacitor energy storage product. We assume that the degradation of an energy storage asset is driven only by the cumulative charging and discharging kWh as it is operated. In practice, battery degradation is more complex, and a proper treatment needs to consider many more factors (see for example [20]). In Table IV we see that neither technology strictly dominates. The battery has a lower cost per kWh-capacity, whereas the supercapacitor has a higher charge/discharge rate, and a lower cost per kWh-throughput, if its large number of cycles can be utilized.

To assess the impact of temporal resolution on technology selection we simulate the operation of an energy storage asset with the properties outlined in Table IV and compare the cost-saving offered by the storage device,

TABLE IV: Battery & Supercapacitor Properties

Parameter	Battery	Supercapacitor
Reference device	BMZ ESS3.0	Eaton XLR-48R6167-R
Data Source	[59]	[60], [61]
B	5.4 kWh	0.041 kWh
Cycle Life	5,000	1,000,000
C_{rate}	1.5	2880
Cost	\$7,700	\$1,700
Cost/kWh-capacity	\$1,426	\$41,463
Cost/kWh-throughput	0.143 \$/kWh	0.021 \$/kWh

TABLE V: Battery & Supercapacitor Performance at Different Temporal Resolutions

	Interval [min]				
Battery	1	2	5	10	30
Value [\$]	579	572	554	528	486
Throughput [kWh]	3678	3632	3525	3376	3131
Degradation []	0.068	0.067	0.065	0.063	0.058
Depreciation [\$]	525	518	503	481	446
Net value [\$]	55	54	51	47	40
ROI [%]	0.71	0.70	0.66	0.61	0.52

	Interval [min]				
Capacitor	1	2	5	10	30
Value [\$]	35	32	27	19	7.2
Throughput [kWh]	211	190	158	111	43
Degradation []	0.0026	0.0023	0.0019	0.0014	0.00053
Depreciation [\$]	4.4	3.9	3.3	2.3	0.9
Net value [\$]	31	28	23	16	6.3
ROI [%]	1.8	1.6	1.4	0.96	0.37

to the costs implied by its degradation. These results are summarized in Table V. This analysis shows that the net return on investment (ROI: the cost saving delivered by operating the storage for 1-year, less the annual depreciation of the asset, divided by the asset's initial capital cost) is higher for the battery at lower temporal resolutions, and for the capacitor at higher resolutions. It is important to note that this is a preliminary analysis, and does not consider the 'calendar' degradation of the battery or capacitor, inclusion of which might result in a higher ROI of the battery at all resolutions (due to the relatively short service life of capacitors). Nonetheless this analysis is of interest, as it shows that using input data with sufficient temporal resolution is important in selecting the right energy storage technology.

IV. CONCLUSION & FURTHER WORK

We have demonstrated that the temporal resolution of input data can significantly affect the value determined for residential energy storage, at least for the empirical case of the users considered in the present study. We have shown that analyses carried out with data at 30-minute or 1-hourly intervals can significantly underestimate the cost-saving which energy storage is able to deliver. An assessment carried out using 30-minute interval data underestimates the cost-saving potential of a 5kWh battery by 17% on average, compared to a study using 1-minute data. We have also presented an

approach to improving the estimation of the real-time value of energy storage, when only coarser data is available. Finally, we have demonstrated that the temporal resolution of input data can affect the relative assessment of different storage technologies. It is important that existing and future studies which are completed with coarser resolution data (which is more readily available to researchers) are interpreted in light of these findings. The operational optimization techniques studied in the literature also need to be reviewed for their suitability of application at higher temporal resolutions. A finer temporal resolution will increase the complexity of many predictive optimization approaches whilst reducing the time available for this computation in an on-line setting. In addition, the cost of any necessary additional infrastructure to measure, control, log, or communicate data at higher frequency may need to be subjected to a cost/benefit analysis in relation to the additional benefit derived from the battery.

The findings in this paper are inherently empirical, therefore will not necessarily apply in other settings; where energy storage is operated for different objectives, with different tariff structures, and for users with different load patterns. Indeed, a key finding from this study is that the sensitivity of energy storage value estimates to temporal resolution of input data varies significantly from customer to customer, even within a single dataset.

ACKNOWLEDGMENT

This work was supported by Melbourne International Research and Fee Remission Scholarships, and an Australia-Indonesia Centre Tactical Research Project grant. The authors would like to thank three anonymous reviewers for their valuable comments.

REFERENCES

- [1] (2016, September) Source: Pecan Street Inc. Dataport 2016. [Online]. Available: <https://dataport.pecanstreet.org>
- [2] G. Hoogsteen *et al.*, "Generation of flexible domestic load profiles to evaluate demand side management approaches," in *2016 IEEE Int. Energy Conf. (ENERGYCON)*, April 2016.
- [3] D. B. de Castro *et al.*, "Dynamic co-simulation of agent-based controlled charging electric vehicles and their impacts on low-voltage networks," in *Intelligent Energy Systems (IWIES), 2013 IEEE Int. Workshop on*, Nov 2013, pp. 82–88.
- [4] R. Suzuki *et al.*, "Determination method of optimal planning and operation for residential PV system and storage battery based on weather forecast," in *Power and Energy (PECon), 2012 IEEE Int. Conf. on*, Dec 2012, pp. 343–347.
- [5] R. D'Agostino *et al.*, "A vanadium-redox-flow-battery model for evaluation of distributed storage implementation in residential energy systems," *IEEE Trans. on Energy Conv.*, vol. 30, no. 2, pp. 421–430, June 2015.
- [6] M. I. Fahmi *et al.*, "Study on the effect of supercapacitors in solar PV system for rural application in Malaysia," in *Power Eng. Conf. (IPEEC), 2015 50th Int. Universities*, Sept 2015.
- [7] A. Campoccia *et al.*, "Economic impact of ice thermal energy storage systems in residential buildings in presence of double-tariffs contracts for electricity," in *2009 6th Int. Conf. on the European Energy Market*, May 2009.

- [8] A. Neagoe-Stefana *et al.*, "Impact of charging electric vehicles in residential network on the voltage profile using Matlab," in *9th Int. Symposium on Advanced Topics in Electrical Eng. (ATEE)*, May 2015, pp. 787–791.
- [9] A. Ouammi *et al.*, "Optimal control of power flows and energy local storages in a network of microgrids modeled as a system of systems," *IEEE Trans. on Control Syst. Technol.*, vol. 23, no. 1, pp. 128–138, Jan 2015.
- [10] A. Parisio *et al.*, "An MPC-based energy management system for multiple residential microgrids," in *2015 IEEE Int. Conf. on Automation Science and Eng. (CASE)*, Aug 2015, pp. 7–14.
- [11] C. Keerthisinghe *et al.*, "Evaluation of a multi-stage stochastic optimisation framework for energy management of residential PV-storage systems," in *Power Eng. Conf. (AUPEC)*, 2014 *Australasian Universities*, Sept 2014.
- [12] D. Arcos-Aviles *et al.*, "Optimal fuzzy logic EMS design for residential grid-connected microgrid with hybrid renewable generation and storage," in *2015 IEEE 24th Int. Symposium on Industrial Electronics (ISIE)*, June 2015, pp. 742–747.
- [13] K. Mackey *et al.*, "Evaluation of a battery energy storage system for coordination of demand response and renewable energy resources," in *2013 4th IEEE Int. Symposium on Power Electronics for Distributed Generation Systems (PEDG)*, July 2013.
- [14] L. Igualada *et al.*, "Optimal energy management for a residential microgrid including a vehicle-to-grid system," *IEEE Trans. on Smart Grid*, vol. 5, no. 4, pp. 2163–2172, July 2014.
- [15] J. Münzberg *et al.*, "Economic evaluation, optimization and comparison of photovoltaic-battery-grid power supply system in single- and multi-family buildings with increasing share of renewable energy," in *2016 Int. Energy and Sustainability Conf. (IESC)*, June 2016, pp. 1–11.
- [16] X. Li *et al.*, "Evaluation of flywheel energy storage systems for residential photovoltaic installations," in *2016 Int. Symposium on Power Electronics, Electrical Drives, Automation and Motion (SPEEDAM)*, June 2016, pp. 255–260.
- [17] S. Patel *et al.*, "Evaluation tool for direct load control of electric vehicle charging and water heating systems," in *Smart Electric Distribution Systems and Technologies (EDST)*, 2015 *Int. Symposium on*, Sept 2015, pp. 88–92.
- [18] J. Tant *et al.*, "Multiobjective battery storage to improve pv integration in residential distribution grids," *IEEE Trans. on Sustainable Energy*, vol. 4, no. 1, pp. 182–191, Jan 2013.
- [19] S. Gottwalt *et al.*, "Modeling and valuation of residential demand flexibility for renewable energy integration," *IEEE Trans. on Smart Grid*, vol. PP, no. 99, pp. 1–10, 2016.
- [20] K. Abdulla *et al.*, "Optimal operation of energy storage systems considering forecasts and battery degradation," *IEEE Trans. on Smart Grid*, vol. PP, no. 99, 2016.
- [21] V. Muenzel *et al.*, "PV generation and demand mismatch: Evaluating the potential of residential storage," *2015 IEEE Power & Energy Society Innovative Smart Grid Technologies Conf. (ISGT)*, 2015.
- [22] B. D. Pietra and D. A. Sbordone, "Analysis of a energy storage system integrated with renewable energy plants and heat pump for residential application," in *Environment and Electrical Eng. (EEEIC)*, 2015 *IEEE 15th Int. Conf. on*, June 2015, pp. 410–414.
- [23] C. Keerthisinghe *et al.*, "Energy management of PV-storage systems: ADP approach with temporal difference learning," in *2016 Power Systems Computation Conf. (PSCC)*, June 2016.
- [24] P. Zhuang and H. Liang, "Energy storage management in smart homes based on resident activity of daily life recognition," in *2015 IEEE Int. Conf. on Smart Grid Communications (SmartGridComm)*, Nov 2015, pp. 641–646.
- [25] T. Niimura *et al.*, "Profiling residential PV output based on weekly weather forecast for home energy management system," in *2012 IEEE Power and Energy Society General Meeting*, July 2012.
- [26] L. P. M. and J. M. G. Figueiredo, "An economic analysis of a power production hybrid system," in *2008 5th Int. Conf. on the European Electricity Market*, May 2008.
- [27] R. J. M. Oviedo *et al.*, "Residential energy demand management in smart grids," in *Transmission and Distribution Conf. and Exposition (T&D)*, 2012 *IEEE PES*, May 2012.
- [28] V. Hamidi *et al.*, "The effect of responsive demand in domestic sector on power system operation in the networks with high penetration of renewables," in *Power and Energy Society General Meeting - Conversion and Delivery of Electrical Energy in the 21st Century*, 2008 *IEEE*, July 2008.
- [29] M. A. A. Pedrasa *et al.*, "The value of accurate forecasts and a probabilistic method for robust scheduling of residential distributed energy resources," in *Probabilistic Methods Applied to Power Systems (PMAPS)*, 2010 *IEEE 11th Int. Conf. on*, June 2010, pp. 587–592.
- [30] H. Nishihara *et al.*, "A real-time power distribution based on load/generation forecasting for peak-shaving," in *New Circuits and Systems Conf. (NEWCAS)*, 2013 *IEEE 11th Int.*, June 2013.
- [31] E. Pashajavid and M. A. Golkar, "Charging of plug-in electric vehicles: Stochastic modelling of load demand within domestic grids," in *20th Iranian Conf. on Electrical Eng. (ICEE2012)*, May 2012, pp. 535–539.
- [32] T. Yoshimura *et al.*, "Evaluation of community-based electric power market with multi-agent simulation," in *2013 IEEE 6th Int. Conf. on Service-Oriented Computing and Applications*, Dec 2013, pp. 343–347.
- [33] W. Xiang *et al.*, "Controlling electric vehicle charging in the smart grid," in *Internet of Things (WF-IoT)*, 2014 *IEEE World Forum on*, March 2014, pp. 341–346.
- [34] J. R. Pillai *et al.*, "Electric vehicles to support large wind power penetration in future danish power systems," in *2012 IEEE Vehicle Power and Propulsion Conf.*, Oct 2012, pp. 1475–1479.
- [35] M. A. A. Pedrasa *et al.*, "Investigating the value of making hourly operational decisions for residential distributed energy resources," in *2012 IEEE Power and Energy Society General Meeting*, July 2012.
- [36] M. D. A. Al-Falahi and M. Z. C. Wanik, "Modeling and performance analysis of hybrid power system for residential application," in *Power Eng. Conf. (AUPEC)*, 2015 *Australasian Universities*, Sept 2015.
- [37] J. Rajasekharan and V. Koivunen, "Cooperative game-theoretic approach to load balancing in smart grids with community energy storage," in *Signal Processing Conf. (EUSIPCO)*, 2015 *23rd European*, Aug 2015, pp. 1955–1959.
- [38] F. Fazelpour *et al.*, "Techno-economic analysis of hybrid power systems for a residential building in Zabol, Iran," in *2016 IEEE 16th Int. Conf. on Environment and Electrical Eng. (EEEIC)*, June 2016.
- [39] J. Jung *et al.*, "Evaluation of DER adoption in the presence of new load growth and energy storage technologies," in *2011 IEEE Power and Energy Society General Meeting*, July 2011.
- [40] Y. Guo *et al.*, "Decentralized coordination of energy utilization for residential households in the smart grid," *IEEE Trans. on Smart Grid*, vol. 4, no. 3, pp. 1341–1350, Sept 2013.
- [41] M. T. Riasat *et al.*, "Design and performance analysis for hybrid PV-diesel-battery power system for residential area in dhaka city," in *2013 IEEE 39th Photovoltaic Specialists Conf. (PVSC)*, June 2013, pp. 1515–1520.
- [42] T. Sutoh *et al.*, "Economic evaluation of a residential photovoltaic system based on a probability model using actual meteorological data," *IEEE Trans. on Energy Conv.*, vol. 2, pp. 9–15, March 1987.
- [43] I. K. A. Aswantara *et al.*, "A dynamic point of preferred operation (PPO) scheme for charging electric vehicles in a residential area," in *2013 Int. Conf. on Connected Vehicles and Expo (ICCVE)*, Dec 2013, pp. 201–206.
- [44] C. Si *et al.*, "Demand response with PHEV discharge in smart grid," in *Control Conf. (CCC)*, 2013 *32nd Chinese*, July 2013, pp. 2574–2579.
- [45] M. Hashemi and V. Agelidis, "Evaluation of voltage regulation mitigation methods due to high penetration of PV generation in residential areas," in *Renewable Energy Research and Applications (ICRERA)*, 2013 *Int. Conf. on*, Oct 2013, pp. 1180–1189.
- [46] P. Arbolea *et al.*, "Unified generating and storing capacity reliability evaluation in nearly-zero energy buildings," in *2015 IEEE Power Energy Society General Meeting*, July 2015.
- [47] O. Erdinc *et al.*, "Smart household operation considering bi-directional EV and ESS utilization by real-time pricing-based DR," *IEEE Trans. on Smart Grid*, vol. 6, no. 3, pp. 1281–1291, May 2015.
- [48] T. Schlösser *et al.*, "Analyzing the impact of home energy systems on the electrical grid," in *Power Systems Computation Conf. (PSCC)*, 2014, Aug 2014.

- [49] A. Nadkarni *et al.*, "Value analysis of 2 kW/4.4 hour energy storage in residential PV systems in Arizona," in *2013 IEEE Power Energy Society General Meeting*, July 2013.
- [50] L. Guo *et al.*, "Robust optimization for home-load scheduling under price uncertainty in smart grids," in *Computing, Networking and Communications (ICNC), 2015 Int. Conf. on*, Feb 2015, pp. 487–493.
- [51] J. Giráldez *et al.*, "A linear programming methodology to quantify the impact of PHEVs with V2G capabilities on distribution systems," in *Green Technologies Conf., 2013 IEEE*, April 2013, pp. 8–15.
- [52] R. Arulmurugan and T. Venkatesan, "Performance calculation and probability lifecycle price investigation of standalone photovoltaic power supply for a residential applications," in *2015 Online Int. Conf. on Green Eng. and Technologies (IC-GET)*, Nov 2015.
- [53] S. Tachikawa *et al.*, "Economical evaluation of photovoltaic and battery systems under real-time pricing (RTP)," in *Renewable Energy Research and Applications (ICRERA), 2013 Int. Conf. on*, Oct 2013, pp. 264–268.
- [54] C. J. C. Williams *et al.*, "Demand side management through heat pumps, thermal storage and battery storage to increase local self-consumption and grid compatibility of PV systems," in *2012 3rd IEEE PES Innovative Smart Grid Technologies Europe (ISGT Europe)*, Oct 2012.
- [55] A. J. Urquhart and M. Thomson, "Impacts of demand data time resolution on estimates of distribution system energy losses," *IEEE Trans. on Power Systems*, vol. 30, pp. 1483–1491, May 2015.
- [56] L. Kools and F. Phillipson, "Data granularity and the optimal planning of distributed generation," *Energy*, vol. 112, pp. 342 – 352, 2016.
- [57] A. Hawkes and M. Leach, "Impacts of temporal precision in optimisation modelling of micro-combined heat and power," *Energy*, vol. 30, no. 10, pp. 1759 – 1779, 2005.
- [58] K. Abdulla. The importance of temporal resolution in evaluating residential energy storage. [Online]. Available: <https://github.com/khalida/energy-storage-temporal-resolution>
- [59] Solar battery storage comparison table. [Online]. Available: <https://www.solarquotes.com.au/battery-storage/comparison-table/>
- [60] Digi-Key Eaton XLR-48R6167-R Product Page. [Online]. Available: <http://www.digikey.com/product-detail/en/eaton/XLR-48R6167-R/283-4662-ND/5956249>
- [61] Eaton XLR-48R6167-R Datasheet. [Online]. Available: <http://www.cooperindustries.com/content/dam/public/bussmann/Electronics/Resources/product-datasheets/bus-elx-ds-10510-xlr-supercapacitor-module.pdf>