NETWORK DEVICE TEST :

1) explain behaviour of hub device ?

HUB:

* It is used to connect the multiple network device

* It is a broadcast device

let us see in step by step::

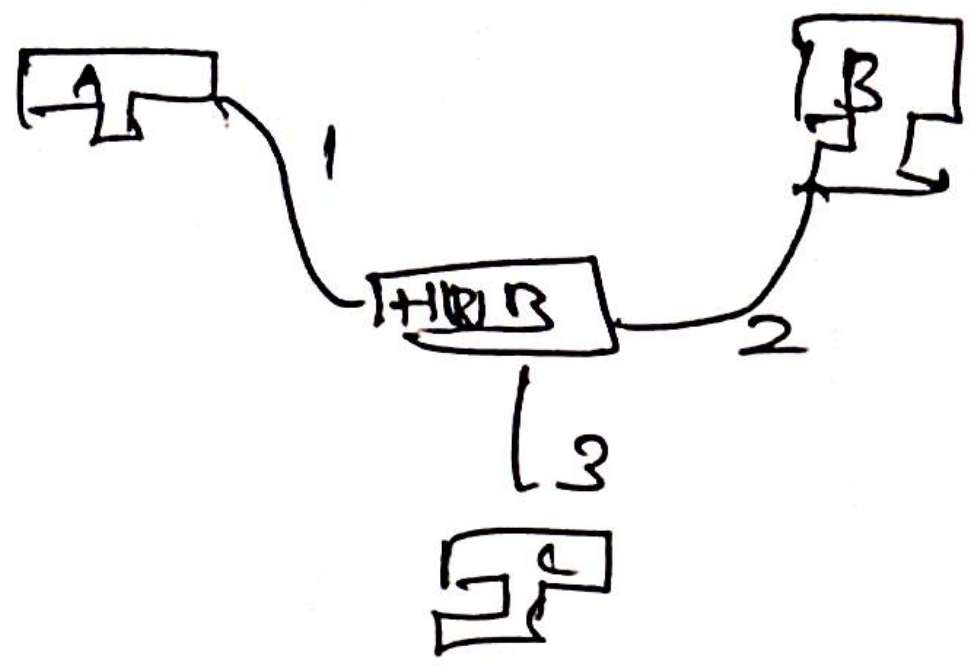

* we have three pc's name as A, B, and c and port no is A-1, B-2 and c-3.

* First of all, the data is send to PCA to PCB

* The data is can be broadcast to all PC

* send for PCB and PC-C

* Main think, one the data is shared to the hub, it can be broadcast and collision

* Because of data loss and heavy Traffic is called an half duplex.

* The hub behaviour is once you shared the data form one PC to another PC using the hub the data can be broadcasted.

2) Explain behaviour of switch device?

i) It is use to connect multiple network device

ii) It contains MAC Table

iii) It will act as broadcast + unicast

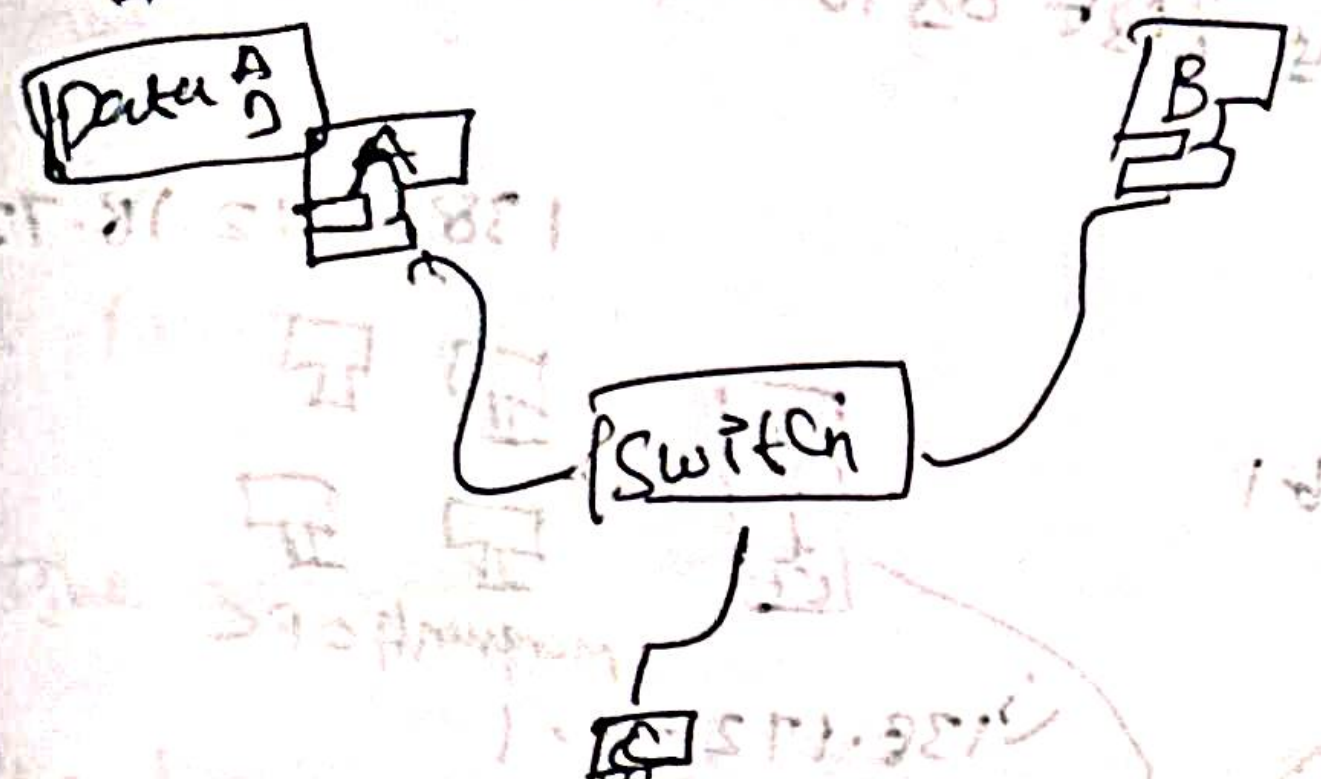

* Stared the data from one PC to another PC

* we have three PC = A, B, C first, you have to assign a ip address of A and B PC.

* The switch behaves, one the data is recived and notle on MAC Table is known as the port number and MAC address

Address learning

* The first time, you will send the data and stores of MAC table and broadcast to all PC

* than Return from PCB to PCA it will comes in swith it will be noted the PCB port number and MAC address is on MAC Table and check it whether the destination PC and directly send to the destination PC

* This will called as broadcast + unicast.

3.) Explain behaioun of Router device?

Router:

* It is use to breake the broadcast domain
* It is a unicast doice
* It cointains Routing Table
* Routing Table cointains list of Rule.

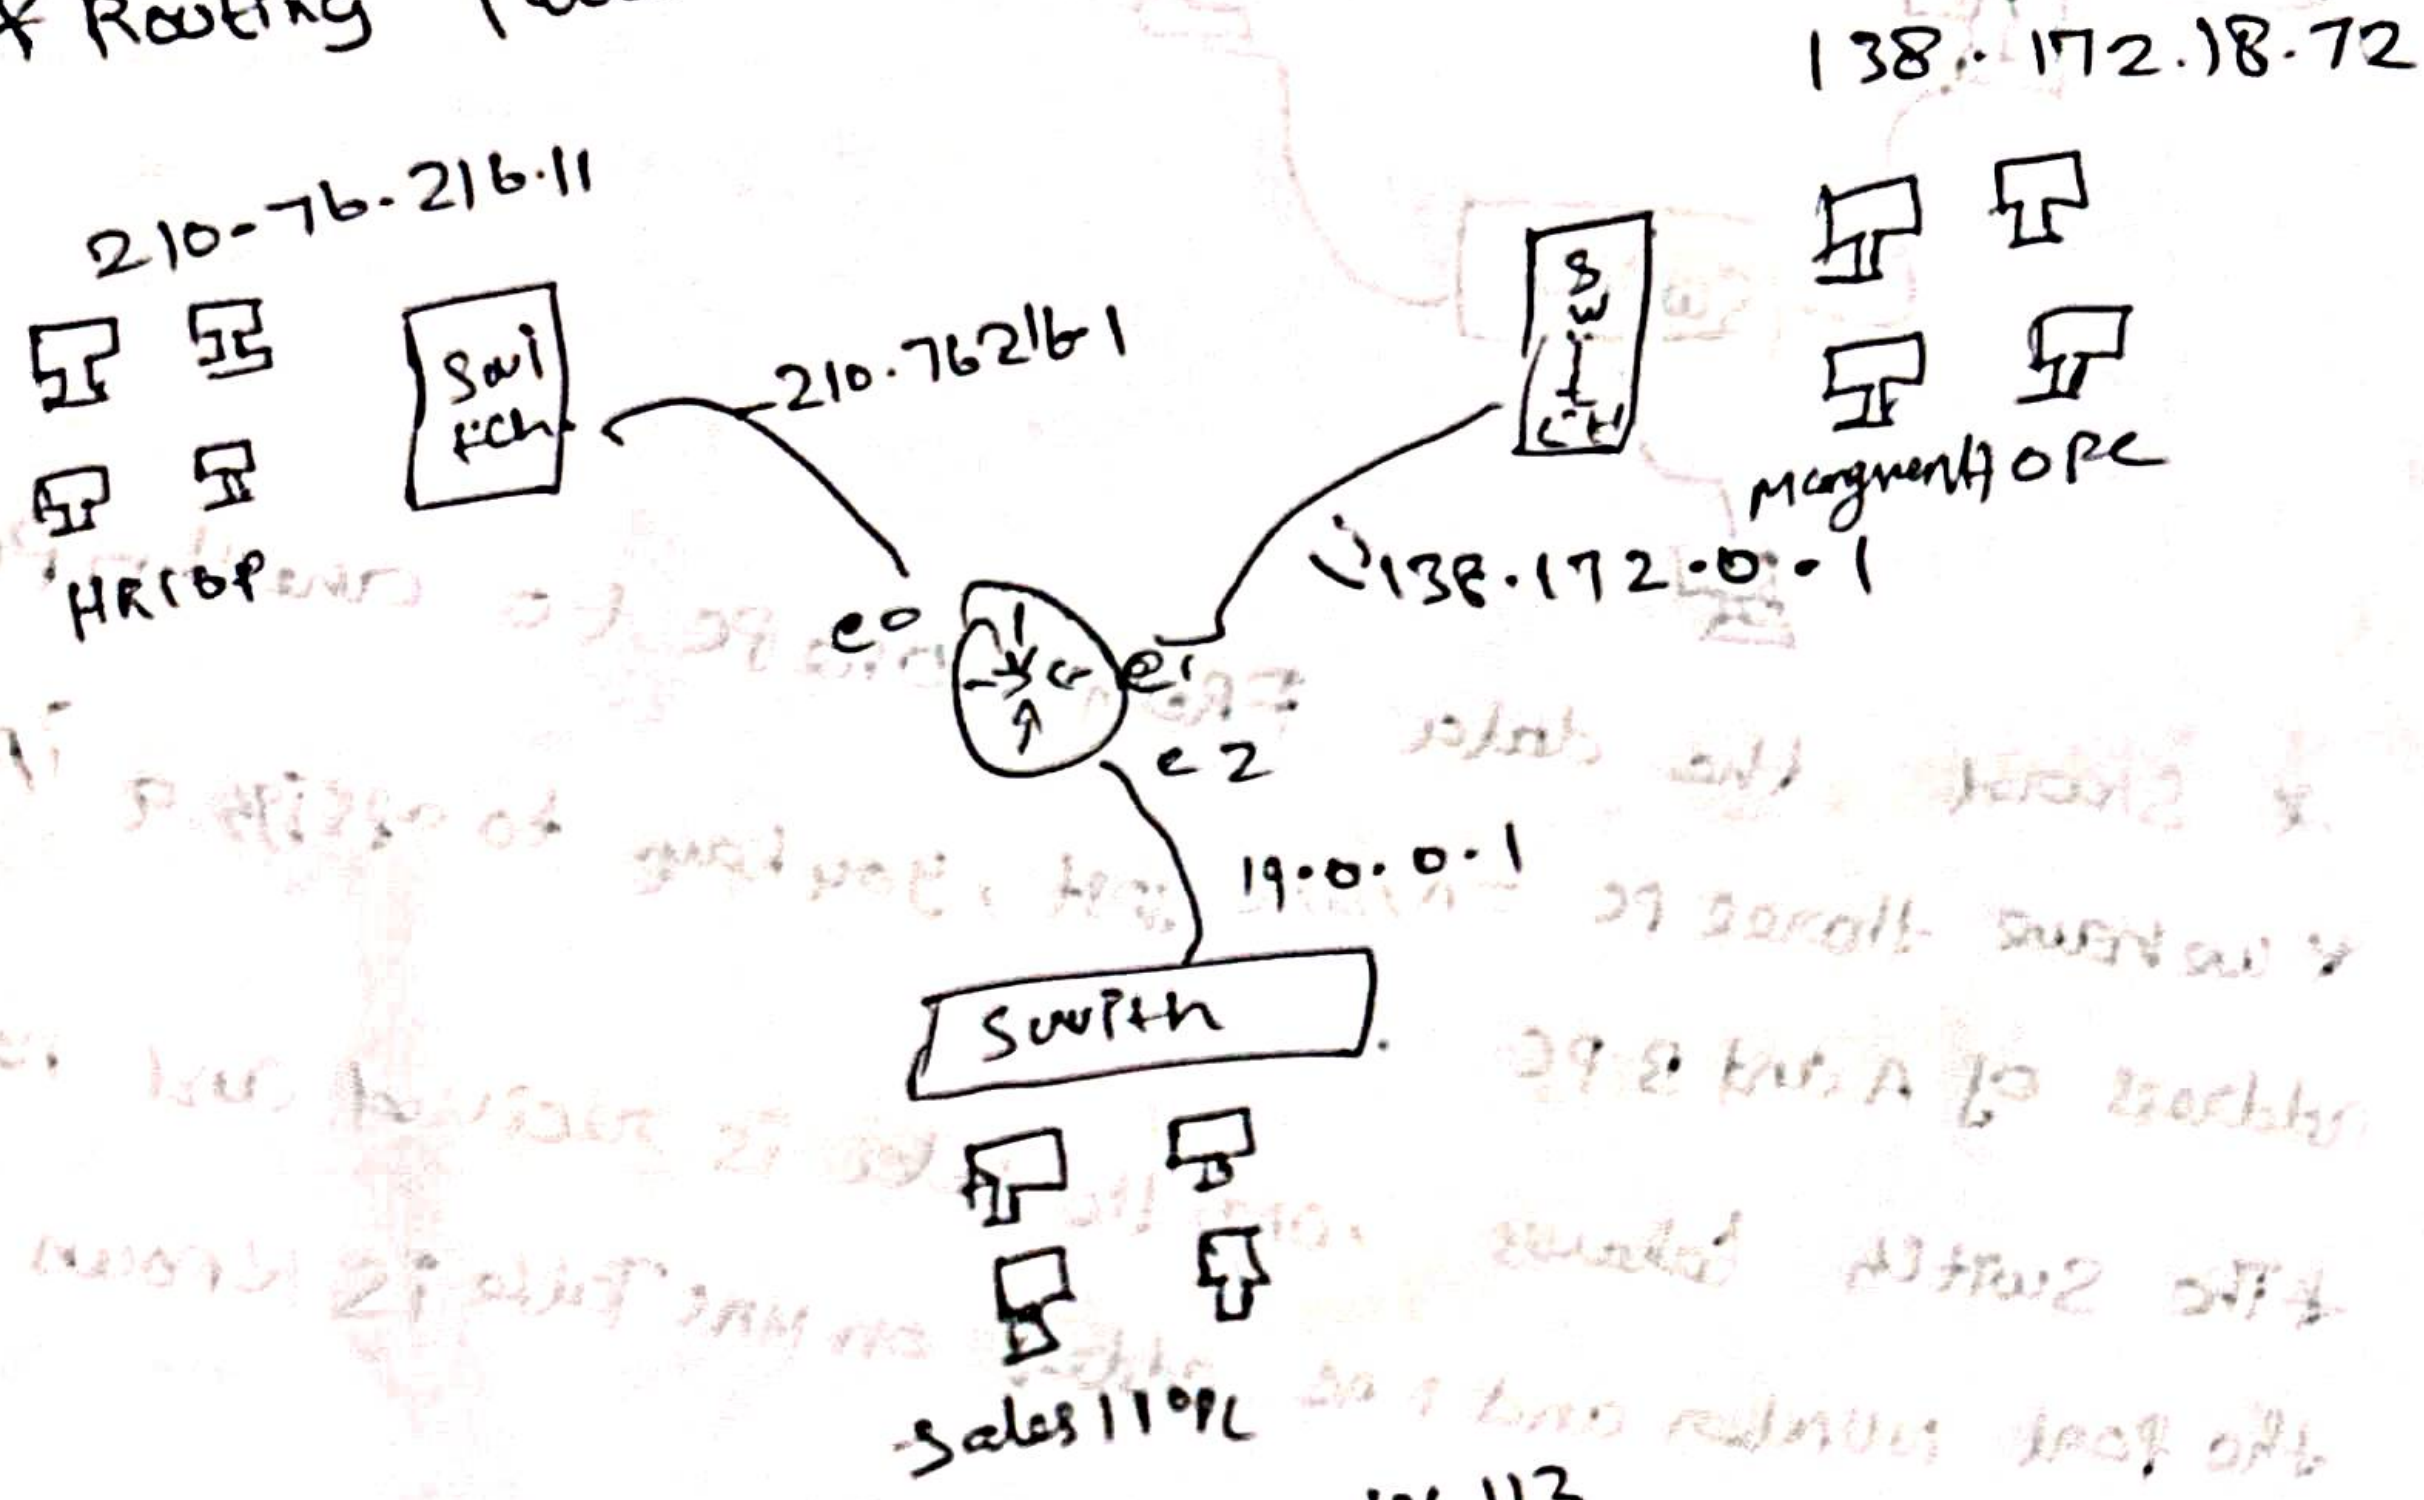

(i) You have three department as HR, Mangangnent, sales Each departments PC has connected by the Swith can be connected by the Router device.

(ii) Router device Performs the data sharing by the way of Unicast

(ii) Each department have ip address and each department have to assign a ip to the Router

* The Router device notes the information of networkID prefix and interferne name in the Routing Table.

* Router —> ip —> 3 information

* The department to department can be share the data using the Router device by the way of unicast . is called Router device .