WPE55 PLUG

FORMWORK Accessories - Plugs for Concrete Tie Rods

WPE55 - PLUG Exposed concrete plug made of TPE for easy closure of the formwork spacer for exposed concrete requirements. Only hammer in, do not glue. Further colors available on request.

Advantages

- Fast and clean sealing of tie holes
- Individual design opportunities
- Watertight sealing of structures
- Smooth, almost pore-free concrete surface

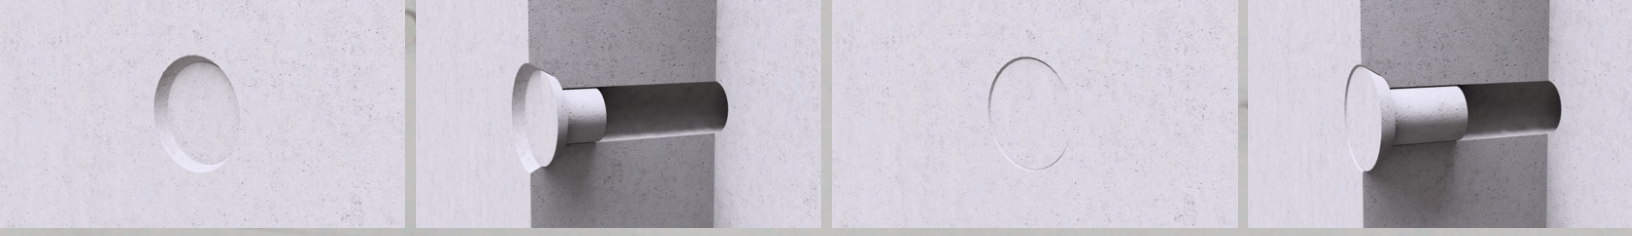

Application

After removing **formwork**, the tie rod anchor and the cone, the plug is driven into the tie hole with a rubber mallet. To make driving easier, a second, inverted plug can be used as a driving-in-aid. The usability of the product in the respective installation situation must be checked by the user! The solid design of the plug increases the safety of the system. Installation depth approx 50 mm.

Packing: 250 pcs Bag / Box

Sr. No.	Properties	Unit	Standard	Value
1	Hardness	Shore A	ISO 868	72
2	MFI @ 90 Deg / 2.16 Kgs	Gm / 10 min	ASTM D1238	51.2
3	Tensile stength at Break Cross Direction	Mpa	ISO 37	5.4
4	Elongation a Break Cross Direction	%	ISO 37	971
5	Tear Strength Cross Direction	kN / m	ISO 34	12.8

Rashi Marketing
62, Siddharth Apt., Parekh Lane, Kandivali (W), Mumbai - 400067
Mob.: 9821152164 • Email: somaiyadhaval5@gmail.com

MAKE IN INDIA

Technical data's present an average values. Information and instructions are based on our experience and knowledge. It's on responsibility of the customer to make sample test on various surfaces in order to check the product in particular purposes, taking in consideration all parameters. In case of any question please contact our production and sales service.