


UART Communication Protocol (Pi to ESP32)

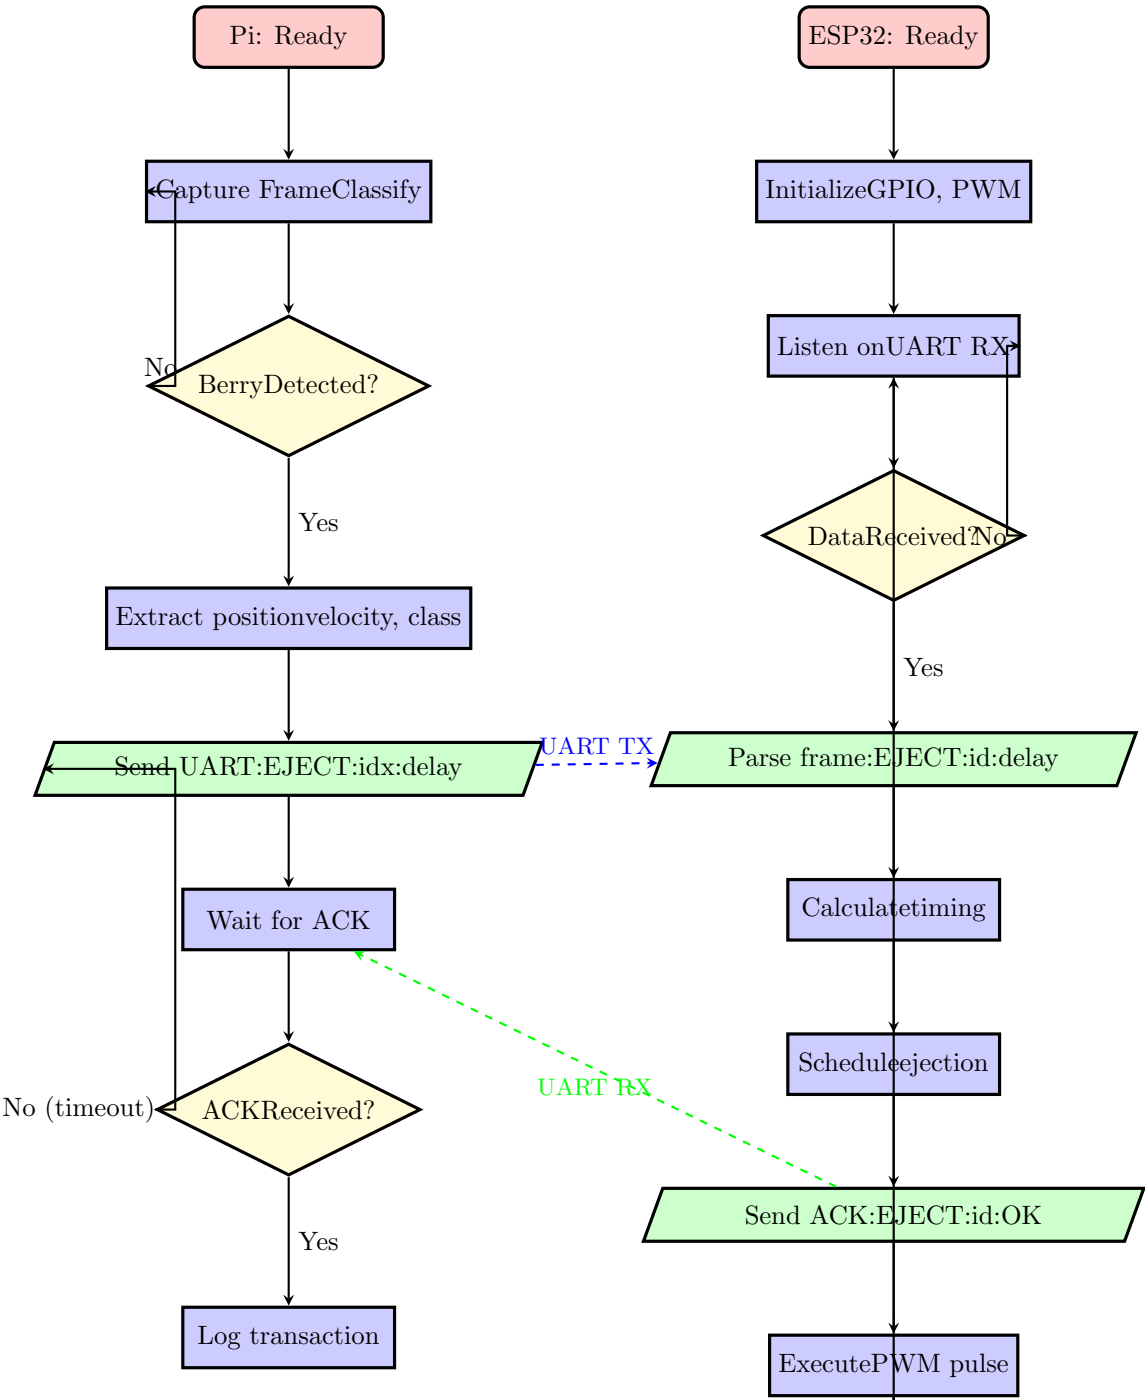

UART Frame Format (ASCII):

EJECT: {index}:{delay_ms}\n
Example: EJECT:2:45\n

ACK Response:

ACK:EJECT: {index}\n
Example: ACK:EJECT:2\n

Baud Rate: 115200 bps, 8N1