




Imagem da tipologia da rede:

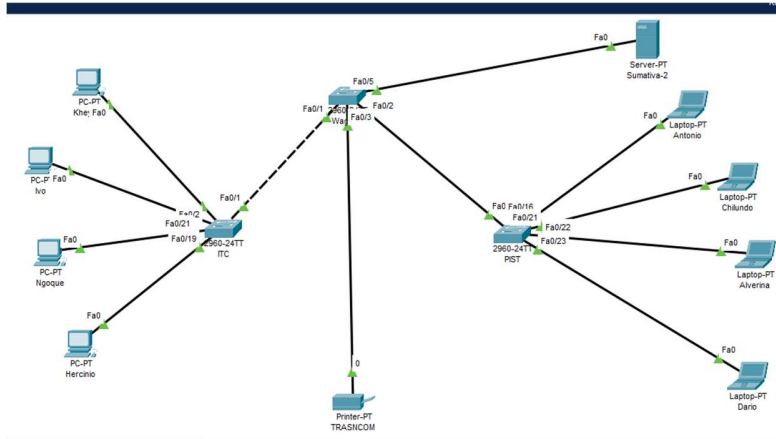


IP do pc(0):

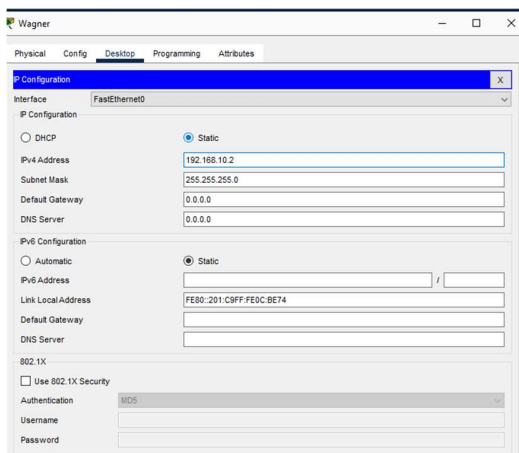


IP do pc(1):

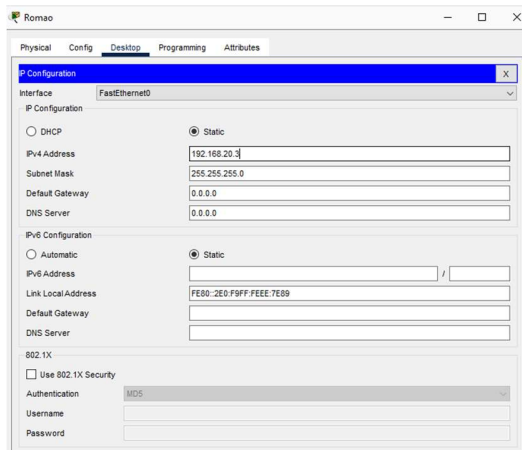


IP do pc(2):

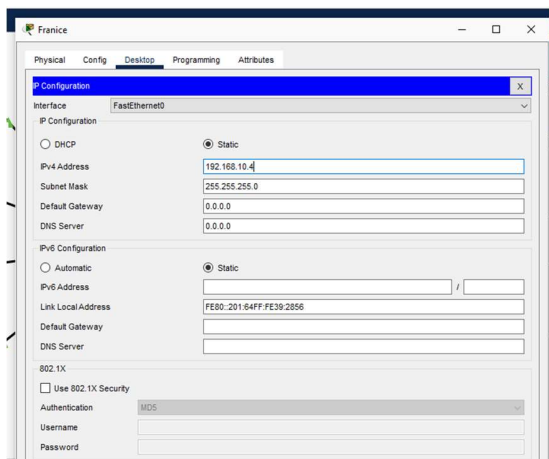


IP do pc(3):

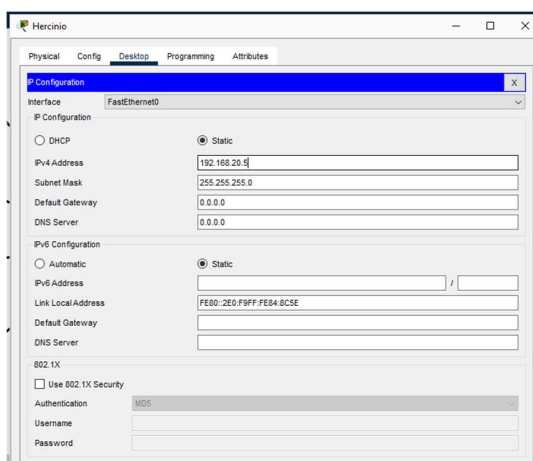


IP do LT(0):

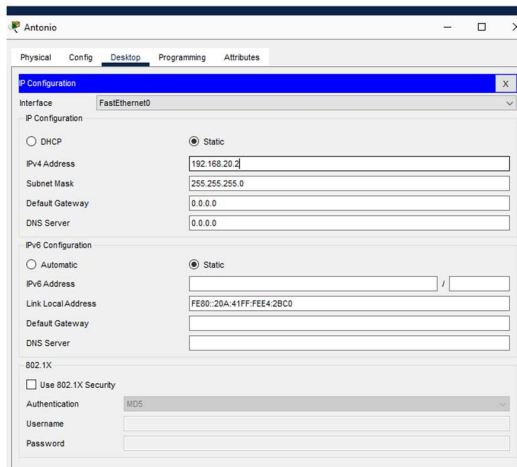


IP do LT(1):

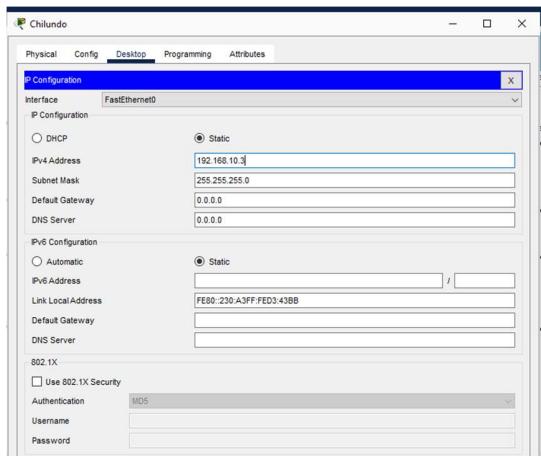

IP do LT(2):

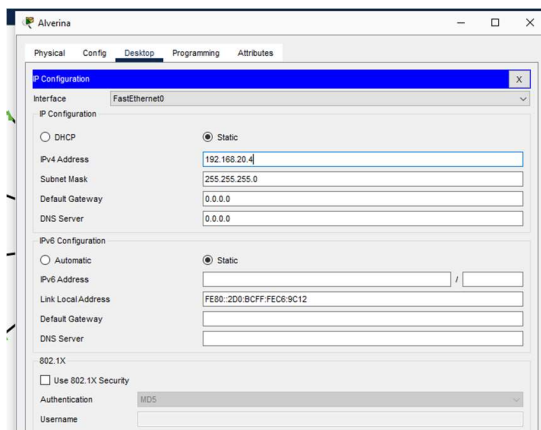

IP do LT(3):

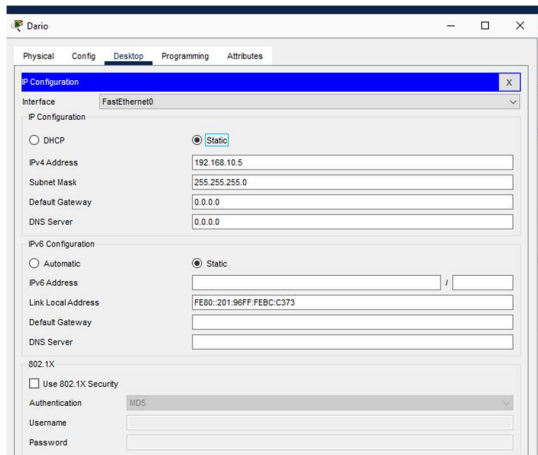

Teste a conectividade entre os LT(0) e pc(3):

```
C:\>ping 192.168.20.2

Pinging 192.168.20.2 with 32 bytes of data:

Reply from 192.168.20.2: bytes=32 time=1ms TTL=128
Reply from 192.168.20.2: bytes=32 time=1ms TTL=128
Reply from 192.168.20.2: bytes=32 time=1ms TTL=128
Reply from 192.168.20.2: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms

C:\>
```

Teste a conectividade entre os pc(2) e LT(3):

```
C:\>ping 192.168.10.5

Pinging 192.168.10.5 with 32 bytes of data:

Reply from 192.168.10.5: bytes=32 time=1ms TTL=128
Reply from 192.168.10.5: bytes=32 time=1ms TTL=128
Reply from 192.168.10.5: bytes=32 time=1ms TTL=128
Reply from 192.168.10.5: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.10.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Teste a conectividade entre os pc(1) e Web Server:

```
C:\>ping 192.168.20.6

Pinging 192.168.20.6 with 32 bytes of data:

Reply from 192.168.20.6: bytes=32 time=1ms TTL=128
Reply from 192.168.20.6: bytes=32 time=1ms TTL=128
Reply from 192.168.20.6: bytes=32 time=1ms TTL=128
Reply from 192.168.20.6: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.20.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Teste a conectividade entre os pc(0) e Printer:

```
C:\>ping 192.168.10.6

Pinging 192.168.10.6 with 32 bytes of data:

Reply from 192.168.10.6: bytes=32 time=1ms TTL=128
Reply from 192.168.10.6: bytes=32 time=3ms TTL=128
Reply from 192.168.10.6: bytes=32 time=1ms TTL=128
Reply from 192.168.10.6: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.10.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 0ms

C:\>
```

Teste a conectividade entre os LT(2) e Printer:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.6

Pinging 192.168.10.6 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.10.6:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
```

Teste de conectividade:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	Antonio	Hercinio	ICMP	Green	0.000	N	0	(edit)	(delete)
	Successful	Franice	Dario	ICMP	Dark Green	0.000	N	1	(edit)	(delete)
	Successful	Wagner	TRASNCOM	ICMP	Teal	0.000	N	2	(edit)	(delete)
	Failed	Alverina	TRASNCOM	ICMP	Cyan	0.000	N	3	(edit)	(delete)

Cisco Packet Tracer25°C Nublado14:5407-11-2025ENG