BÁO CÁO THỰC HÀNH

Bài thực hành số 5

Môn học: Nhập môn Mạng máy tính

Lớp: IT005.Q110.2

THÀNH VIÊN THỰC HIỆN:

STT	Họ và tên	MSSV
1	Tăng Anh Khôi	24520868

Điểm tự đánh giá
10

MỤC LỤC

Task 1.....2
Task 2.....3
Task 3.....10

Task 1

- Kết quả tổng quát

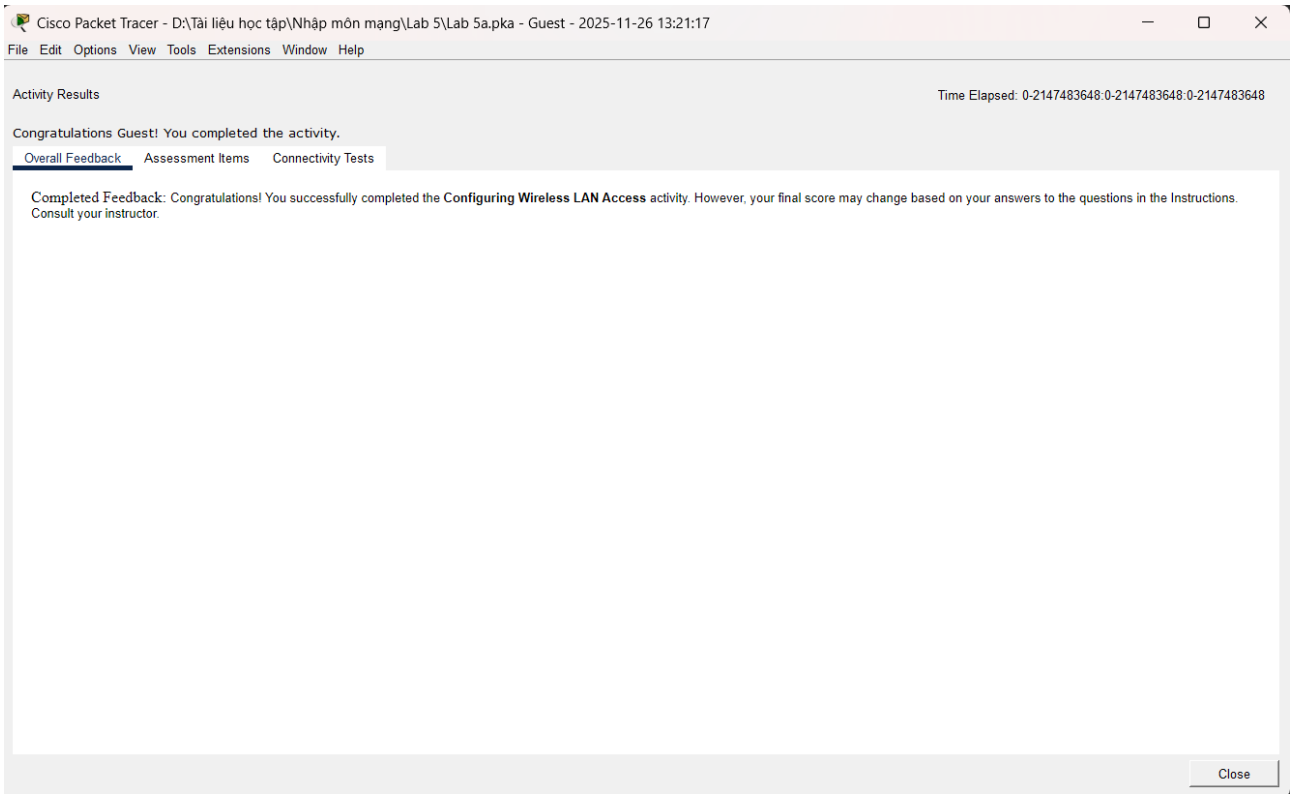

- Kết quả chi tiết

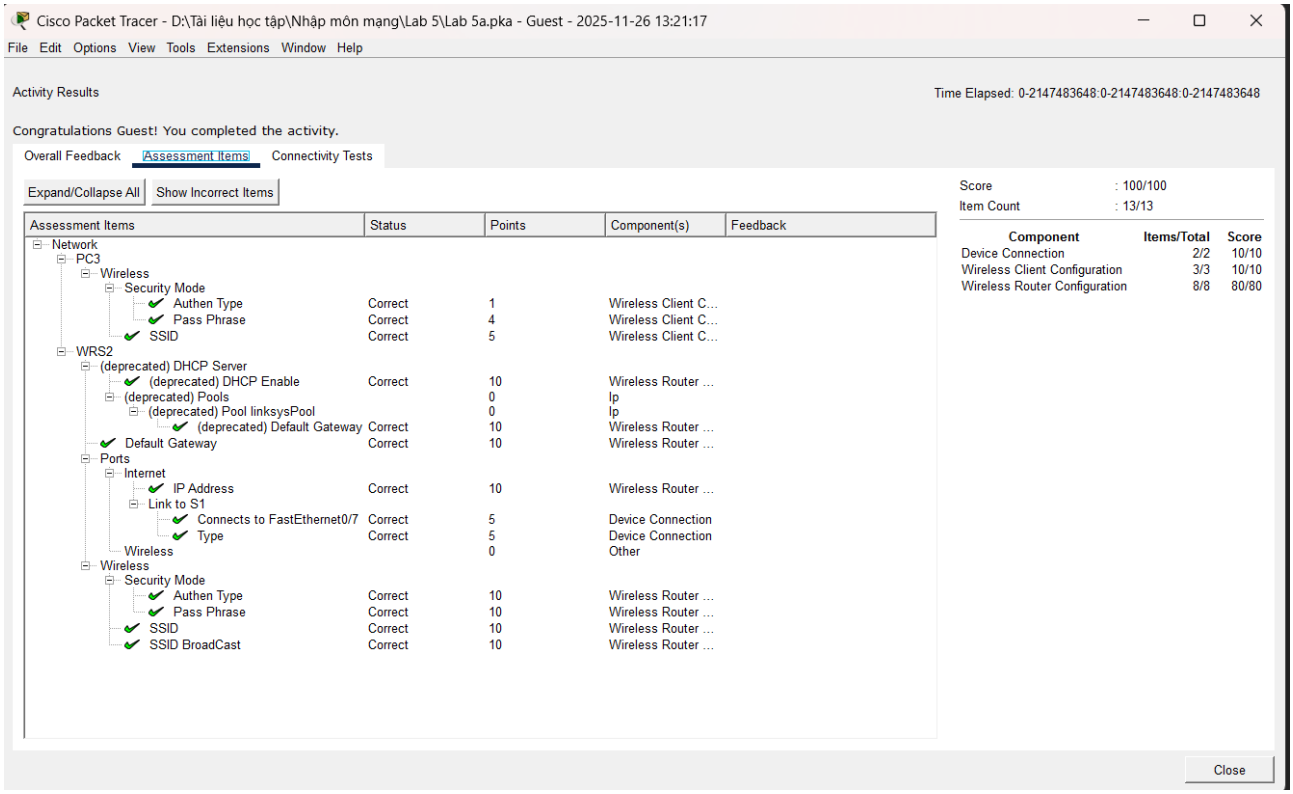

Task 2

Ping PC1 đến PC4

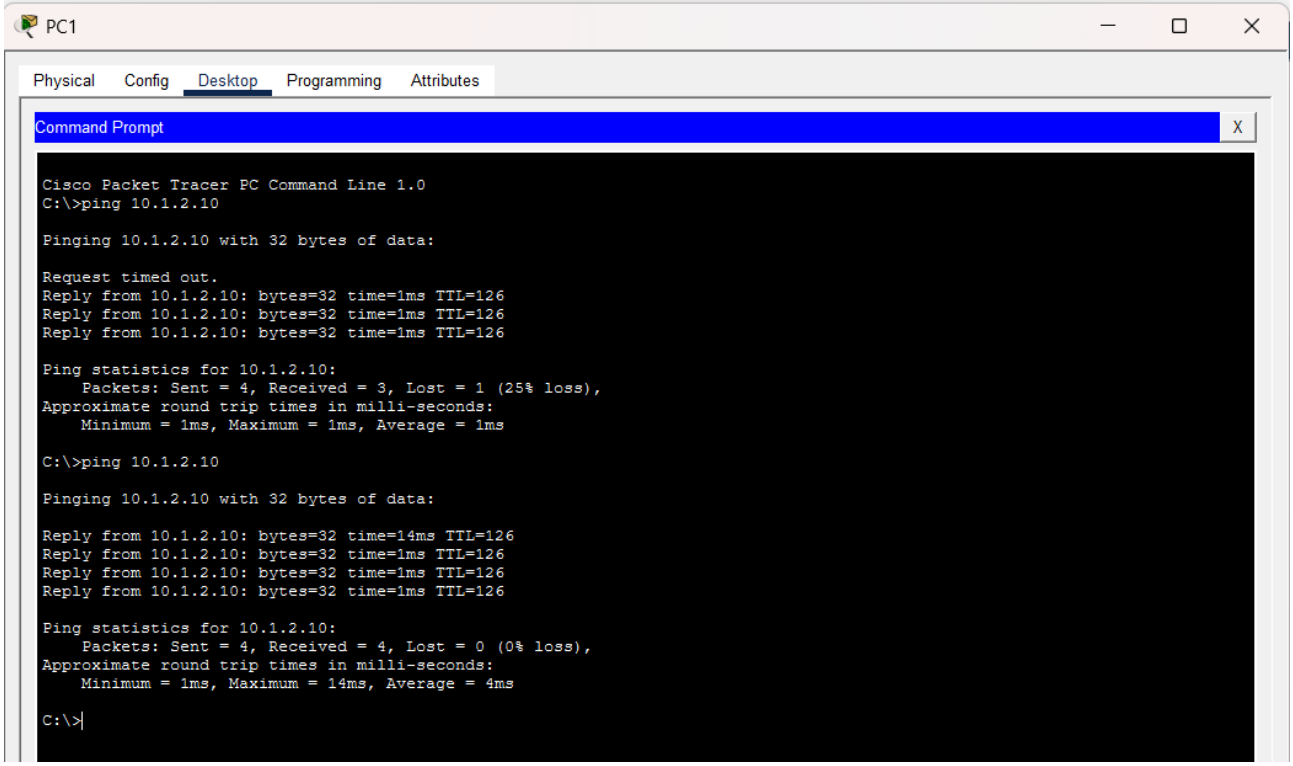

Ping R2 đến PC2

```
R2#ping 192.168.11.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.11.10, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/10/19 ms

R2#
```

Lệnh R1#show run

```
R1#show run
Building configuration...

Current configuration : 1222 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname R1
!
!
!
enable secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO1941/K9 sn FTX15240P9D
!
!
!
!
!
!
!
!
!
!
!
!
spanning-tree mode pvst
!
!
!
```

```
!
spanning-tree mode pvst
!
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 192.168.10.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 192.168.11.1 255.255.255.0
 duplex auto
 speed auto
!
interface Serial0/0/0
 ip address 209.165.200.225 255.255.255.252
 clock rate 64000
!
interface Serial0/0/1
 no ip address
 clock rate 2000000
 shutdown
!
interface FastEthernet0/1/0
 switchport mode access
 shutdown
!
interface FastEthernet0/1/1
 switchport mode access
 shutdown
!
interface FastEthernet0/1/2
 switchport mode access
 shutdown
!
interface FastEthernet0/1/3
 switchport mode access
 shutdown
!
interface Vlan1
 no ip address
```

```
 shutdown
!
interface FastEthernet0/1/2
 switchport mode access
 shutdown
!
interface FastEthernet0/1/3
 switchport mode access
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
router eigrp 1
 network 192.168.10.0
 network 192.168.11.0
 network 209.165.200.0
 auto-summary
!
ip classless
!
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
 password 7 0822455D0A16
 login
!
line aux 0
!
line vty 0 4
 login
!
!
!
end

R1#
```

Lệnh R1#show ip interface brief

```
R1#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     192.168.10.1    YES manual up                    up
GigabitEthernet0/1     192.168.11.1    YES manual up                    up
Serial0/0/0            209.165.200.225 YES manual up                    up
Serial0/0/1            unassigned      YES unset  administratively down down
FastEthernet0/1/0      unassigned      YES unset  administratively down down
FastEthernet0/1/1      unassigned      YES unset  administratively down down
FastEthernet0/1/2      unassigned      YES unset  administratively down down
FastEthernet0/1/3      unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
R1#
```

Lệnh R1#show ip route

```
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

D    10.0.0.0/8 [90/2170112] via 209.165.200.226, 00:10:03, Serial0/0/0
     192.168.10.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.10.0/24 is directly connected, GigabitEthernet0/0
L       192.168.10.1/32 is directly connected, GigabitEthernet0/0
     192.168.11.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.11.0/24 is directly connected, GigabitEthernet0/1
L       192.168.11.1/32 is directly connected, GigabitEthernet0/1
     209.165.200.0/24 is variably subnetted, 3 subnets, 3 masks
D       209.165.200.0/24 is a summary, 00:10:10, Null0
C       209.165.200.224/30 is directly connected, Serial0/0/0
L       209.165.200.225/32 is directly connected, Serial0/0/0

R1#
```

Lệnh R2#show run

```
R2#show run
Building configuration...

Current configuration : 927 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
service password-encryption
!
hostname R2
!
!
!
enable secret 5 $1$mERr$9cTjUIEqNGurQiFU.ZeCi1
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
license udi pid CISCO1941/K9 sn FTX1524E7C4
!
!
!
!
!
!
!
!
!
!
!
!
!
spanning-tree mode pvst
!
!
```

```
!
spanning-tree mode pvst
!
!
!
!
!
!
interface GigabitEthernet0/0
 ip address 10.1.1.1 255.255.255.0
 duplex auto
 speed auto
!
interface GigabitEthernet0/1
 ip address 10.1.2.1 255.255.255.0
 duplex auto
 speed auto
!
interface Serial0/0/0
 ip address 209.165.200.226 255.255.255.252
!
interface Serial0/0/1
 no ip address
 clock rate 2000000
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
router eigrp 1
 network 10.0.0.0
 network 209.165.200.0
 auto-summary
!
ip classless
!
ip flow-export version 9
!
!
!
no cdp run
!
!
!
```

```
ip flow-export version 9
!
!
!
no cdp run
!
!
!
!
!
line con 0
 password 7 0822455D0A16
 login
!
line aux 0
!
line vty 0 4
 login
!
!
!
end
```

Lệnh R2#show ip interface brief

```
R2#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0     10.1.1.1        YES manual up                    up
GigabitEthernet0/1     10.1.2.1        YES manual up                    up
Serial0/0/0            209.165.200.226 YES manual up                    up
Serial0/0/1            unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
R2#
```

Lệnh R2#show ip route

```
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 5 subnets, 3 masks
D       10.0.0.0/8 is a summary, 00:13:13, Null0
C       10.1.1.0/24 is directly connected, GigabitEthernet0/0
L       10.1.1.1/32 is directly connected, GigabitEthernet0/0
C       10.1.2.0/24 is directly connected, GigabitEthernet0/1
L       10.1.2.1/32 is directly connected, GigabitEthernet0/1
D    192.168.10.0/24 [90/2170112] via 209.165.200.225, 00:13:13, Serial0/0/0
D    192.168.11.0/24 [90/2170112] via 209.165.200.225, 00:13:13, Serial0/0/0
     209.165.200.0/24 is variably subnetted, 3 subnets, 3 masks
D       209.165.200.0/24 is a summary, 00:13:13, Null0
C       209.165.200.224/30 is directly connected, Serial0/0/0
L       209.165.200.226/32 is directly connected, Serial0/0/0
 --More--
```

- Kết quả tổng quát

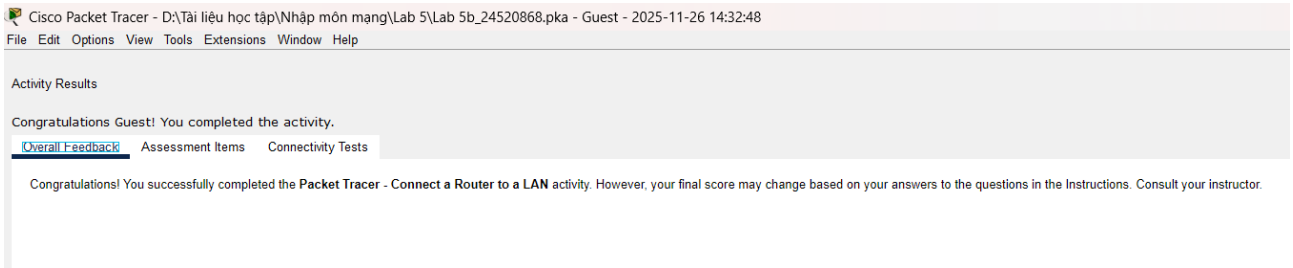

- Kết quả chi tiết

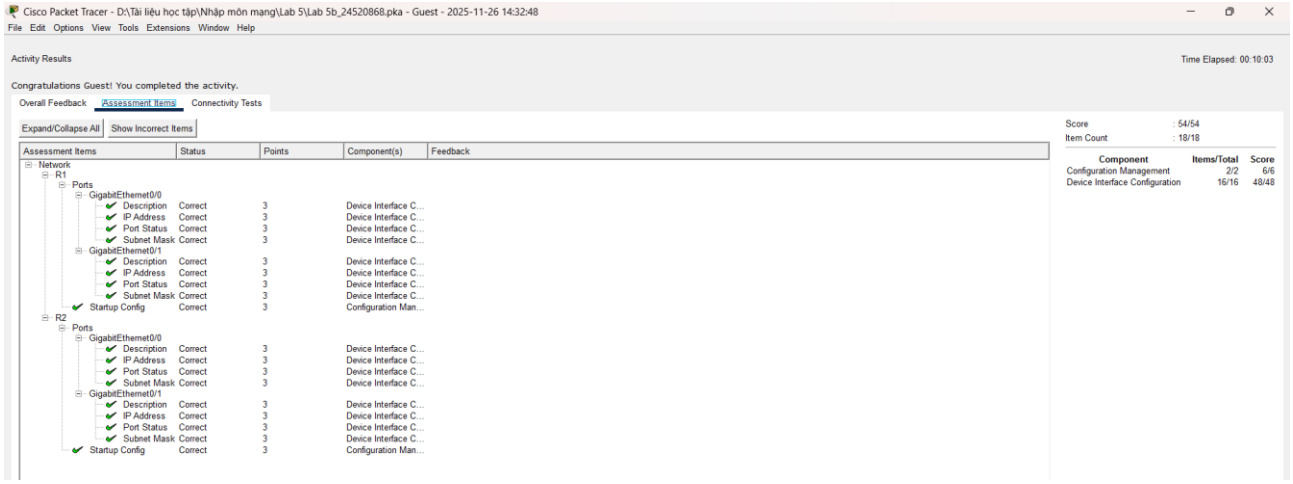

Task 3

- Có 8 mạng con

- Chia mạng con từ địa chỉ đã cho:

STT	Địa chỉ mạng	Địa chỉ đầu	Địa chỉ cuối	Địa chỉ brodcast
0	192.168.100.0	192.168.100.1	192.168.100.30	192.168.100.31
1	192.168.100.32	192.168.100.33	192.168.100.62	192.168.100.63
2	192.168.100.64	192.168.100.65	192.168.100.94	192.168.100.95
3	192.168.100.96	192.168.100.97	192.168.100.126	192.168.100.127
4	192.168.100.128	192.168.100.129	192.168.100.158	192.168.100.159
5	192.168.100.160	192.168.100.161	192.168.100.190	192.168.100.191
6	192.168.100.192	192.168.100.193	192.168.100.222	192.168.100.223
7	192.168.100.224	192.168.100.225	192.168.100.254	192.168.100.255

- Bảng địa chỉ

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	G0/0	192.168.100.1	255.255.255.224	NA
	G0/1	192.168.100.33	255.255.255.224	NA
	S0/0/0	192.168.100.129	255.255.255.224	NA
R2	G0/0	192.168.100.65	255.255.255.224	NA
	G0/1	192.168.100.97	255.255.255.224	NA
	S0/0/0	192.168.100.158	255.255.255.224	NA
S1	VLAN 1	192.168.100.2	255.255.255.224	192.168.100.1
S2	VLAN 1	192.168.100.34	255.255.255.224	192.168.100.33
S3	VLAN 1	192.168.100.66	255.255.255.224	192.168.100.65
S4	VLAN 1	192.168.100.98	255.255.255.224	192.168.100.97
PC1	NIC	192.168.100.30	255.255.255.224	192.168.100.1
PC2	NIC	192.168.100.62	255.255.255.224	192.168.100.33
PC3	NIC	192.168.100.94	255.255.255.224	192.168.100.65
PC4	NIC	192.168.100.126	255.255.255.224	192.168.100.97

- Kết quả tổng quát

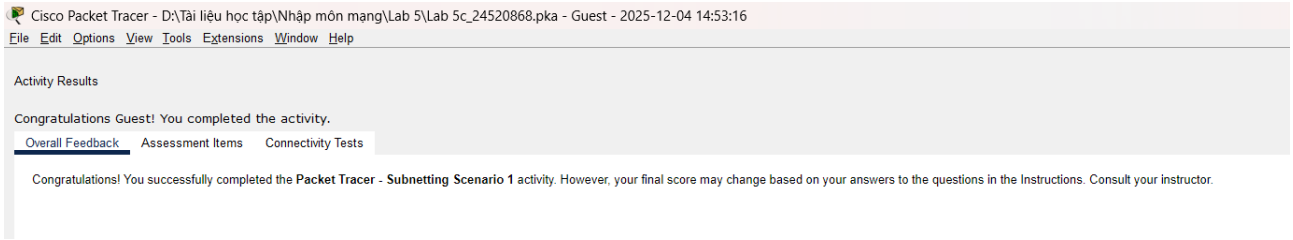
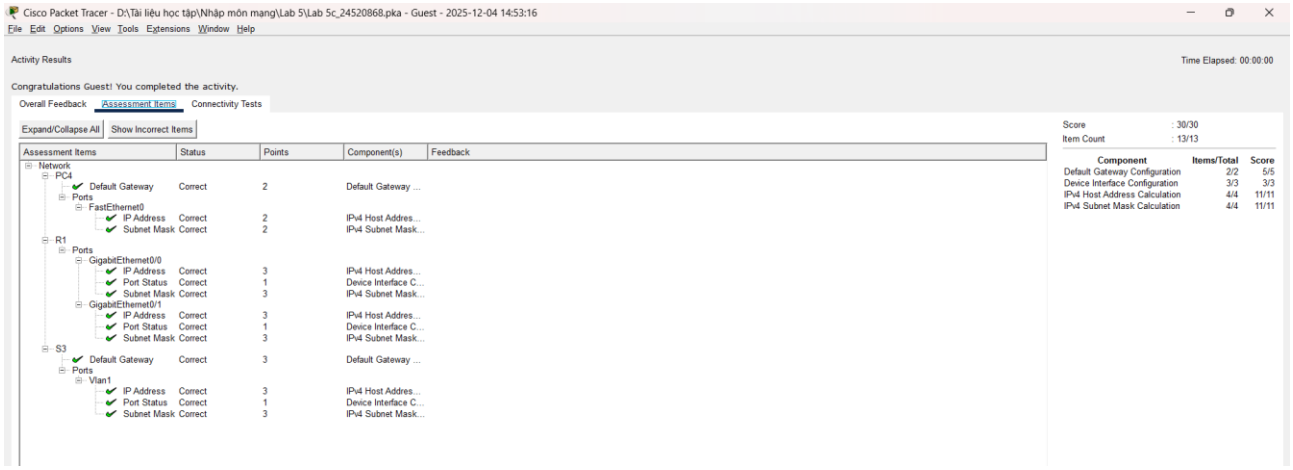
- Kết quả chi tiết