

1

2

3

4

5

6

A

A

B

B

C


C

D

D


E

E

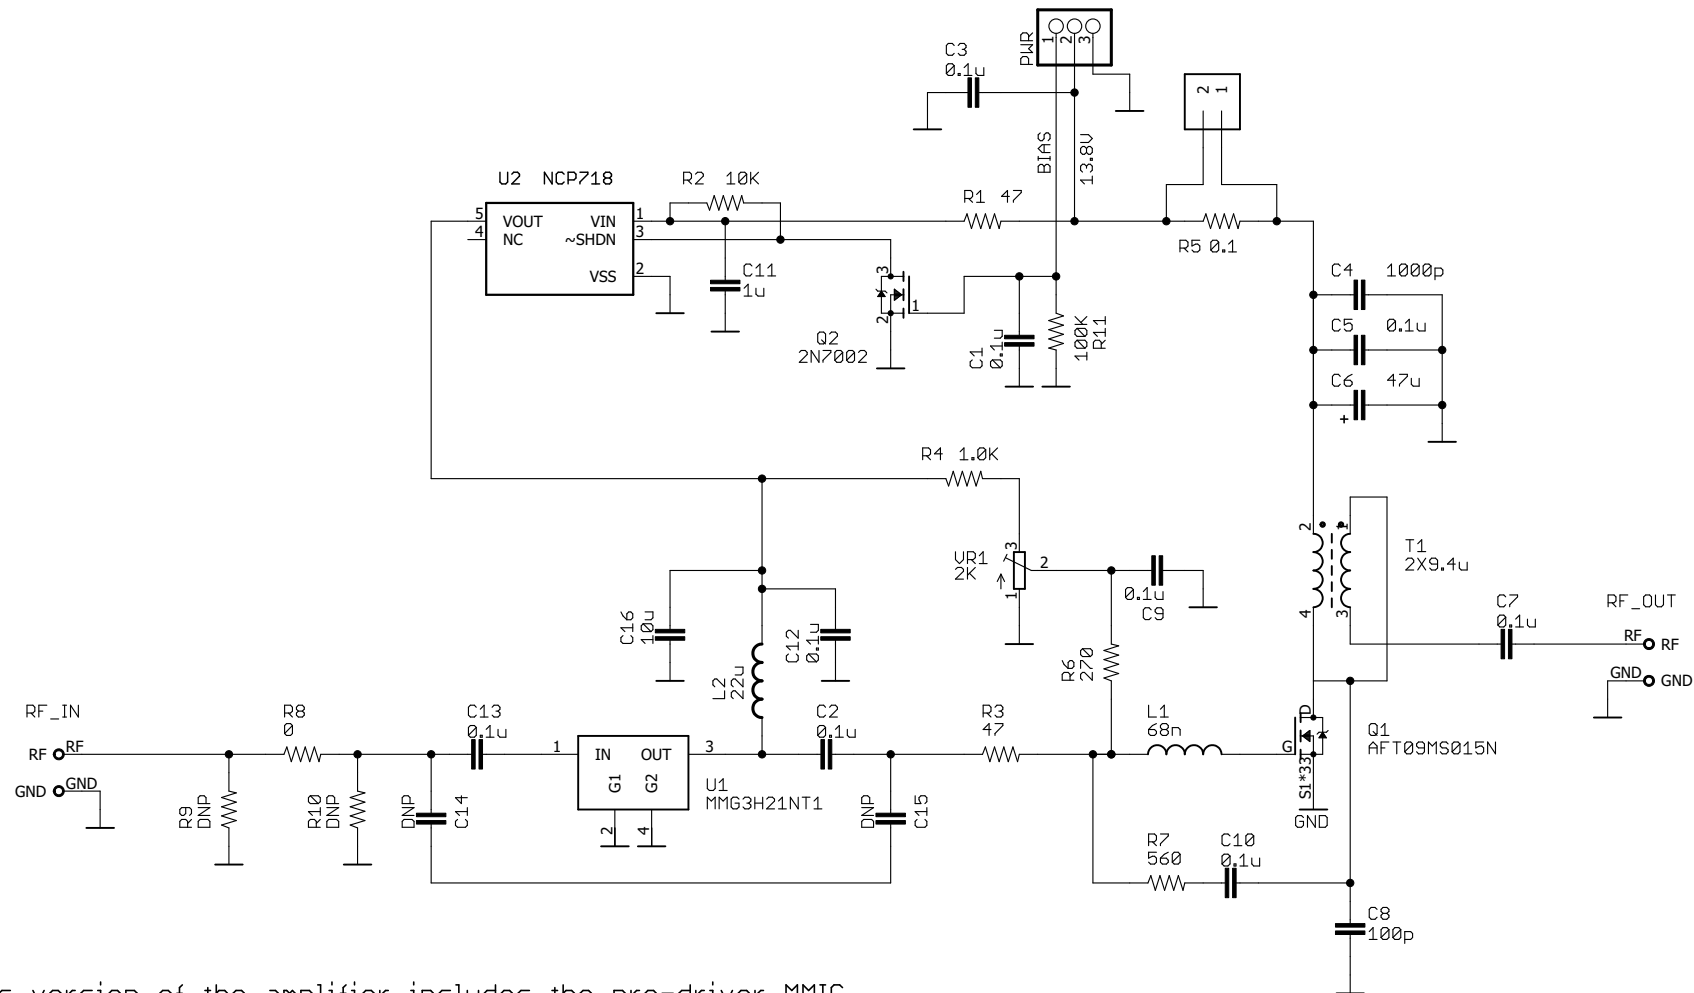

This version of the amplifier includes the pre-driver MMIC.  
 Drive level of -3 - 0 dBm for 5W output.  
 Do not exceed +10 dBm (10 mW) input.  
 For higher drive levels use R8, R9, R10 as an input attenuator.

Set UR1 for a bias of 100 mA; 0.1V across R5.  
 VDD = 13.8V  
 BIAS signal: <1V Bias On, >2V Bias Off



HobbyPCB, LLC		
TITLE: AFT09_Driver_Rev_B		
Document Number:	HR50-DRV_C	REV: C
Date: not saved!	Sheet: 1/1	