Part # CSHHNDI3TM-SUS-M5-14

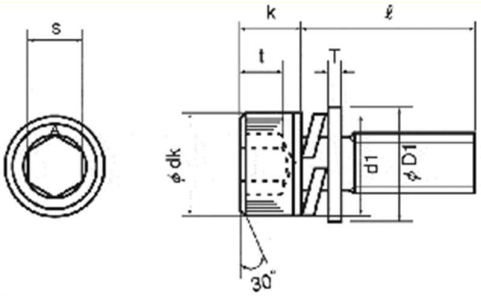

Screw Nominal		M2	M2.5 (2.6)	M3	M4	M5	M6	M8
Pitch		0.4	0.45	0.5	0.7	0.8	1.0	1.25
b	Reference	16	17	18	20	22	24	28
dk	Reference Dimensions	3.8	4.5	5.5	7	8.5	10	13
	Maximum	3.98	4.68	5.68	7.22	8.72	10.22	13.27
	Minimum	3.62	4.32	5.32	6.78	8.28	9.78	12.73
k	Reference Dimensions	2	2.5 (2.6)	3	4	5	6	8
	Minimum	1.86	2.36 (2.46)	2.86	3.82	4.82	5.7	7.64
s	Reference Dimensions	1.5	2	2.5	3	4	5	6
	Minimum	1.52	2.02	2.52	3.02	4.02	5.02	6.02
t	Minimum	1	1.1	1.3	2	2.5	3	4
Flat Washer D1 x T		5×0.3	6.5×0.5	7×0.5	9×0.8	10×1.0	12.5×1.6	17×1.6
Spring Washer	d1 (Maximum)	4	4.8	5.5	7	8.5	11.5	14.5
Maximum Value from Seat to Thread		2.1	2.7	3.0	4.4	5.4	6.9	8.4

Nominal of Thread (M)	5	**Length L (mm)**	14
Pitch(mm)	0.8	**Detailed Shape**	[Standard] Standard
Mounting Hole Shape	[Hex Socket] Hex Socket	**Basic Shape**	Standard (Round)
Material	[Stainless Steel] Stainless Steel	**Surface Treatment**	-
Thread Type	Metric coarse	**Tip Shape**	[Flat End] Flat End
Additional Shape	Washer Included	**Sales Unit**	Low Quantity (can be purchased from one)