NOTES:

3. T-HANDLE TO BE RED NYLON
4. TRAVEL: 2.0 INCHES MINIMUM

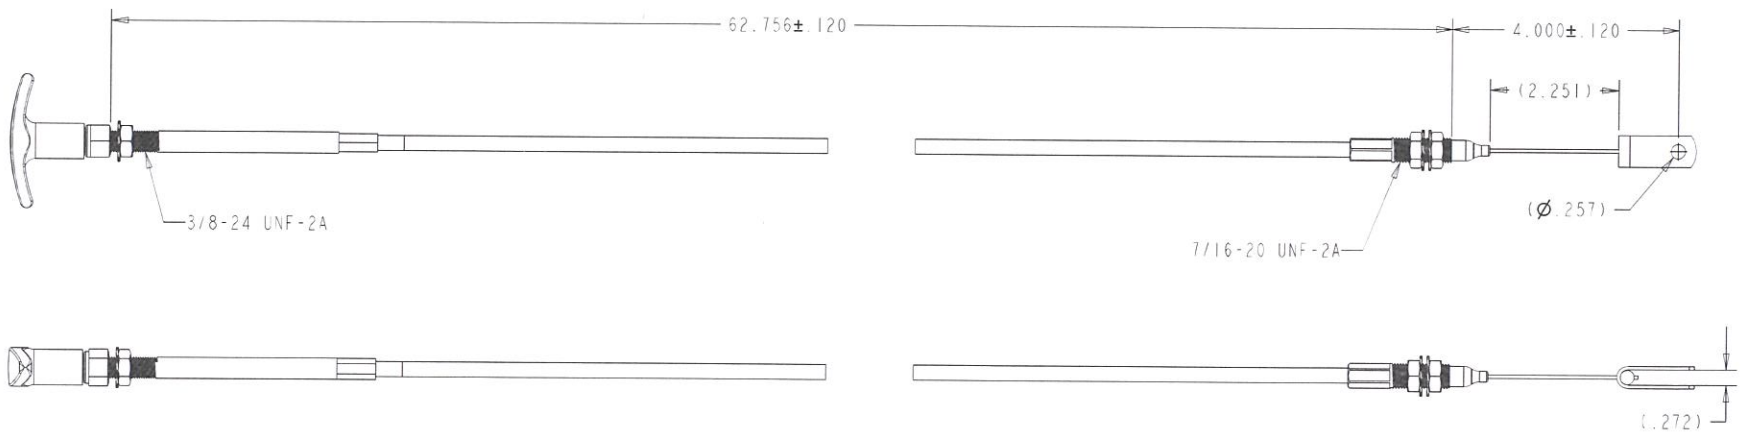

REV	CHANGE RECORD	EC No.	DRAWN	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
A	PRODUCTION RELEASE	10798	T. MONROE	2023-02-13

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS HELD AFTER COATING
DIM & TOL PER ASME Y14.5-2009
CASTINGS & FORGINGS-DIMENSIONS SHOWN PLUS DRAFT PER ASME Y14.8-2009
BREAK ALL SHARP EDGES
USE IDENTICAL WELDS ON INDENTICAL ITEMS.
WELD SYMBOLS TO ANSI AWS A2.2007

PART CLASS:	40
SUB CLASS:	NA
MODEL No.	3051-523
VERSION No.	A.4
DRAWING No.	3051-523
VERSION No.	A.4

REFER TO PROTECTION NOTICE ISO 16016

FINISH: PER VENDOR SPECS (SEE ASV ENG-STD-001)

MATERIAL: PER VENDOR SPECS

ALTERNATIVE MATERIAL: PER VENDOR SPECS

THIRD ANGLE PROJECTION

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

DESCRIPTION: CABLE, LOADER RELEASE

WEIGHT	SCALE
NA	1.000

DRG SIZE	SHEET
A2	1 OF 1

PART No. 3051-523

REV A