DRAWING NUMBER	DIM A
[redacted]	
A09481-2	11.19
[redacted]	
[redacted]	
[redacted]	

NOTE:

N 1. SHAFT TO BE COMPLETELY DEBURRED.

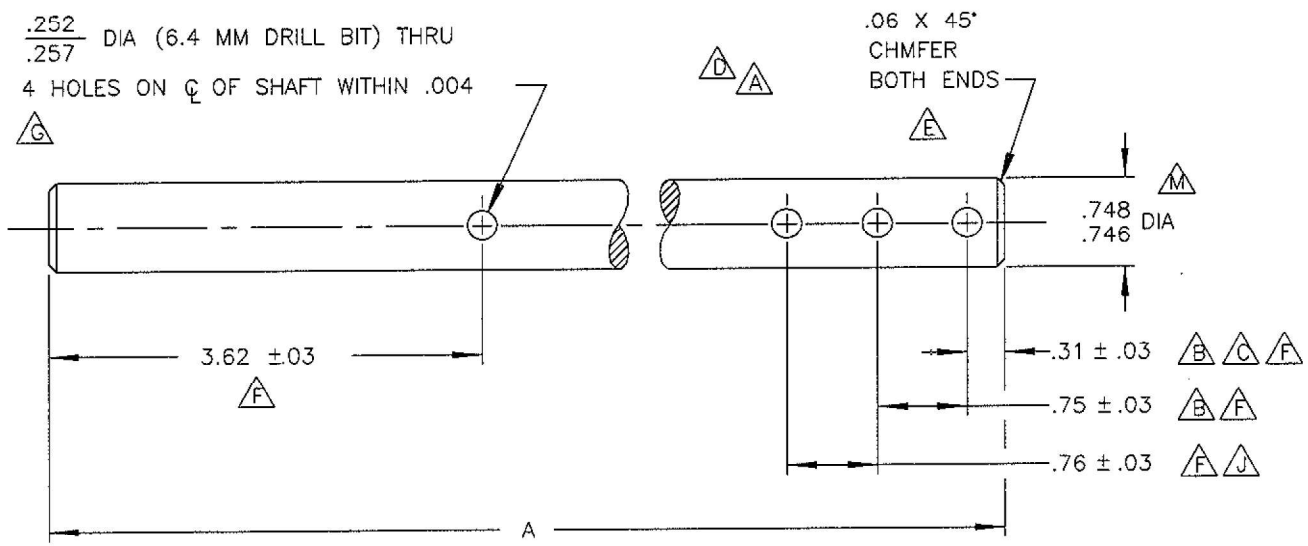

N	62635	10/18/14
M	61616	07/17/08
L	60075	03/13/01

H

K	54639	03/17/99
J	54639	03/17/99
H	50312	06/08/94
G	51931	12/22/92
F		04/13/07
E		01/11/67
D		12/03/55
C		07/08/64
B		05/18/94
A		01/20/94

DO NOT SCALE DRAWING

TOLERANCE UNLESS SPECIFIED:
DECIMAL .00 = ± .030
DECIMAL .000 = ± .005
FRACTIONAL = ± 1/32
ANGULAR = ± 1° 0'

SCALE: 1 : 1

SHAFT, WORM G-6 ACTUATOR

DOCT CODE	DRAWN	APPROVED	
C2	WJR	STOKES	A09481
	CHECKED JGH	DATE 06/08/63	

1013984 SHAFT WORM CS

M206 CARBON STEEL, ASTM A311, GRADE 1144

0

A09481-2 Rev

M NUMBER **206**

DESCRIPTION Steel, Bar, 1144, ASTM A311

SPECIFICATIONS ASTM A311, Grade 1144, Stress-Relieved, Cold-Drawn Carbon Steel Bars
UNS G11440

ADDITIONAL REQUIREMENTS Material type to be identified by stamping or color coding on each piece.

Other stress relieved, cold drawn steel bar materials with equivalent strength are acceptable substitutes.

Note: Grade 1144 cold drawn bars are not available in sizes greater than 4.5". For larger bar material other carbon or low alloy steel bars with yield strength of at least 75,000 psi may be substituted for Grade 1144.

REFERENCE DATA

	to 1-1/4" dia.	to 3" dia.	3" to 4.5" dia.
Tensile Strength, min.	100,000 psi	90,000 psi	85,000 psi
Yield Strength, min.	90,000 psi	80,000 psi	75,000 psi
Elongation, in 2", min.	10 %	10 %	10 %
Reduction in Area	30 %	20 %	20 %

REV.	ISSUE	A	B	C	D	E	F	G	H
PCN #		16224	61261	38606					
DATE	6/29/84	6/27/84	8/4/05	8/31/11					

APPROVAL : *R. Ruegemer* DATE: 8/31/11

Form 1540-493