




ACTUAL SIZE

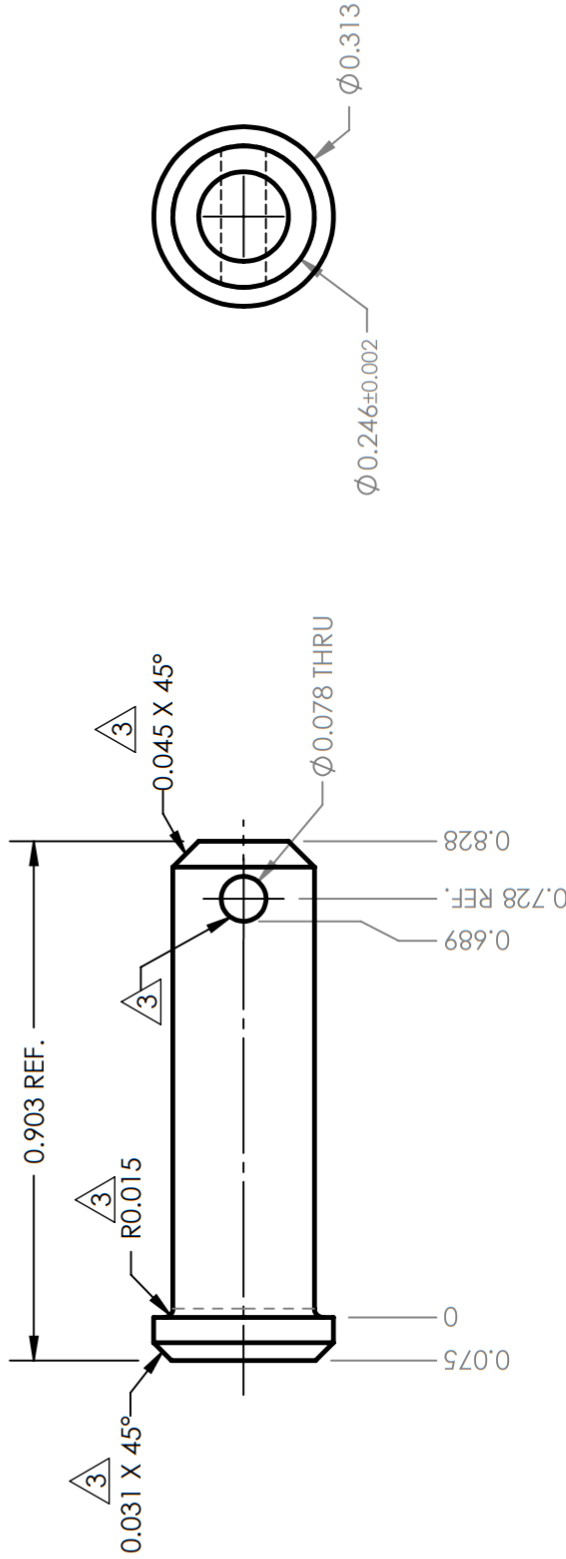

REV.	DATE	REVISION DESCRIPTION	BY	ENG	APR	MFG	APR	ECN #
4	3/25/2021	UPDATED SHEET FORMAT, FINISH WAS P&P	MDS	CJL	MKE			9448
3	6/29/2015	UPDATED SHEET FORMAT, CHANGED RADIUS TO CHAMFER, INSIDE EDGE CHANGED FROM R0.010/R0.015 TO R0.015, REMOVED CHAMFER FROM HOLE, CHANGED HOLE SIZE FROM 0.073/0.088 TO 0.078, REMOVED NOTES ON BREAKING EDGES AND PART NUMBER	DCL	CJL	JMS			6002
2	6/2/2009	CONVERTED TO SOLIDWORKS, CHANGED 0.302/0.305 TO 0.316, CHANGED TO REFERENCE	KEL					
1	12/17/1987	ADDED 0.010 TO LENGTH	DJS					
			BY	ENG	APR	MFG	APR	ECN #

DIMENSIONS IN OVALS ARE KEY PRODUCT CHARACTERISTICS		CLEVIS PIN 1.5" Ø WIRE BLOCK		DRAWING NUMBER	REV.	
UNLESS OTHERWISE SPECIFIED: - DIMENSIONS IN INCHES - ALL DIMENSIONS PRIOR TO FINISHING - REMOVE ALL BURRS AND BREAK SHARP EDGES WITH 0.010 MAX RADIUS OR CHAMFER		MATERIAL: S.S. TYPE 316 / 3		PART # SP-019	H-5390A 4	
		FINISH: PASSIVATE / 4		SHEET NUMBER: 1/1		SCALE: 3:1
		© The designs, constructions, arrangements, disclosures and devices illustrated in presentations bearing this note are the property of Pewaukee, WI and are submitted in confidence with the understanding that such material shall not be utilized in any way by any party without prior written consent from _____		DESIGN BY: KEL		DATE: 10/7/1987
DRAWN BY: KEL	DATE: 10/7/1987					
ENG. APR: CJL	DATE: 6/2/2009					
MFG. APR: KEL	DATE: 6/2/2009					
TOLERANCES UNLESS OTHERWISE SPECIFIED:						
DECIMAL: ± .005	SURFACE FINISH: 63 ✓					
ANGULAR: ± 1 °						