




3:21 on FT50-61

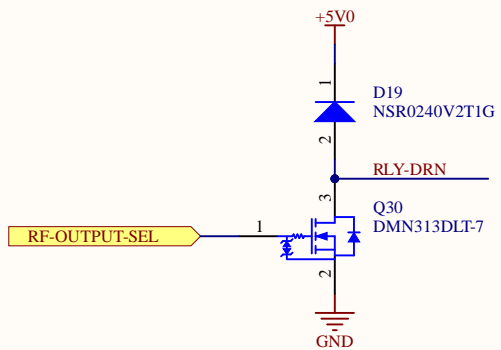

D16 prevents back-powering VBATT when only 5V USB is attached (RX only)

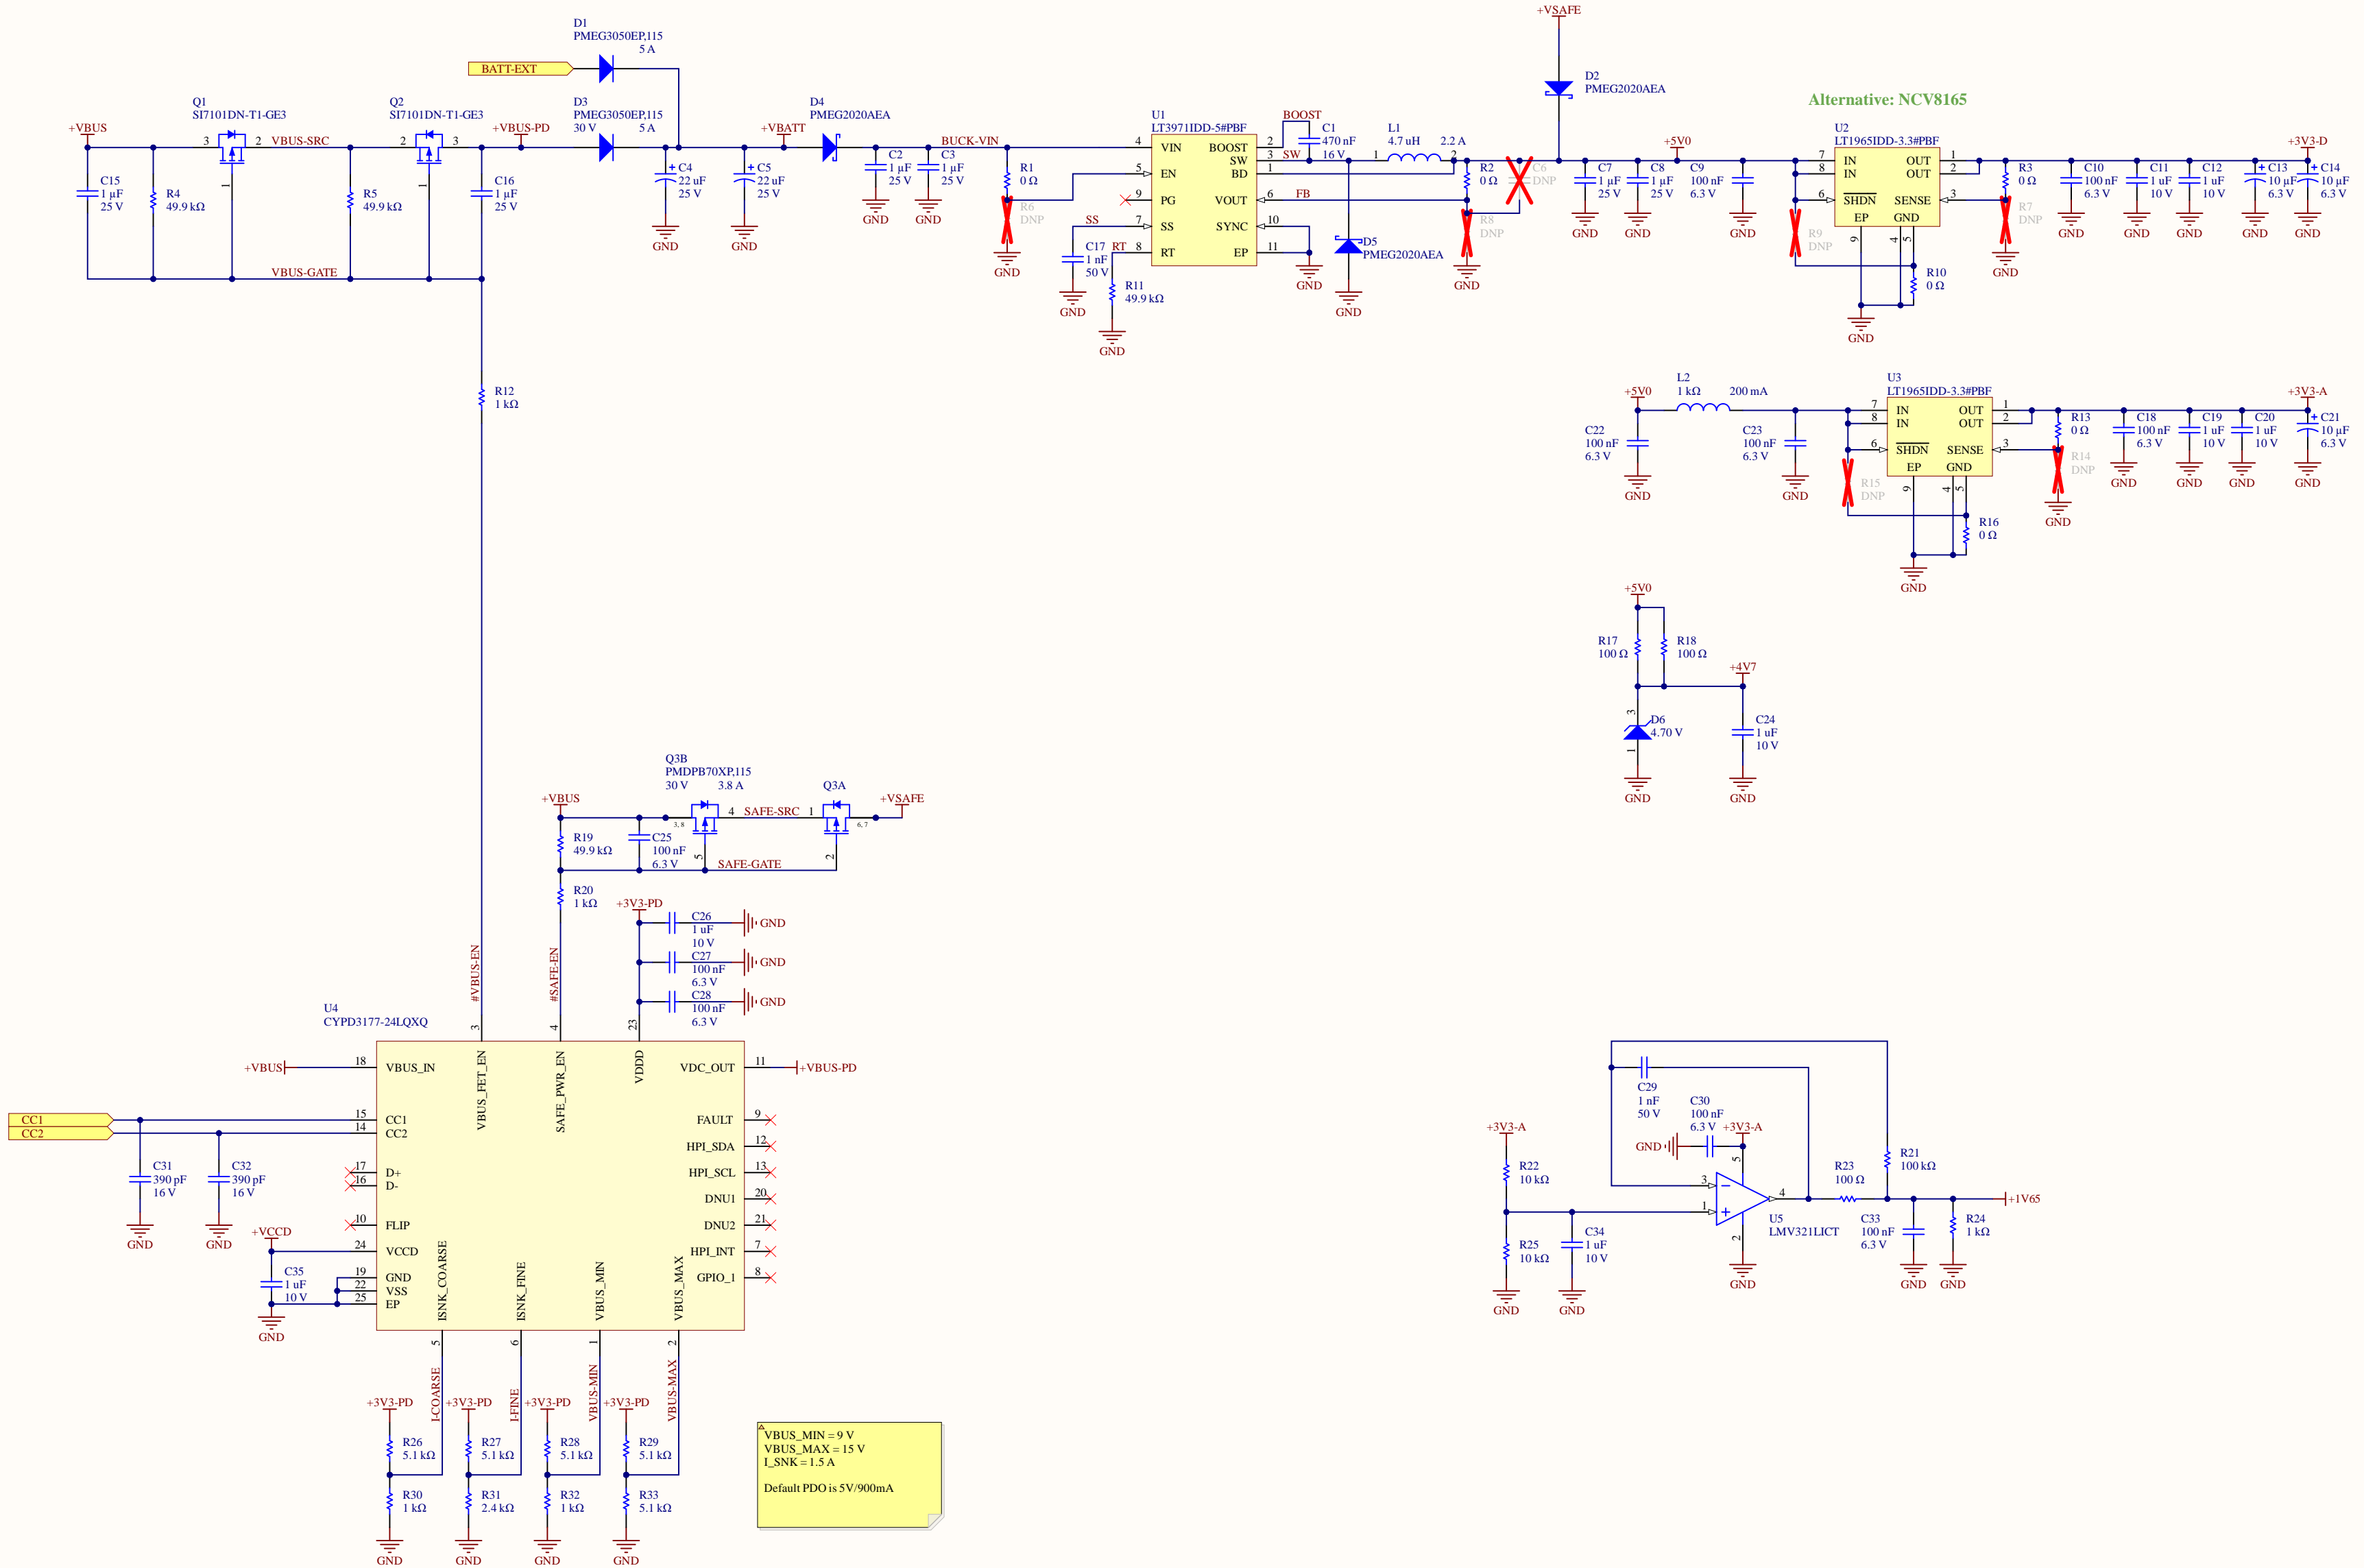


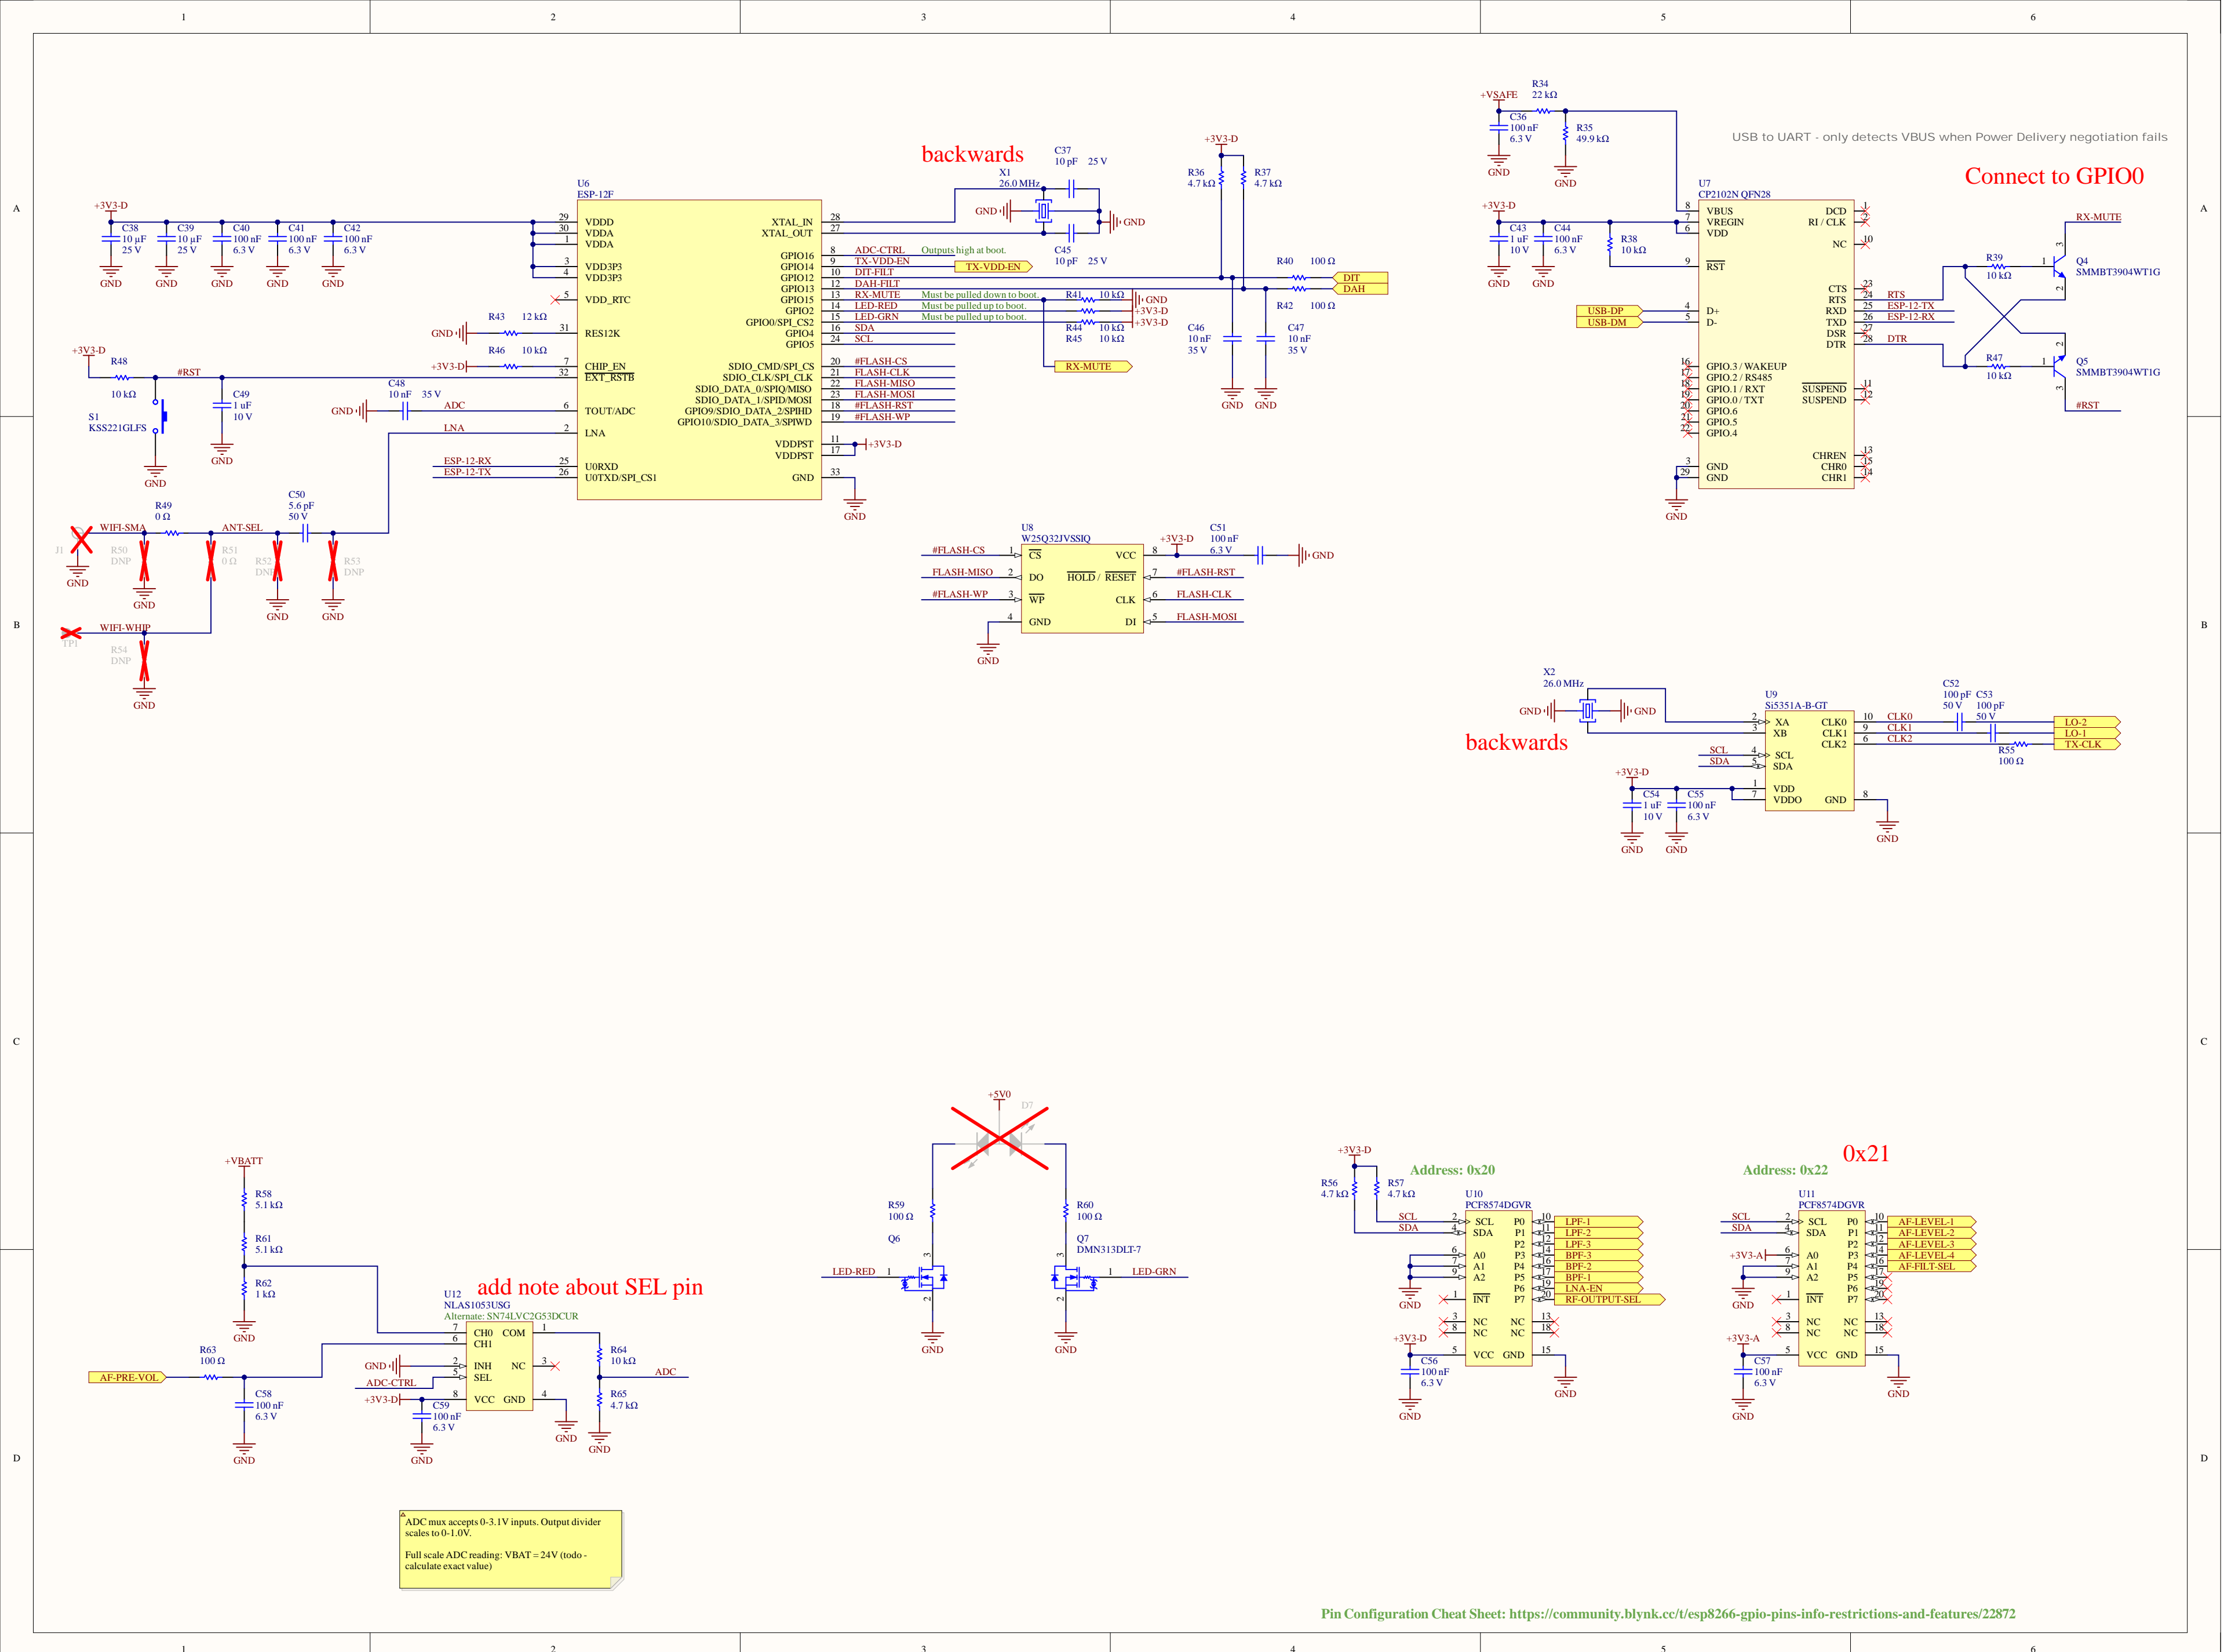

2.5kHz BW Sallen-Key Low Pass Filter


Filter Select & Mute Switch

add note about SEL pin

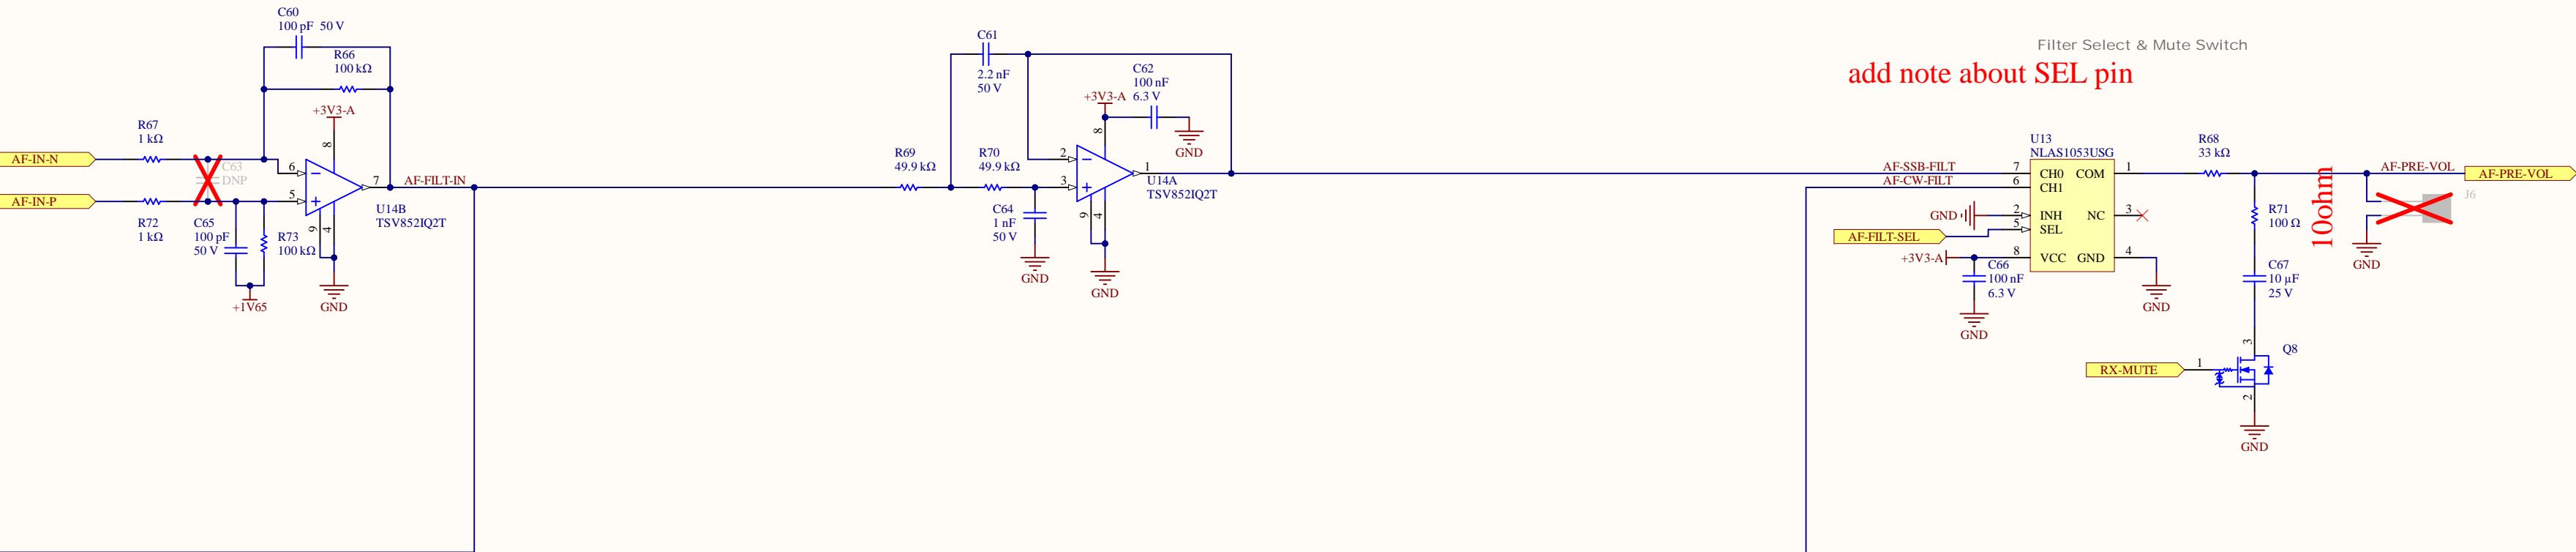

add pot for tuning gain of this pathway
need DC blocking cap to GND
or pads for 22k/1k inline.

CW filter distorts when driven strongly
should match gain of SSB filter

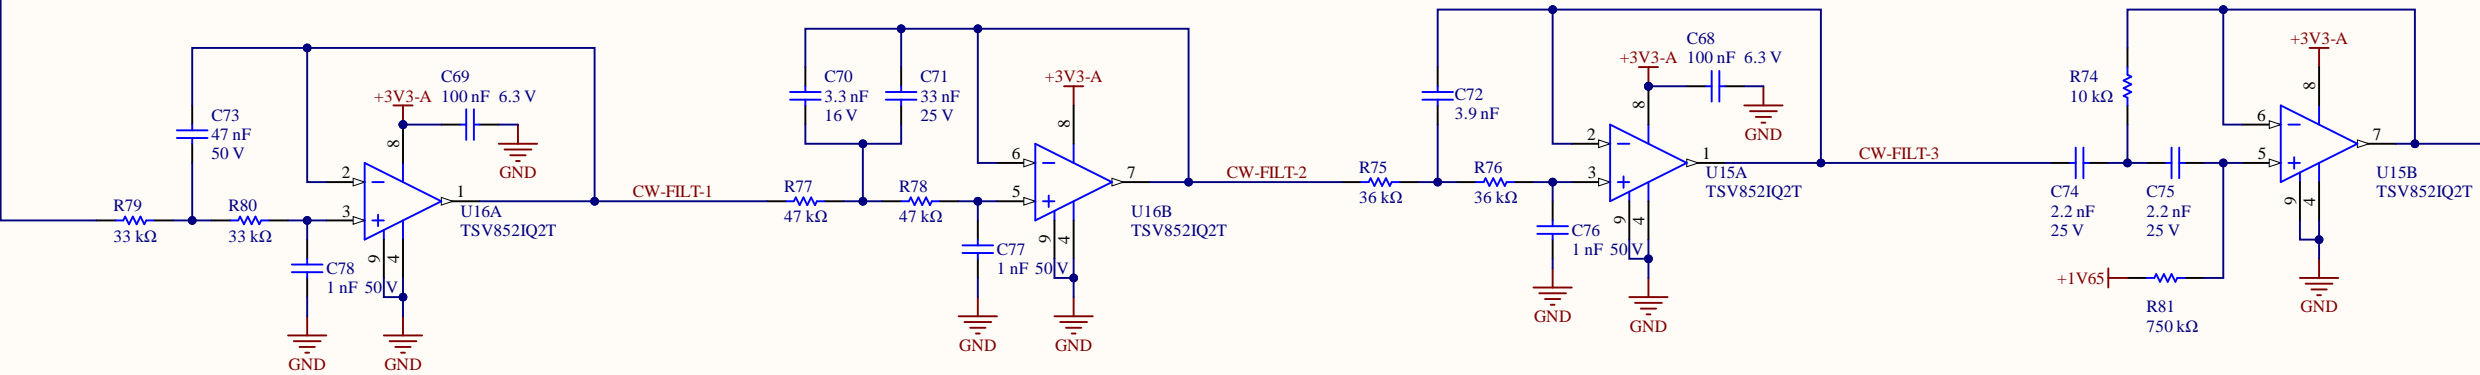

Volume selection

change net name

R88 needs series cap.
depop for now.

Headphone Driver, 4.8kHz LPF, EMC Filter

