RF-Based Drone Identification Using Machine Learning

[23ET7PE3ML]

Department of Electronics and Telecommunication Engineering

BMS College of Engineering, Bengaluru

Guided by

Dr. C Gururaj
Professor, Department of Electronics and Communication


Presented by

Utkarsh Sinha (1BM23ET055)
Vishal Joshy (1BM23ET058)
Yash Gupta (1BM23ET061)

Introduction and Problem Definition

- Unmanned Aerial Vehicles (UAVs) transmit continuous **Radio Frequency (RF)** control signals to their operators, enabling **passive detection** without line of sight, unlike optical or radar sensing.
- These links operate in the **2.4 GHz ISM band** (Industrial, Scientific and Medical). This band is chosen because it is licence-free worldwide and balances range against antenna size; lower bands sacrifice data rate, higher bands sacrifice range and obstacle penetration.
- Detecting **presence** alone is insufficient; a practical system must also determine the **drone family** and its **operating condition** to assess threat level.
- The 2.4 GHz band is shared with **Wi-Fi and Bluetooth**, so recorded signals are noisy and classification is non-trivial.
- Segments extracted from a single recording are highly correlated; assigning them to both training and test sets causes **data leakage** and inflates measured accuracy.

Proposed Methodology

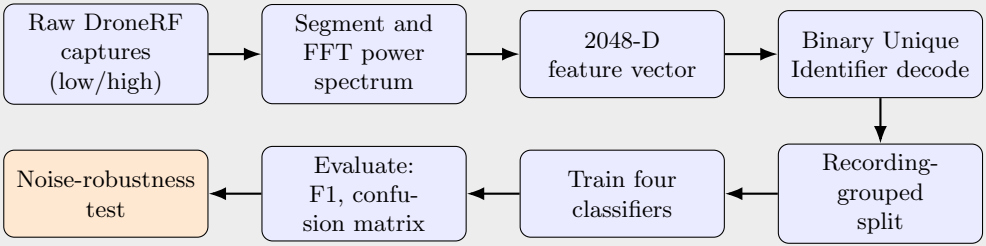

The **Fast Fourier Transform (FFT)** converts each time-domain segment into a frequency fingerprint; three labels are then decoded from a single filename code.

Dataset Used: DroneRF

Why this dataset: DroneRF is the standard public benchmark for RF-based drone detection, published with the founding study in this field, which makes results directly comparable with prior work.

Class (Family)	BUI codes	Modes	Role
Background (no drone)	00000	1	Negative class
Parrot Bebop	10000–10011	4	Drone family 1
Parrot AR	10100–10111	4	Drone family 2
DJI Phantom	11000	1	Drone family 3

Scale: approximately **41 GB** of raw recordings, comprising **227 recording pairs**, which yield **22,700** labelled feature vectors after segmentation.
BUI denotes a **Binary Unique Identifier**, the 5-digit code that labels every recording (expanded on the next slide).

Label Decoding from the Filename

Example files on disk:

```
10111H_3.csv
10111L_3.csv
# contents (RF samples)
-0.021, 0.034, -0.012,
0.045, 0.008, -0.030,
0.019, -0.007, 0.041, ...
```

BUI = Binary Unique Identifier (5 digits): the first digit marks drone presence, the next two the drone family, the last two the operating mode. The letter (H/L) marks the high or low RF sub-band.

All three labels decode from the code:

Target	Rule
Presence (2 classes)	0 if background, else 1
Family (4 classes)	background, Bebop, AR or Phantom
Mode (10 classes)	one index per BUI code

No manual labelling is required, since the ground truth is embedded in each filename.

Feature Extraction

Raw RF captures are long sequences of amplitude samples that appear as noise in the time domain. The drone's signature is visible only in the **frequency domain**, so the pipeline transforms each segment as follows:

1. **Segmentation:** each capture is divided into windows of $L = 100{,}000$ samples, long enough to hold a stable spectrum yet short enough to yield many training examples.
2. **Fast Fourier Transform:** a 2048-point FFT (a power of two, for computational efficiency) converts each window to the frequency domain; the upper 1024 bins are retained, as the magnitude spectrum is symmetric.

$$X_f = \left| \, \mathrm{FFT}_M(x - \bar{x}) \, \right|, \qquad f = \tfrac{M}{2} + 1, \ldots, M$$

3. **Band fusion:** the low (`L`) and high (`H`) sub-bands are concatenated and squared to a **power spectrum**, giving a single **2048-dimensional** vector per segment.

Result: a feature matrix of **22,700** $\times$ **2048** for model training.

Classification Models and Rationale

Model	Rationale for inclusion	Observed behaviour
Logistic Regression	Linear baseline; strong performance would imply a linearly separable task	Perfect on presence and family; weak on mode (0.375)
Random Forest	Bagging ensemble that captures non-linear structure	Stable; marginally lower on family (0.898)
Support Vector Machine (RBF kernel)	Models curved decision boundaries	Strong on simple tasks; limited on mode (5000-sample training cap)
XGBoost	Gradient-boosted trees; state of the art on tabular data	**Best overall**, and decisively best on the mode task (0.492)


All four models perform near-identically on the easy tasks and separate only on the 10-class operating-mode task, where XGBoost leads. That task is therefore where the comparison is meaningful.


Classification Results


Model	Presence	Family	Mode (5-fold)
Logistic Regression	1.000	0.999	0.375
Random Forest	0.978	0.898	0.378
Support Vector Machine	1.000	0.977	0.160
XGBoost	**1.000**	**1.000**	**0.492**


- Scores are reported as **macro-averaged F1**, which is robust to the class imbalance in the dataset.
- **Presence** and **family** are essentially solved; the 10-class **operating-mode** task is hard, with XGBoost leading at 0.492 ($\pm$0.009 over five folds).

Confusion Matrices: All Models (Operating Mode)










Robustness Under Noise and Interference

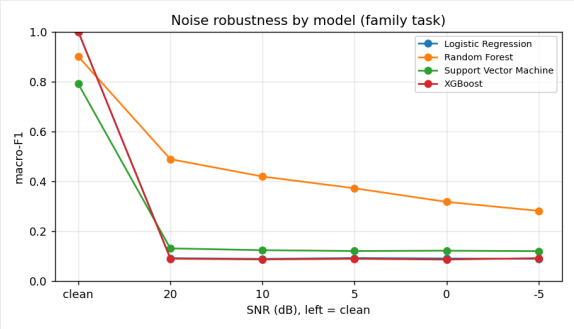

Method: each model is trained on clean data, then evaluated on the family task as **Gaussian noise** is added to the test set at decreasing **Signal-to-Noise Ratio (SNR)**.

Finding: Random Forest is the most robust, degrading gracefully. The models with the highest clean scores (XGBoost, Logistic Regression, Support Vector Machine) collapse to near-chance once any noise is added.

Implication: high clean accuracy does not imply robustness. A deployed system would favour Random Forest or require explicit noise handling.

Advantages and Limitations

Advantages

- **Passive detection** without line of sight or lighting constraints.
- **Interpretable, low-cost** models that train rapidly on standard hardware.
- **Leakage-aware** evaluation yields trustworthy metrics.
- A single pipeline answers all three classification questions.

Limitations

- **Operating-mode** classification remains difficult (best F1 0.492).
- Spectral features **degrade sharply** under heavy noise.
- Only **three drone families** are represented in the dataset.
- Dataset-based study; **no live hardware** or field deployment.

Applications and Conclusion

Applications

- **Passive surveillance** near airports and restricted zones.
- Early warning for unauthorised drones at public events.
- Low-cost monitoring on **software-defined radios**.
- Drone-type identification for **threat assessment**.

Conclusion

- Four classical models were compared across three tasks under a **leakage-aware** split.
- Presence and family are reliably classified; **XGBoost** leads the hard mode task at 0.492.
- A **noise-robustness** test quantified feature sensitivity to interference.
- Classical models remain **competitive with deep learning** on this dataset.

Literature Survey

Reference	Approach	Relevance to the present work
Al-Sa'd *et al.*, 2019	Deep Neural Networks	Established the DroneRF dataset and the three-task structure adopted here.
Al-Emadi *et al.*, 2020	XGBoost, three tasks	Closest prior study; corroborates XGBoost's strength and the difficulty of the mode task.
Ezuma *et al.*, 2020	Machine learning under interference	Motivates the noise-robustness analysis in the shared 2.4 GHz band.
Medaiyese *et al.*, 2022	Wavelet-transform features	Principal alternative to the Fast Fourier Transform features used here.
LUMEN, 2026	Power Spectral Density features	Validates the power-spectral feature choice on constrained hardware.
Sensors, 2024	RF detector robustness study	Establishes Signal-to-Noise-Ratio degradation testing as standard practice.

Research gap: prior studies are largely deep-learning-based or omit an explicit leakage check. This work compares four interpretable classical models across all three tasks under a recording-grouped split.

References

1. M. F. Al-Sa'd *et al.*, "RF-based drone detection and identification using deep learning approaches," *Future Generation Computer Systems*, vol. 100, 2019.
2. S. Al-Emadi, F. Al-Senaid, "Drone detection using machine learning," *Proceedings of the IEEE International Conference on Informatics, IoT and Enabling Technologies*, 2020.
3. M. Ezuma *et al.*, "Detection and classification of UAVs in the presence of Wi-Fi and Bluetooth interference," *IEEE Open Journal of the Communications Society*, vol. 1, 2020.
4. O. O. Medaiyese *et al.*, "Wavelet transform analytics for RF-based UAV detection," *Pervasive and Mobile Computing*, vol. 82, 2022.
5. "LUMEN: a lightweight UAV network for Power Spectral Density-based RF fingerprinting," *Sensors*, vol. 26(10), 2026.
6. "Robustness of deep-learning-based RF UAV detectors," *Sensors*, vol. 24(22), 2024.
7. M. S. Allahham *et al.*, "DroneRF dataset," *Data in Brief*, vol. 26, 2019.