


CA、CE、CF

Heavy Duty Petrochemical Process Pumps

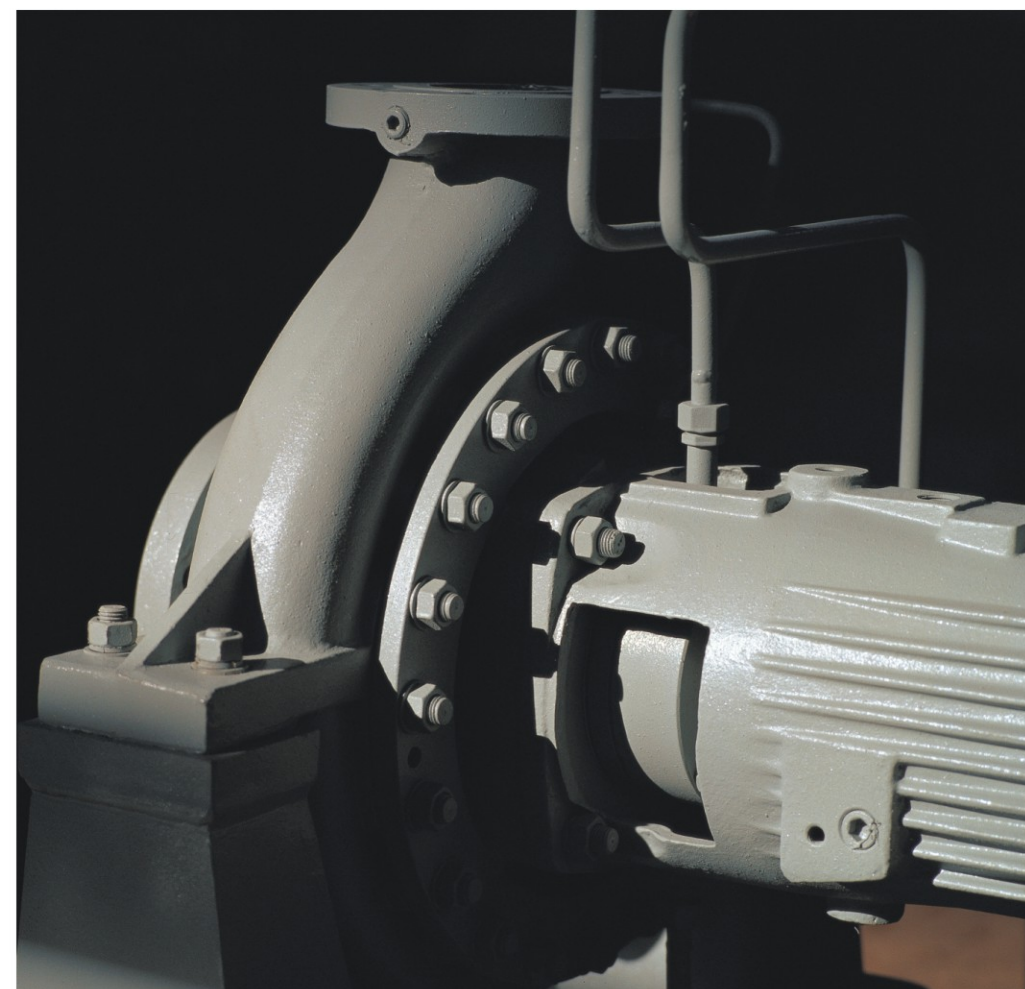

NANFANG PUMP INDUSTRY CO., LTD.

CNP Headquarter
Add: Renhe Town, Hungzhou China
Postcode: 311107
Tel: +86 571 86397810, 86397838
Fax: +86 571 86397809
Email: info@nanfang-pump.com
Website: www.cnppump.com

CNP CHANGSHA CO.,LTD

Add: Changsha, Hunan, China
Postcode: 410100
Tel: +86 731 85252879
Fax: +86 731 85252878
Email: ch-sales1@nanfang-pump.com
Website: www.cnp-changsha.com

Application

Refineries	Petrochemical industry
Coal processing	Lower temperature engineer
Chemical industry	Fibre industry
Paper and pulp industry	Sugar industry
Sea water	Water industry
Air condition	Nuclear power station
Offshore industry	

Performance Range

Size	25 up to 400mm
Capacity	up to 2600m ³ /h
Head	up to 250m
Working pressure	up to 7.5Mpa
Operating temperature	-80°C up to +450°C

Standard Material

According to API 610 standard

Description

Single stage, horizontal volute casing pump with feet below and single entry impeller, end suction type. Depending on operating conditions hydraulic balance provided by front or wear rings and balance holes.

Full compliance with the latest edition of API 610, heavy duty fan cooled bearing housing, heavy duty and non-grout baseplates for PAU and offshore application.


Casing cover with cooling or heating connections, shaft sealing by packing or mechanical seals of any design (single or double working), connections for cooling, flushing or sealing liquid.

Standard pipework according to API 682 Plans. Cooling system for high temperature pumping. Flanges according to DIN or ANSI.


CA working pressure up to 2.5Mpa, can be supplied with open impeller. (Code OH1)

CE working pressure up to 5.0Mpa, can be supplied with open impeller. (Code OH2)

CF working pressure up to 7.5Mpa. (Code OH2)

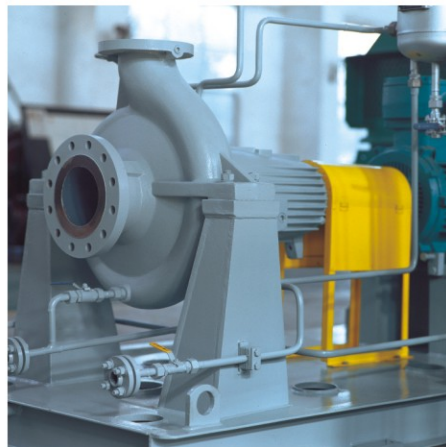

Sectional Drawing

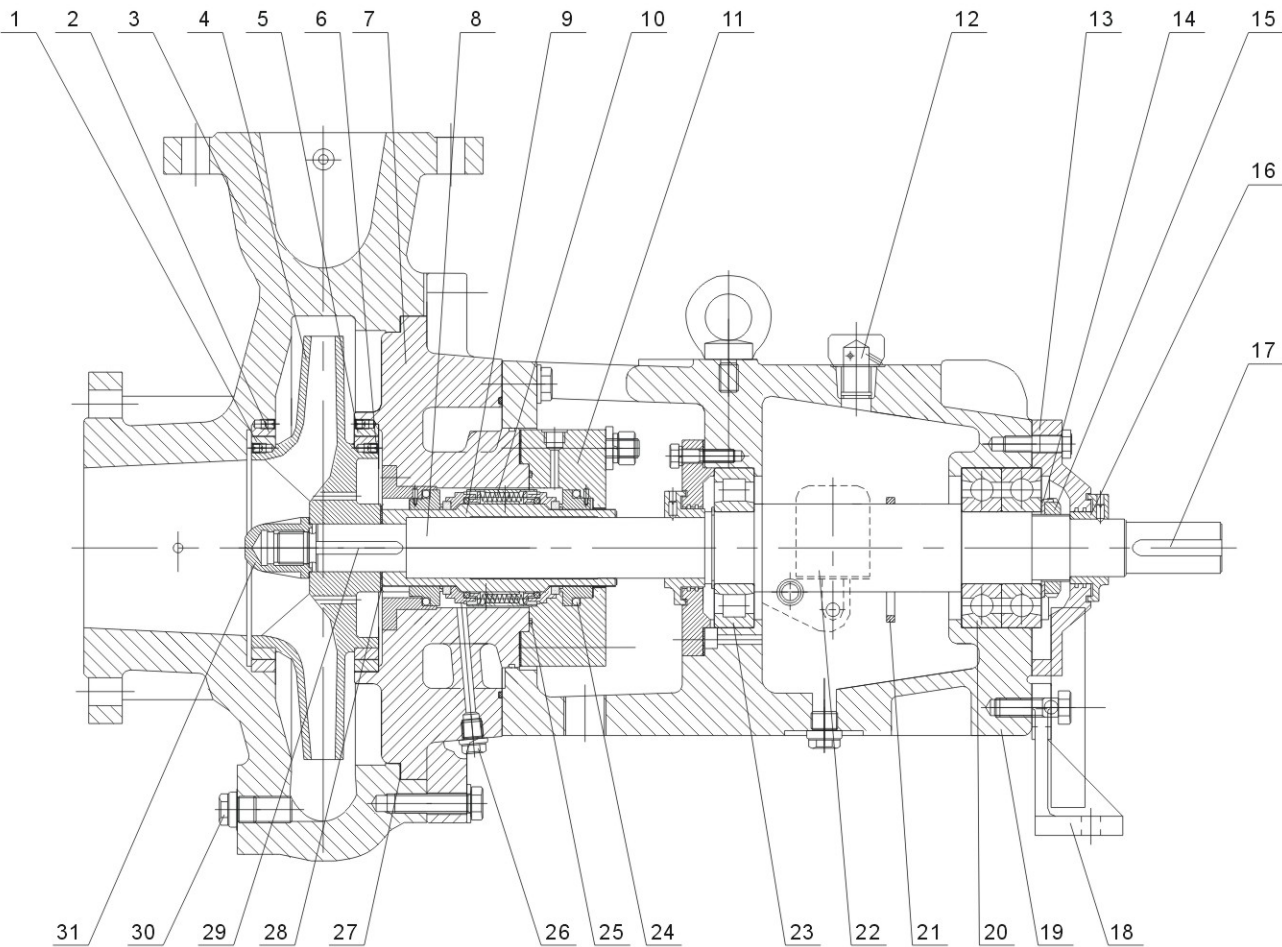

1. Volute casing

2. Impeller wear ring

3. Casing wear ring

4. Impeller

5. Impeller wear ring

6. Casing wear ring

7. Casing cover

8. Mechanical seal

9. Sealing cover

10. Vent filter

11. Protective cover

12. Collar

13. Deflector

14. Keyway

15. Bearing nut

16. Bearing cover
17. Supporting foot

18. Bearing

19. Bearing bracket

20. constant-level oiler

21. Lubricating ring

22. Antifriction bearing

23. O-ring

24. Shaft

25. O-ring

26. 1/4" screwed plug

27. Flat gasket

28. Casing foot

29. 1/2" pipe plug

30. Keyway

31. Impeller nut

Design Features and Advantages

6. Impeller designs

Closed impeller (standard)
Open impeller depending on size (CA and CE).
Inducer possible.
Optimum compliance with various operating conditions, closed impeller with high efficiencies, low NPSHr values.
Open impeller for very gaseous liquids, high solids concentrations, extremely low NPSHr values, small suction head required.

5. Flush system according to API 682 plans.

4. Well dimensioned stuffing box chamber

Possibility of replacing packing or mechanical seals of any design.

7. Interchangeable wear parts

Impeller and casing wear rings.
Shaft sleeve in the area of the shaft seal.
Flushing of casing wear ring possible.
When casing and impeller wear ring and shaft seal are subject to wear, casing, impeller and shaft can be reused.
Small wear of casing and impeller wear ring due to absence of solids.

8. Double volute casing (above 80mm branch size)

Large branches.
Increased corrosion allowance.
Enclosed casing gasket.
Small radial thrust, small shaft deflection (< 0.05mm) in the area of the shaft seal.
Low branch velocity, low noise level due to additional primary measures at impeller, long rated lift of casings, casing joint cannot break.

3. one-piece heavy duty bearing bracket


Oil-lubricated antifriction bearing, with automatic lubrication and oil level control.
 $T \leq 250^{\circ}\text{C}$, no cooling.
 $T > 250^{\circ}\text{C}$, air cooling (fan or water cooling possible).
With labyrinth sealing(standard), radial sealing ring possible.
Stable, aligning shaft position, robust shaft with small shaft deflection.
Few bearing checks required no cooling water pipework.
No cooling water consumption.

2. Interchangeable modular elements for various sizes



Only 8 bearing frames for 46 sizes.
Same hydraulics (impellers) and bearing frames as for light or medium duty series.

1. Process design API 610 (Code OH1 & OH2)


Assembly unit coupling with spacer.
Design and maintenance standard complying with process industry is ensured.
Rapid disassembly or assembly.
Disassembly without removal of pipe work and diver.

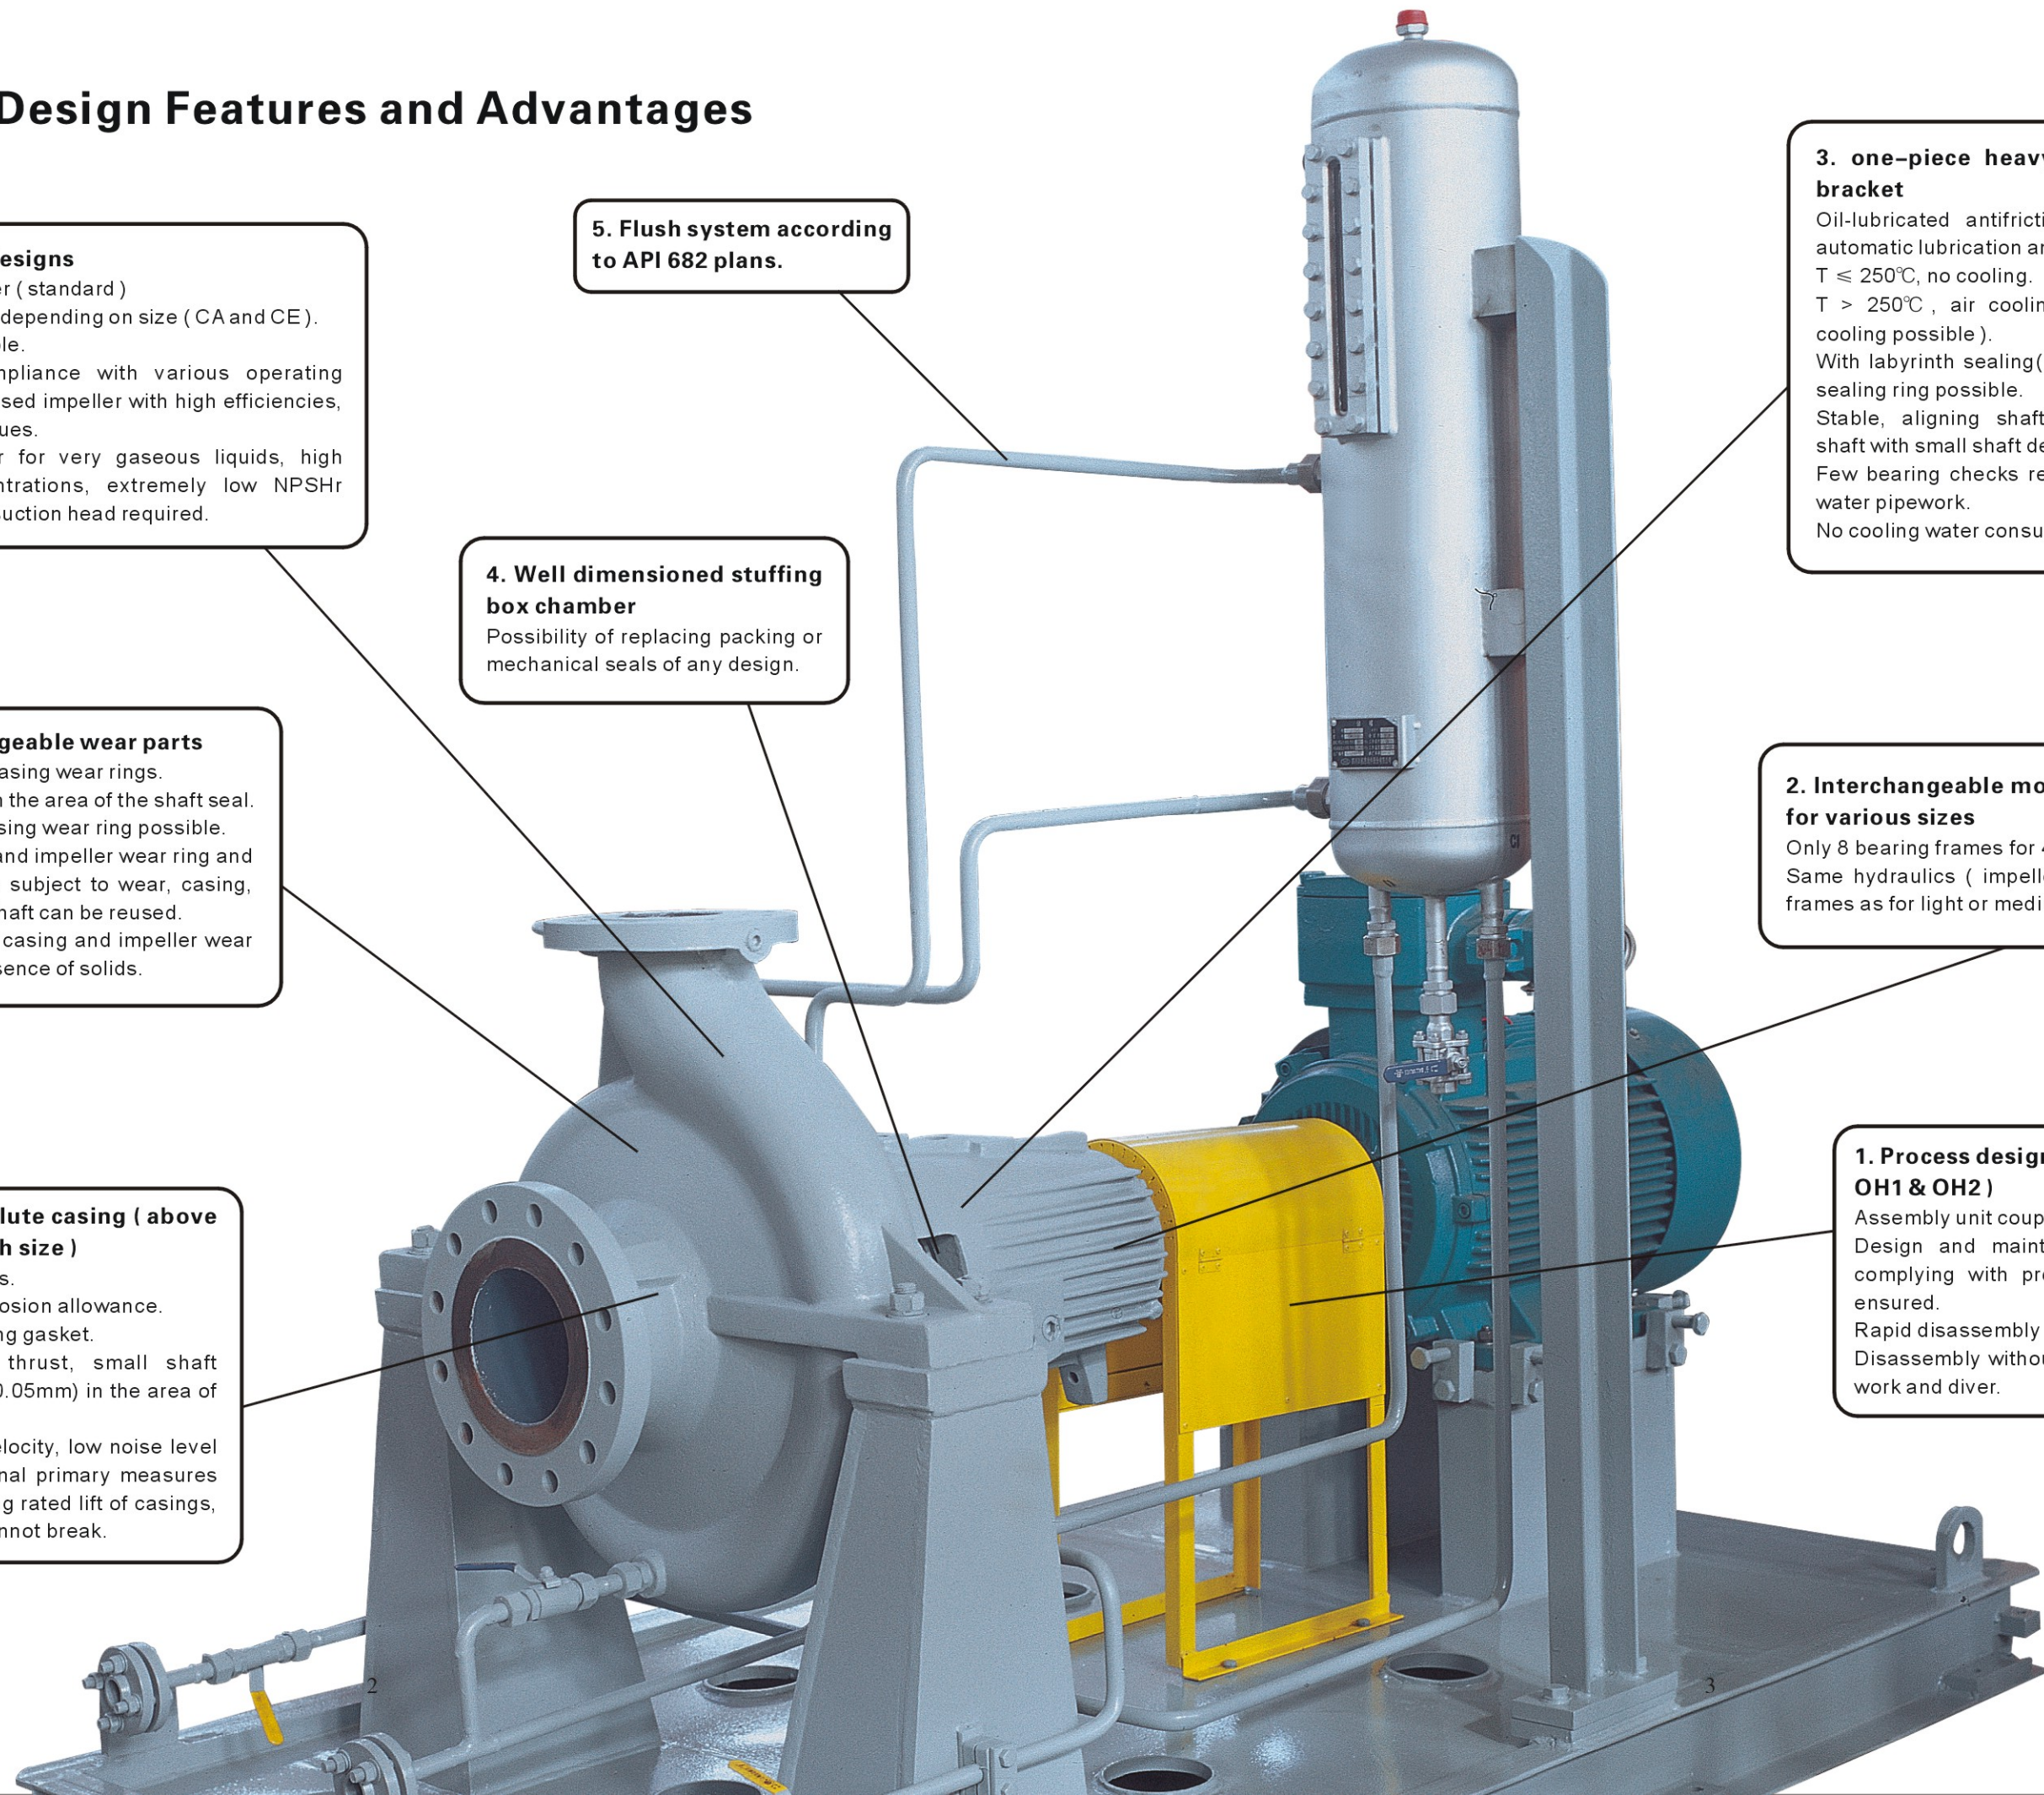

Hydraulic Coverage

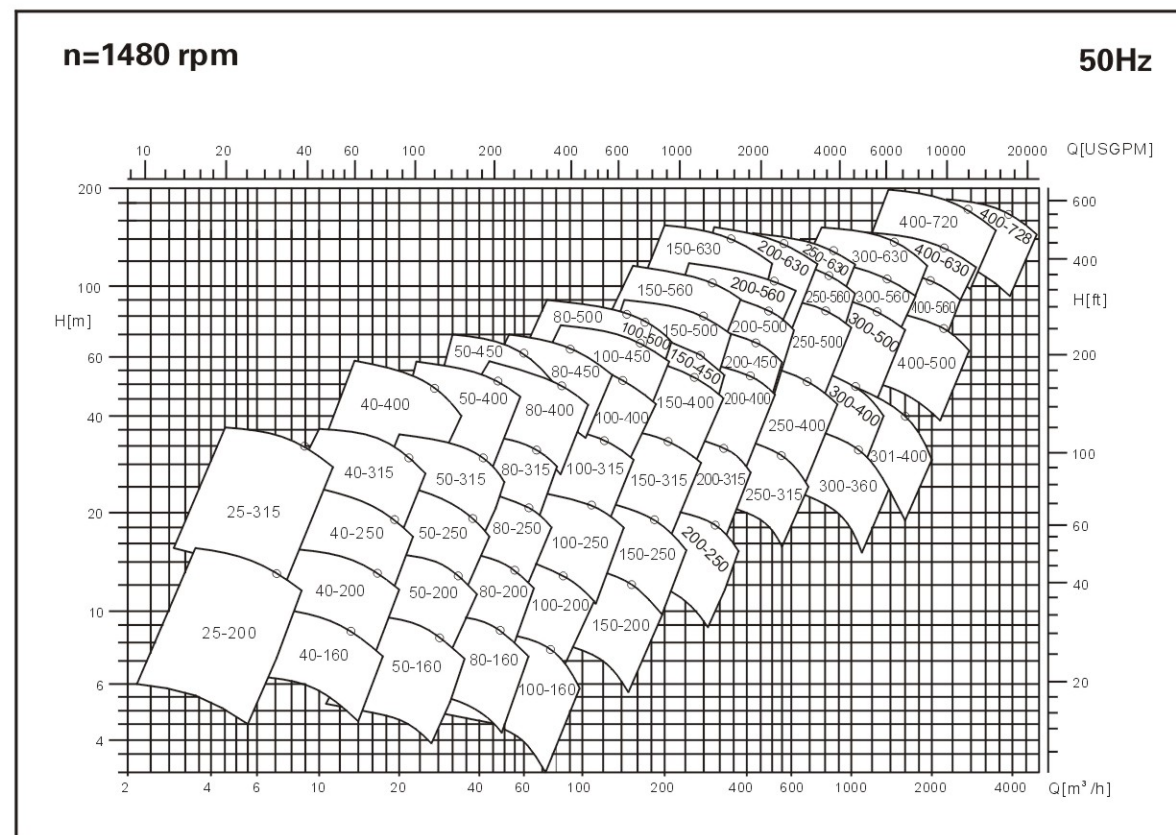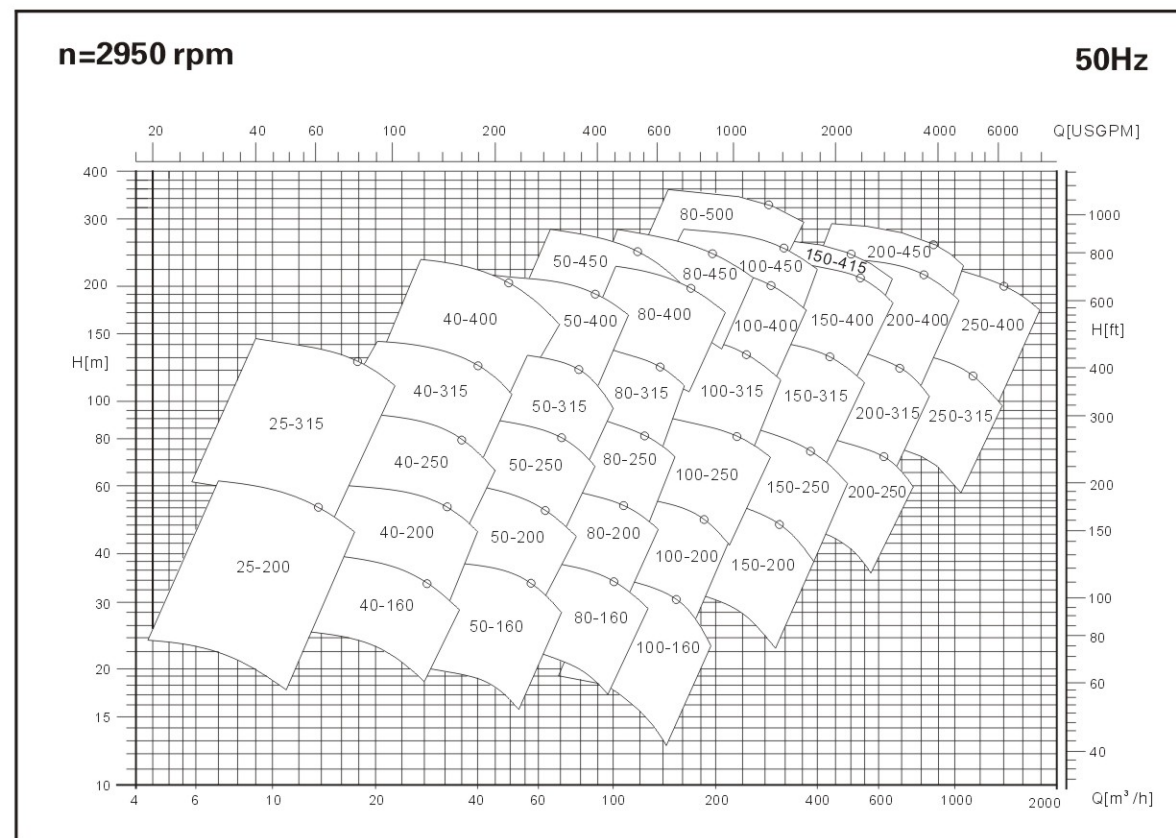

Hydraulic Coverage

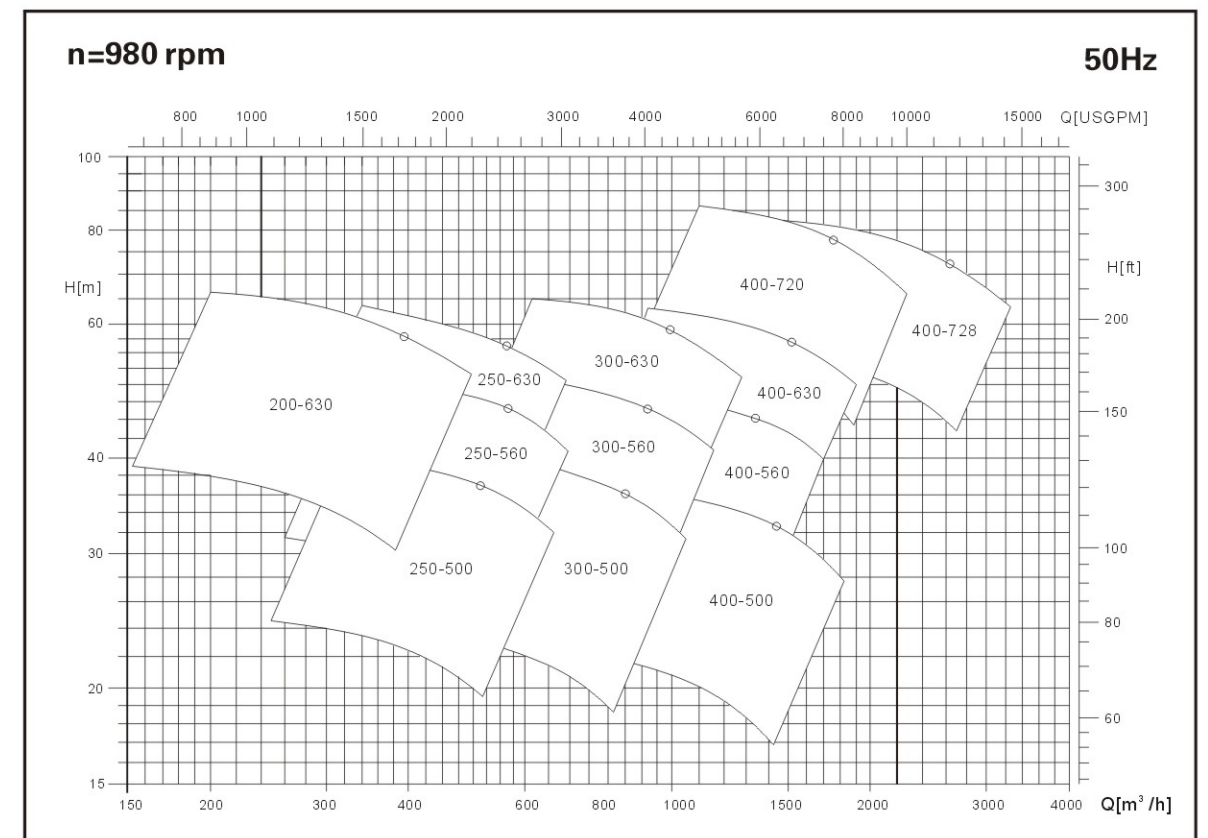

★请根据具体要求向工厂索取泵曲线与机组外形尺寸图。