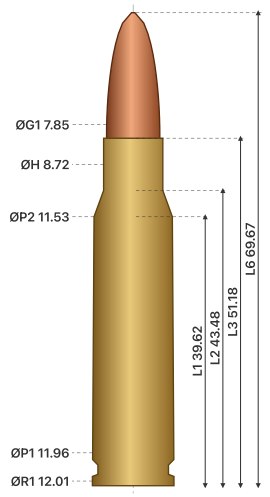
# R8_AERO_V2_OR.grtload

**File:** *"R8_AERO_V2_OR.grtload"*

| Load data | |
|---|---|
| Cartridge | 308 Win. (308 Winchester, 7,62 x 51) |
| Projectile | Styria Arms, AERO SB 165 gr HP 2, .308, 165.00 grain |
| Charge | 43.06 grain, Reload Swiss RS52 |
| Ladder step | 0.30 grain × 5 |
| Seating depth | 16.16 mm |
| Bullet length | 34.65 mm |
| Case capacity | 55.70 grain H2O (derived from load data) |
| L3/CL | 51.18 mm |
| L6/OAL | 69.67 mm |
| CBTO | |

308 Win. (308 Winchester, 7,62 x 51)



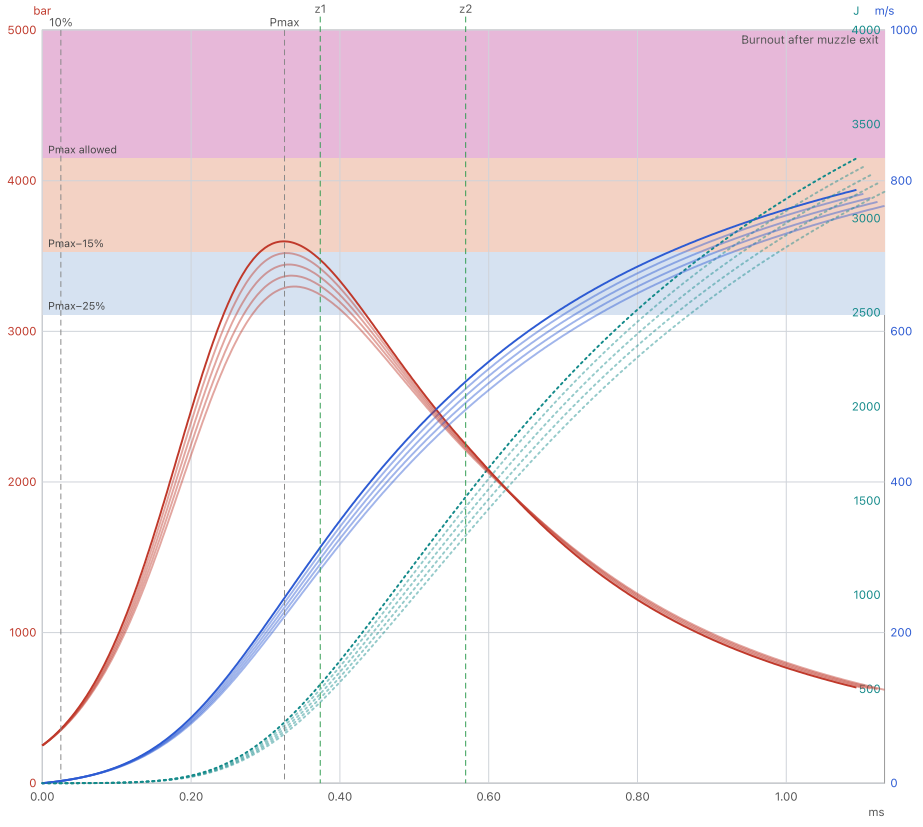

| | |
|---|---|
| Pmax | 4150 bar |
| PK | 4773 bar |
| PE | 5190 bar |
| EE | 3920 J |
| Q | 47.510 mm² |
| V | 55.70 gr H2O |
| E | 3.85 mm |
| E1 | 10.39 mm |
| G1 | 7.85 mm |
| H1 | 8.72 mm |
| H2 | 8.72 mm |
| L1 | 39.62 mm |
| L2 | 43.48 mm |
| L3 | 51.18 mm |
| L6 | 71.12 mm |
| M | 25.00 mm |
| P1 | 11.96 mm |
| P2 | 11.53 mm |
| R | 1.37 mm |
| R1 | 12.01 mm |
| alpha | 40.0 ° |

**Results 43.06 grain**

| Pmax | P0 | V0 | BT | BLT | OBT |
|---|---|---|---|---|---|
| 3597 bar | 635 bar | 788 m/s | 1.0943 ms | 1.0694 ms | 1.0496 ms |
| **Fill** | **Burnt** | **E0** | **Recoil** | **IPSC/BDS** | **MIP** |
| 103.4 % | 98.3 % | 3319 J | 17 J | 427 | 842 |

Load ladder

| Charge | Pmax | V0 | E0 | BT | Burnt |
|---|---|---|---|---|---|
| **43.06 gr** | **3597 bar** | **788 m/s** | **3319 J** | **1.094 ms** | **98.3 %** |
| 42.76 gr | 3520 bar | 783 m/s | 3274 J | 1.104 ms | 98.2 % |
| 42.46 gr | 3444 bar | 777 m/s | 3229 J | 1.113 ms | 98.1 % |
| 42.16 gr | 3370 bar | 772 m/s | 3185 J | 1.123 ms | 97.9 % |
| 41.86 gr | 3298 bar | 767 m/s | 3142 J | 1.132 ms | 97.8 % |




Simulation – neither load data nor an approval. Typical deviation from laboratory measurements: rifle ±4 % V0, ±12–15 % pressure; handgun ±10 % V0, pressure not backed. At low fill ratios (below about 90 %) the pressure is calculated too low. Never load on the basis of this app alone; never exceed the makers' maximum loads; start with their starting load. Use at your own risk; liability excluded to the extent permitted by law. In our tests the measured pressure at this load ratio exceeded the calculation by up to 30 % (here up to about 4677 bar); for most loads by clearly less.