
R8_AERO_V2_OR.grtload

File: *"R8_AERO_V2_OR.grtload"*

Load data	
Cartridge	308 Win. (308 Winchester, 7,62 x 51)
Projectile	Styria Arms, AERO SB 165 gr, .308, 165.00 grain
Charge	43.06 grain, Reload Swiss RS52
Ladder step	0.30 grain × 5
Seating depth	16.16 mm
Bullet length	34.65 mm
Case capacity	55.80 grain H2O (derived from load data)
L3/CL	51.18 mm
L6/OAL	69.67 mm
CBTO	

308 Win. (308 Winchester, 7,62 x 51)

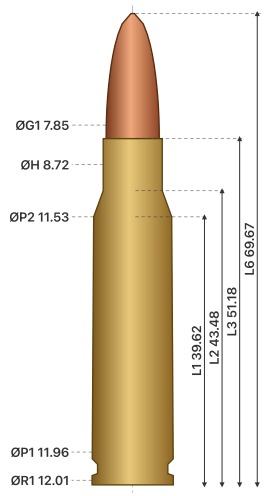


Pmax	4150 bar
PK	4773 bar
PE	5190 bar
EE	3920 J
Q	47.510 mm²
V	55.80 gr H2O
E	3.85 mm
E1	10.39 mm
G1	7.85 mm
H1	8.72 mm
H2	8.72 mm
L1	39.62 mm
L2	43.48 mm
L3	51.18 mm
L6	71.12 mm
M	25.00 mm
P1	11.96 mm
P2	11.53 mm
R	1.37 mm
R1	12.01 mm
alpha	40.0 °

Results 43.06 grain

Pmax	P0	V0	BT	BLT	OBT
3542 bar	636 bar	786 m/s	1.1006 ms	1.0763 ms	1.0933 ms
Fill	**Burnt**	**E0**	**Recoil**	**IPSC/BDS**	**MIP**
103.2 %	98.3 %	3302 J	17 J	425	840

Load ladder

Charge	Pmax	V0	E0	BT	Burnt
43.06 gr	**3542 bar**	**786 m/s**	**3302 J**	**1.101 ms**	**98.3 %**
42.76 gr	3466 bar	781 m/s	3258 J	1.110 ms	98.1 %
42.46 gr	3391 bar	775 m/s	3213 J	1.119 ms	98.0 %
42.16 gr	3318 bar	770 m/s	3169 J	1.129 ms	97.9 %
41.86 gr	3248 bar	765 m/s	3126 J	1.139 ms	97.7 %

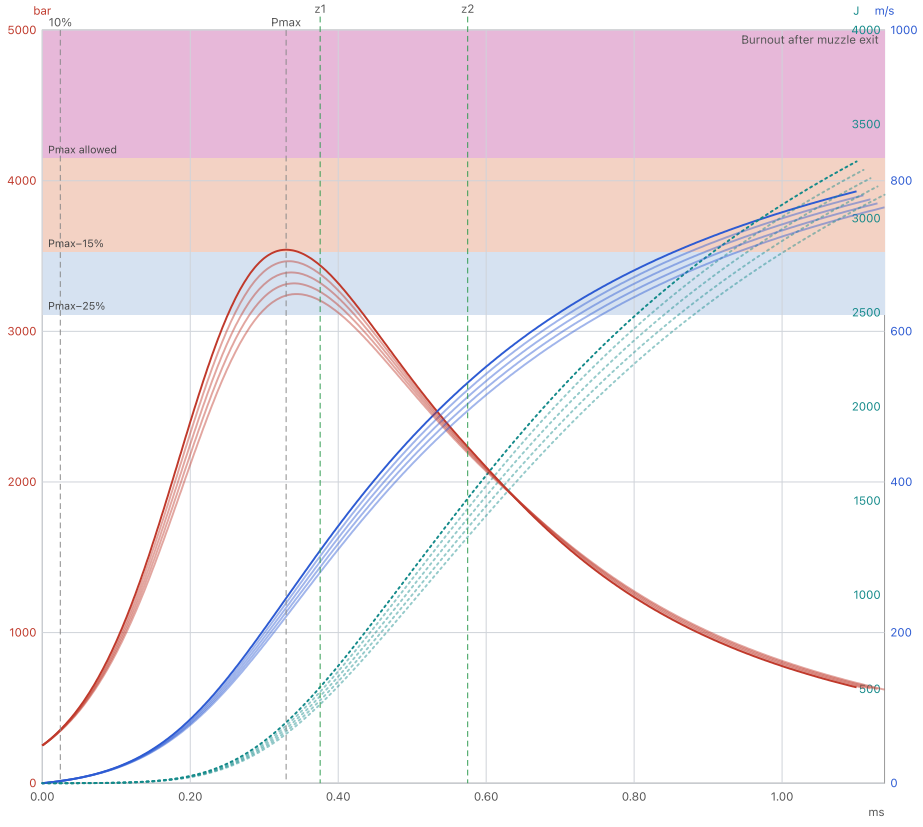

Simulation – neither load data nor an approval. Typical deviation from laboratory measurements: rifle ±4 % V0, ±12–15 % pressure; handgun ±10 % V0, pressure not backed. At low fill ratios (below about 90 %) the pressure is calculated too low. Never load on the basis of this app alone; never exceed the makers' maximum loads; start with their starting load. Use at your own risk; liability excluded to the extent permitted by law. In our tests the measured pressure at this load ratio exceeded the calculation by up to 30 % (here up to about 4605 bar); for most loads by clearly less.