
R8_AERO_V2_OR.grtload

File: *"R8_AERO_V2_OR.grtload"*

Load data	
Cartridge	308 Win. (308 Winchester, 7,62 x 51)
Projectile	Styria Arms, AERO SB 165 gr HP 2, .308, 165.00 grain
Charge	43.06 grain, Reload Swiss RS52
Ladder step	0.30 grain × 5
Seating depth	16.16 mm
Bullet length	34.65 mm
Case capacity	55.70 grain H2O (derived from load data)
L3/CL	51.18 mm
L6/OAL	69.67 mm
CBTO	

308 Win. (308 Winchester, 7,62 x 51)

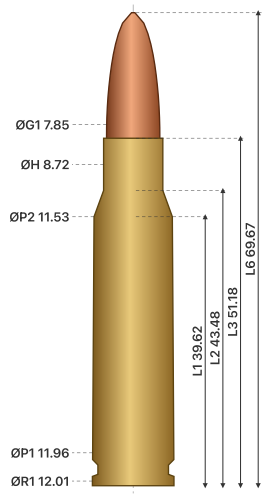


Pmax	4150 bar
PK	4773 bar
PE	5190 bar
EE	3920 J
Q	47.510 mm²
V	55.70 gr H2O
E	3.85 mm
E1	10.39 mm
G1	7.85 mm
H1	8.72 mm
H2	8.72 mm
L1	39.62 mm
L2	43.48 mm
L3	51.18 mm
L6	71.12 mm
M	25.00 mm
P1	11.96 mm
P2	11.53 mm
R	1.37 mm
R1	12.01 mm
alpha	40.0 °

Results 43.06 grain

Pmax	P0	V0	BT	BLT	OBT
3641 bar	667 bar	772 m/s	1.1311 ms	1.1015 ms	1.0933 ms
Fill	**Burnt**	**E0**	**Recoil**	**IPSC/BDS**	**MIP**
103.4 %	100.0 %	3190 J	17 J	418	826

Load ladder

Charge	Pmax	V0	E0	BT	Burnt
43.06 gr	**3641 bar**	**772 m/s**	**3190 J**	**1.131 ms**	**100.0 %**
42.76 gr	3569 bar	767 m/s	3147 J	1.141 ms	100.0 %
42.46 gr	3499 bar	762 m/s	3105 J	1.150 ms	100.0 %
42.16 gr	3430 bar	757 m/s	3063 J	1.160 ms	100.0 %
41.86 gr	3363 bar	752 m/s	3022 J	1.170 ms	99.9 %

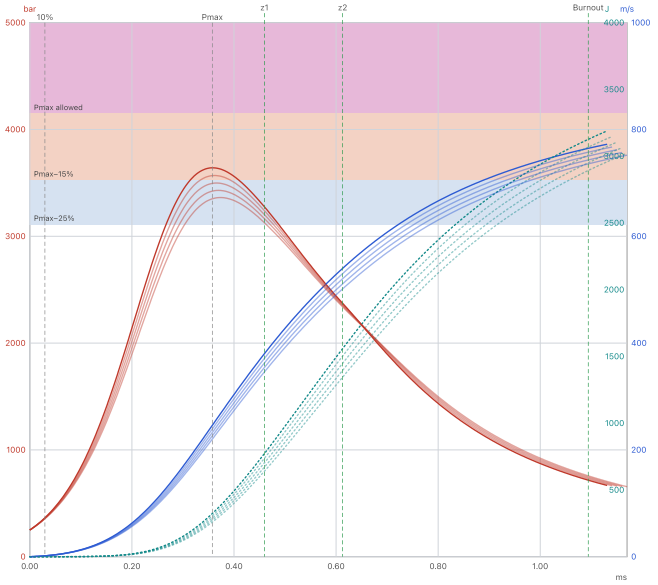

CAUTION

- With the deviation from the makers' laboratory measurements (15 %) the real pressure can exceed the maximum permitted pressure (C.I.P. 4150 bar): load only after the makers' data and work up from their start load.

NOTE

- Simulation – neither load data nor an approval. Typical deviation from laboratory measurements: rifle ±2–5 % V0, ±8–15 % pressure; handgun ±10 % V0, pressure not backed. The pressure can be calculated too low, especially at low fill ratios. Never load on the basis of this app alone; never exceed the makers' maximum loads; start with their starting load. Use at your own risk; liability excluded to the extent permitted by law.
- Compared with the makers' published laboratory measurements, the measured pressure at this load ratio was at most 15 % above the calculation in 19 of 20 loads (here about 4187 bar), in single loads up to 22 % (about 4442 bar).
- Case, powder lot and seating depth change the pressure by about ±8 %.
- Case capacity derived from load data.

Calculated values – they can differ considerably from reality. Always compare with current manufacturer load data. OBT is empirical after C. Long (barrel vibration), not interior ballistics.