


Console Output Evolution During Boot

From Early UART to Full Framebuffer Console

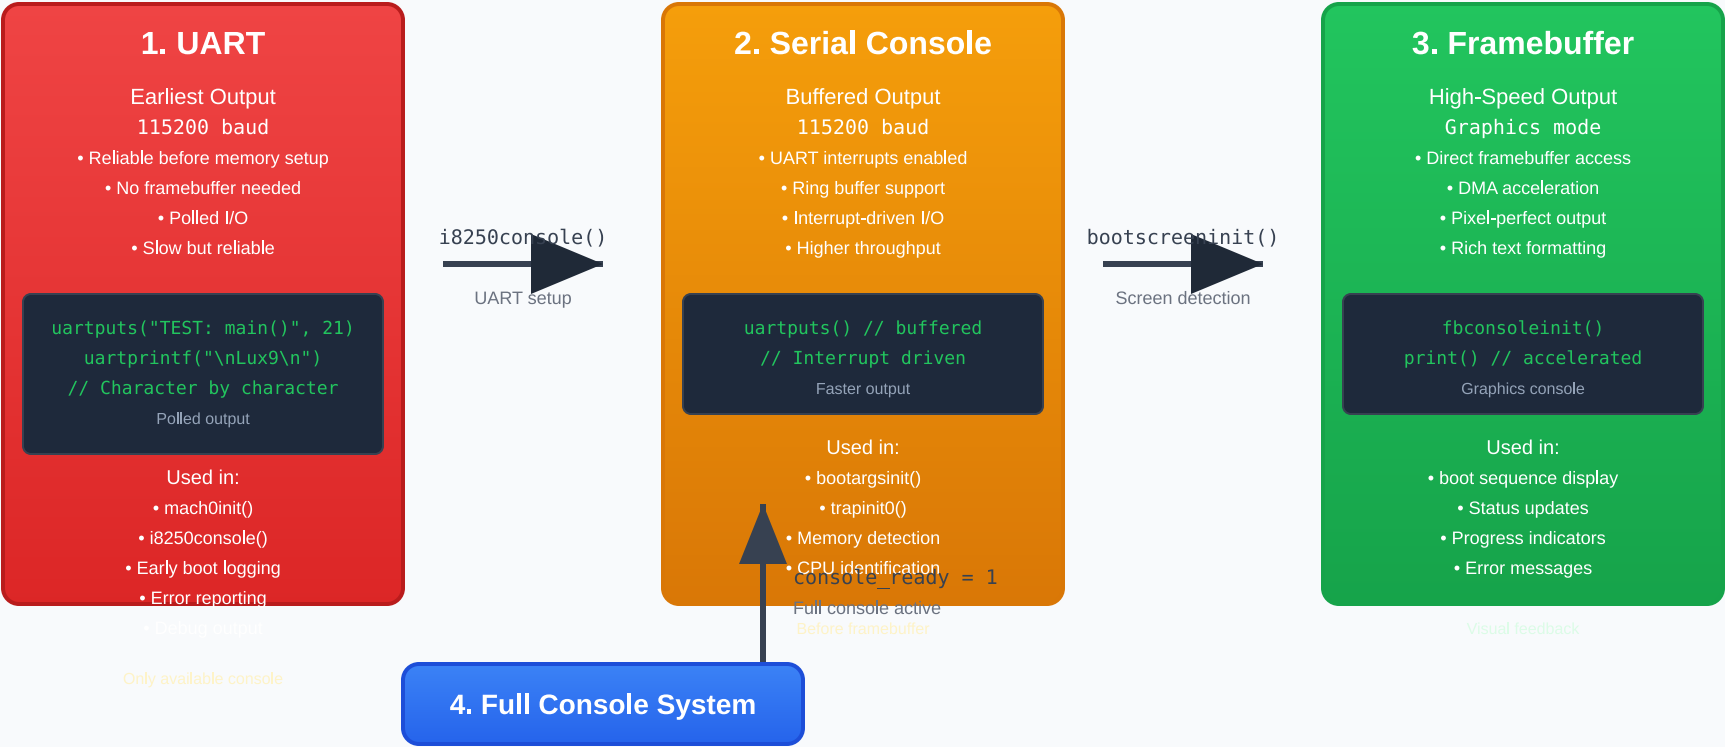

Console Ready Evolution

- `console_ready = 0`: Only UART output
- `boot_log()` automatically switches between UART and `print()`
- `console_ready = 1`: Framebuffer + `print()` available
- Seamless transition preserves all output