


\*. 현장명 : 정읍시노인복지관 - 1(set)  
(등기구업체 - 다운텍)

LED BAR - 1200=1(EA)  
LED BAR - 1350=1(EA)  
SMPS (60W)=1(EA)

선길이-1.5M

SMPS  
60 W  
입방형

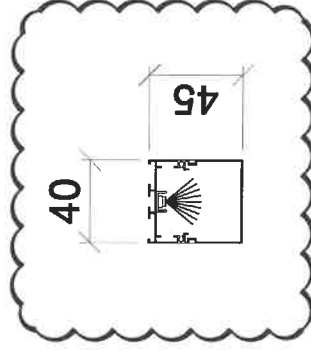


AL PROFILE TUBE (마구리포함) - 1446L  
LED BAR-(누드&클립&잭 타입)  
10000K = 1350L

LED BAR-(누드&클립&잭 타입)  
10000K = 1200L  
AL PROFILE TUBE (마구리포함) - 1325L

단위 (cm)  
(600x1600)

(좌, 우의 길이가 틀림에 주의 요망)

(단, 우 미너리 포함) - 1446

223	LED BAR 고정용 볼립 선터거리 - 500	LED BAR 고정용 볼립 선터거리 - 500	223
20			20
	LED BAR - 10000K - 1350		48
	전선 상부트 리용		40
	Ø20 (전선 외둘레)		45

Quantity: 1 EA

Technical drawing of a lighting fixture assembly. The drawing shows two main components: a left unit labeled "LED BAR 고정용 플립 섀터거리 - 400" with a dimension of 262.5, and a right unit labeled "LED BAR - 10000K - 1200" with a dimension of 62.5. A detail view shows a square component with dimensions 40 and 45, and a note "전선 상부로 인출" (Pull wire upwards) and "Ø20 (전선 외경)" (Ø20 (wire outer diameter)).

Quantity : 1 EA

[illegible]

\* 현장명 : 에이원엘리베이터-나국중학교 - 1(set)

(등기구업체 : 다운텍)

★ 7000K ★

AL PROFILE TUBE (마구리포함) -1464L


200mm

선길이-1.5M

SMPS  
100W

AL PROFILE TUBE (마구리포함) -1448L  
LED BAR-누드&클립&잭타입- 000K-1350L

(LED BAR-누드&클립&잭타입- 000K-1350L)

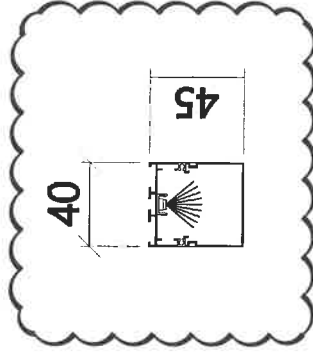

LED BAR-누드&클립&잭타입- 000K-1350L  
AL PROFILE TUBE (마구리포함) -1448L

(LED BAR-누드&클립&잭타입- 000K-1350L)


200mm

CAR INSIDE

W1600 x D1500


0.75  
1464=2  
1448=2

224	LED BAR 고정 센터 - 500L	LED BAR 고정 센터 - 500L	224
49	LED BAR - 3000K (누드&클립&젝타입) = 1350L		49



<b>CAR INSIDE</b>	<b>W1600 x D1500</b>
-------------------	----------------------

232	LED BAR 고정 센터 - 500L	LED BAR 고정 센터 - 500L	232
57	LED BAR - 3000K (누드&클립&좌타입) = 1350L		57

[illegible]


\*.현장명 : 제일특수강-유구조등학교 - 1(set)  
(등기구업체 : 다운텍)

LED BAR - 1300L=6(EA)

SMPS(100W)=2(EA)

031타입

LED BAR-(누드&클립&잭타입)  
10000K-1300L

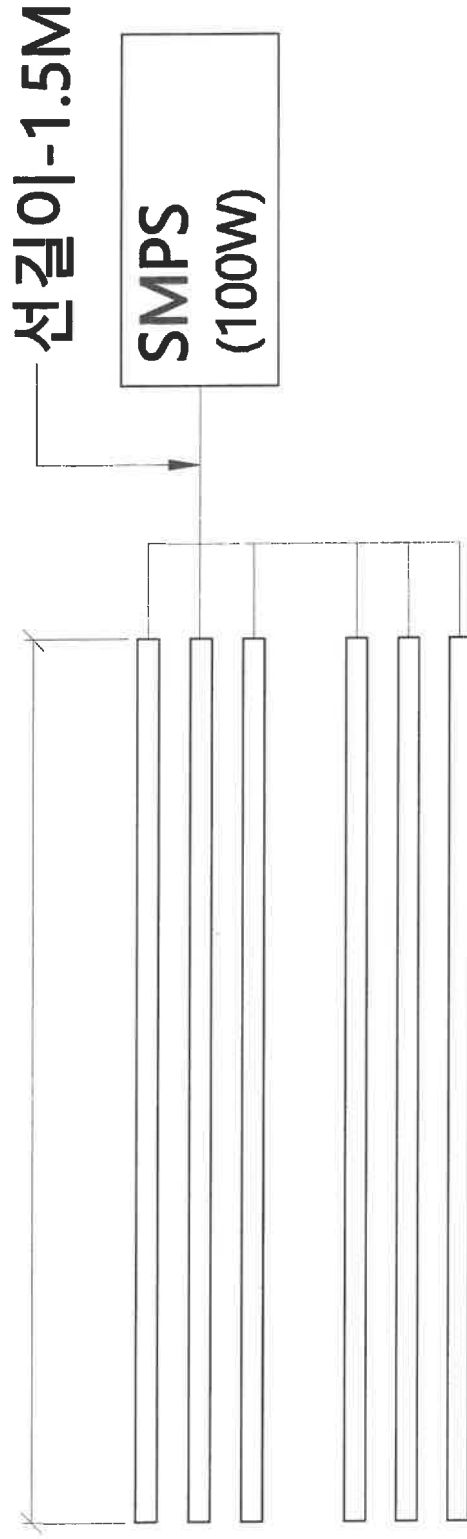

CAR INSIDE

W1600 x D1500

1/1