

*.현장명 : 다완테크-동남SVC-회화초 - 1(set)

LED BAR-1450L=4(EA)
SMPS(60W)=2(EA)

(등기구업체 : 다온텍)

N20타입

선길이-1.5M

선길이-1.5M

SMPS
(60W)

SMPS
(60W)

LED BAR-(누드&클립&잭타입)
10000K-1450L

LED BAR-(누드&클립&잭타입)

10000K-1450L

LED BAR-(누드&클립&잭타입)

10000K-1450L


LED BAR-(누드&클립&잭타입)
10000K-1450L

CAR INSIDE

W1700 x D1550


* 현장명 : 한울테크-화지 어울림 - 1(set) 045

(등기구업체 : 다운텍)

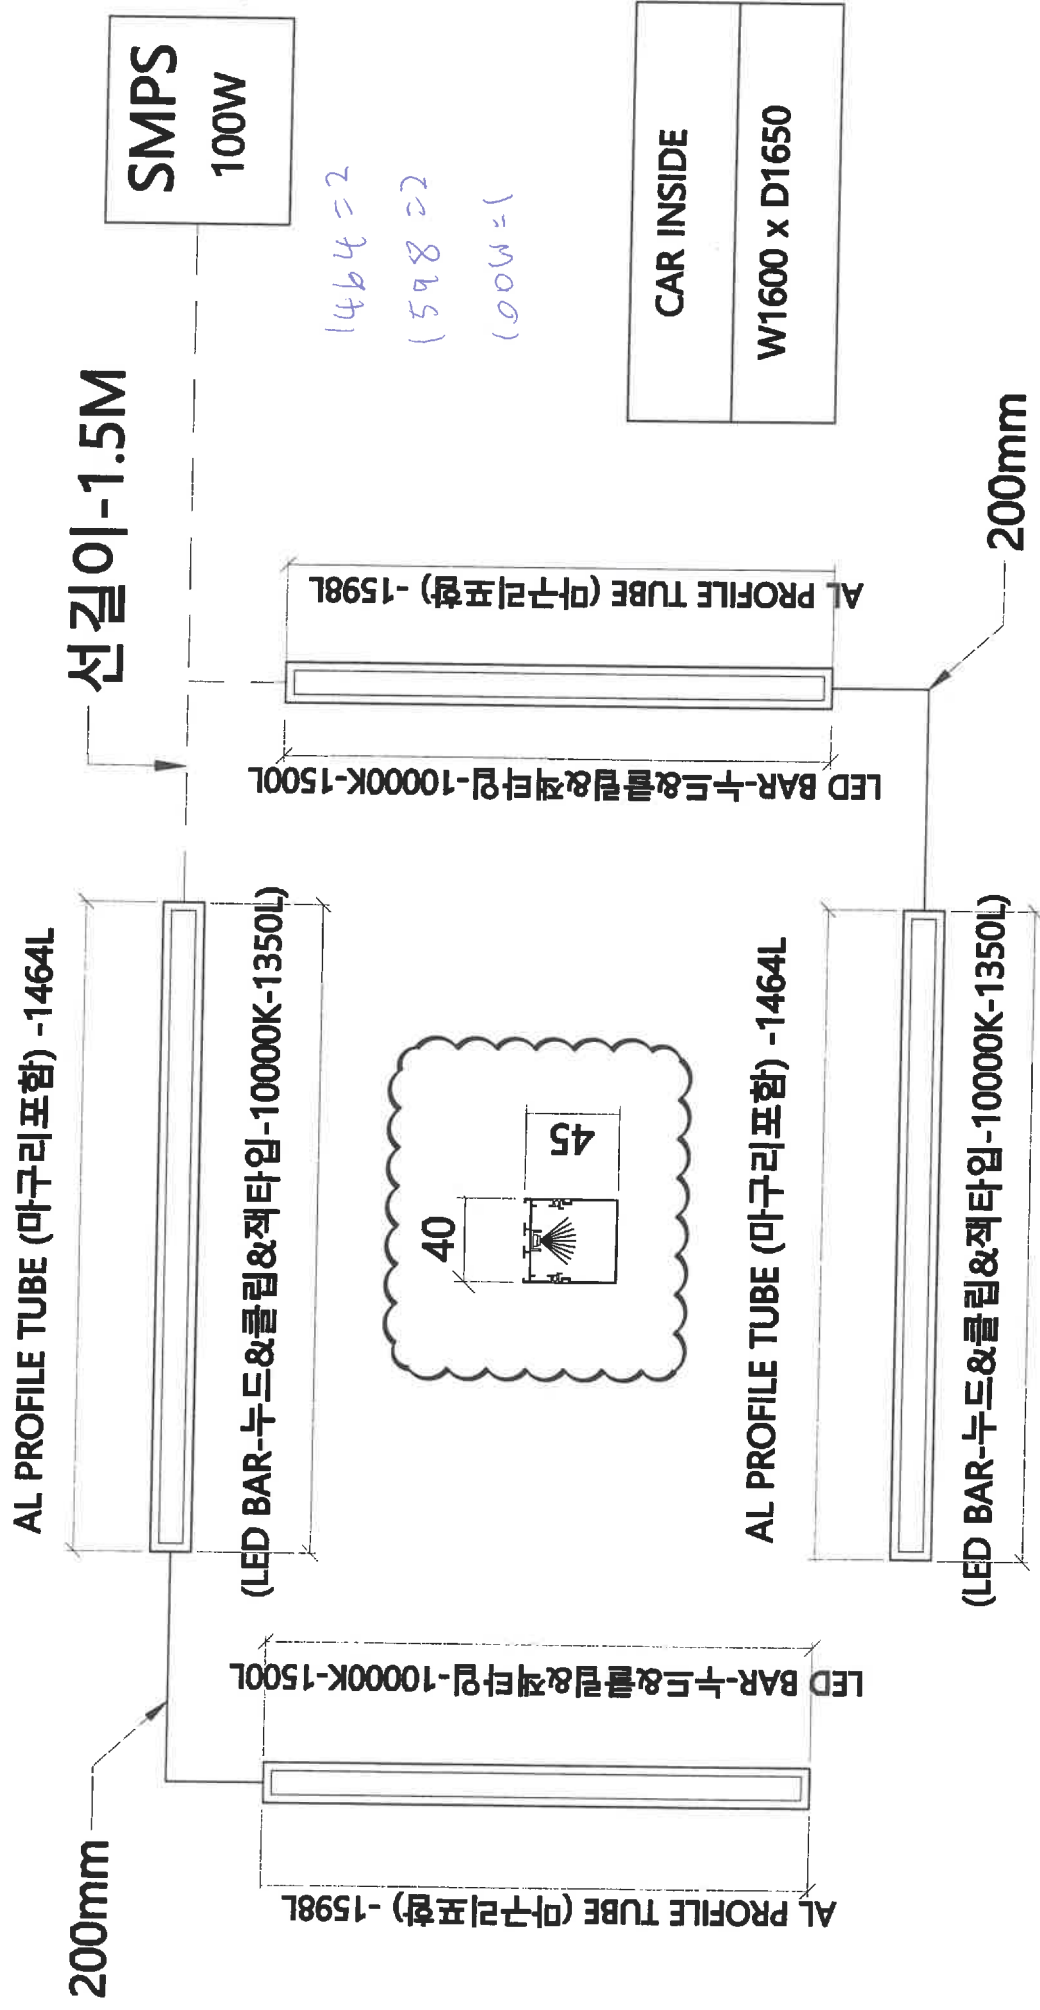

1598 - (AL TUBE 길이)					
224	LED BAR 고정 센터 - 575L	LED BAR 고정 센터 - 575L	224		
○					
49	LED BAR - 10000K (누드&클립&적타입) = 1500L				49

CAR INSIDE	W1600 x D1650
-------------------	----------------------



1464 - (AL TUBE 길이)				
232	LED BAR 고정 센터 - 500L	LED BAR 고정 센터 - 500L	232	
57	LED BAR - 10000K (누드&클립&잭타입) = 1350L			57


Figure 10.10 shows a rectangular box with a width of 40 units and a height of 45 units. A light source is positioned at the top center of the box, and a line of sight is drawn from the light source to the bottom right corner of the box. The line of sight is labeled with the number 40.

[illegible]

*.포스코 광양 흥보관 1,2호기- 2(set)

(등기구업체-다운텍)


LED BAR - 1300=18(EA)
SMPS (150W)=2(EA)
SMPS (100W)=2(EA)

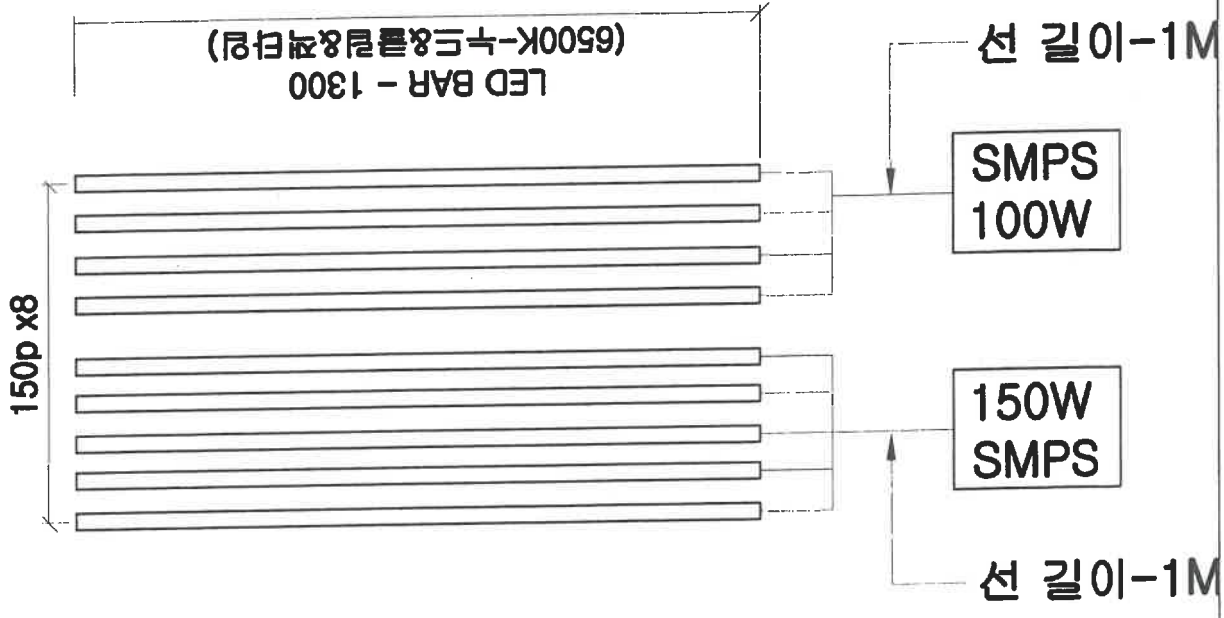

Car Inside-W1800xD1500

*.포스코 광양 홍보관 3,4호기- 2(set)


(등기구업체-다운텍)

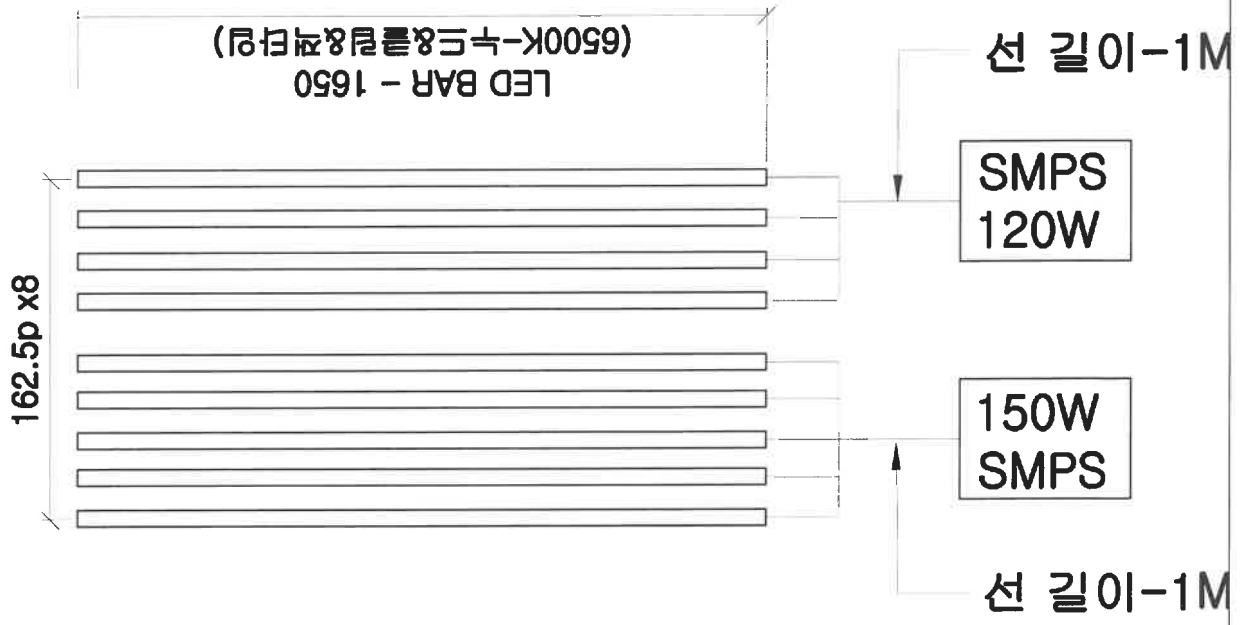

누드광원(8핀타입)

LED BAR - 1650=18(EA)
SMPS (150W)=2(EA)
SMPS (120W)=2(EA)

Car Inside-W1900xD1850

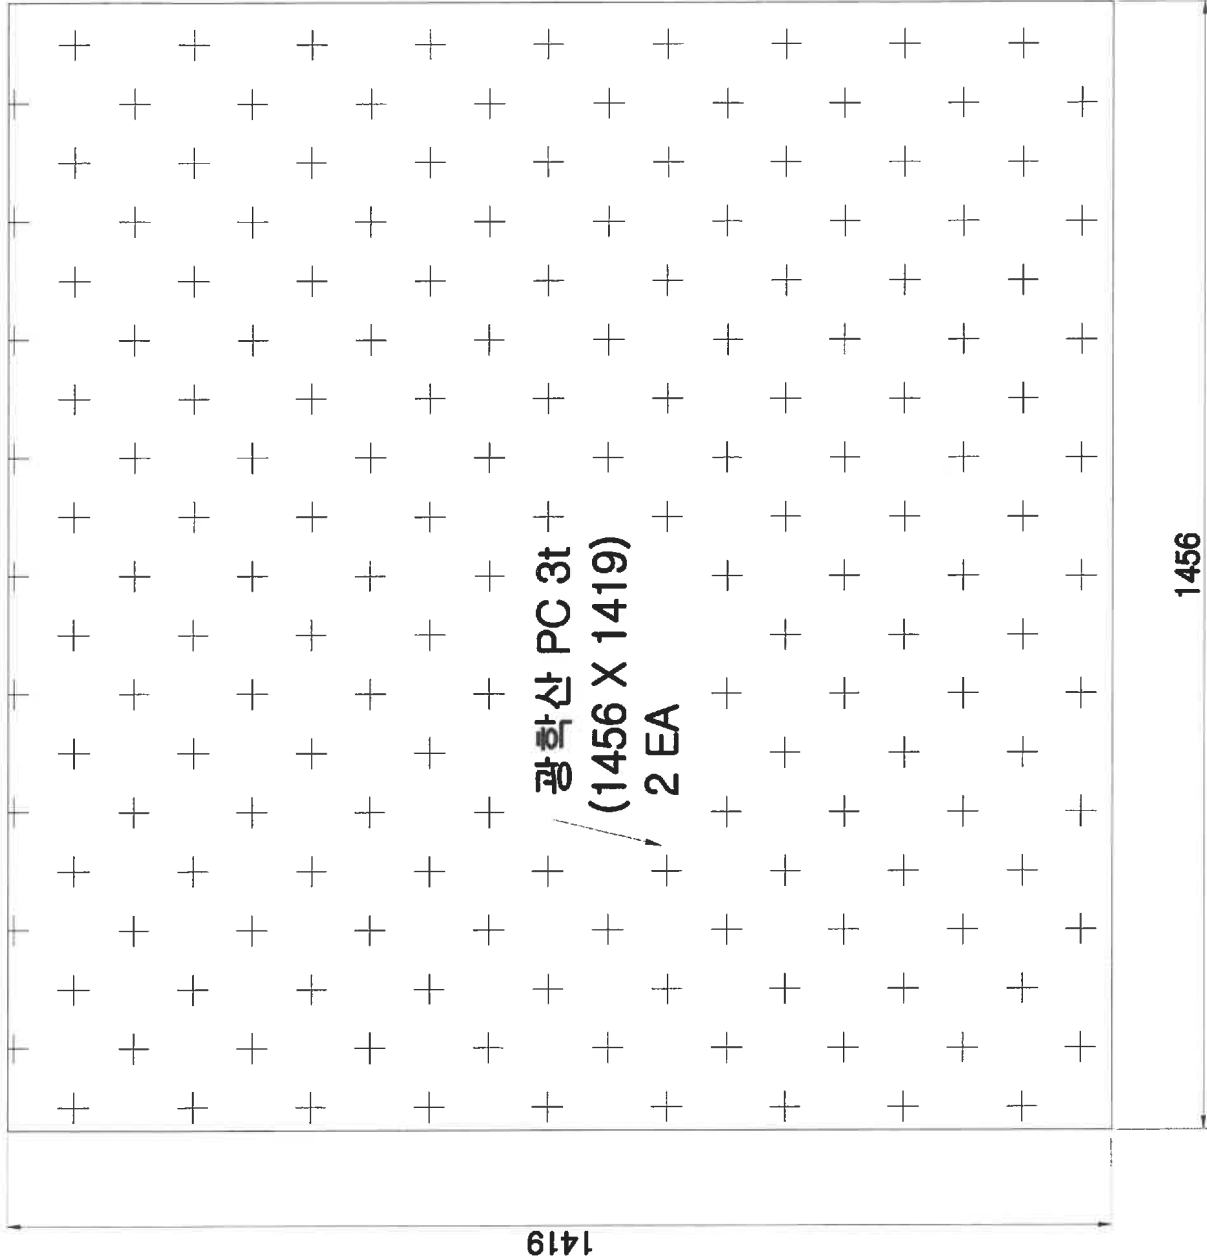

△

△

△

△

NO DATE

REVISIONS

DEN

CHK

APR

TRACED BY
DRAWN BY
DESIGNED BY
CHECKED BY
REVIEWED BY
APPROVED BY

SCALE
1 / 11
DATE
2025. 02. 10
ANGLE

PROJECT
포스코 광양 교육관 3,4호기
DWG. NAME
-
DWG. NO
MR-20250210-LC-05

SHEET
0