

032타입

*현장명 : 한산엘테크-수서 신동아아파트 4차분 - 3(set)
(등기구업체 : 다운텍)

LED BAR - 950L = 12(EA)
SMPS(60W)=6(EA)
AL PROFILE TUBE - 982 = 6(EA)

선길이-1.5M

SMPS
(60W)

SMPS - (슬림형 사용)

SMPS
(60W)

LED BAR-(누드&클립&잭타입)
10000K-950L

AL PROFILE TUBE - 982

LED BAR-(누드&클립&잭타입)
10000K-950L

CAR INSIDE

W1400 x D1035

LED BAR-(누드&클립&잭타입)
10000K-950L

AL PROFILE TUBE - 982

LED BAR-(누드&클립&잭타입)
10000K-950L

223	LED BAR 고정용 클립 센터거리 - 268L	223
223	LED BAR 고정용 클립 센터거리 - 268L	223
23	LED BAR - 10000K (누드&클립&젝타입) = 950L	23

Technical drawing of a mechanical part, likely a bracket or support, with dimensions. The drawing shows a side view with a base of 84, a height of 59, and a total width of 58.8. A detail view shows a cross-section with a base of 25, a height of 30, and a total width of 28.8.



982

072

CAR INSIDE	W1400 x D1035
-------------------	----------------------

CAR INSIDE	W1400 x D1035
-------------------	----------------------

[illegible]

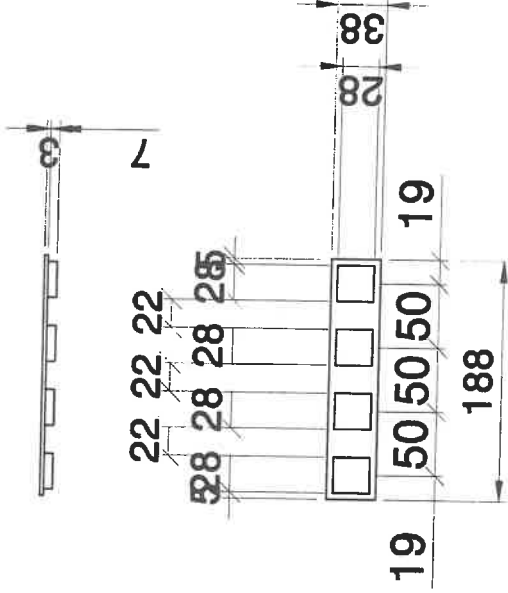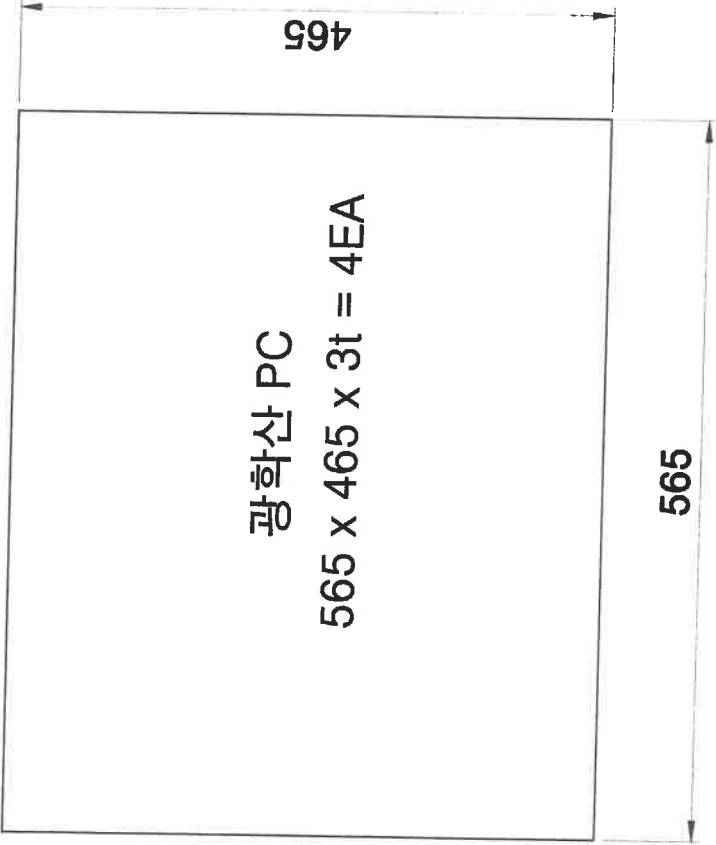

사각 투명 Acyl : 타공 30 x 30 x 4 = 16EA
(후면 3.0T 한지부착)

Part Name : 조명판 아크릴
Mat.Spec : 광학산PC 3.0T
Size : 565 x465 mm
Quantity : 8 EA

KE5 (1400X1750)

2/2

(1)

REVISIONS				(주) 미래기업				SCALE		PROJECT	
NO	DATE	DEN	CHK	APR	TRACED BY	DRAWN BY	DESIGNED BY	CHECKED BY	REVIEWED BY	APPROVED BY	1 / 5
△											베스트빌
△											
△											
△											
									DATE	2024. 10. 12	DWG. NAME
									ANGLE		DWG. NO
											Light Case Ass'y
											MR-20241012-LC-05
											SHEET
											0